


7-06

MULTI-LANE WIDTH "SCHOOL"

REFER TO STD. 1205.10

NOTE: TWO-LANE FHWA SCHOOL SYMBOL MAY ALSO BE USED AS SHOWN IN PART 7C-6 OF THE MUTCD

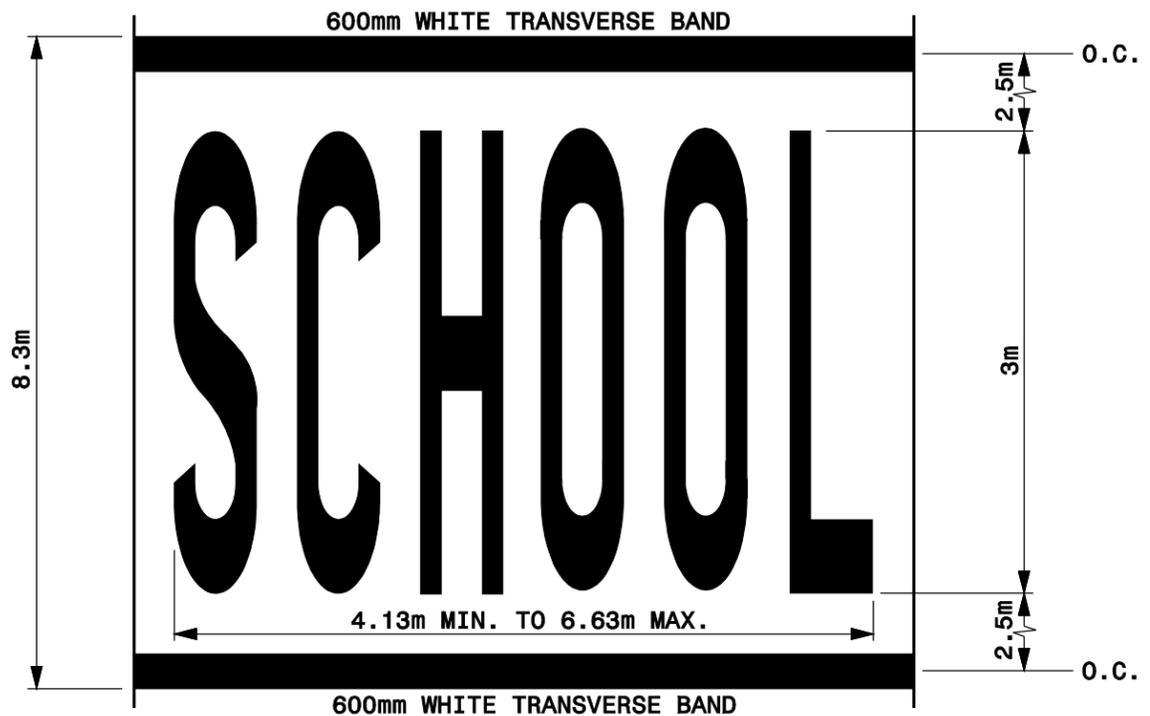


LETTER HEIGHT = 3m
LETTER WIDTH = 480mm
SPACING = 250mm MIN./750mm MAX.

(USE EQUAL SPACING BETWEEN LETTERS AND CENTER ENTIRE SYMBOL IN LANES)

SINGLE LANE "SCHOOL"

REFER TO STD. 1205.10

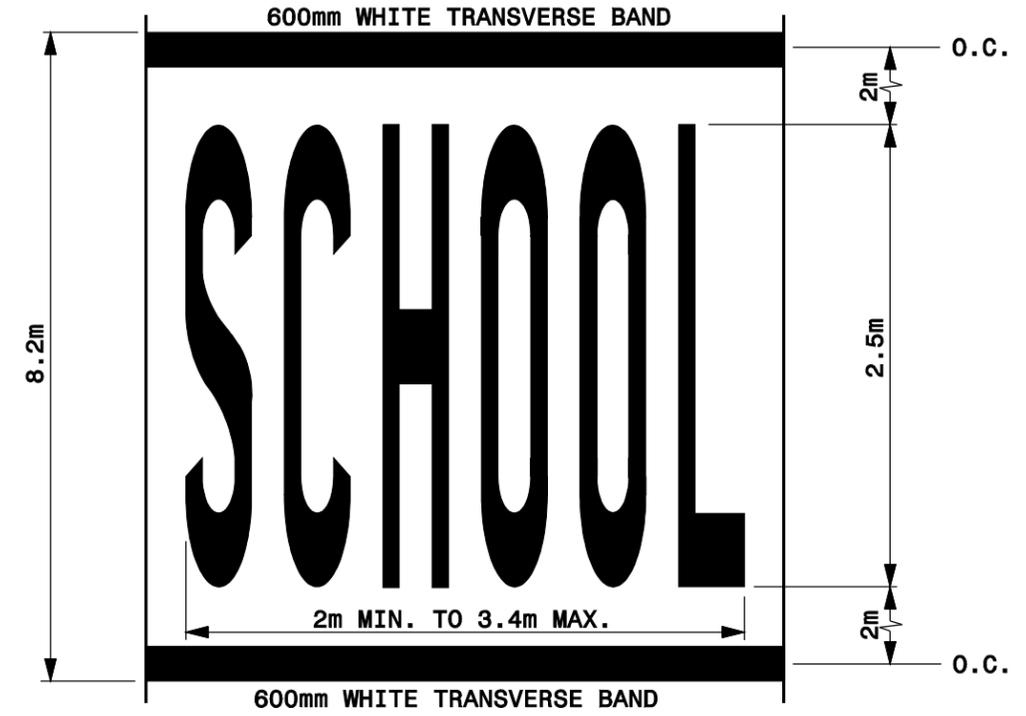


LETTER HEIGHT = 2.5m
LETTER WIDTH = 400mm
SPACING = 100mm MIN./200mm MAX.



(USE EQUAL SPACING BETWEEN LETTERS AND CENTER ENTIRE SYMBOL IN LANES)

7-06

"ONLY"

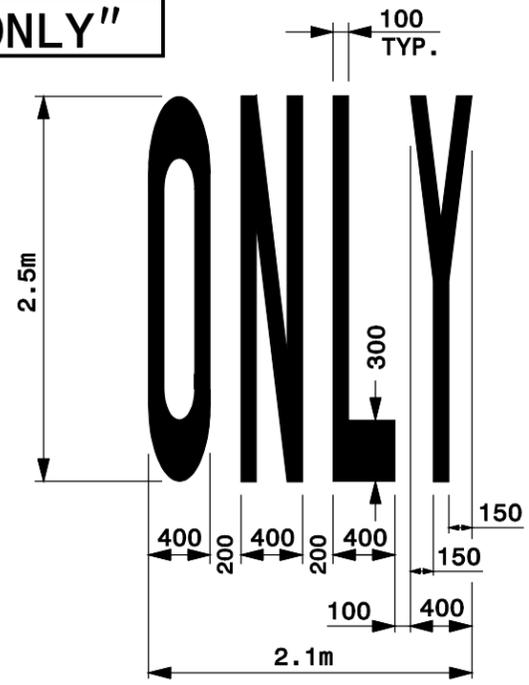

NOTE: THIS DRAWING IS DIMENSIONED IN MILLIMETERS UNLESS OTHERWISE DEPICTED WITHIN THE DRAWING.

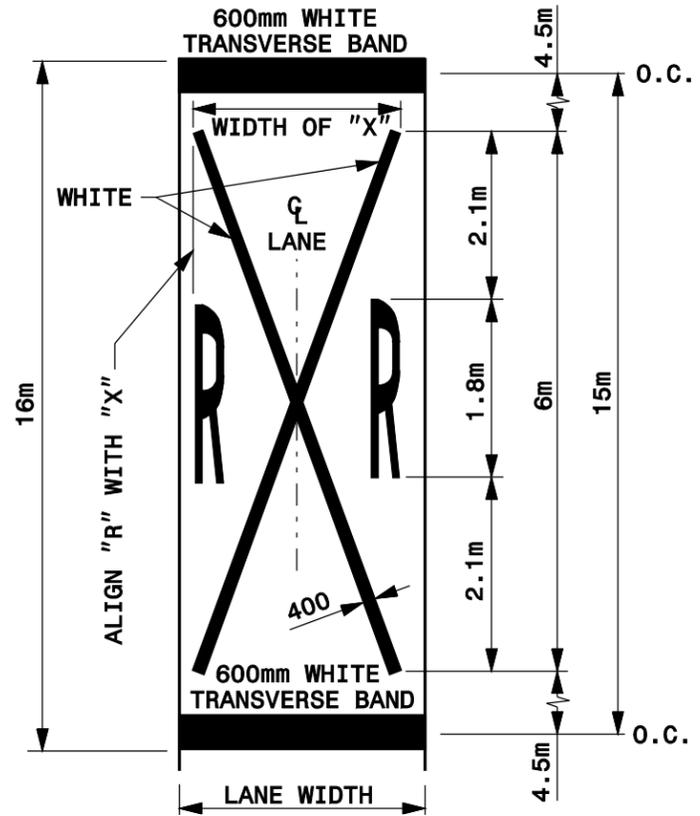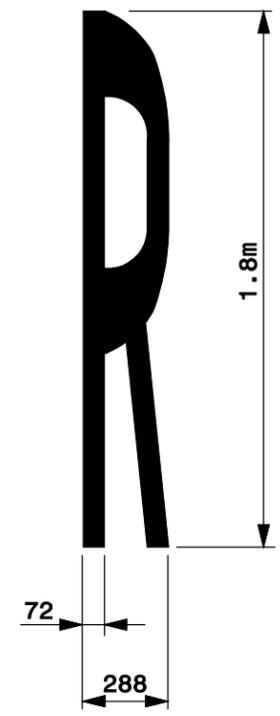

RAILROAD RXR SYMBOL

REFER TO STD. 1205.11

LANE WIDTH (METERS)	WIDTH OF "X" (METERS)
$2.4 \leq W \leq 2.7$	2.1
$2.7 < W \leq 3.6$	2.4
$W > 3.6$	3

GENERAL NOTE

- 1- THE SCHOOL PAVEMENT MARKING CONSISTS OF SIX (6) CHARACTERS. THE TWO (2) 600mm TRANSVERSE BANDS WILL BE PAID FOR UNDER A SEPARATE PAY ITEM.
- 2- PAVEMENT MARKING IN ADVANCE OF A HIGHWAY-RAIL CROSSING SHALL CONSIST OF TWO (2) CHARACTERS AND TWO (2) 400mm LINES (FORMING AN X) WHICH ARE PAID FOR UNDER TWO SEPARATE PAY ITEMS. ALSO, THE TWO (2) 600mm TRANSVERSE BANDS WILL BE PAID FOR UNDER A SEPARATE PAY ITEM.