

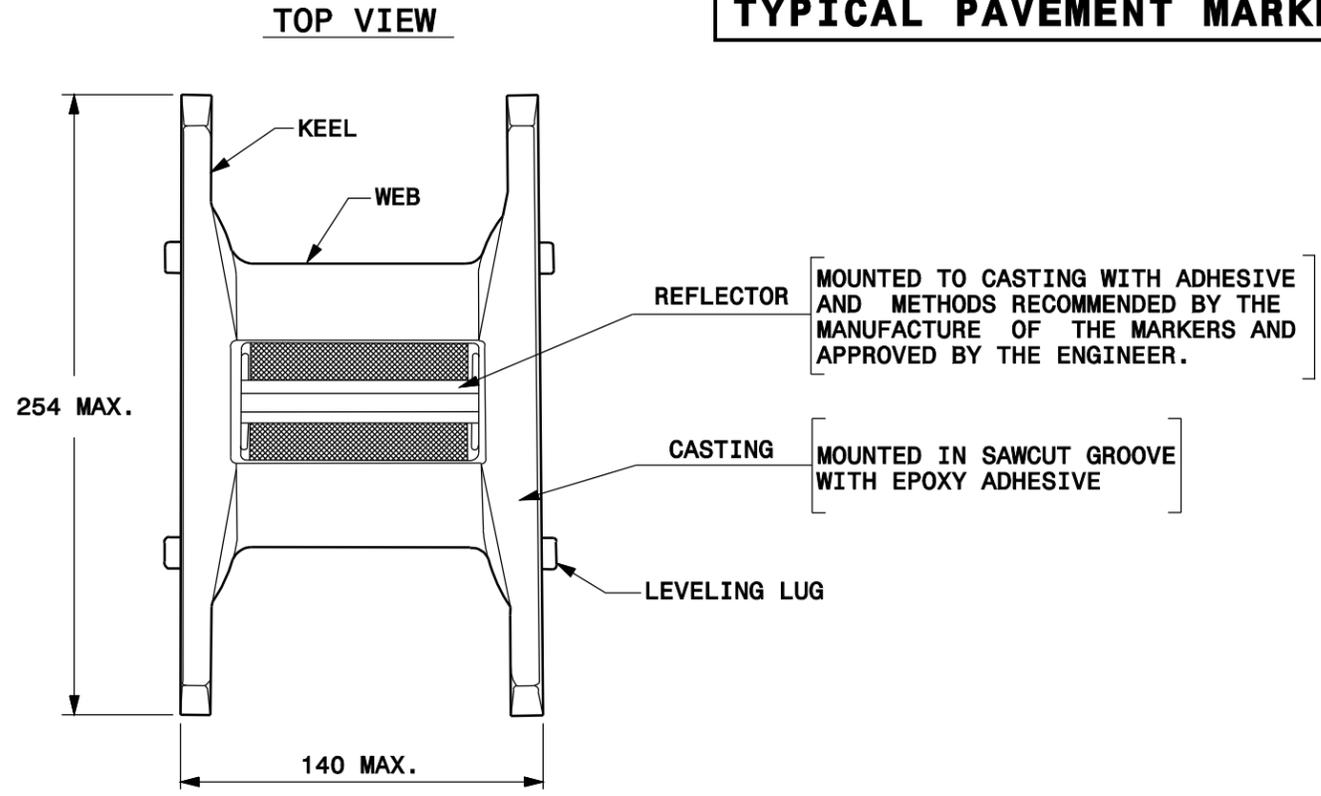
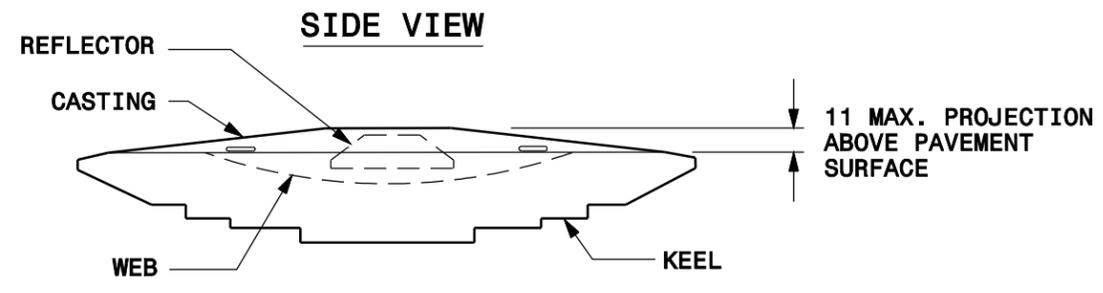


TYPICAL PAVEMENT MARKER

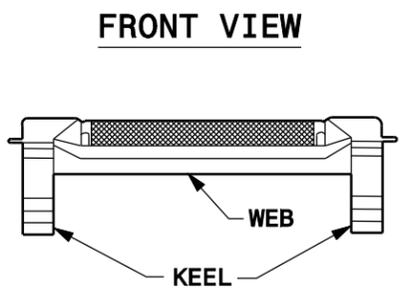

REFLECTOR

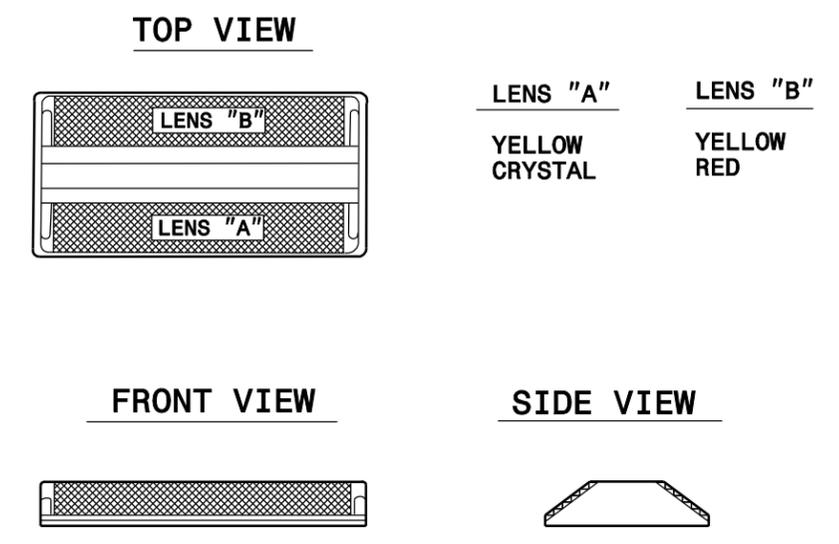

GENERAL NOTES

- 1- USE A MINIMUM OF 929+/- SQ. MILLIMETER AREA FOR EACH REFLECTIVE LENS.
- 2- SAWCUT GROOVES TO DIMENSIONS PROVIDED BY THE MANUFACTURER.
- 3- CONTACT ALL LEVELING LUGS TO THE PAVEMENT SURFACE.
- 4- REFLECTOR DIMENSIONS CAN VARY, BUT DESIGNED TO FIT IN THE CASTING AND PROVIDE THE REQUIRED REFLECTIVITY.

NOTE:
THIS DRAWING IS DIMENSIONED IN MILLIMETERS UNLESS OTHERWISE DEPICTED WITHIN THE DRAWING.