


## TYPICAL REINFORCED CONCRETE BOX CULVERT SURVEY LAYOUT

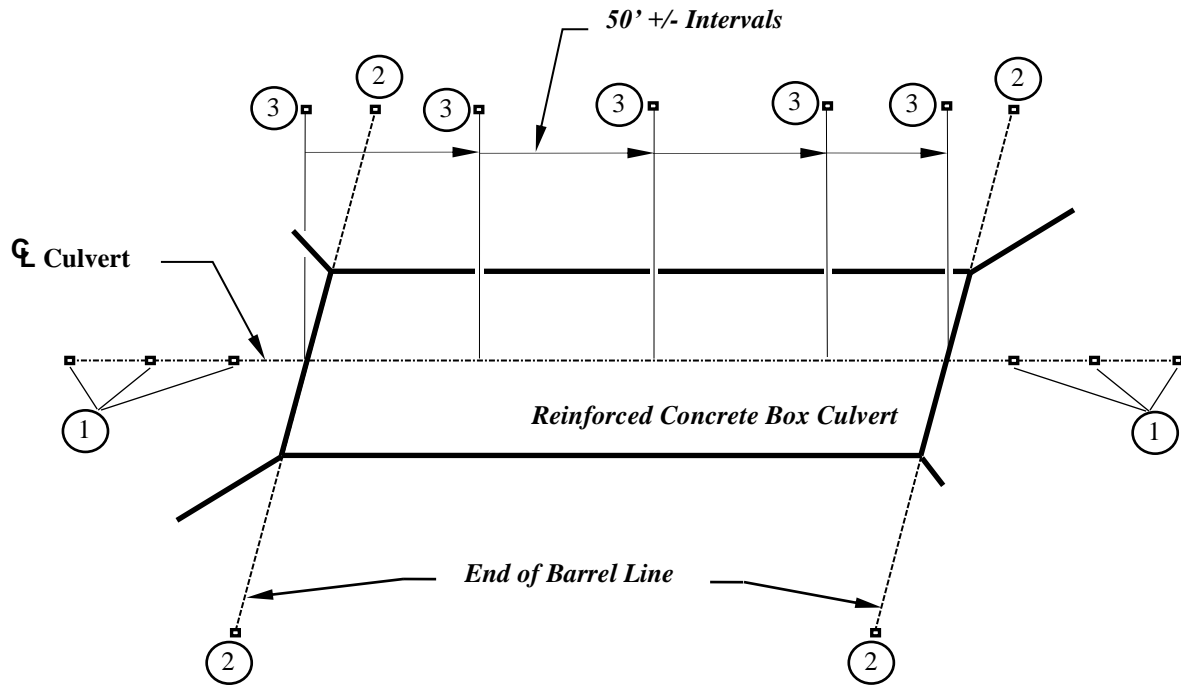

- ① Tacked hubs along centerline of culvert.
- ② Tacked hubs along end of barrel with distance marked to centerline of culvert and cut/fill to top of bottom slab on guard stakes.
- ③ Hubs with marked guard stakes giving offset and cut/fill to top of bottom of slab - including camber.

**Note:**

See **Section 3 - Pipe Culverts** for camber calculations.