

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL.....	140	LF
4102000000	904	SIGN ERECTION, TYPE E.....	7	EA
4108000000	904	SIGN ERECTION, TYPE F.....	4	EA
4155000000	907	DISPOSAL OF SIGN SYSTEM,U-CHANNEL..	2	EA


PAY ITEM NOTES	
1	DISPOSAL OF SUPPORT, U-CHANNEL
2	DISPOSAL OF SIGN, D, E OR F

ROADWAY STANDARD DRAWINGS	
THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2024 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:	
STD. NO.	
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF "D", "E", "F" SIGNS ON "U" CHANNEL POSTS

EXISTING and PROPOSED SIGNS  
SR-1237 (MANSON DREWRY RD) AT US 1-158

GENERAL NOTES

- ALL SIGNS FURNISHED BY CONTRACTOR
- ALL TYPE 'E' AND 'F' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS
- SIGNING PLANS DO NOT INCLUDE TEMPORARY CONTRUCTION SIGNING OR PAVEMENT MARKINGS. SEE TRAFFIC MANAGEMENT PLANS
- WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- ALL EXISTING SIGNS ON "U" CHANNEL POSTS WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS
- WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL
- THE BACKGROUND FOR TYPE E AND F SIGNS SHALL BE TYPE III REFLECTIVE SHEETING

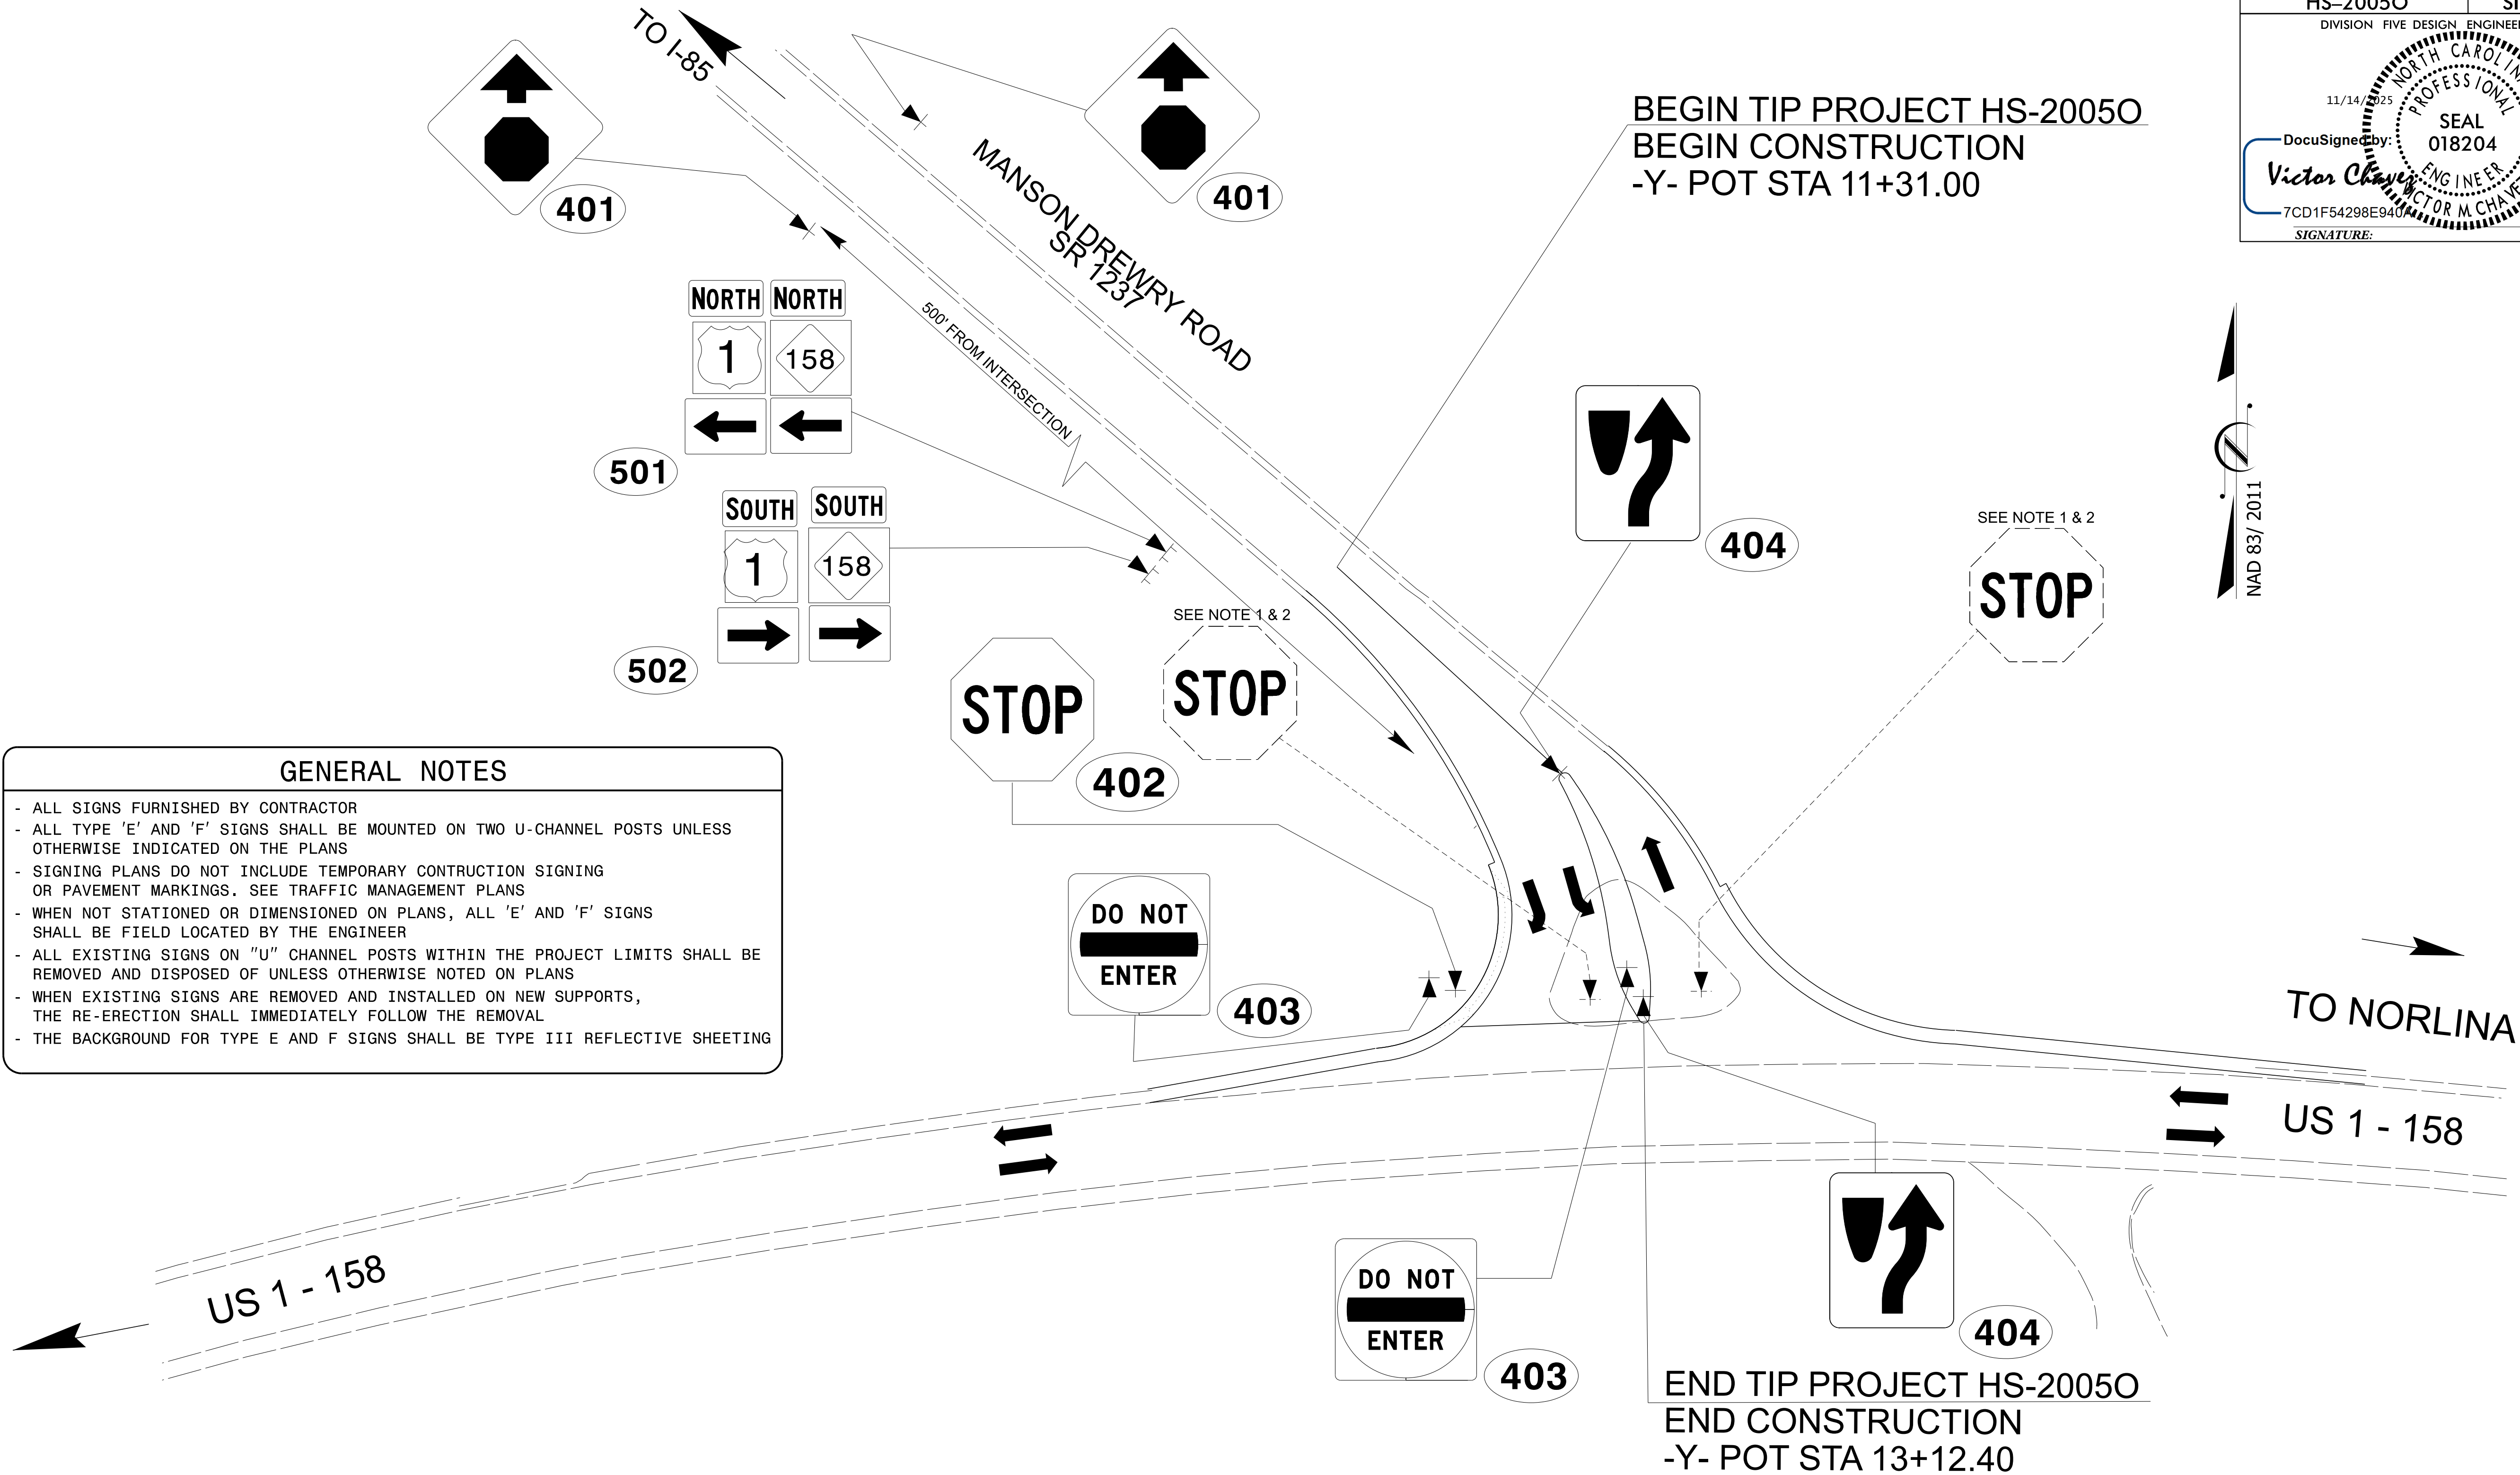

PROJECT REFERENCE NO.  
HS-20050

SHEET NO.  
SIGN-3

DIVISION FIVE DESIGN ENGINEER

11/14/2025

DocuSigned by:  
*Victor Chavez*  
7CD1F54298E9407  
SIGNATURE:

NORTH CAROLINA  
PROFESSIONAL  
SEAL  
018204  
ENGINEER  
VICTOR M. CHAVEZ  
P.E.