




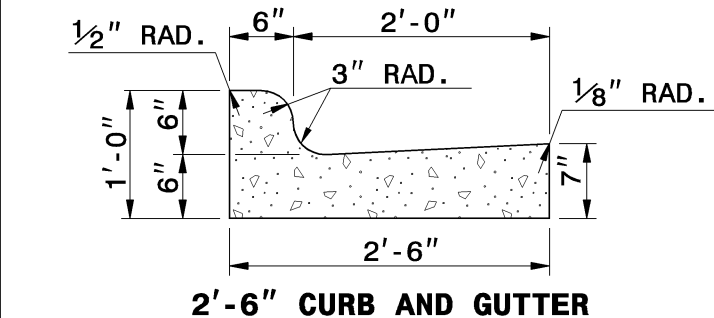


2'-6" CURB AND GUTTER

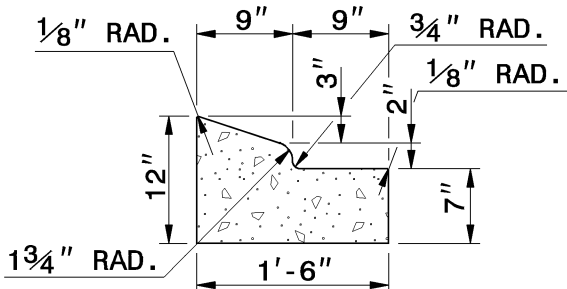


1'-6" CURB AND GUTTER

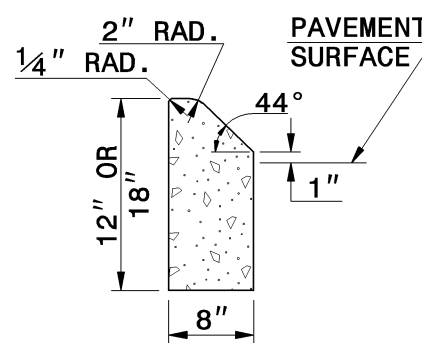


8" X 12" OR 18"
CONCRETE CURB

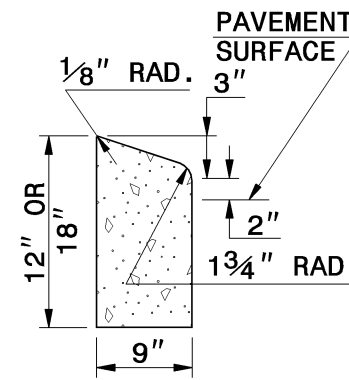


9" X 12" OR 18"
CONCRETE CURB

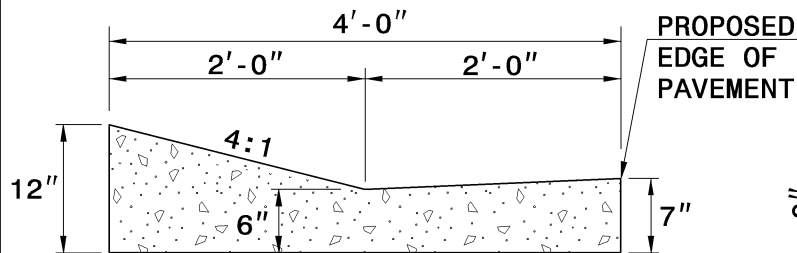


EXPRESSWAY GUTTER

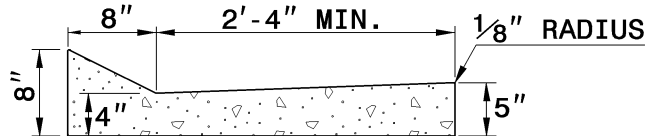

SHOULDER BERM GUTTER



8" X 6" MEDIAN CURB




VALLEY GUTTER


SECTION VIEW OF CURBS OR CURBS AND GUTTERS

GENERAL NOTES:

- PLACE CONTRACTION JOINTS AT 10' INTERVALS, EXCEPT THAT A 15' SPACING MAY BE USED WHEN A MACHINE IS USED OR WHEN SATISFACTORY SUPPORT FOR THE FACE FORM CAN BE OBTAINED WITHOUT THE USE OF TEMPLATES AT 10' INTERVALS.
- JOINT SPACING MAY BE ALTERED IF REQUIRED BY THE ENGINEER.
- CONTRACTION JOINTS MAY BE INSTALLED WITH THE USE OF TEMPLATES OR FORMED BY OTHER APPROVED METHODS. CONSTRUCT NON-TEMPLATE FORMED JOINTS A MIN. OF 1 1/2" DEEP.
- FILL ALL CONSTRUCTION JOINTS, EXCEPT IN 8"x6" MEDIAN CURB, WITH JOINT FILLER AND SEALER.
- SPACE EXPANSION JOINTS AT 90' INTERVALS AND ADJACENT TO ALL RIGID OBJECTS.

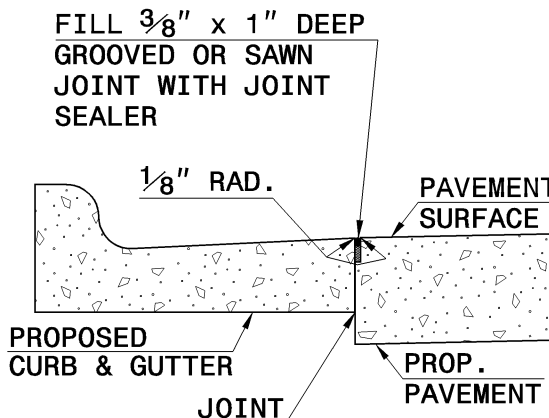

LONGITUDINAL JOINT

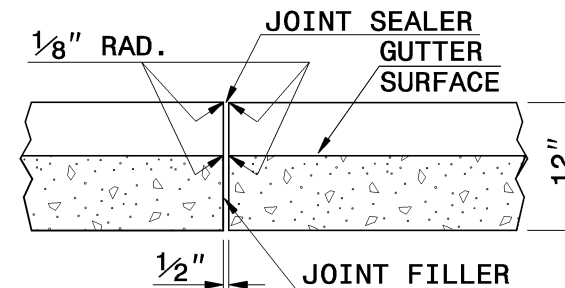

TRANSVERSE EXPANSION JOINT
IN CURB AND GUTTER

SECTION VIEW OF JOINTS