



ELEVATION

- GENERAL NOTES:**
- ALL MORTAR JOINTS ARE 13mm ± 3mm.
 - BOND BRICKWORK WITH FULL HEADERS EVERY THREE COURSES.
 - CONCAVE TOOL ALL EXPOSED JOINTS.
 - CONSTRUCT THE BASE WITH FORMS.
 - USE CLASS 'B' CONCRETE.
 - PAY FOR CONCRETE AS BRICK MASONRY.
 - CONCRETE BRICK MAY BE USED IN LIEU OF CLAY BRICK.
 - JUMBO BRICK WILL BE PERMITTED.

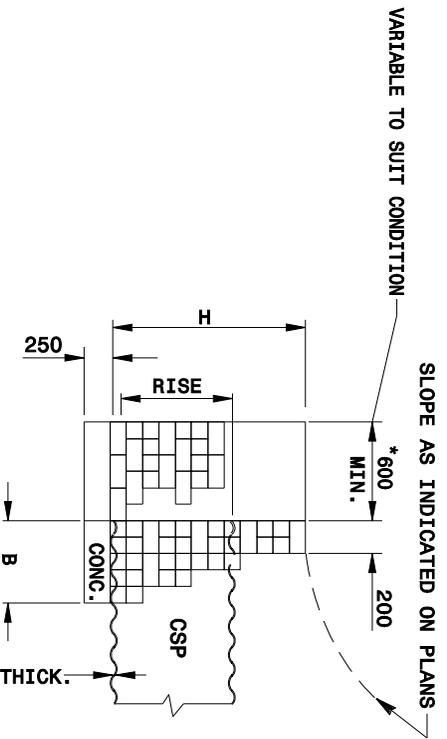

END ELEVATION

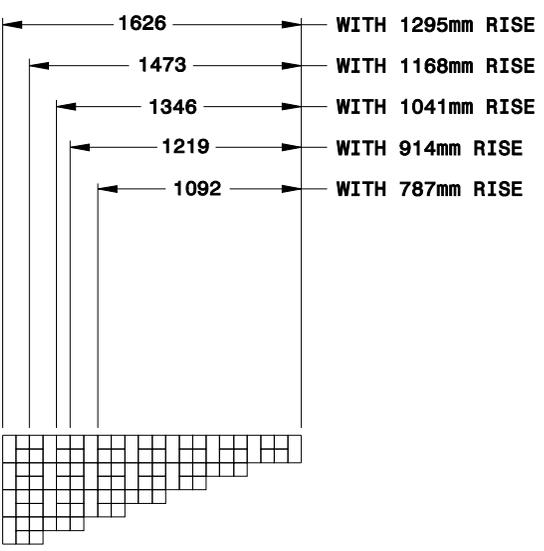

TYPICAL SECTION THRU WALL

* QUANTITIES BASED ON 600mm

| DIMENSIONS AND QUANTITIES | | | | | | | | |
|---------------------------|------|-------|------|-----|------------|-----|-------------------------|-------------------------|
| COMMON DIMENSIONS | | | | | QUANTITIES | | | |
| SPAN | RISE | THICK | H | B | G | E | BRICK m ³ | CONC. m ³ |
| 1016 | 787 | 2.75 | 1092 | 610 | 1727 | 584 | 1.166 | 0.547 |
| 1168 | 914 | 2.75 | 1219 | 711 | 1956 | 660 | 1.548 | 0.711 |
| 1346 | 1041 | 2.75 | 1346 | 813 | 2184 | 762 | 2.008 | 0.902 |
| 1524 | 1168 | 2.75 | 1473 | 813 | 2438 | 838 | 2.547 | 0.970 |
| 1676 | 1295 | 2.75 | 1626 | 914 | 2692 | 914 | 3.115 | 1.193 |

Note:
This drawing is dimensioned in millimeters unless otherwise depicted within the drawing.