



**TRANSVERSE SECTION FOR
CONCRETE PAVEMENT**

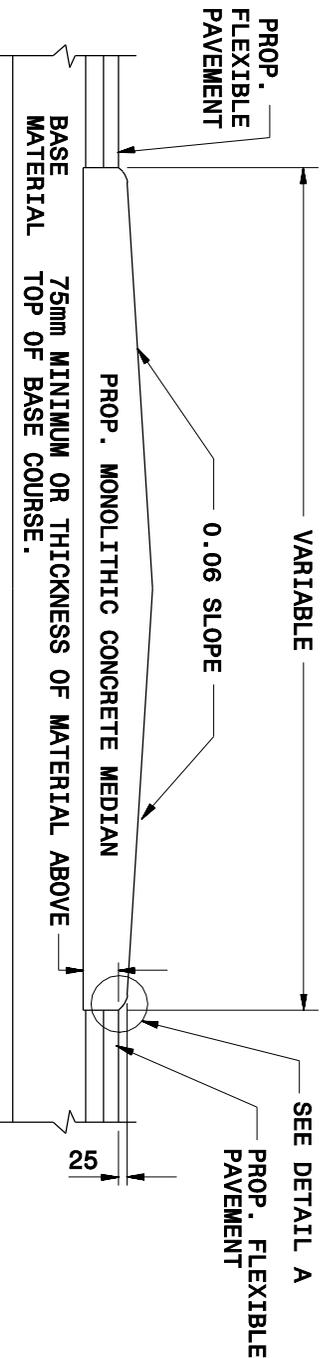


**TRANSVERSE SECTION FOR
FLEXIBLE PAVEMENT**

GENERAL NOTES:
PLACE 13mm EXPANSION JOINTS AT 9.0m INTERVALS AND AT ALL OTHER POINTS WHERE PROPOSED MEDIAN ABUTS RIGID OBJECTS. PLACE GROOVED JOINTS 13mm DEEP AT 3.0m INTERVALS BETWEEN EXPANSION JOINTS. FILL THE TOP 13mm OR EXPANSION JOINTS AND 13mm GROOVED JOINTS WITH JOINT SEALER.

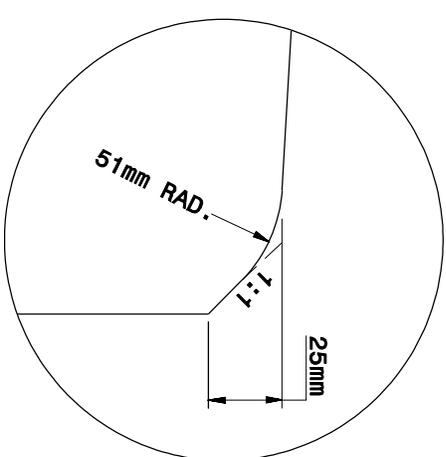

DETAIL - A

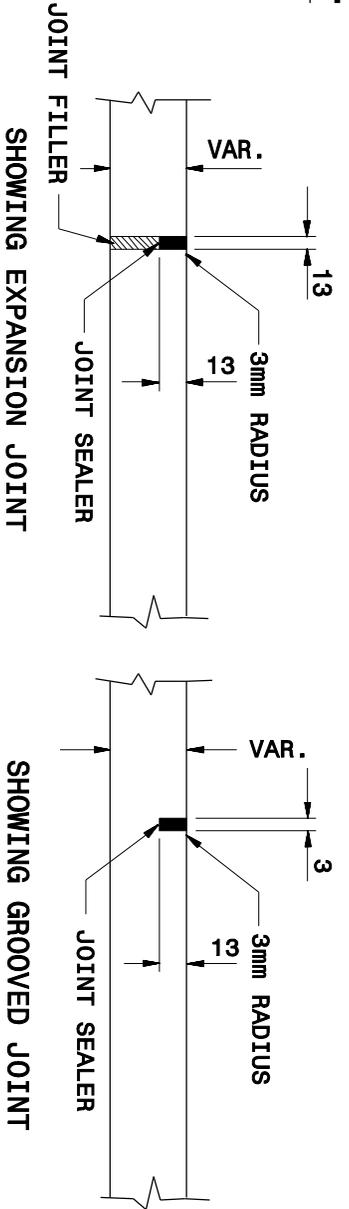

**PART LONGITUDINAL SECTIONS
OF CONCRETE MEDIAN**

Note:
This drawing is dimensioned in millimeters unless otherwise depicted within the drawing.