



7-06

HI-VISIBILITY CROSSWALK

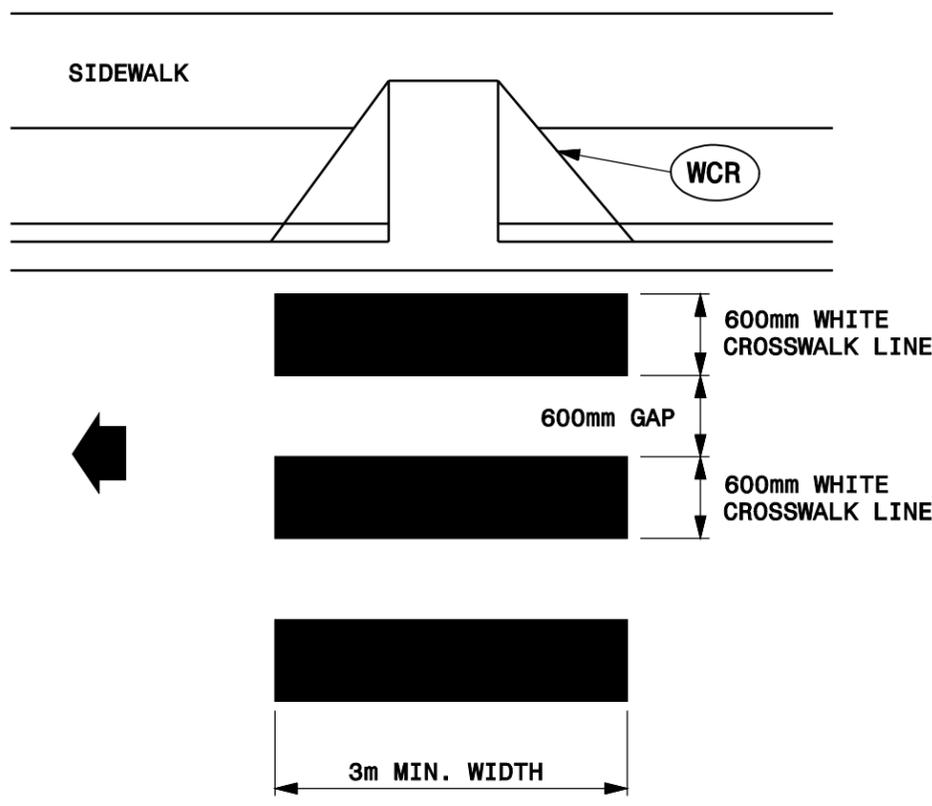

STANDARD CROSSWALK

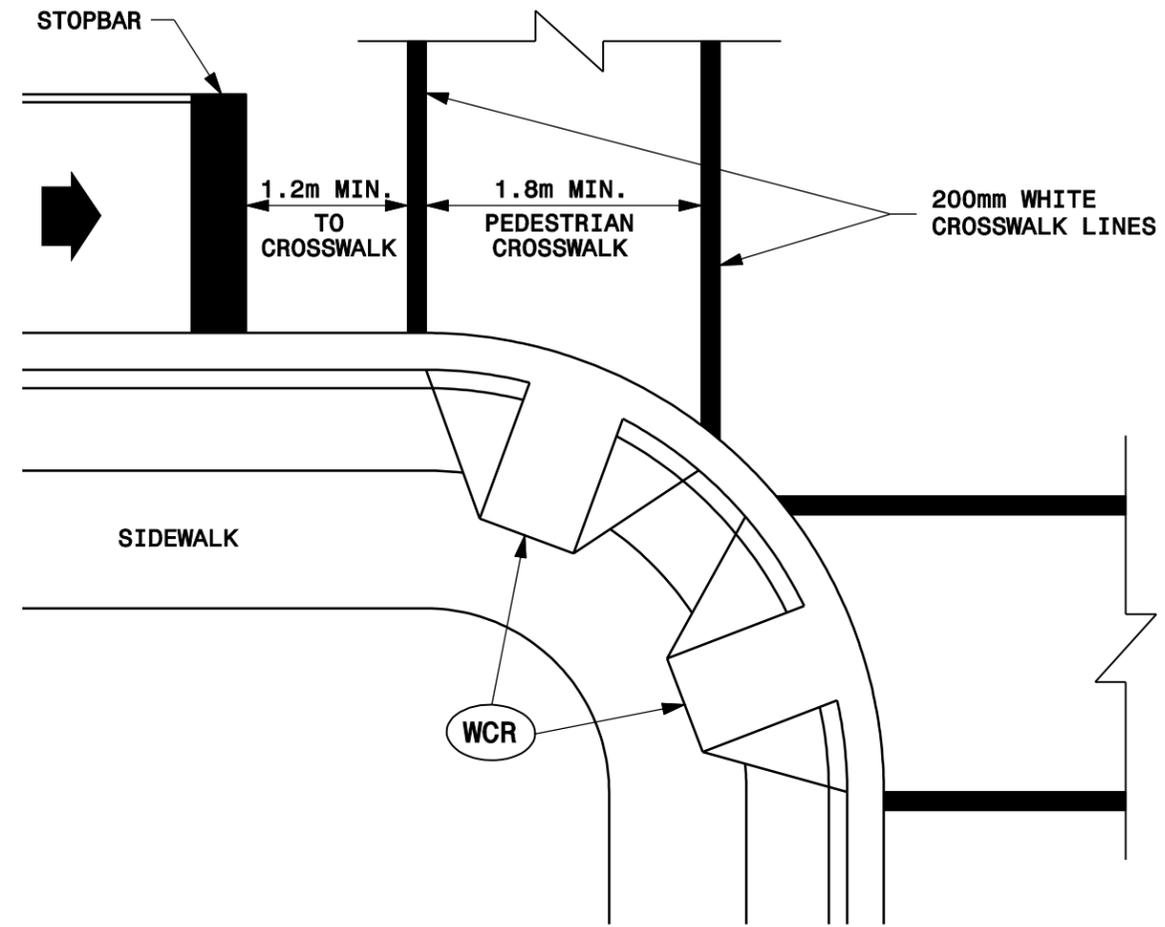

GENERAL NOTES

- 1- THE MINIMUM WIDTH OF STANDARD CROSSWALKS IS 1.8 METERS. THE MINIMUM WIDTH OF HI-VISIBILITY CROSSWALKS IS 3 METERS.
- 2- CENTER CROSSWALKS TO THEIR CORRESPONDING WHEELCHAIR RAMPS, BUT DO NOT SET THEM WITHIN THE INTERSECTION AREA ESTABLISHED BY BISECTING THE INTERSECTION RADII.
- 3- PLACE STOP BARS A MINIMUM OF 1.2 METERS FROM NEAREST CROSSWALK LINE, BUT NOT WITHIN THE AREA OF A WHEELCHAIR RAMP. PLACE STOP BARS PARALLEL TO CROSSWALK LINES, BUT CAN BE PLACED PERPINDICULAR TO TRAVEL LANES.
- 4- COORDINATE PLACEMENT OF CROSSWALKS IN ALL CASES WITH THE LOCATION OF WHEELCHAIR RAMPS. (SEE SIGNAL PLANS).

LEGEND



NOTE:
THIS DRAWING IS DIMENSIONED IN MILLIMETRS UNLESS OTHERWISE DEPICTED WITHIN THE DRAWING.

7-06