


7-06

GUARDRAIL/BARRIER AT BRIDGES

UNDIVIDED ROADWAYS TWO-LANE AND MULTI-LANE


GUARDRAIL/BARRIER ALONG ROADWAY

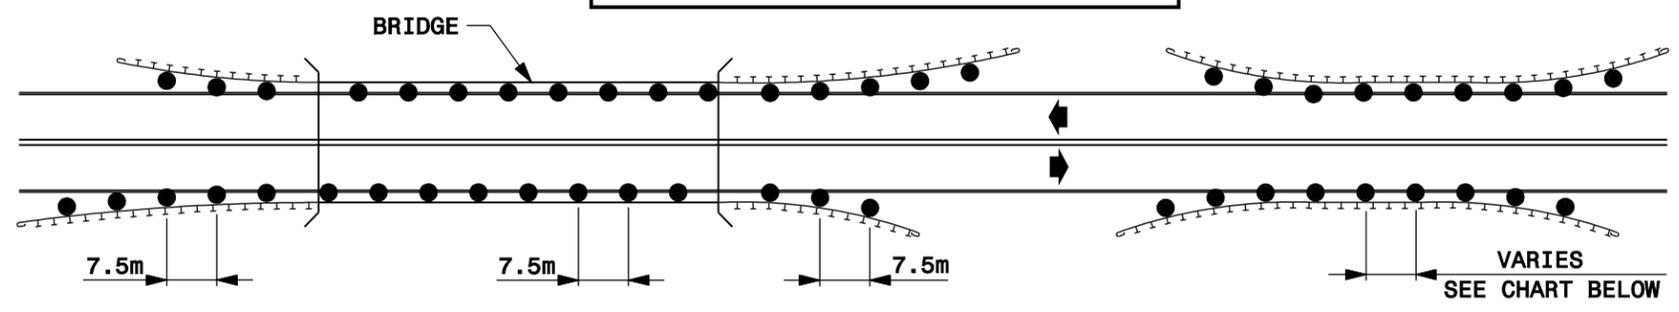

GUARDRAIL/BARRIER AT BRIDGES

DIVIDED ROADWAYS

GUARDRAIL/BARRIER ALONG ROADWAY

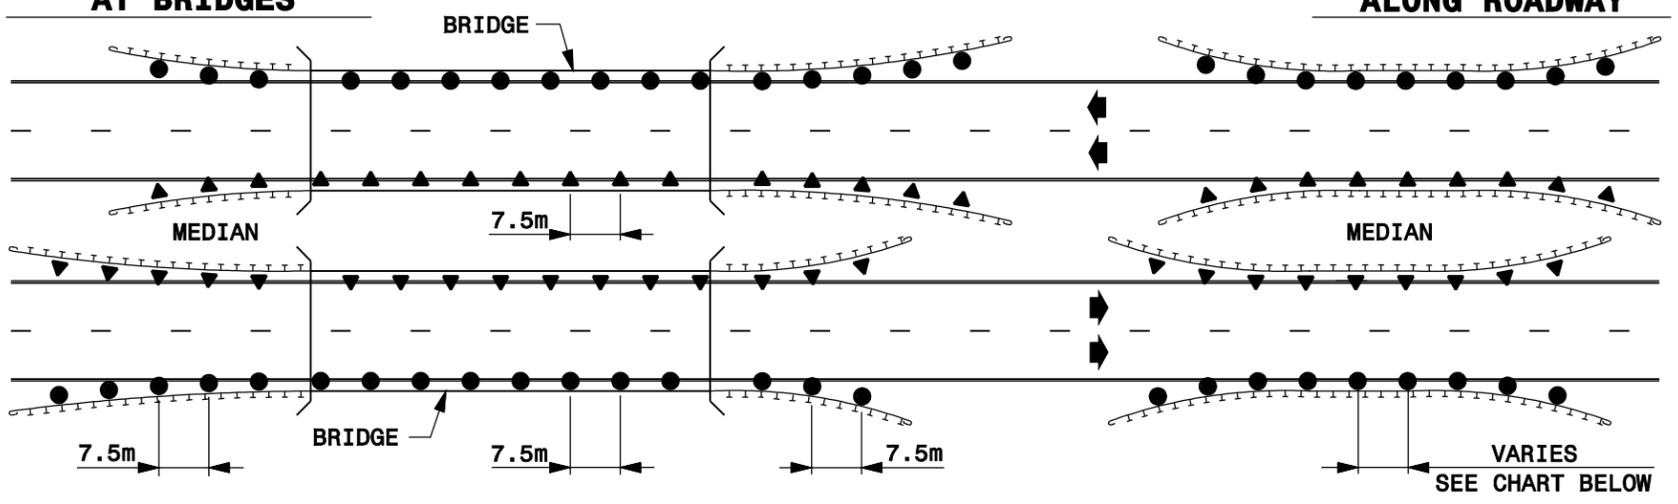


DELINEATOR SPACING REQUIREMENTS FOR PERMANENT AND CONSTRUCTION ZONE GUARDRAIL, BARRIER, AND BRIDGERAIL	
SPACING (METERS)	RAIL LOCATIONS
30	ROADWAY CURVATURE < 585m RADIUS RAIL PARALLEL TO ROADWAY
15	ROADWAY CURVATURE ≥ 585m RADIUS RAIL PARALLEL TO ROADWAY
7.5	TRANSITIONS, TAPERS, & SECTIONS LESS THAN 60 METERS LONG
7.5	BRIDGE RAILS AND RAILS AT BRIDGE APPROACHES

GENERAL NOTES

- 1- INSTALL DELINEATORS AT ALL LOCATIONS OF PERMANENT AND TEMPORARY GUARDRAILS, CONCRETE BARRIERS, AND BRIDGE RAILS.
- 2- INSTALL DELINEATORS PRIOR TO ALLOWING TRAFFIC TO PROCEED IN AN AREA WITH NEW BARRIER OR GUARDRAIL INSTALLATIONS (TEMPORARY AND PROPOSED).
- 3- CONFORM COLOR OF DELINEATORS TO THE COLOR OF THE ADJACENT EDGE LINES.
- 4- POSITION DELINEATORS SUCH THAT THE REFLECTIVE SHEETING IS PERPENDICULAR TO THE ROADWAY.
- 5- BEGIN DELINEATOR PLACEMENT 1.5 METERS FROM BARRIER APPROACH ENDS AND 7.5 METERS FROM GUARDRAIL APPROACH ENDS.
- 6- BARRIER DELINEATORS THAT FALL ON JOINTS OR MOVE CONNECTIONS (UP TO 300mm), ON EITHER SIDE OF THE JOINT.
- 7- POSITION THE GUARDRAIL AND/OR BARRIER DELINEATORS TO ACHIEVE A UNIFORM HEIGHT WITH THE BARRIER DELINEATORS WHERE GUARDRAIL TIES TO CONCRETE BARRIER.

LEGEND

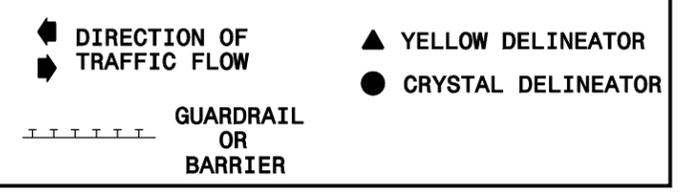

NOTE:
THIS DRAWING IS DIMENSIONED IN MILLIMETERS UNLESS OTHERWISE DEPICTED WITHIN THE DRAWING.

7-06