



ISOMETRIC VIEW

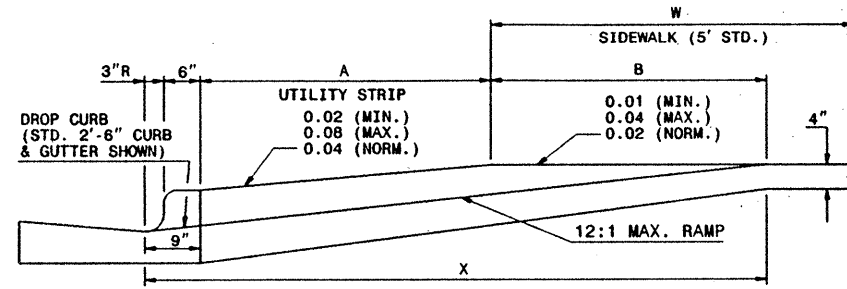


SECTION B-B

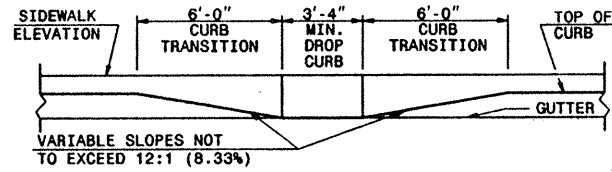


SECTION A-A

W	A	W+A+9"	X	B
5'	0.0'	5.8'	5.8'	5.0'*
6'	0.0'	6.8'	6.8'	6.0'**
7'	0.0'	7.8'	7.3'	6.5'**
8'	0.0'	8.8'	7.3'	6.5'**
5'	2.0'	7.8'	7.8'	5.0'
5'	2.5'	8.3'	8.1'	4.8'
5'	3.0'	8.8'	8.3'	4.4'
5'	3.5'	9.3'	8.4'	4.1'
5'	4.0'	9.8'	8.6'	3.8'
5'	4.5'	10.3'	8.7'	3.4'
5'	5.0'	10.8'	8.9'	3.1'

$B = X - (A + 9")$   
 B = DISTANCE FROM FRONT EDGE OF SIDEWALK TO BACK POINT OF 12:1 (8.33%) SLOPE.  
 \* BACK OF SIDEWALK DROP REQUIRED FOR ALL SIDEWALK SLOPES.  
 \*\* BACK OF SIDEWALK DROP REQUIRED FOR SIDEWALK SLOPES 0.04.

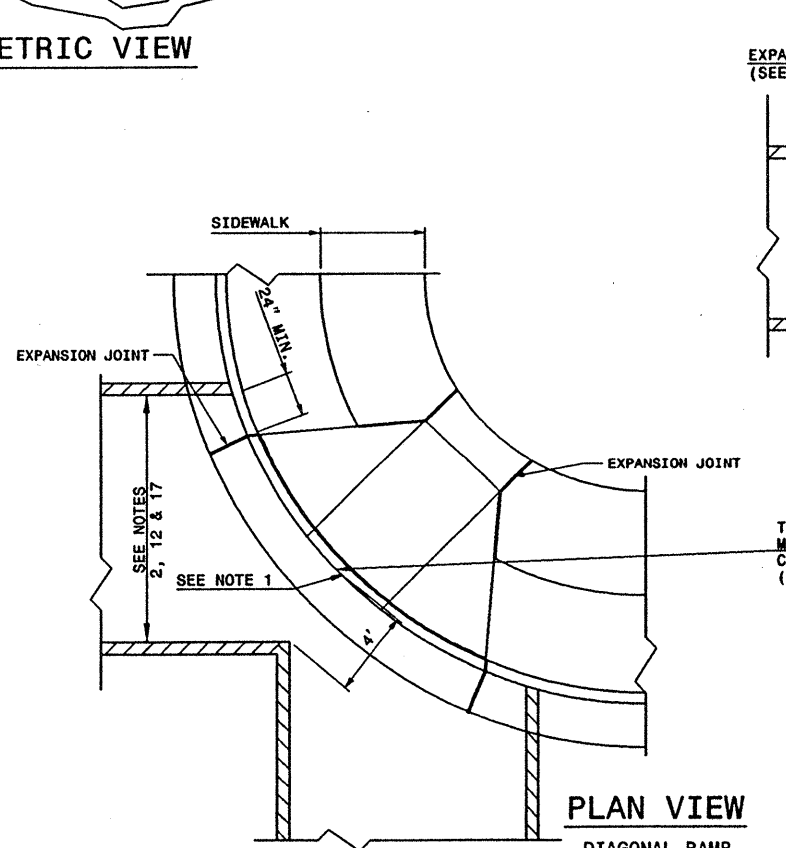

PLAN VIEW  
DIAGONAL RAMP  
MAX. 25' RADII  
(60" MIN. FLOOR WIDTH)

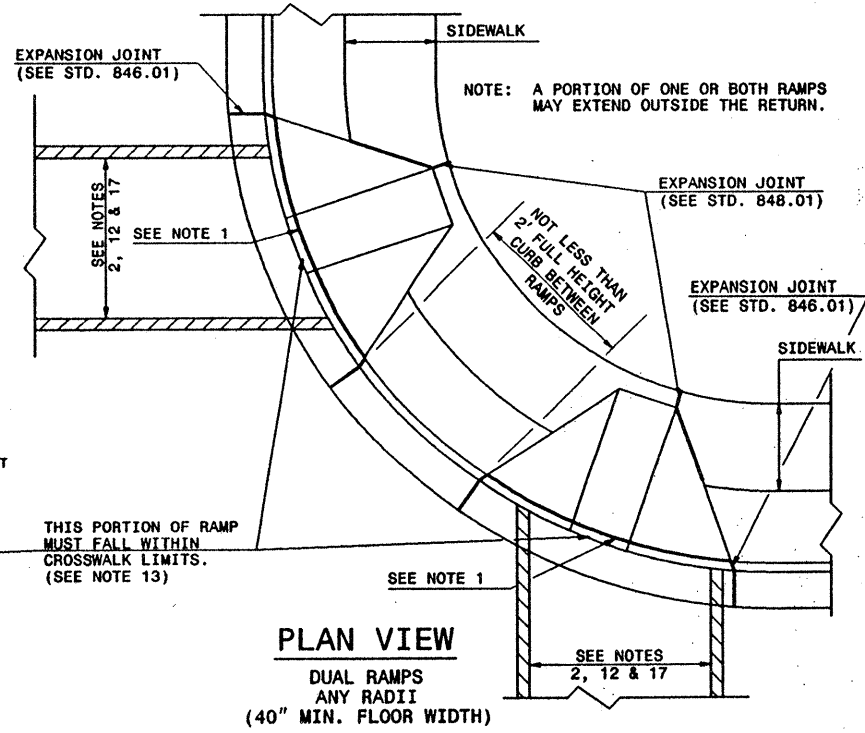

PLAN VIEW  
DUAL RAMP  
ANY RADII  
(40" MIN. FLOOR WIDTH)

ROADWAY PLAN SYMBOL <b>CCFR</b> CURB CUT FOR FUTURE RAMP	ROADWAY PLAN SYMBOL <b>WCR</b> FOR PROPOSED WHEELCHAIR RAMP
--	---