
NOTES ON PLANS:

PLATES SHALL CONFORM TO AASHTO M270 GRADE 36 STEEL OR APPROVED EQUAL.


THE 6" \varnothing PVC PLASTIC PIPE AND FITTINGS SHALL BE SCHEDULE 40 AND CONFORM TO ASTM D1785.

COUPLING IN DRAIN PIPE WILL BE PERMITTED AS APPROVED BY THE ENGINEER.


BOLT SIZE TO BE SAME AS DIAPHRAGMS AND CROSSFRAME CONNECTIONS.STAINLESS STEEL WORM DRIVE HOSE CLAMP SHALL BE COMMERCIAL QUALITY.









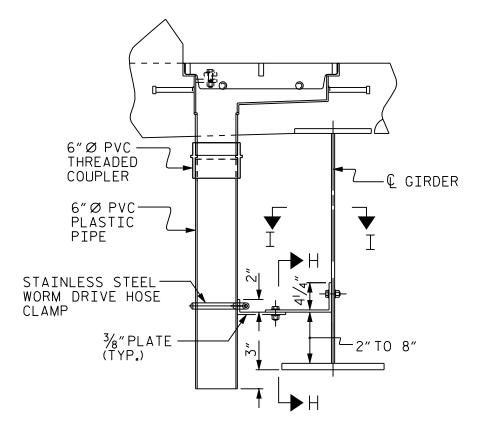

FOR USE WITH STEEL BEAMS OR GIRDERS WHEN A COLLECTION SYSTEM WILL NOT BE ATTACHED TO THE STRUCTURE.

DRAIN CONNECTOR DETAIL

FIGURE 6 – 15


NOTES ON PLANS:

PLATES SHALL CONFORM TO AASHTO M270 GRADE 250 STEEL OR APPROVED EQUAL.

THE 152mm \varnothing PVC PLASTIC PIPE AND FITTINGS SHALL BE SCHEDULE 40 AND CONFORM TO ASTM D1785.

COUPLING IN DRAIN PIPE WILL BE PERMITTED AS APPROVED BY THE ENGINEER.

BOLT SIZE TO BE SAME AS DIAPHRAGMS AND CROSSFRAME CONNECTIONS.STAINLESS STEEL WORM DRIVE HOSE CLAMP SHALL BE COMMERCIAL QUALITY.

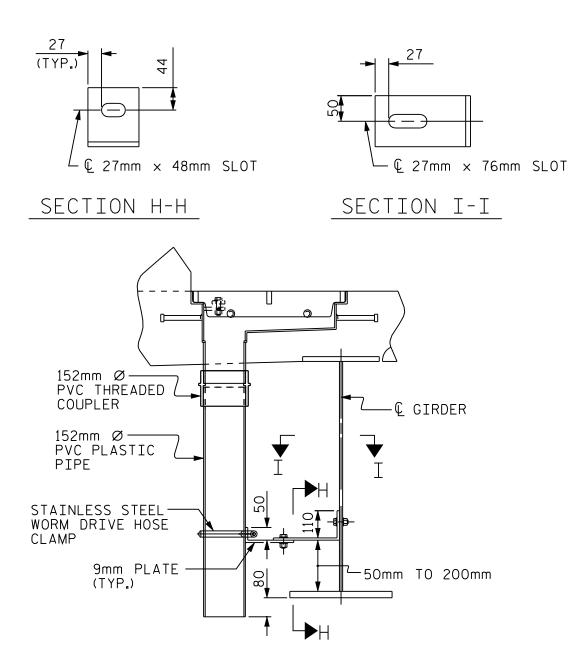

FOR USE WITH STEEL BEAMS OR GIRDERS WHEN A COLLECTION SYSTEM WILL NOT BE ATTACHED TO THE STRUCTURE.

DRAIN CONNECTOR DETAIL

FIGURE 6 – 15 M