

NOTES

APPROACH SLAB SHALL NOT BE CONSTRUCTED PRIOR TO COMPLETION OF THE BRIDGE DECK.

FOR REINFORCED BRIDGE APPROACH FILL INCLUDING GEOTEXTILE, IMPERMEABLE GEOMEMBRANE, 4" Ø DRAINAGE PIPE, #78M STONE, AND SELECT MATERIAL, SEE ROADWAY PLANS.

AREA BETWEEN THE WINGWALL AND APPROACH SLAB SHALL BE GRADED TO DRAIN THE WATER AWAY FROM THE FILL FACE OF THE BRIDGE AND SHALL BE PAVED. SEE ROADWAY PLANS.

THE JOINT SHALL BE SAWED PRIOR TO THE CASTING OF THE BARRIER RAIL, OR PARAPET AND END POST.

WITH FOAM JOINT SEAL

FOR FOAM JOINT SEALS, SEE SPECIAL PROVISIONS.

THE NOMINAL UNCOMPRESSED SEAL WIDTH OF THE FOAM JOINT SEAL SHALL BE ---".

FOR ELASTOMERIC CONCRETE, SEE SPECIAL PROVISIONS.

BILL OF MATERIAL

APPROACH SLAB AT EB #1

BAR	NO.	SIZE	TYPE	LENGTH	WEIGHT
*A		#4	STR		
A		#4	STR		
*B		#5	STR		
B		#6	STR		

REINFORCING STEEL LBS.

*EPOXY COATED REINFORCING STEEL LBS.

CLASS AA CONCRETE C. Y.




APPROACH SLAB AT EB #2

BAR	NO.	SIZE	TYPE	LENGTH	WEIGHT
*A		#4	STR		
A		#4	STR		
*B		#5	STR		
B		#6	STR		

REINFORCING STEEL LBS.

*EPOXY COATED REINFORCING STEEL LBS.

CLASS AA CONCRETE C. Y.

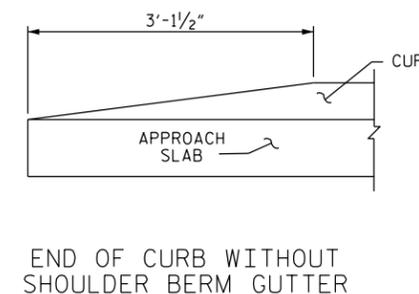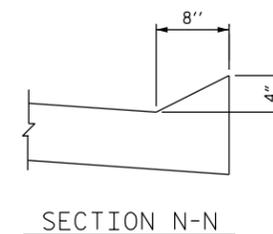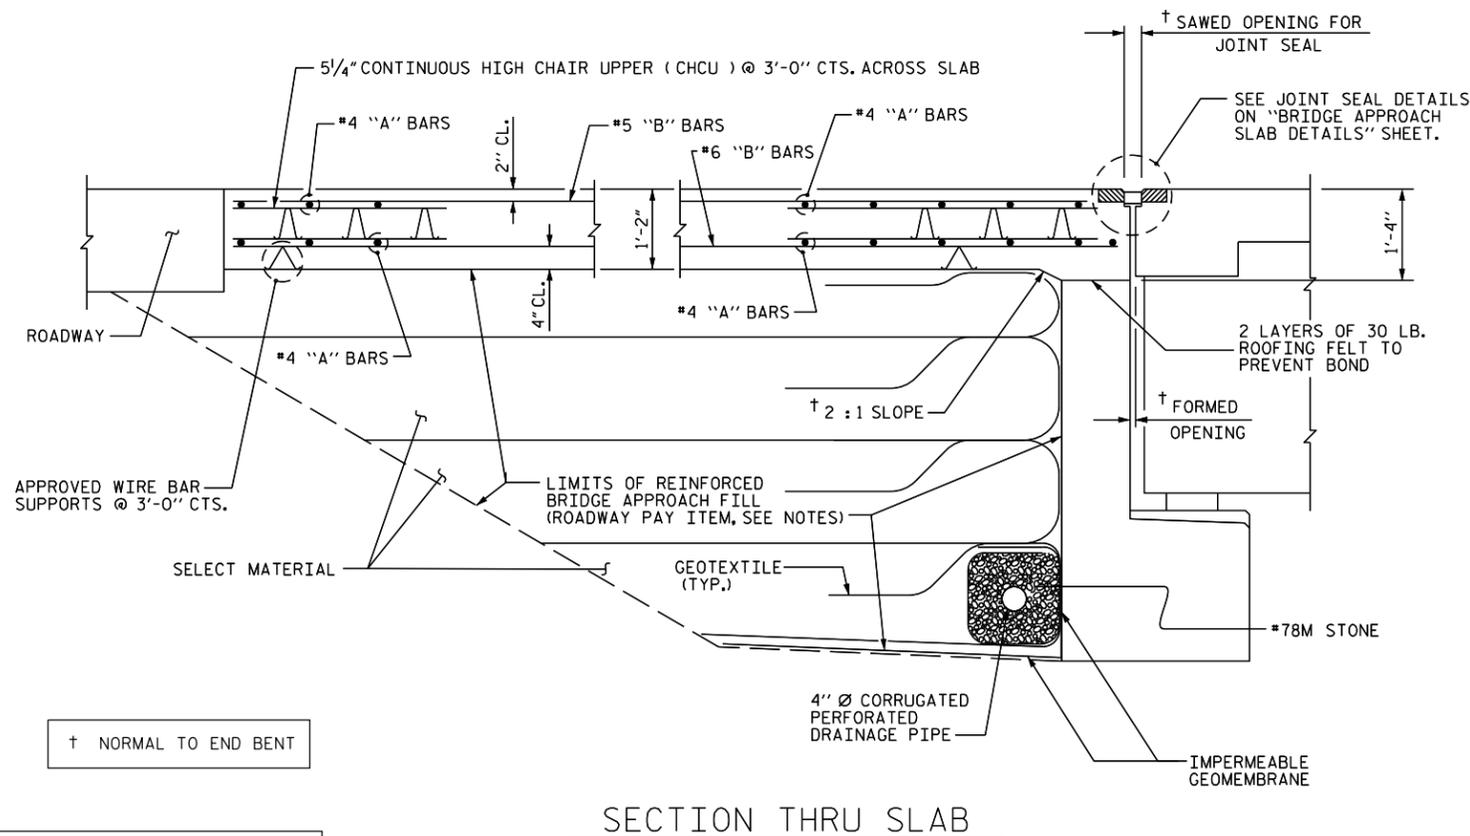

SECTION THRU SLAB

CURB DETAILS

PROJECT NO. _____

_____ COUNTY

STATION: _____

SHEET 1 OF 2

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH
STANDARD
BRIDGE APPROACH SLAB
FOR RIGID PAVEMENT

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	TOTAL SHEETS
1			3			
2			4			

STD. NO. BAS1

ASSEMBLED BY :	DATE :
CHECKED BY :	DATE :
DRAWN BY : RH 5/99	REV. 7/10/01 LES/RDR
CHECKED BY : RDR 5/99	REV. 5/17/03R RHW/JTE
	REV. 5/11/06RR KMM/GM