



**TYPICAL SECTION NO. 1**

Map 1 NC 610 / E Fairfield Rd  
Map 21 SR 1113 Kivett Dr

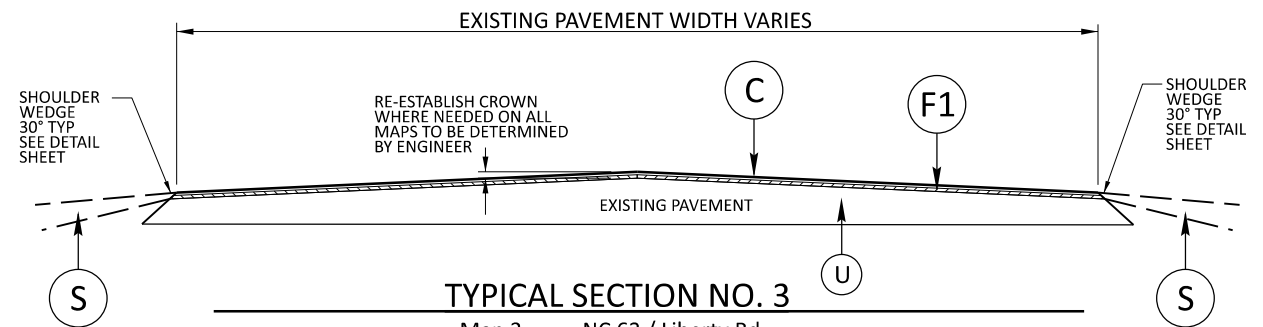


**TYPICAL SECTION NO. 3**

Map 3 NC 62 / Liberty Rd  
Map 21 SR 1113 Kivett Dr

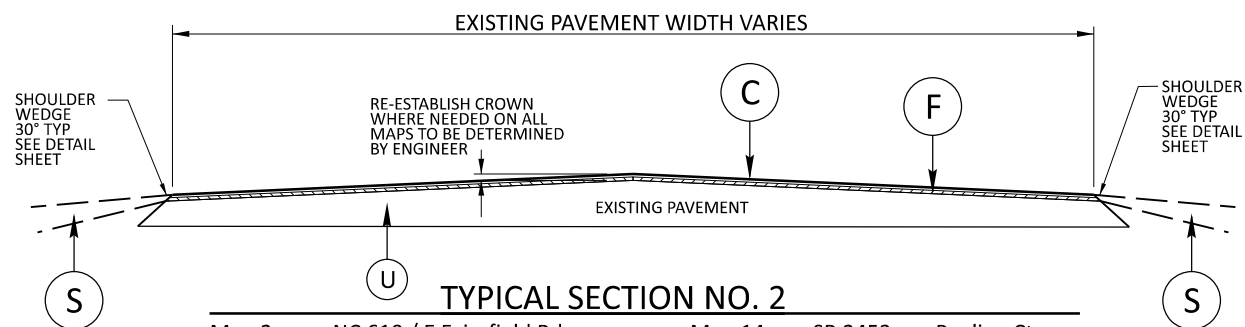

**TYPICAL SECTION NO. 2**

Map 2	NC 610 / E Fairfield Rd	Map 14	SR 2453	Paulina Ct	
Map 4	SR 4395	Squirrel Chase Dr	Map 15	SR 4360	Sarah Marie Dr
Map 5	SR 5510	N Scamper Grey Ct	Map 16	SR 2446	Sarelma Dr
Map 6	SR 4396	S Scamper Grey Ct	Map 17	SR 2463	Tiarella Ct
Map 7	SR 4359	Cornus Ct	Map 18	SR 2462	Tiarella Dr
Map 8	SR 2445	Dickenben Dr	Map 19	SR 2461	Weitzel Dr
Map 9	SR 2447	Emmacyn Dr	Map 20	SR 4957	William Bailey Ed
Map 10	SR 4350	Henfree Dr	Map 22	SR 3325	Ritters Lake Rd
Map 11	SR 2685	Hepatical Ct	Map 23	SR 3417	Rygate Dr
Map 12	SR 2464	Hepatical Ln	Map 24	SR 4015	Emsley Rd
Map 13	SR 2444	Joseph Hoskins Ln	Map 25	SR 4018	Blazer Rd

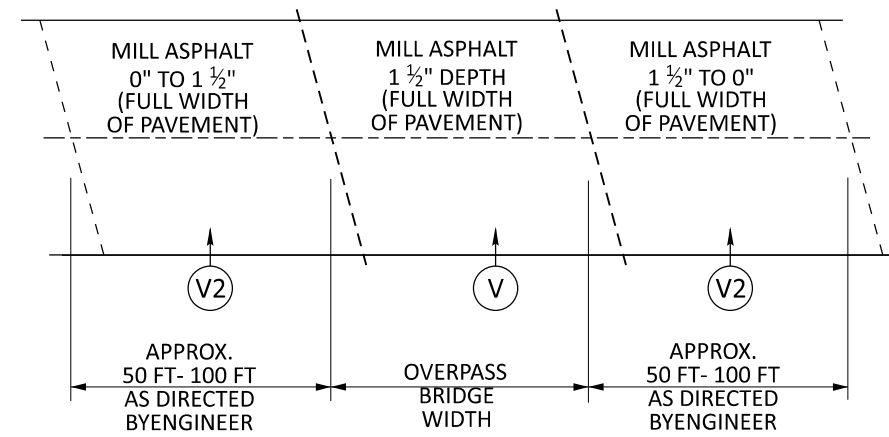

**PLAN VIEW-  
MILLING ASPHALT PAVEMENT UNDER OVERPASS**

Map 21 SR 1113 Kivett Dr

PAVEMENT SCHEDULE	
C	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TO BE APPLIED AT AN AVERAGE RATE OF 165 LBS PER SQ YD.
F	AST MAT COAT, #78M
F1	AST MAT COAT, # 67M
S	SHOULDER RECONSTRUCTION (SEE DETAIL)
U	EXISTING PAVEMENT
V	MILL ASPHALT PAVEMENT, 1 1/2" DEPTH
V2	MILL ASPHALT PAVEMENT, 0" TO 1 1/2" DEPTH