



**This electronic collection of documents is provided
for the convenience of the user
and is Not a Certified Document –**

**The documents contained herein were originally issued
and sealed by the individuals whose names and license
numbers appear on each page, on the dates appearing
with their signature on that page.**

**This file or an individual page
shall not be considered a certified document.**

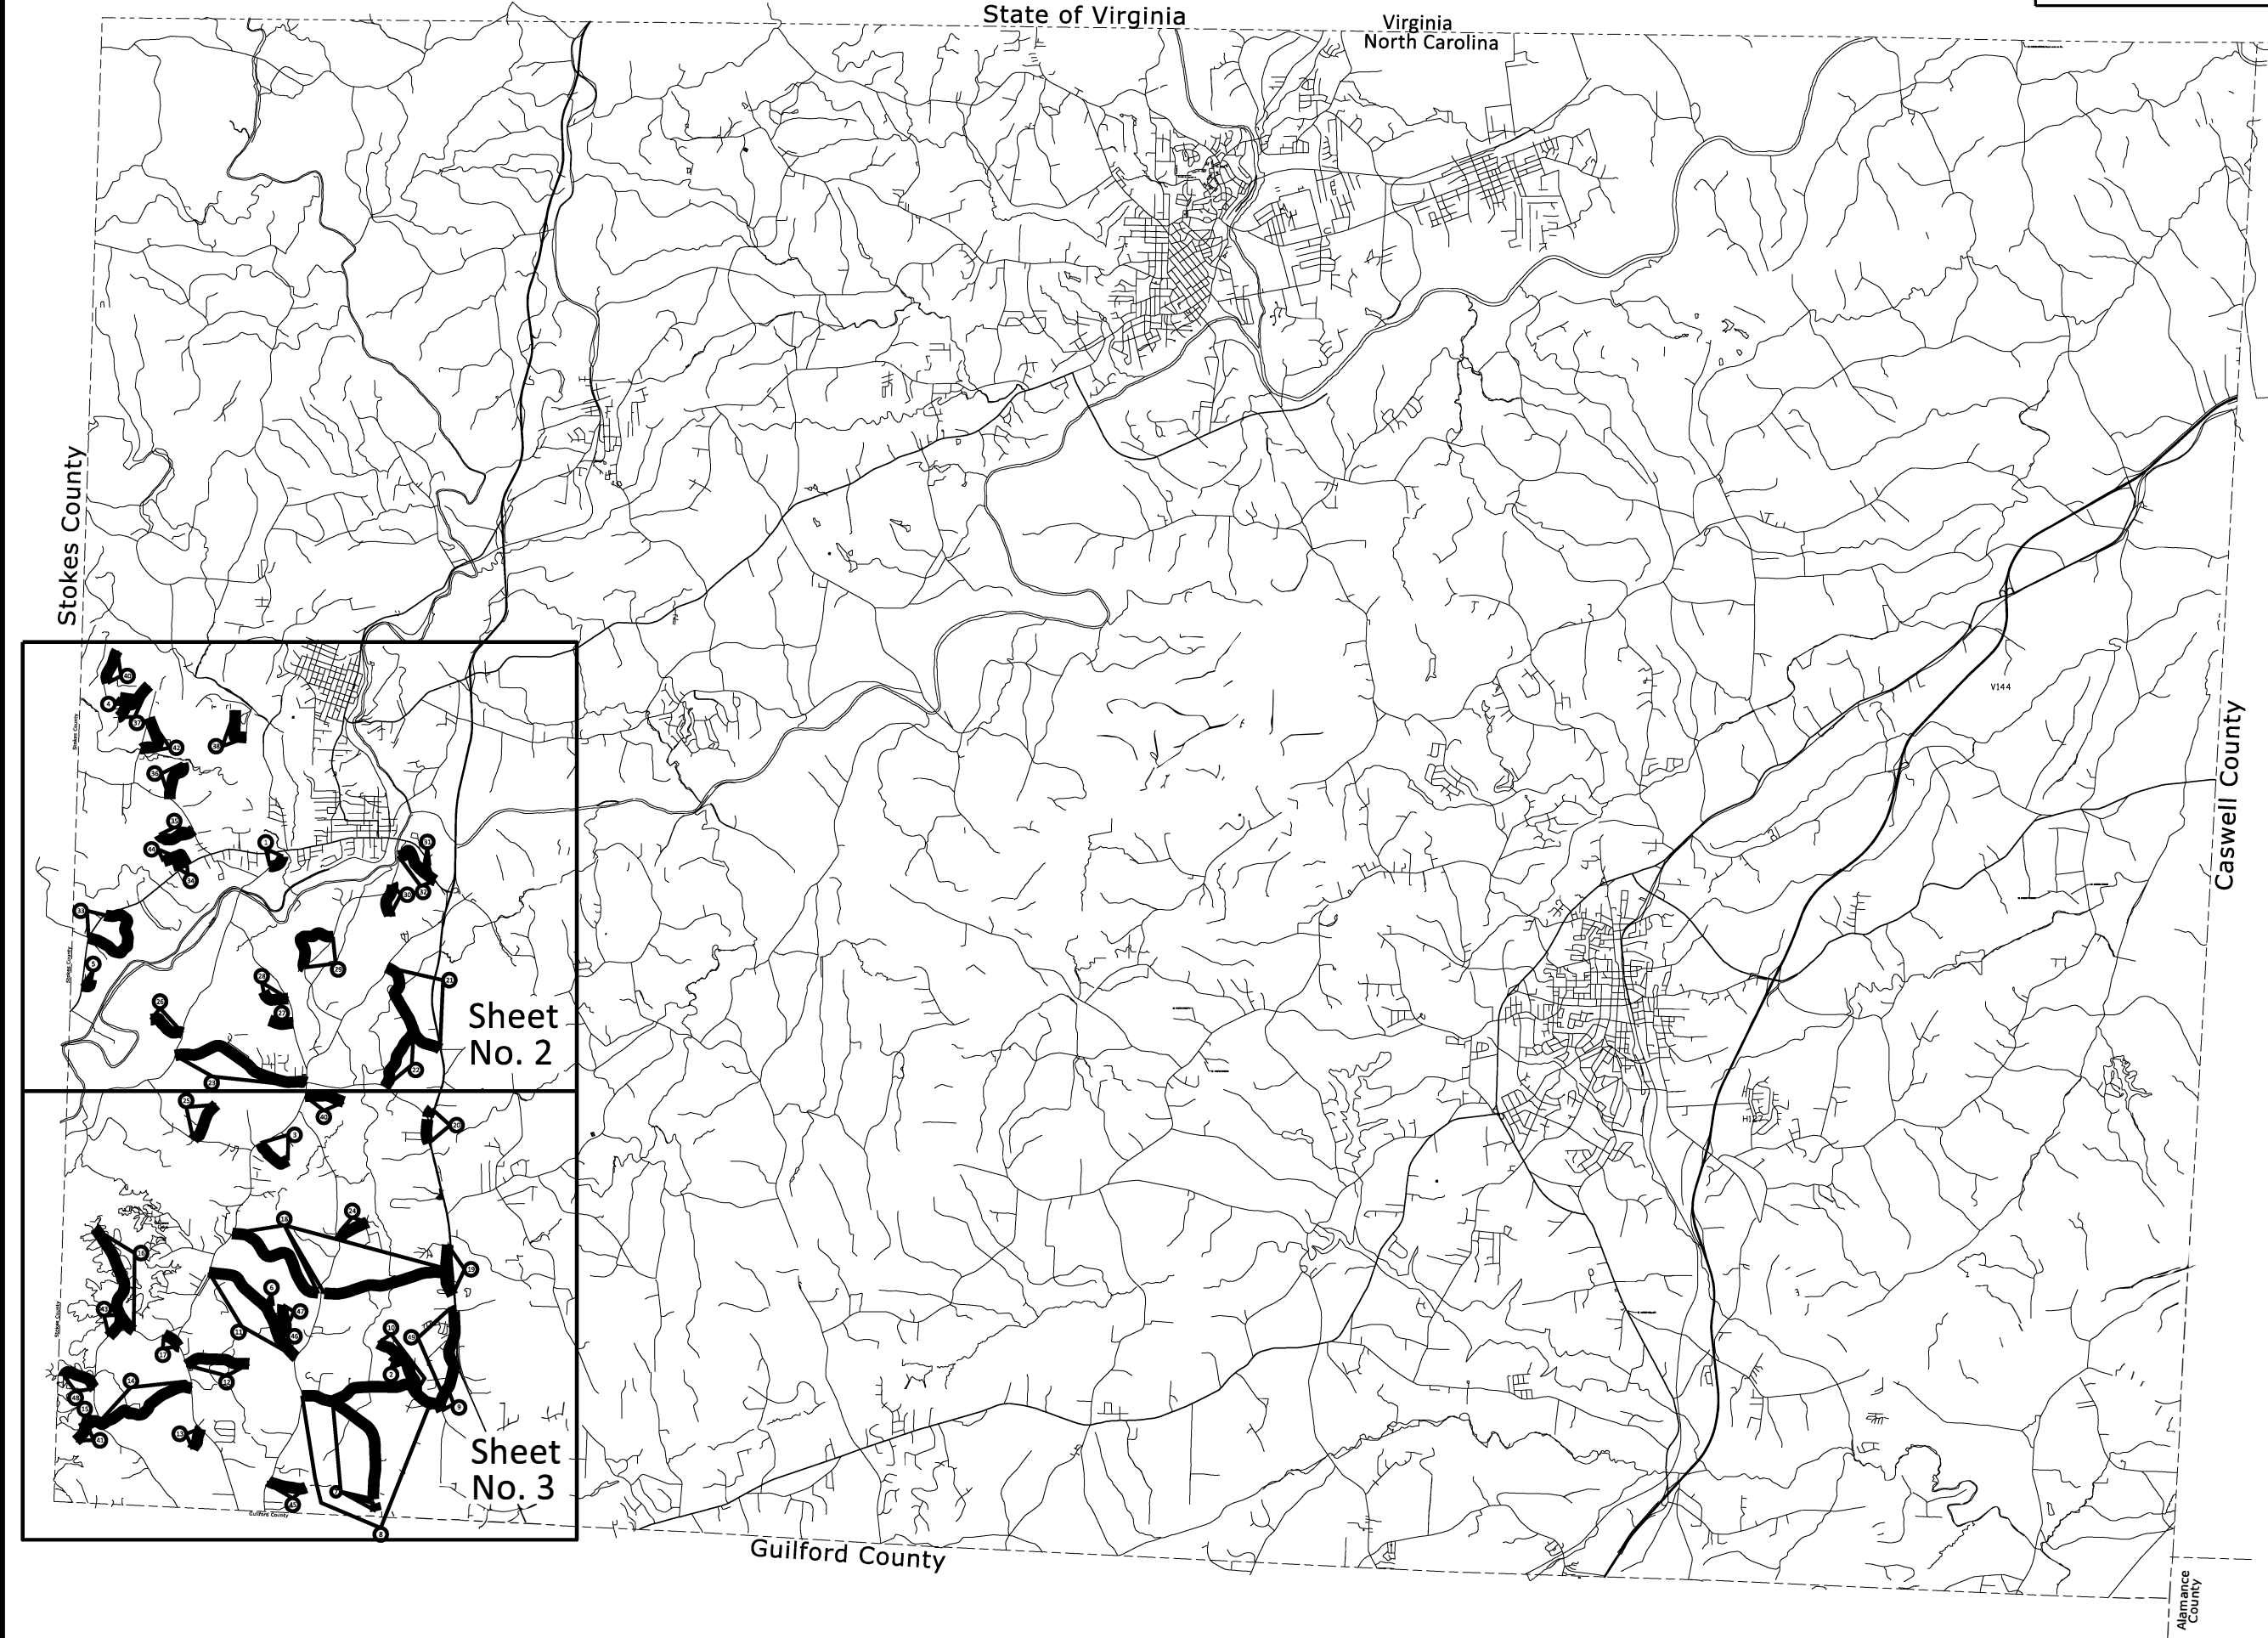


ROCKINGHAM
COUNTY
NORTH CAROLINA

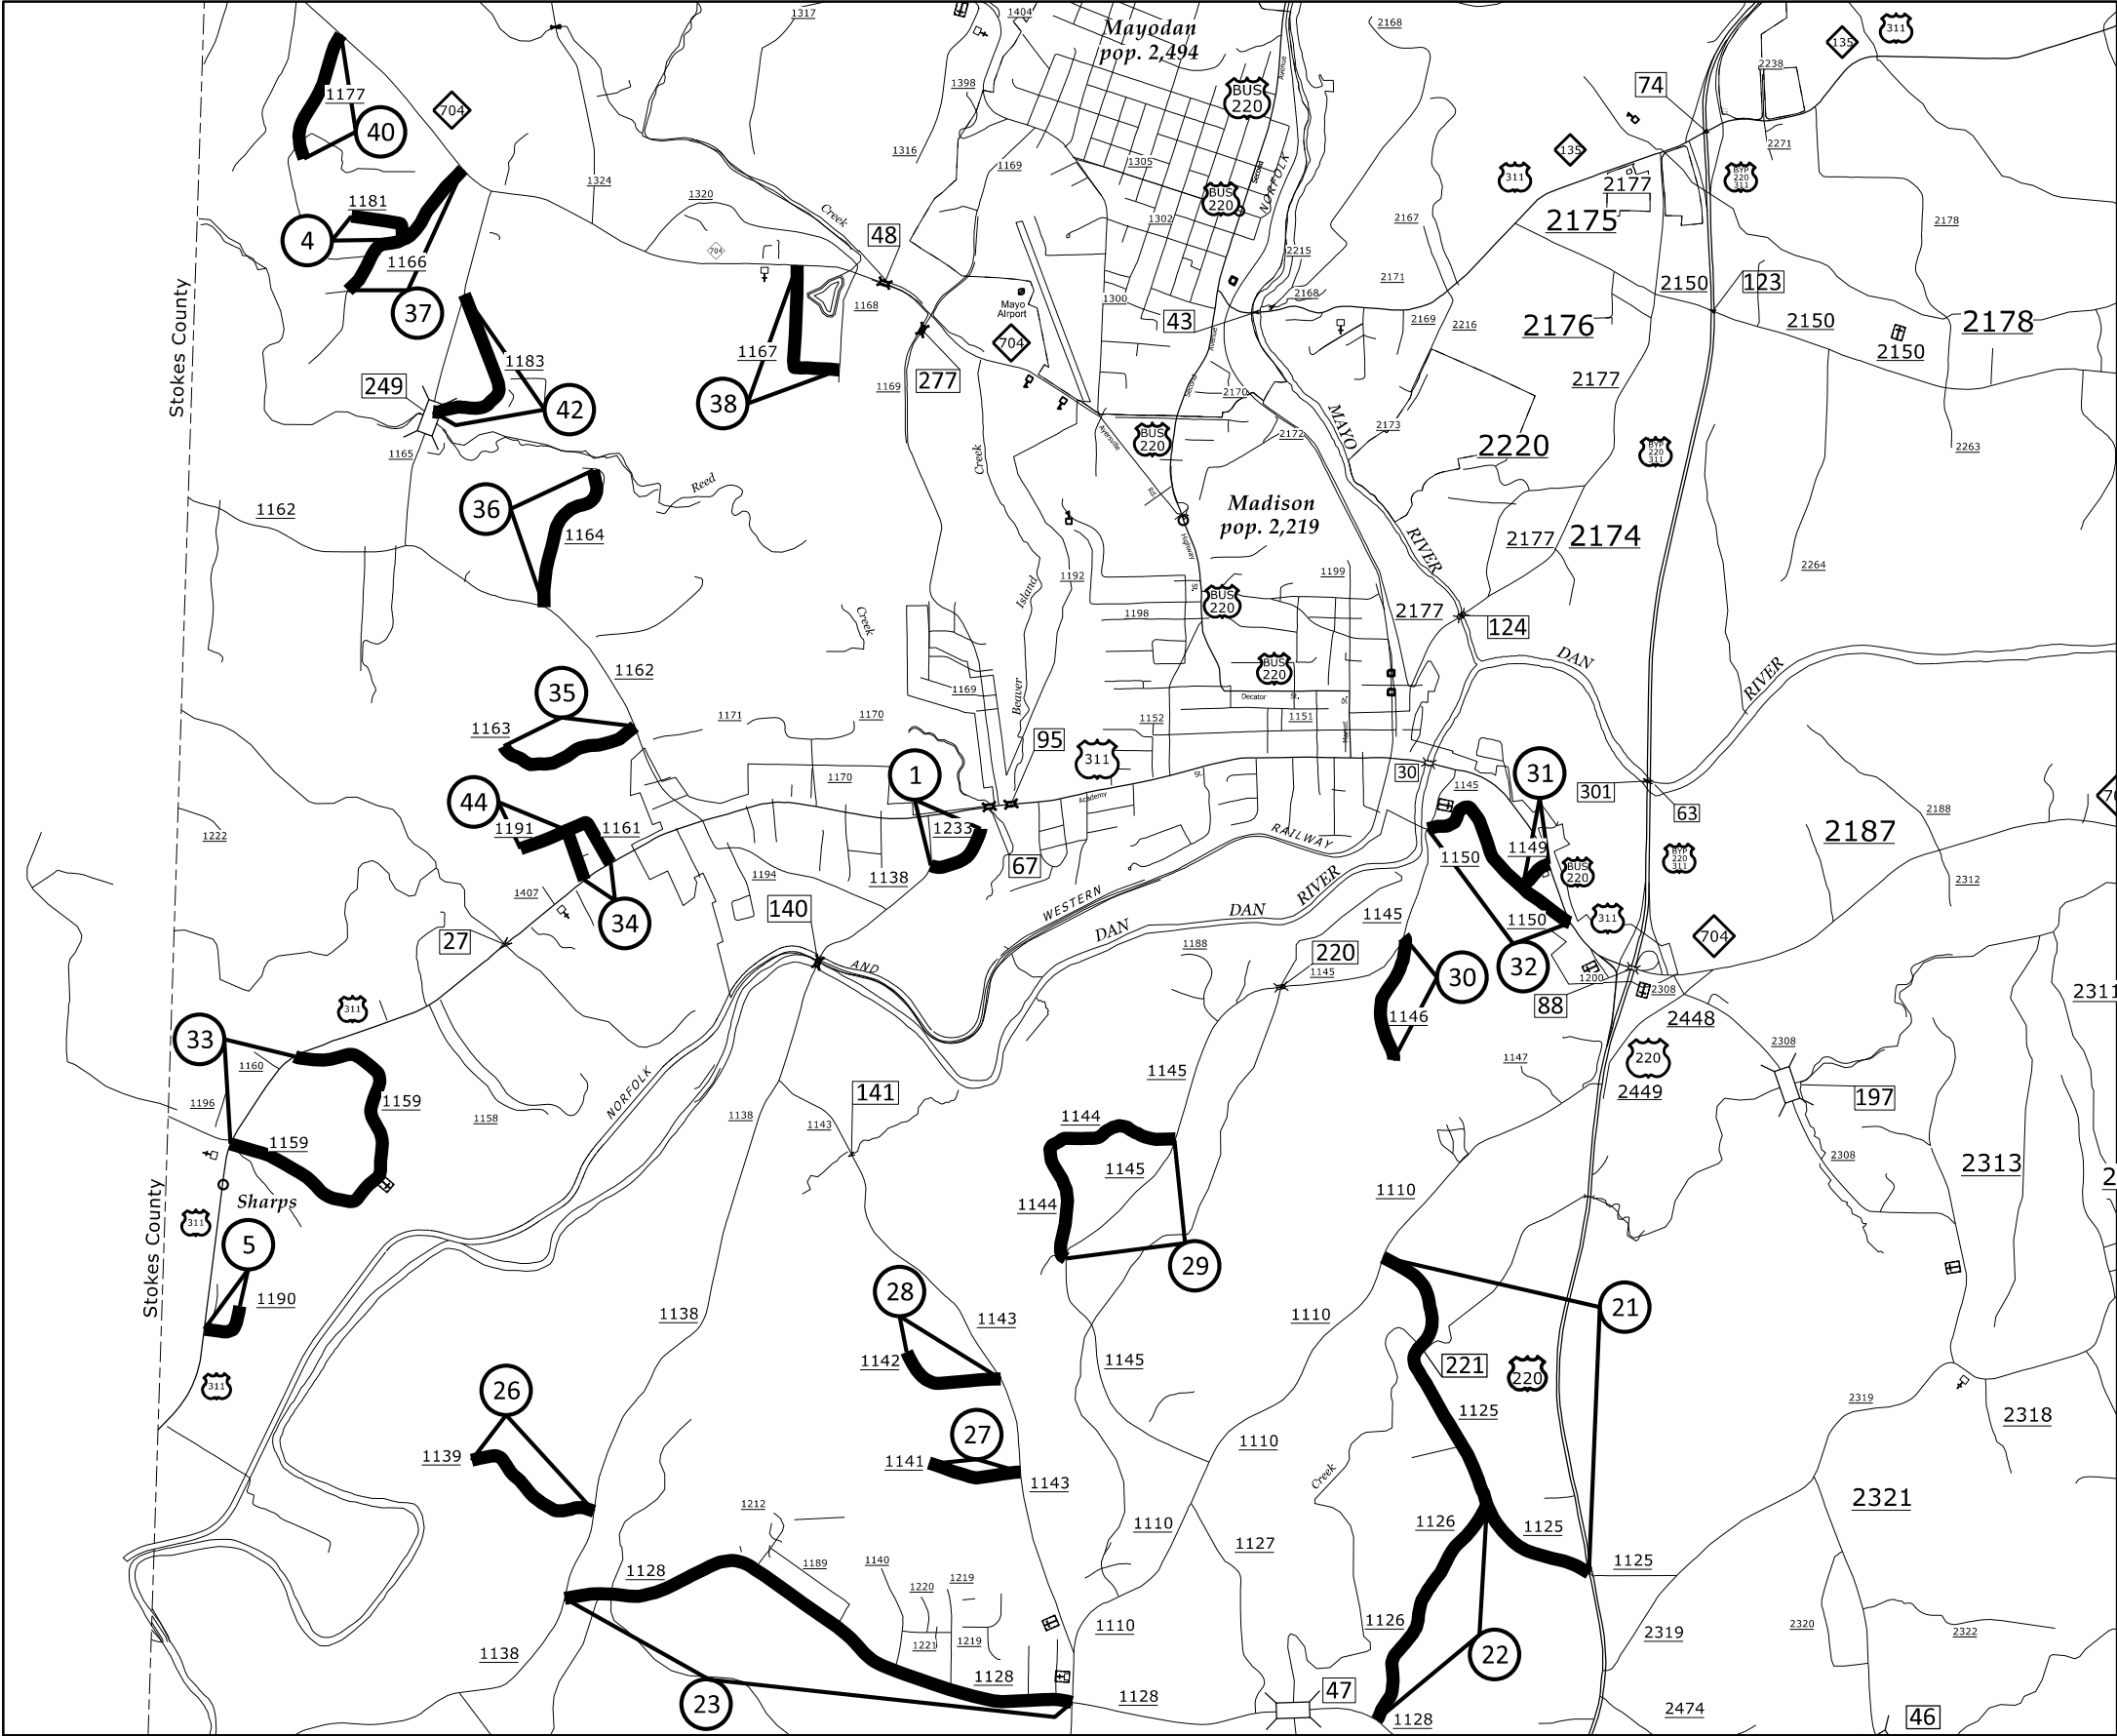


- Map 1** SR 1233 - Water Plant Rd
DO NOT REPLACE PAVEMENT MARKINGS
- Map 4** SR 1181 - Pinecrest Rd
- Map 5** SR 1190 - Western Rd
- Map 21** SR 1125 - Williams Rd
Bridge #221
No pavement on bridge
- Map 22** SR 1126 - Landreth Rd
- Map 23** SR 1128 - Sardis Church Rd
- Map 26** SR 1139 - Jw Rd
- Map 27** SR 1141 - Tilly Rd
- Map 28** SR 1142 - Relus Rd
- Map 29** SR 1144 - Sally Lp
- Map 30** SR 1146 - Nell Rd
- Map 31** SR 1149 - Colonial Rd
- Map 32** SR 1150 - Old Covered Bridge Rd
- Map 33** SR 1159 - Dodge Lp
- Map 34** SR 1161 - Reed Lp
- Map 35** SR 1163 - Gibson Rd
- Map 36** SR 1164 - Madison Beach Rd
- Map 37** SR 1166 - Case Rd
- Map 38** SR 1167 - Ziglar Rd
- Map 40** SR 1177 - Gilligan Rd
- Map 42** SR 1183 - Creek Lp
- Map 44** SR 1191 - Raleigh Rd

MATCH LINE SEE SHEET 2

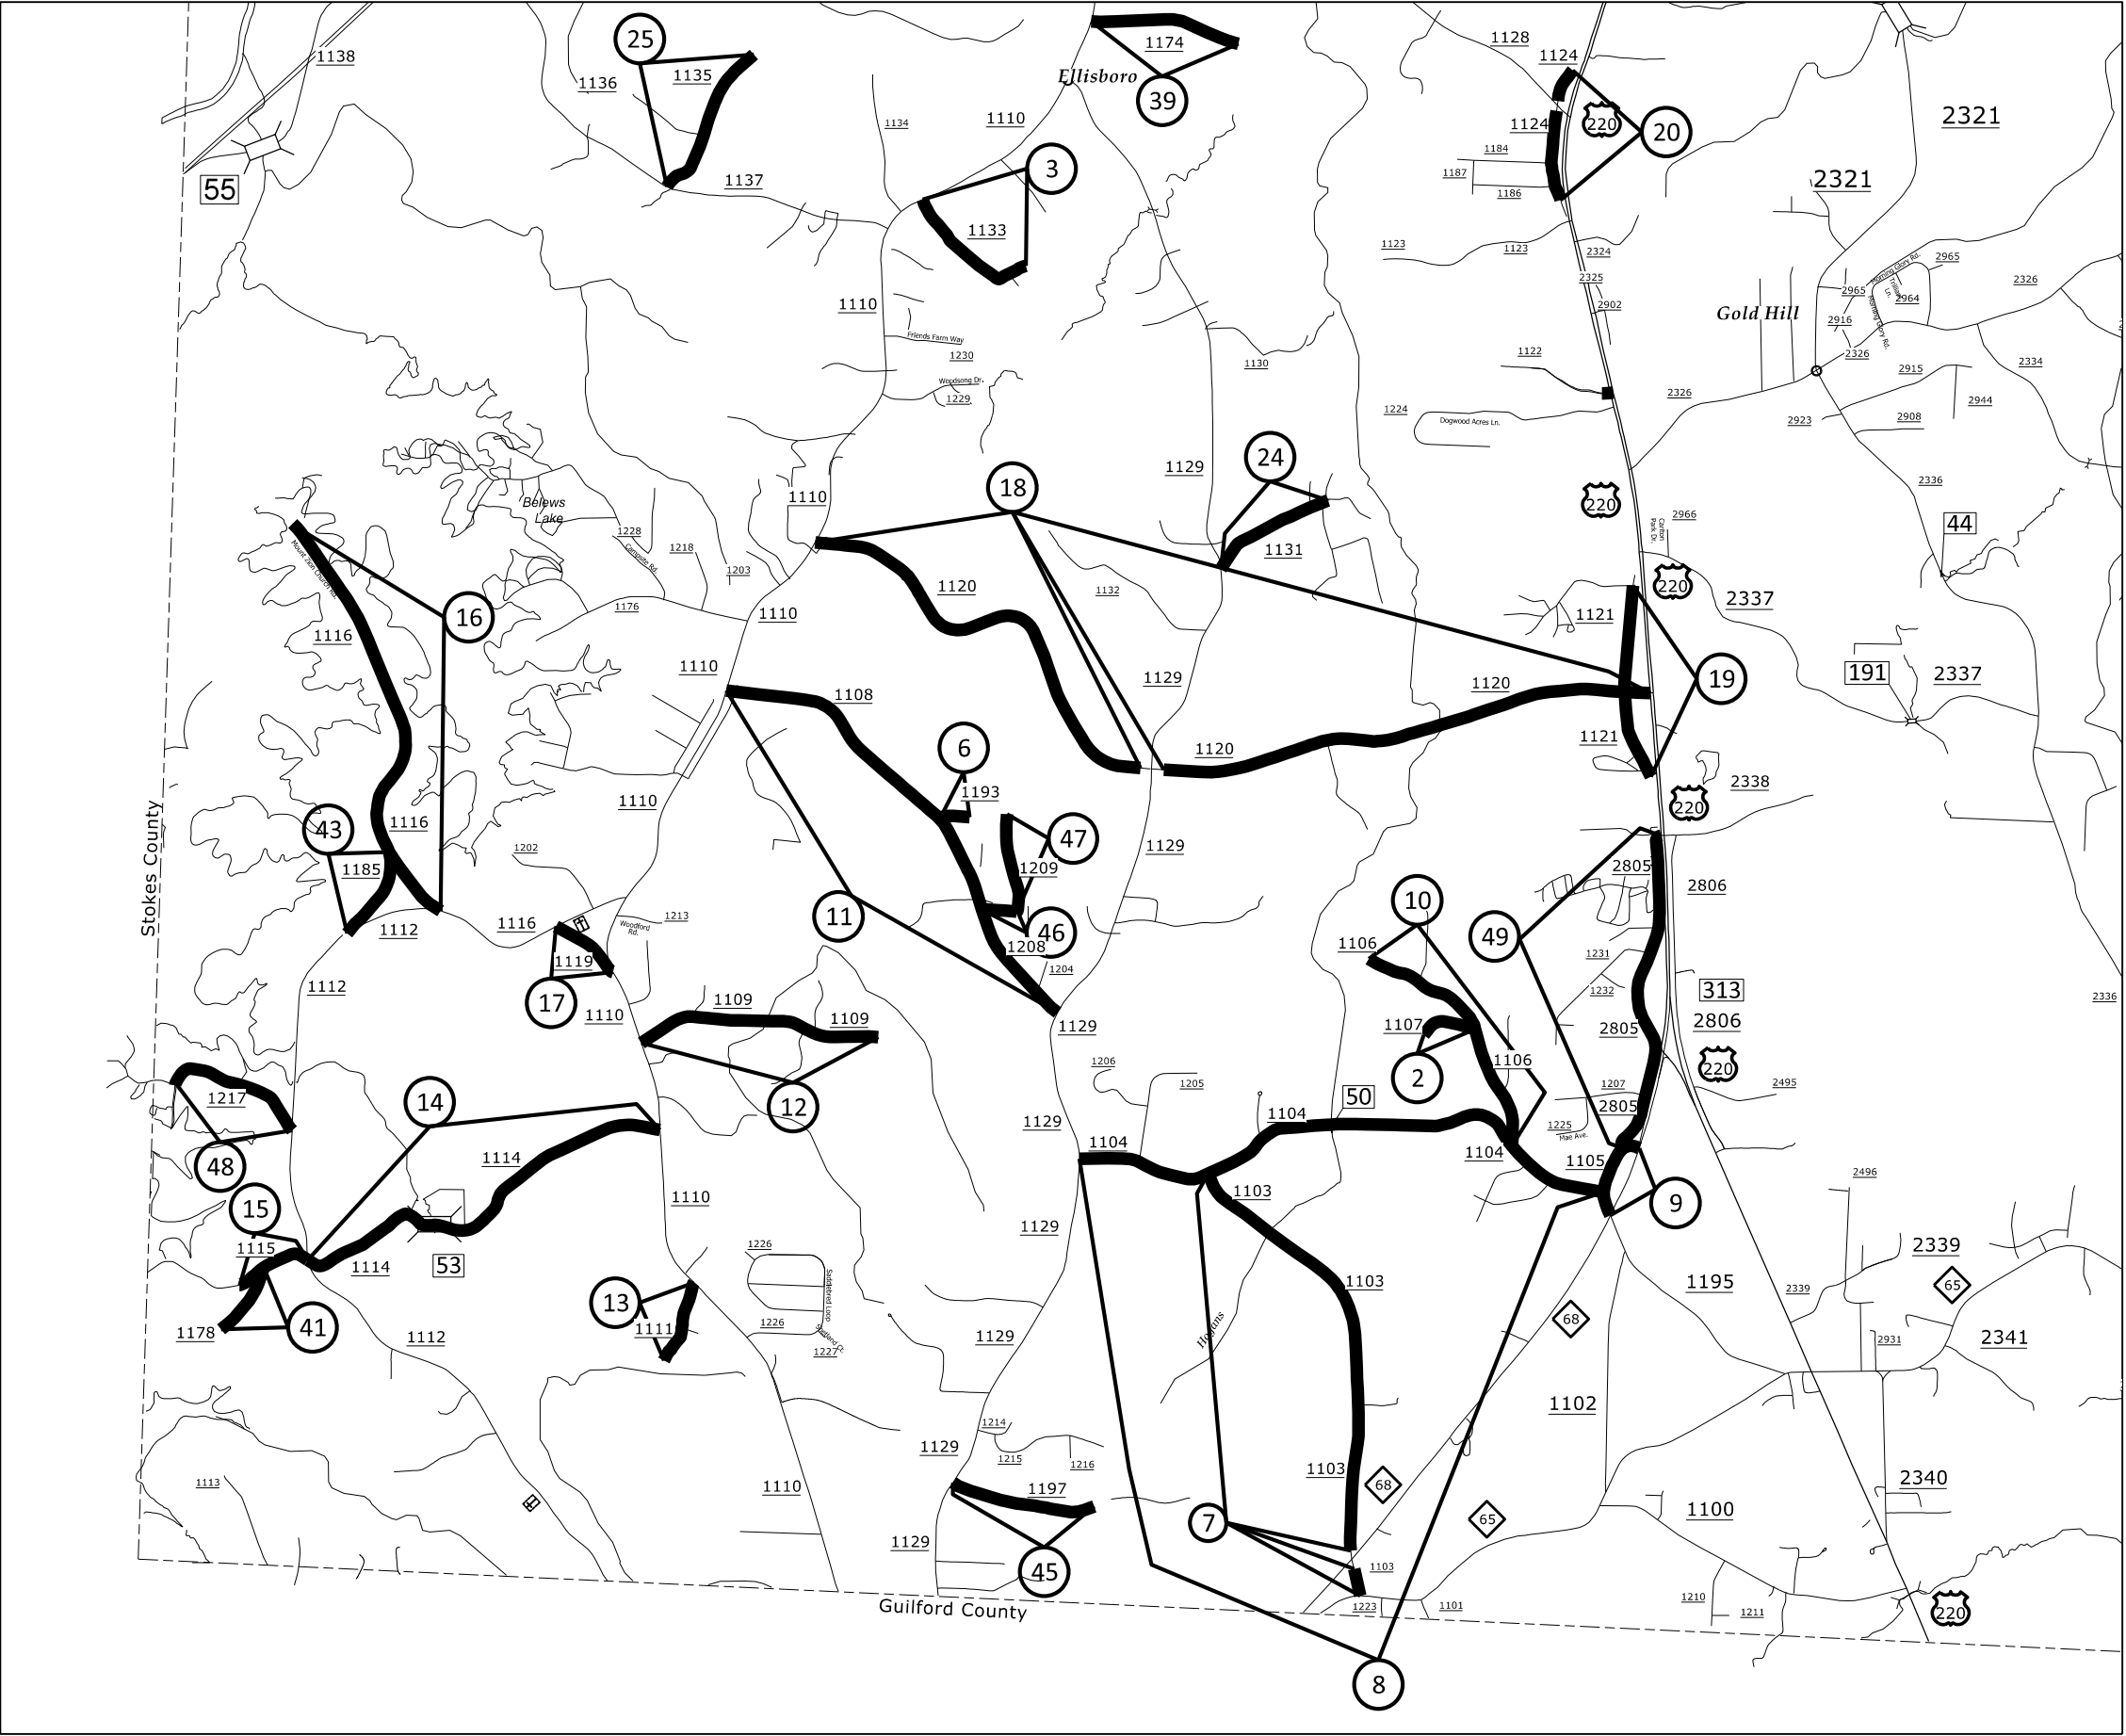


- Map 2** SR 1107 - Middleton Rd
Map 3 SR 1133 - Goose Rd
- Map 6** SR 1193 - Honey Rd
- Map 7** SR 1103 - Lauren Rd
SKIP INTERSECTION AT NC 68
- Map 8** SR 1104 - Lemons Rd
BRIDGE # 50
No pavement on bridge
- Map 9** SR 1105 - Lemons Lp
Map 10 SR 1106 - Albert Rd
Map 11 SR 1108 - Stanley Rd
Map 12 SR 1109 - Hilton Rd
Map 13 SR 1111 - Christopher Rd
- Map 14** SR 1114 - Renn Rd
BRIDGE # 53
No pavement on bridge
- Map 15** SR 1115 - Southern Rd
Map 16 SR 1116 - Mt Zion Church Rd
Map 17 SR 1119 - Mt Zion Lp
- Map 18** SR 1120 - Simpson Rd
SKIP INTERSECTION AT
SR 1129 Gideon Grove Church Rd
- Map 19** SR 1121 - Ram Lp
- Map 20** SR 1124 - Sardis Lp
SKIP INTERSECTION AT
SR 1128 Sardis Church Rd
- Map 24** SR 1131 - Gentry Rd
Map 25 SR 1135 - Ped Rd
- Map 39** SR 1174 - Fletcher Rd
- Map 41** SR 1178 - Plummer Rd
- Map 43** SR 1185 - Oak Level Loop Rd
- Map 45** SR 1197 - Sunrise Acres Rd
Map 46 SR 1208 - Matt Dillon Dr
Map 47 SR 1209 - Cartwright Dr
Map 48 SR 1217 - Humphreys Ridge Dr
Map 49 SR 2805 - Price Farm Rd

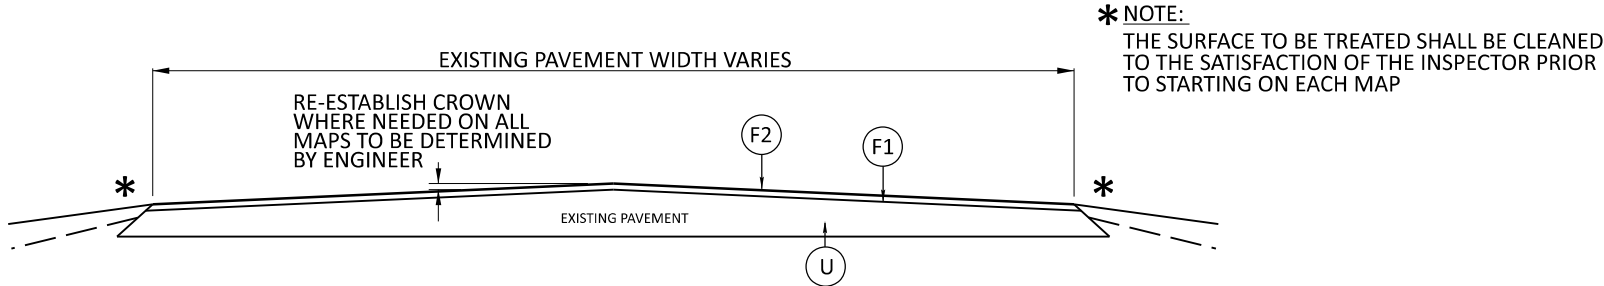

TYPICAL SECTION NO. 1

Map 1	SR 1233 - Water Plant Rd	Map 22	SR 1126 - Landreth Rd
Map 2	SR 1107 - Middleton Rd	Map 24	SR 1131 - Gentry Rd
Map 3	SR 1133 - Goose Rd	Map 25	SR 1135 - Ped Rd
Map 4	SR 1181 - Pinecrest Rd	Map 26	SR 1139 - Jw Rd
Map 5	SR 1190 - Western Rd	Map 27	SR 1141 - Tilly Rd
Map 6	SR 1193 - Honey Rd	Map 28	SR 1142 - Relus Rd
Map 7	SR 1103 - Lauren Rd	Map 29	SR 1144 - Sally Lp
Map 8	SR 1104 - Lemons Rd	Map 30	SR 1146 - Nell Rd
	Bridge # 50	Map 31	SR 1149 - Colonial Rd
	No pavement on bridge	Map 32	SR 1150 - Old Covered Bridge Rd
Map 9	SR 1105 - Lemons Lp	Map 33	SR 1159 - Dodge Lp
Map 10	SR 1106 - Albert Rd	Map 34	SR 1161 - Reed Lp
Map 11	SR 1108 - Stanley Rd	Map 35	SR 1163 - Gibson Rd
Map 12	SR 1109 - Hilton Rd	Map 36	SR 1164 - Madison Beach Rd
Map 13	SR 1111 - Christopher Rd	Map 37	SR 1166 - Case Rd
Map 14	SR 1114 - Renn Rd	Map 38	SR 1167 - Ziglar Rd
	Bridge # 53	Map 39	SR 1174 - Fletcher Rd
	No pavement on bridge	Map 40	SR 1177 - Gilligan Rd
Map 15	SR 1115 - Southern Rd	Map 41	SR 1178 - Plummer Rd
Map 16	SR 1116 - Mt Zion Church Rd	Map 42	SR 1183 - Creek Lp
Map 17	SR 1119 - Mt Zion Lp	Map 43	SR 1185 - Oak Level Loop Rd
Map 18	SR 1120 - Simpson Rd	Map 44	SR 1191 - Raleigh Rd
Map 19	SR 1121 - Ram Lp	Map 45	SR 1197 - Sunrise Acres Rd
Map 20	SR 1124 - Sardis Lp	Map 46	SR 1208 - Matt Dillon Dr
Map 21	SR 1125 - Williams Rd	Map 47	SR 1209 - Cartwright Dr
	Bridge # 221	Map 48	SR 1217 - Humphreys Ridge Dr
	No pavement on bridge	Map 49	SR 2805 - Price Farm Rd

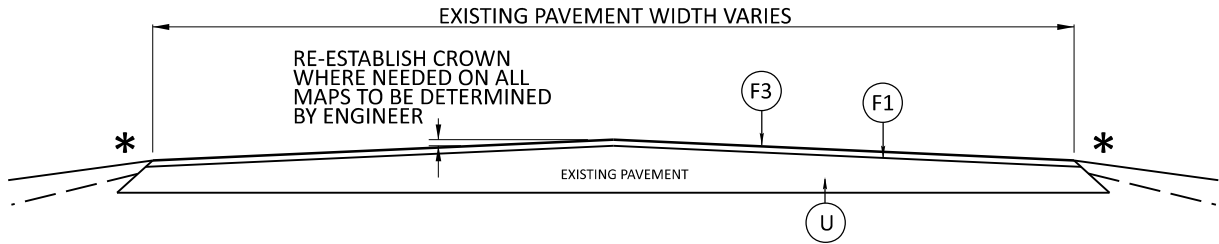


TYPICAL SECTION NO. 2


Map 23 SR 1128 - Sardis Church Rd

* NOTE:
THE SURFACE TO BE TREATED SHALL BE CLEANED TO THE SATISFACTION OF THE INSPECTOR PRIOR TO STARTING ON EACH MAP.

TEMPORARY PAINT IS TO BE USED ON MAP 23, IF TIME EXCEEDS TIME LIMITATIONS FOR PAVEMENT MARKINGS REPLACEMENT BETWEEN DOUBLE SEAL AND MICROSURFACING TREATMENT.

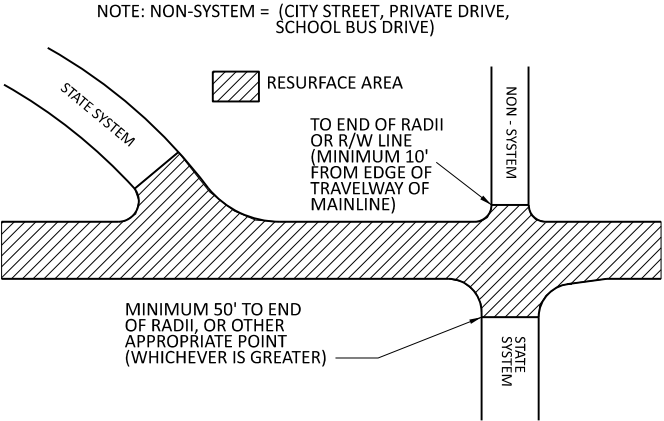

PAVING DETAIL 1
MAIN LINE IS BEING RESURFACED

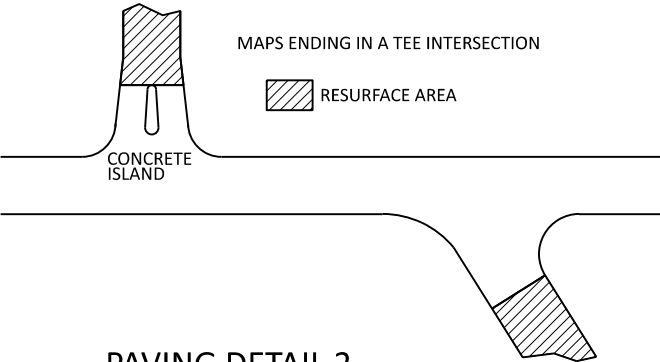

PAVING DETAIL 2
MAIN LINE NOT BEING RESURFACED

PAVEMENT SCHEDULE	
F1	PROPOSED ASPHALT SURFACE TREATMENT, DOUBLE SEAL
F2	PROPOSED FOG SEAL
F3	PROPOSED MICROSURFACING SINGLE COURSE, TYPE II AT A RATE OF 18 TO 22 LBS. PER SQ. YD
U	EXISTING PAVEMENT


SIGNING FOR ASPHALT SURFACE TREATMENT

PROJECT REFERENCE NO.

SHEET NO.

2025CPT.07.17.20792

5

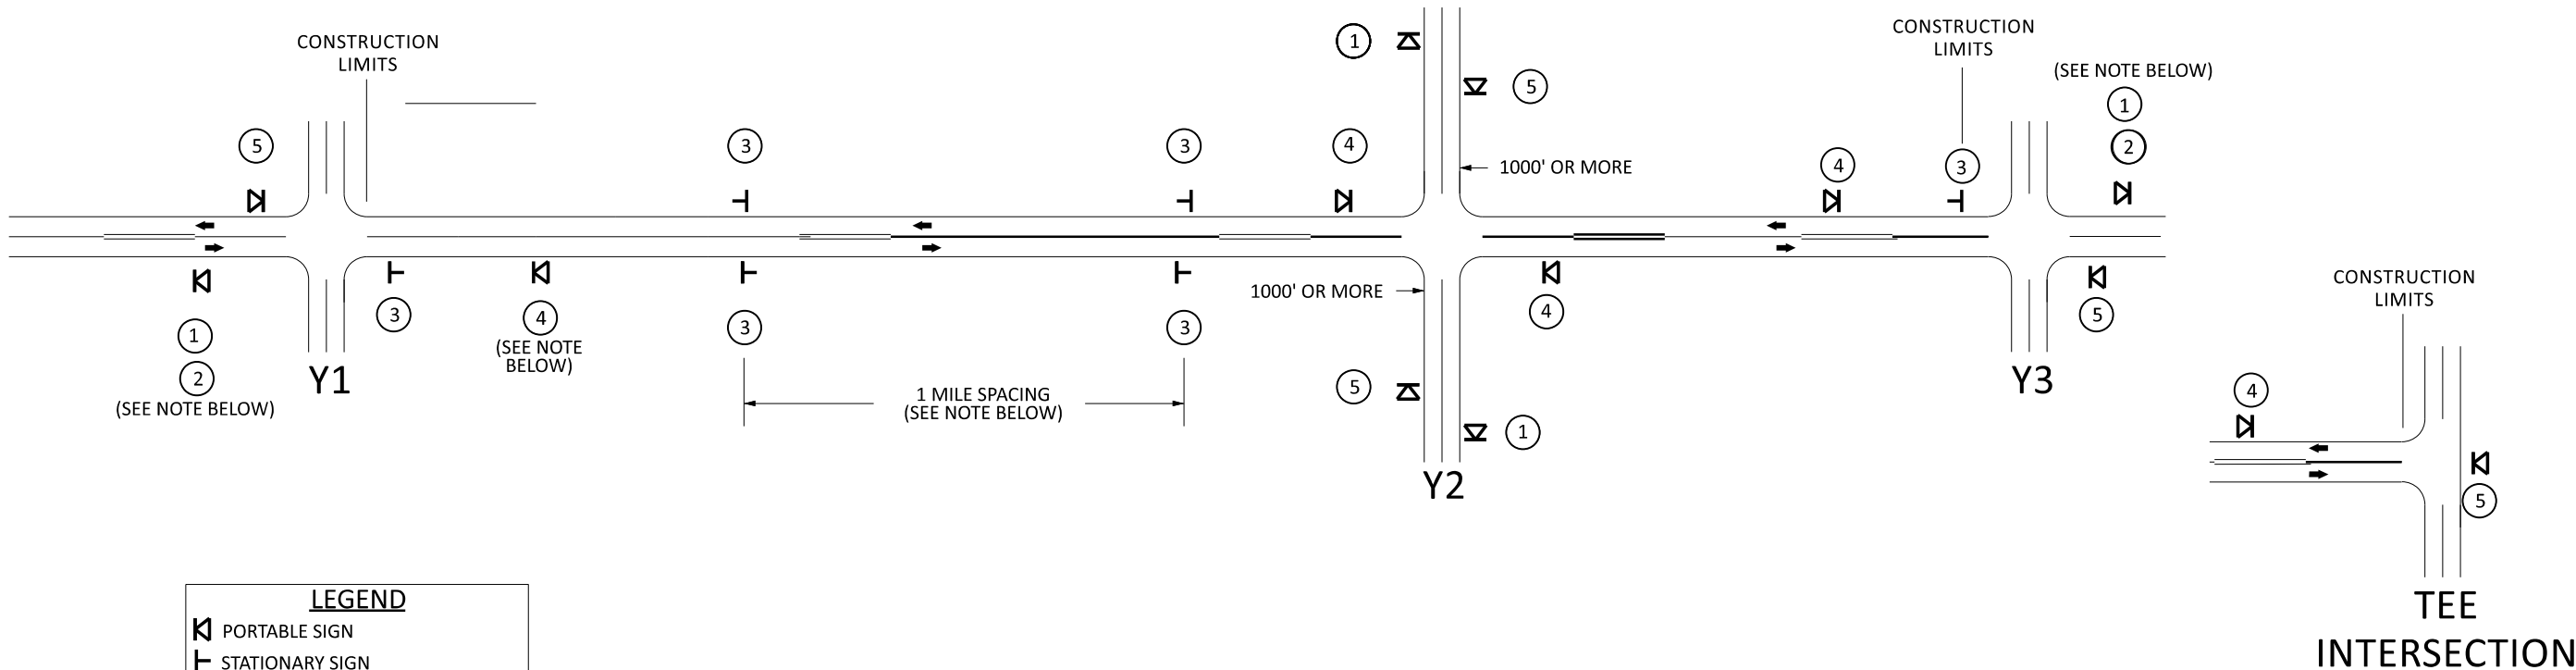

LEGEND

- PORTABLE SIGN
- STATIONARY SIGN
- DIRECTION OF TRAFFIC FLOW

MAINLINE (-L-) SIGNING

-Y- LINE SIGNING


SIGNING NOTES AND PLACEMENT PER DIRECTION

- ROAD WORK AHEAD W20-1 48" X 48" PLACE 1000' PRIOR TO BEGINNING OF CONSTRUCTION LIMITS. ONLY USED ON -Y- LINES IF RESURFACING LIMITS EXTEND 1000' ALONG -Y- LINE.
- NEXT XX MILES W7-3aP 24" X 18" #2 SIGN ONLY USED WHEN RESURFACING LIMITS ARE 2 OR MORE MILES IN LENGTH. ROUND UP TO NEXT WHOLE NUMBER.(NO FRACTIONAL OR DECIMAL NUMBERS)
- LOOSE GRAVEL W8-7 48" X 48" - ALTERNATE THE FOLLOWING TWO SIGNS:
- STARTING WITH "LOOSE GRAVEL" (WB-7) FOLLOWED BY "UNMARKED PAVEMENT".
- PLACE INITALLY AT THE CONSTRUCTION LIMITS AND SPACED 1 MILE APART THEREAFTER.
- UNMARKED PAVEMENT SP 13106 48" X 48" - AT TEE INTERSETIONS INSTALL INITIALLY 0.5 MILES FROM INTERSECTION AND SPACE 1 MILE APART THEREAFTER.
- ROAD UNDER CONST SP 13106 48" X 48" THESE ARE FOR -Y- LINES THAT ARE "THROUGH" ROADWAYS. DEAD END AND SUBDIVISION ROADS ARE NOT "THROUGH" ROADWAYS. INSTALL 500' +/- FROM EACH -Y- LINE APPROACH AS SHOWN ABOVE. FOR MULTIPLE -Y- LINES THAT ARE SEPARATED BY 0.25 MILES OR LESS, TREAT AS A SINGLE UNIT AND INSTALL WITHIN 500' OF EACH APPROACH. A MAXIMUM OF 2 SIGN SETS PER MILE. DO NOT INSTALL WHEN -Y- LINES ARE WITHIN 0.5 MILES FROM "END ROAD WORK" SIGN.
- END ROAD WORK G20-2 A 48" X 24" PLACE 500' FOLLOWING THE END OF CONSTRUCTION LIMITS.

NO REQUIRED STATIONARY SIGNING FOR THE FOLLOWING -Y- LINE CONDITIONS:

- 1) LESS THAN 1000' OF RESURFACING ALONG -Y- LINE
- 2) SUBDIVISION ROADS
- 3) DEAD END ROADS

WHEN PAVING/CONSTRUCTION ACTIVITIES PROCEED ACROSS AN UNSIGNED -Y- LINE, ADVANCE WARNING PORTABLE SIGNS SHALL BE USED ALONG THE -Y- LINE AS SHOWN BELOW. REMOVE UPON COMPLETION OF WORK.



PLACED 500' IN ADVANCE OF FLAGGER.




PLACED 250' IN ADVANCE OF FLAGGER.

MAPS LESS THAN 2 MILES

THE ABOVE SIGNS ARE ALL THAT ARE REQUIRED FOR A CONTRACTOR TO BEGIN A RESURFACING CONTRACT. ANY ADDITIONAL SIGNS REQUESTED BY NCDOT DIVISIONS SHALL BE INSTALLED WITHIN 7 BUSINESS DAYS OF THE START OF CONTRACT WORK.

FOR AST RESURFACING MAPS WITH CONSTRUCTION LIMITS LESS THAN 2 MILES IN LENGTH, USE A STATIONARY "LOOSE GRAVEL" SIGN AT THE BEGINNING CONSTRUCTION LIMIT FOLLOWED BY AN "UNMARKED PAVEMENT" SIGN MIDWAY THROUGH AND AN "END ROAD WORK" SIGN AT THE END CONSTRUCTION LIMIT.



RESURFACING ADVANCE WARNING SIGNS FOR RURAL AND SUBURBAN 2 LANE ROADWAYS

PROJECT NO.	SHEET NO.	TOTAL NO.
2025CPT.07.17.20792, ETC	6	7

SUMMARY OF QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	TYP NO	LENGTH	WIDTH	BEGIN MP	END MP	1803500000-E ASPHALT SURFACE TREATMENT, DOUBLE SEAL	1820000000-E ASPHALT SURFACE TREATMENT, FOG SEAL	1838000000-E EMULSION FOR ASPHALT SURFACE TREATMENT	1838500000-N VACUUM TRUCK	1891000000-E MICRO SURFACING SINGLE COURSE, TYPE II	4413000000-E WORK ZONE ADVANCE/GENERAL WARNING SIGNING	4457000000-N TEMPORARY TRAFFIC CONTROL	4700000000-E 12" X 90 M WHITE THERMO	4720000000-E THERMO MSG STOP 90 M AHEAD 90 M		4810000000-E 4" YELLOW PAINT	4890000000-E 4" 60 MILS HOT SPRAY THERMO (WHITE) 4" 60 MILS HOT SPRAY THERMO (YELLOW) 6" 60 MILS HOT SPRAY THERMO (WHITE)		
						MI	FT			SY	SY	GAL		SY	SF		LF	EA	EA	LF	LF	LF	LF
2025CPT.07.17.20792	Rockingham	1	SR-1233 / WATER PLANT RD	FROM SR 1138 - LINDSEY BRIDGE RD TO END MAINT	1	0.23	24	0	0.23	3,347	3,347	1,841	4		24	1							
TOTAL FOR MAP NO. 1						0.23				3,347	3,347	1,841			24								
2025CPT.07.17.20792	Rockingham	2	SR-1107 / MIDDLETON RD	FROM SR 1106 - ALBERT RD TO DEAD END	1	0.248	18.5	0	0.248	2,768	2,768	1,522			24								
TOTAL FOR MAP NO. 2						0.248				2,768	2,768	1,522			24								
2025CPT.07.17.20792	Rockingham	3	SR-1133 / GOOSE RD	FROM SR 1110 - ELLISBORO RD TO END MAINT	1	0.503	20	0	0.503	6,089	6,089	3,349			24								
TOTAL FOR MAP NO. 3						0.503				6,089	6,089	3,349			24								
2025CPT.07.17.20792	Rockingham	4	SR-1181 / PINECREST RD	FROM SR 1166 - CASE RD TO DEAD END	1	0.224	18	0	0.224	2,399	2,399	1,319			24								
TOTAL FOR MAP NO. 4						0.224				2,399	2,399	1,319			24								
2025CPT.07.17.20792	Rockingham	5	SR-1190 / WESTERN RD	FROM US 311 TO DEAD END	1	0.167	18.5	0	0.167	1,826	1,826	1,004			24								
TOTAL FOR MAP NO. 5						0.167				1,826	1,826	1,004			24								
2025CPT.07.17.20792	Rockingham	6	SR-1193 / HONEY RD	FROM SR 1108 - STANLEY RD TO DEAD END	1	0.095	18	0	0.095	1,000	1,000	550			24								
TOTAL FOR MAP NO. 6						0.095				1,000	1,000	550			24								
2025CPT.07.17.20792	Rockingham	7	SR-1103 / LAUREN RD	FROM NC 65 TO SR 1104 - LEMONS RD (SKIP INTERSECTION AT NC 68)	1	1.641	21	0	1.641	20,417	20,417	11,230			40						18,000	17,330	
TOTAL FOR MAP NO. 7						1.641				20,417	20,417	11,230			40						18,000	17,330	
2025CPT.07.17.20792	Rockingham	8	SR-1104 / LEMONS RD	FROM SR 1129 - GIDEON GROVE CHURCH RD TO SR 1105 - LEMONS LP	1	2.01	20	0	2.01	24,736	24,736	13,605			40						21,000	21,500	600
TOTAL FOR MAP NO. 8						2.01				24,736	24,736	13,605			40						21,000	21,500	600
2025CPT.07.17.20792	Rockingham	9	SR-1105 / LEMONS LP	FROM NC 68 TO NC 68	1	0.283	20	0	0.283	3,983	3,983	2,191			40						3,200	3,000	50
TOTAL FOR MAP NO. 9						0.283				3,983	3,983	2,191			40						3,200	3,000	50
2025CPT.07.17.20792	Rockingham	10	SR-1106 / ALBERT RD	FROM SR 1104 - LEMONS RD TO DEAD END	1	0.829	20	0	0.829	10,147	10,147	5,581			24								
TOTAL FOR MAP NO. 10						0.829				10,147	10,147	5,581			24								
2025CPT.07.17.20792	Rockingham	11	SR-1108 / STANLEY RD	FROM SR 1129 - GIDEON GROVE CHURCH RD TO SR 1110 - ELLISBORO RD	1	1.698	20	0	1.698	21,081	21,081	11,595			40						18,300	17,000	50
TOTAL FOR MAP NO. 11						1.698				21,081	21,081	11,595			40						18,300	17,000	50
2025CPT.07.17.20792	Rockingham	12	SR-1109 / HILTON RD	FROM SR 1110 - ELLISBORO RD TO DEAD END	1	0.851	20.5	0	0.851	10,336	10,336	5,685			40						9,000	8,500	
TOTAL FOR MAP NO. 12						0.851				10,336	10,336	5,685			40						9,000	8,500	
2025CPT.07.17.20792	Rockingham	13	SR-1111 / CHRISTOPHER RD	FROM SR 1110 - ELLISBORO RD TO END MAINT	1	0.293	18.5	0	0.293	3,268	3,268	1,797			24								
TOTAL FOR MAP NO. 13						0.293				3,268	3,268	1,797			24								
2025CPT.07.17.20792	Rockingham	14	SR-1114 / RENN RD	FROM SR 1112 - OAK LEVEL CHURCH RD TO SR 1110 - ELLISBORO RD	1	1.414	20.5	0	1.414	17,004	17,004	9,352			40						15,000	15,000	
TOTAL FOR MAP NO. 14						1.414				17,004	17,004	9,352			40						15,000	15,000	
2025CPT.07.17.20792	Rockingham	15	SR-1115 / SOUTHERN RD	FROM BEG PVMT TO SR 1112 - OAK LEVEL CHURCH RD	1	0.26	20	0.36	0.62	3,694	3,694	2,032			24								
TOTAL FOR MAP NO. 15						0.26				3,694	3,694	2,032			24								
2025CPT.07.17.20792	Rockingham	16	SR-1116 / MT ZION CHURCH RD	FROM SR 1112 - OAK LEVEL CHURCH RD TO DEAD END	1	1.55	20.5	0.75	2.3	19,277	19,277	10,575			40						16,500	16,500	
TOTAL FOR MAP NO. 16						1.55				19,277	19,277	10,575			40						16,500	16,500	
2025CPT.07.17.20792	Rockingham	17	SR-1119 / MT ZION LP	FROM SR 1110 - ELLISBORO RD TO SR 1116 - MT ZION CHURCH RD	1	0.22	20.5	0.04	0.26	2,703	2,703	1,486			40						2,400	2,400	
TOTAL FOR MAP NO. 17						0.22				2,703	2,703	1,486			40						2,400	2,400	
2025CPT.07.17.20792	Rockingham	18	SR-1120 / SIMPSON RD	FROM SR 1110 - ELLISBORO RD TO US 220 (SKIP SR 1129 GIDEON GROVE CHURCH RD)	1	3.41	20.5	0	3.41	39,939	39,939	21,966			367						35,000	32,000	100
TOTAL FOR MAP NO. 18						3.41				39,939	39,939	21,966			367						35,000	32,000	100
2025CPT.07.17.20792	Rockingham	19	SR-1121 / RAM LP	FROM BEG MAINT TO S. DEAD EN	1	0.711	19	0	0.711	8,050	8,050	4,428			24								
TOTAL FOR MAP NO. 19						0.711				8,050	8,050	4,428			24								
2025CPT.07.17.20792	Rockingham	20	SR-1124 / SARDIS LP	FROM BEG MAINT TO CUL-DE-SAC (SKIP SR 1128 SARDIS CHURCH RD)	1	0.443	19	0	0.443	5,535	5,535	3,044			24								
TOTAL FOR MAP NO. 20						0.443				5,535	5,535	3,044			24								
2025CPT.07.17.20792	Rockingham	21	SR-1125 / WILLIAMS RD	FROM SR 1110 - ELLISBORO RD TO US 220	1	1.42	19.5	0	1.42	16,210	16,210	8,915			40						15,000	14,000	50
TOTAL FOR MAP NO. 21						1.42				16,210	16,210	8,915			40						15,000	14,000	50
2025CPT.07.17.20792	Rockingham	22	SR-1126 / LANDRETH RD	FROM SR 1125 - WILLIAMS RD TO SR 1128 - SARDIS CHURCH RD	1	0.85	20	0	0.85	9,889	9,889	5,439			40						8,900	8,900	
TOTAL FOR MAP NO. 22						0.85				9,889	9,889	5,439			40						8,900	8,900	
2025CPT.07.17.20792	Rockingham	23	SR-1128 / SARDIS CHURCH RD	FROM SR 1138 - LINDSEY BRIDGE RD TO SR 1110 - ELLISBORO RD	2	1.9	23	0	1.9	25,536		14,045		25,536	40		50	8	5	14,000	22,000	14,000	62
TOTAL FOR MAP NO. 23						1.9				25,536		14,045		25,536	40		50	8	5	14,000	22,000	14,000	62
2025CPT.07.17.20792	Rockingham	24	SR-1131 / GENTRY RD	FROM SR 1129 - GIDEON GROVE CHURCH RD TO DEAD END	1	0.455	20	0	0.455	5,131	5,131	2,822			24								
TOTAL FOR MAP NO. 24						0.455				5,131	5,131	2,822			24								
2025CPT.07.17.20792	Rockingham	25	SR-1135 / PED RD	FROM SR 1137 - EDEN CHURCH RD TO END PVMT	1	0.564	19.5	0	0.564	6,579	6,579	3,618			24								
TOTAL FOR MAP NO. 25						0.564				6,579	6,579	3,618			24								

PROJECT NO.	SHEET NO.	TOTAL NO.
2025CPT.07.17.20792, ETC	7	7

SUMMARY OF QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	TYP NO	LENGTH	WIDTH	BEGIN MP	END MP	1803500000-E ASPHALT SURFACE TREATMENT, DOUBLE SEAL	1820000000-E ASPHALT SURFACE TREATMENT, FOG SEAL	1838000000-E EMULSION FOR ASPHALT SURFACE TREATMENT	1838500000-N VACUUM TRUCK	1891000000-E MICRO SURFACING SINGLE COURSE, TYPE II	4413000000-E WORK ZONE ADVANCE/GENERAL WARNING SIGNING	4457000000-N TEMPORARY TRAFFIC CONTROL	4700000000-E 12" X 90 M WHITE THERMO	4720000000-E THERMO MSG STOP 90 M		4810000000-E 4" YELLOW PAINT	4890000000-E		
						MI	FT			SY	SY	GAL	WK	SY	SF	LS	LF	EA	EA	LF	4" 60 MILS HOT SPRAY THERMO (WHITE) LF	4" 60 MILS HOT SPRAY THERMO (YELLOW) LF	6" 60 MILS HOT SPRAY THERMO (WHITE) LF
2025CPT.07.17.20792	Rockingham	26	SR-1139 / JW RD	FROM SR 1138 - LINDSEY BRIDGE RD TO END MAINT	1	0.568	19.5	0	0.568	6,617	6,617	3,639			24								
TOTAL FOR MAP NO. 26						0.568				6,617	6,617	3,639			24								
2025CPT.07.17.20792	Rockingham	27	SR-1141 / TILLY RD	FROM SR 1143 - RIERSON RD TO DEAD END	1	0.32	20	0	0.32	3,763	3,763	2,070			24								
TOTAL FOR MAP NO. 27						0.32				3,763	3,763	2,070			24								
2025CPT.07.17.20792	Rockingham	28	SR-1142 / RELUS RD	FROM SR 1143 - RIERSON RD TO END MAINT	1	0.327	18.5	0	0.327	3,613	3,613	1,987			24								
TOTAL FOR MAP NO. 28						0.327				3,613	3,613	1,987			24								
2025CPT.07.17.20792	Rockingham	29	SR-1144 / SALLY LP	FROM SR 1145 - MINERAL SPRINGS RD TO SR 1145 - MINERAL SPRINGS RD	1	0.87	19.5	0	0.87	9,642	9,642	5,303			40						9,000	9,000	
TOTAL FOR MAP NO. 29						0.87				9,642	9,642	5,303			40						9,000	9,000	
2025CPT.07.17.20792	Rockingham	30	SR-1146 / NELL RD	FROM SR 1145 - MINERAL SPRINGS RD TO END MAINT	1	0.46	19.5	0	0.46	5,167	5,167	2,842			24								
TOTAL FOR MAP NO. 30						0.46				5,167	5,167	2,842			24								
2025CPT.07.17.20792	Rockingham	31	SR-1149 / COLONIAL RD	FROM US 220 BUS TO SR 1150 - OLD COVERED BRIDGE RD	1	0.114	19.5	0	0.114	1,300	1,300	715			40						1,500	1,500	
TOTAL FOR MAP NO. 31						0.114				1,300	1,300	715			40						1,500	1,500	
2025CPT.07.17.20792	Rockingham	32	SR-1150 / OLD COVERED BRIDGE RD	FROM SR 1145 - MINERAL SPRINGS RD TO US 220 BUS	1	0.71	20	0	0.71	8,356	8,356	4,596			40						7,400	7,200	60
TOTAL FOR MAP NO. 32						0.71				8,356	8,356	4,596			40						7,400	7,200	60
2025CPT.07.17.20792	Rockingham	33	SR-1159 / DODGE LP	FROM US 311 TO US 311	1	1.27	19	0	1.27	13,954	13,954	7,675			40						6,800	6,800	
TOTAL FOR MAP NO. 33						1.27				13,954	13,954	7,675			40						6,800	6,800	
2025CPT.07.17.20792	Rockingham	34	SR-1161 / REED LP	FROM US 311 TO US 311	1	0.41	17.5	0	0.41	3,982	3,982	2,190			24						6,800	6,800	
TOTAL FOR MAP NO. 34						0.41				3,982	3,982	2,190			24								
2025CPT.07.17.20792	Rockingham	35	SR-1163 / GIBSON RD	FROM SR 1162 - K FORK RD TO END MAINT	1	0.435	18	0	0.435	4,547	4,547	2,501			24								
TOTAL FOR MAP NO. 35						0.435				4,547	4,547	2,501			24								
2025CPT.07.17.20792	Rockingham	36	SR-1164 / MADISON BEACH RD	FROM SR 1162 - K FORK RD TO END PVMT	1	0.535	18.5	0	0.535	5,907	5,907	3,249			24								
TOTAL FOR MAP NO. 36						0.535				5,907	5,907	3,249			24								
2025CPT.07.17.20792	Rockingham	37	SR-1166 / CASE RD	FROM NC 704 TO END PVMT	1	0.823	19.5	0	0.823	9,459	9,459	5,203			24								
TOTAL FOR MAP NO. 37						0.823				9,459	9,459	5,203			24								
2025CPT.07.17.20792	Rockingham	38	SR-1167 / ZIGLAR RD	FROM NC 704 TO SR 1168 - GROGAN LAKE RD	1	0.5	20	0	0.5	6,018	6,018	3,310			40						5,500	4,800	
TOTAL FOR MAP NO. 38						0.5				6,018	6,018	3,310			40						5,500	4,800	
2025CPT.07.17.20792	Rockingham	39	SR-1174 / FLETCHER RD	FROM SR 1110 - ELLISBORO RD TO DEAD END	1	0.519	19	0	0.519	5,879	5,879	3,234			24								
TOTAL FOR MAP NO. 39						0.519				5,879	5,879	3,234			24								
2025CPT.07.17.20792	Rockingham	40	SR-1177 / GILLIGAN RD	FROM NC 704 TO END MAINT	1	0.447	19	0	0.447	5,200	5,200	2,860			24								
TOTAL FOR MAP NO. 40						0.447				5,200	5,200	2,860			24								
2025CPT.07.17.20792	Rockingham	41	SR-1178 / PLUMMER RD	FROM BEG PVMT TO SR 1115 - SOUTHERN RD	1	0.271	20	0	0.271	3,299	3,299	1,814			24								
TOTAL FOR MAP NO. 41						0.271				3,299	3,299	1,814			24								
2025CPT.07.17.20792	Rockingham	42	SR-1183 / CREEK LP	FROM SR 1165 - CARDINAL RD TO SR 1165 - CARDINAL RD	1	0.6	18.5	0	0.6	6,228	6,228	3,426			24								
TOTAL FOR MAP NO. 42						0.6				6,228	6,228	3,426			24								
2025CPT.07.17.20792	Rockingham	43	SR-1185 / OAK LEVEL LOOP RD	FROM SR 1116 - MT ZION CHURCH RD TO SR 1112 - OAK LEVEL CHURCH RD	1	0.313	20.5	0	0.313	3,849	3,849	2,117			40						3,500	3,500	
TOTAL FOR MAP NO. 43						0.313				3,849	3,849	2,117			40						3,500	3,500	
2025CPT.07.17.20792	Rockingham	44	SR-1191 / RALEIGH RD	FROM SR 1161 - REED LP TO DEAD END	1	0.166	17	0	0.166	1,653	1,653	909			24								
TOTAL FOR MAP NO. 44						0.166				1,653	1,653	909			24								
2025CPT.07.17.20792	Rockingham	45	SR-1197 / SUNRISE ACRES RD	FROM SR 1129 - GIDEON GROVE CHURCH RD TO END PVMT	1	0.391	20	0	0.391	4,589	4,589	2,524			24								
TOTAL FOR MAP NO. 45						0.391				4,589	4,589	2,524			24								
2025CPT.07.17.20792	Rockingham	46	SR-1208 / MATT DILLON DR	FROM SR 1108 - STANLEY RD TO SR 1209 - CARTWRIGHT DR	1	0.104	18.5	0	0.104	1,131	1,131	622			24								
TOTAL FOR MAP NO. 46						0.104				1,131	1,131	622			24								
2025CPT.07.17.20792	Rockingham	47	SR-1209 / CARTWRIGHT DR	FROM SR 1208 - MATT DILLON DR TO END MAINT	1	0.353	18	0	0.353	3,924	3,924	2,158			24								
TOTAL FOR MAP NO. 47						0.353				3,924	3,924	2,158			24								
2025CPT.07.17.20792	Rockingham	48	SR-1217 / HUMPHREYS RIDGE DR	FROM SR 1112 - OAK LEVEL CHURCH RD TO END MAINT	1	0.501	20	0	0.501	6,089	6,089	3,349			24								
TOTAL FOR MAP NO. 48						0.501				6,089	6,089	3,349			24								
2025CPT.07.17.20792	Rockingham	49	SR-2805 / PRICE FARM RD	FROM US 220 TO SR 1105 - LEMONS LP	1	1.125	22	0.045	1.17	14,884	14,884	8,186			40						12,000	12,000	30
TOTAL FOR MAP NO. 49						1.125				14,884	14,884	8,186			40						12,000	12,000	30
TOTAL FOR PROJ NO. 2025CPT.07.17.20792						34.401				409,994	384,458	225,470	4	25,536	1,807	1,000	50	8	5	14,000	230,000	214,930	1,002
GRAND TOTAL						34.401				409,994	384,458	225,470	4	25,536	1,807	1	50	13		14,000	445,932		