SIGN NUMBER: SP05058
TYPE: A
QUANTITY: 1

SIGN WIDTH: 7'-6"
HEIGHT: 5'-0"
TOTAL AREA: 37.5 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 1.5"
RADII: 6"

NO. Z BARS: 2
LENGTH: 82.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: BSESSOMS
TEPPL TOPIC: B-24
DATE: Mar 01,2005
DIV: STATEWIDE
CHECKED BY:

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

LETTER POSITIONS

Letter spacings are to start of next letter

																												Series/Size Text Length
		T	r	a	i	l	w	a	y	s																		EM8/6
	15.2	8.3	5.1	8.1	4.6	3.8	9.5	7.3	7.8	5.1	15.2																	59.7
		G	r	e	y	h	o	u	n	d																		EM8/6
	12.1	9	5.1	6.8	8.7	7.6	7.7	8.2	7.6	5.1	12.1																	65.8
		B	u	s		S	t	a	t	i	o	n																EM8/6
	7.9	9.2	7.4	5.1	8	8.1	5.8	7.3	6.5	4	7.7	5.1	7.9															74.3
		N	E	X	T		R	I	G	H	T																	E6
	18	6.3	5.6	6	4.4	6	6.3	2.6	6.3	6	4.4	18																54

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP05058
TYPE: A
QUANTITY: 1

SIGN WIDTH: 7'-6"
HEIGHT: 5'-0"
TOTAL AREA: 37.5 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 1.5"
RADII: 6"

NO. Z BARS: 2
LENGTH: 82.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: BSESSOMS
TEPPL TOPIC: B-24
DATE: Mar 01,2005
DIV: STATEWIDE
CHECKED BY:

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

LETTER POSITIONS

Letter spacings are to start of next letter

																												Series/Size Text Length
		T	r	a	i	l	w	a	y	s																		EM8/6
	15.2	8.3	5.1	8.1	4.6	3.8	9.5	7.3	7.8	5.1	15.2																	59.7
		G	r	e	y	h	o	u	n	d																		EM8/6
	12.1	9	5.1	6.8	8.7	7.6	7.7	8.2	7.6	5.1	12.1																	65.8
		B	u	s		S	t	a	t	i	o	n																EM8/6
	7.9	9.2	7.4	5.1	8	8.1	5.8	7.3	6.5	4	7.7	5.1	7.9															74.3
		N	E	X	T		R	I	G	H	T																	E6
	18	6.3	5.6	6	4.4	6	6.3	2.6	6.3	6	4.4	18																54

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP05065
TYPE: D
QUANTITY: 1

SIGN WIDTH: 3'-6"
HEIGHT: 2'-6"
TOTAL AREA: 8.8 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.5"
RADII: 3"

NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
ARUP	17	5	8	5

MAT'L: 0.080" (2.0 mm) ALUMINUM

DESIGN BY: BSESSOMS
TEPPL TOPIC: B-24
DATE: Mar 01,2005
DIV: STATEWIDE
CHECKED BY:

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

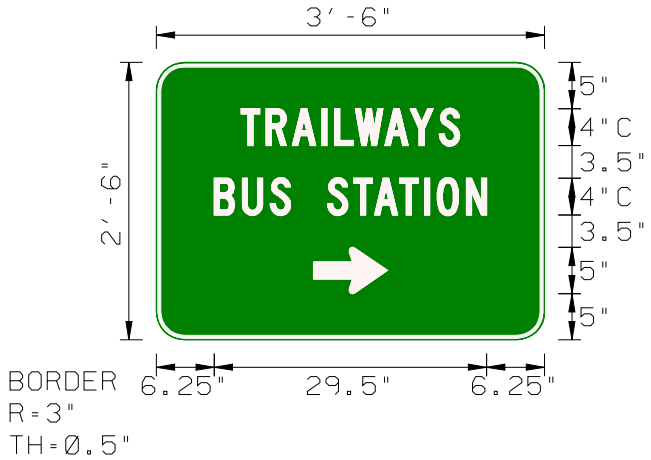

LETTER POSITIONS

Letter spacings are to start of next letter

																											Series/Size Text Length
		T	R	A	I	L	W	A	Y	S																	C4
	9.2	2.7	2.9	3.2	1.4	2.2	3.2	2.7	3.2	2.2	9.2																23.6
		B	U	S		S	T	A	T	I	O	N															C4
	6.3	3	3	2.2	4	2.9	2.2	2.7	2.7	1.4	3.2	2.2	6.3														29.5

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP05064
TYPE: D
QUANTITY: 1

SIGN WIDTH: 5'-0"
HEIGHT: 3'-0"
TOTAL AREA: 15.0 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.75"
RADII: 3"

NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
RIGHT AR	26	5	8	5

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: BSESSOMS DATE: Feb 23,2005 CHECKED BY:
TEPPL TOPIC: B-24 DIV: STATEWIDE

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

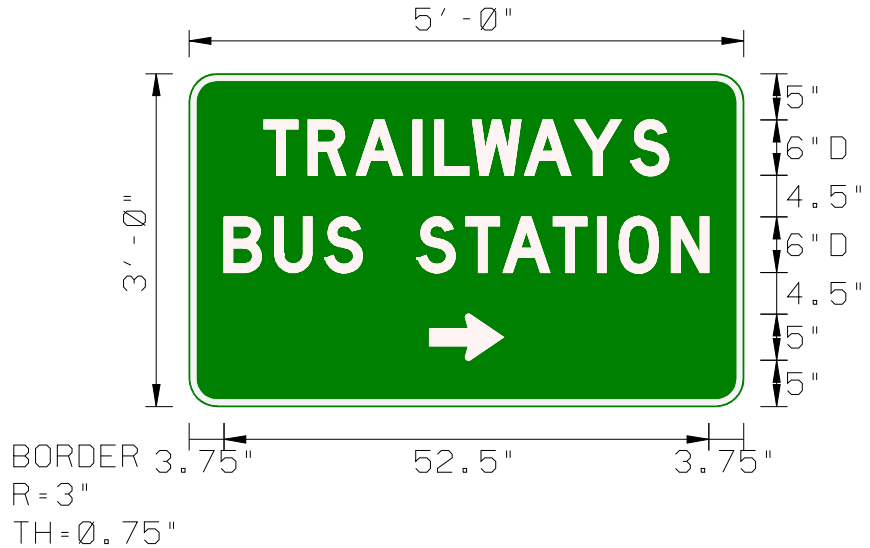

LETTER POSITIONS

Letter spacings are to start of next letter

																											Series/Size Text Length
		T	R	A	I	L	W	A	Y	S																	D6
	8.1	4.8	5.2	6.1	2.4	4	5.6	5.4	6.2	4	8.1																43.8
		B	U	S		S	T	A	T	I	O	N															D6
	3.8	5.5	5.5	4	6	5.2	4	5.4	4.8	2.4	5.6	4	3.8														52.5

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP05063
TYPE: B
QUANTITY: 1

SIGN WIDTH: 7'-6"
HEIGHT: 4'-6"
TOTAL AREA: 33.8 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 1.5"
RADII: 6"

NO. Z BARS: 2
LENGTH: 82.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: BSESSOMS DATE: Mar 01,2005 CHECKED BY:
TEPPL TOPIC: B-24 DIV: STATEWIDE

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

LETTER POSITIONS

Letter spacings are to start of next letter

																											Series/Size Text Length
		T	r	a	i	l	w	a	y	s																	EM8/6
	15.2	8.3	5.1	8.1	4.6	3.8	9.5	7.3	7.8	5.1	15.2																59.7
		B	u	s		S	t	a	t	i	o	n															EM8/6
	7.9	9.3	7.4	5.1	8	8.1	5.8	7.3	6.5	4	7.7	5.1	7.9														74.3
		E	X	I	T		X	X	X																		E8,E10
	13.5	7.5	8.5	3	5.9	8	10.7	10.7	8.6	13.5																	63

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP05062
TYPE: B
QUANTITY: 1

SIGN WIDTH: 7′-6″
HEIGHT: 4′-0″
TOTAL AREA: 30.0 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0″
WIDTH: 1.5″
RADII: 6″

NO. Z BARS: 2
LENGTH: 82.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT′L: 0.125″ (3.2 mm) ALUMINUM

DESIGN BY: BSESSOMS
TEPPL TOPIC: B-24
DATE: Mar 01,2005
DIV: STATEWIDE
CHECKED BY:

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032″ (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

LETTER POSITIONS

Letter spacings are to start of next letter

																											Series/Size Text Length
		T	r	a	i	l	w	a	y	s																	EM8/6
	15.2	8.3	5.1	8.1	4.6	3.8	9.5	7.3	7.9	5.1	15.2																59.7
		B	u	s		S	t	a	t	i	o	n															EM8/6
	7.9	9.3	7.4	5.1	8	8.1	5.8	7.3	6.5	4	7.7	5.1	7.9														74.3
		N	E	X	T		L	E	F	T																	E6
	20.4	6.3	5.6	6	4.4	6	5.6	5.6	5.2	4.4	20.4																49.3

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP05061
TYPE: B
QUANTITY: 1

SIGN WIDTH: 7'-6"
HEIGHT: 4'-0"
TOTAL AREA: 30.0 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 1.5"
RADII: 6"

NO. Z BARS: 2
LENGTH: 82.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: BSESSOMS
TEPPL TOPIC: B-24
DATE: Mar 01,2005
DIV: STATEWIDE
CHECKED BY:

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

LETTER POSITIONS

Letter spacings are to start of next letter

																											Series/Size Text Length
		T	r	a	i	l	w	a	y	s																	EM8/6
	15.2	8.3	5.1	8.1	4.6	3.8	9.5	7.3	7.9	5.1	15.2																59.7
		B	u	s		S	t	a	t	i	o	n															EM8/6
	7.9	9.3	7.4	5.1	8	8.1	5.8	7.3	6.5	4	7.7	5.1	7.9														74.3
		N	E	X	T		R	I	G	H	T																E6
	18	6.3	5.6	6	4.4	6	6.3	2.6	6.3	6	4.4	18															54

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP05060
TYPE: D
QUANTITY: 1

SIGN WIDTH: 2′-6″
HEIGHT: 2′-6″
TOTAL AREA: 6.3 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0″
WIDTH: 0.5″
RADII: 3″

NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
ARUP	11	4	5	8

MAT′L: 0.063″ (1.6 mm) ALUMINUM

DESIGN BY: BSESSOMS
TEPPL TOPIC: B-24
DATE: Mar 01,2005
DIV: STATEWIDE
CHECKED BY:

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032″ (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

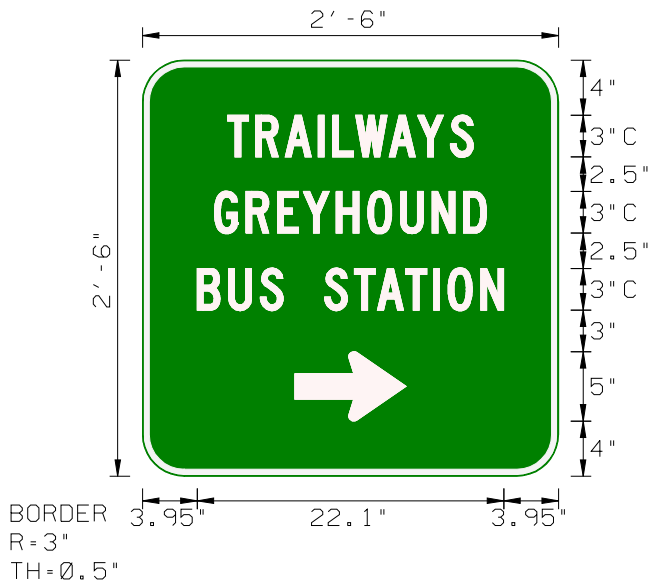

LETTER POSITIONS

Letter spacings are to start of next letter

																											Series/Size Text Length
		T	R	A	I	L	W	A	Y	S																	C3
	6.1	2	2.1	2.4	1	1.7	2.4	2	2.4	1.7	6.1																17.7
		G	R	E	Y	H	O	U	N	D																	C3
	5.2	2.3	2.3	1.8	2.4	2.3	2.4	2.3	2.3	1.6	5.2																19.6
		B	U	S		S	T	A	T	I	O	N															C3
	3.9	2.3	2.3	1.6	3	2.1	1.7	2	2	1	2.4	1.6	4														22.1

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP05066
TYPE: D
QUANTITY: 1

SIGN WIDTH: 4'-0"
HEIGHT: 2'-6"
TOTAL AREA: 10.0 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.5"
RADII: 3"

NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
ARUP	5.5	11	5	8

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: BSESSOMS
TEPPL TOPIC: B-24
DATE: Feb 23,2005
DIV: STATEWIDE
CHECKED BY:

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

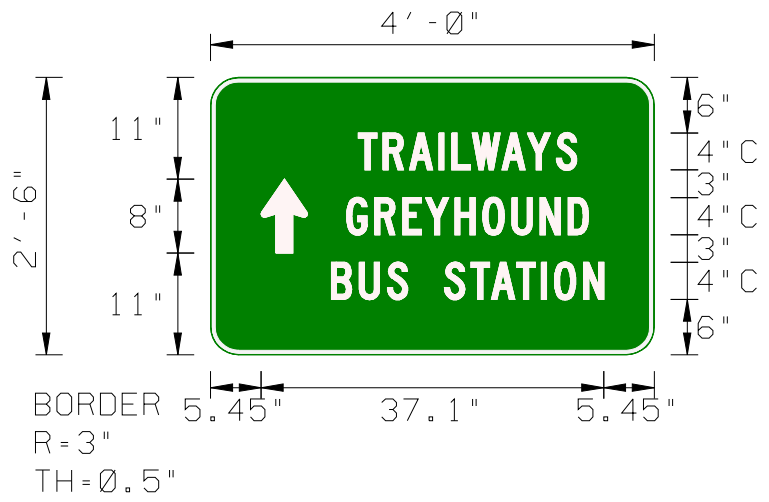

LETTER POSITIONS

Letter spacings are to start of next letter

																											Series/Size Text Length
		T	R	A	I	L	W	A	Y	S																	C4
	16	2.7	2.9	3.2	1.4	2.2	3.2	2.7	3.2	2.2	8.4																23.6
		G	R	E	Y	H	O	U	N	D																	C4
	14.7	3	3	2.5	3.2	3	3.2	3	3	2.2	7.1																26.2
		B	U	S		S	T	A	T	I	O	N															C4
	13.1	3	3	2.2	4	2.9	2.2	2.7	2.7	1.4	3.2	2.2	5.5														29.5

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP05067
TYPE: D
QUANTITY: 1

SIGN WIDTH: 3'-0"
HEIGHT: 3'-0"
TOTAL AREA: 9.0 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.5"
RADII: 3"

NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
RIGHT AR	15	4	6	4

MAT'L: 0.080" (2.0 mm) ALUMINUM

DESIGN BY: BSESSOMS
TEPPL TOPIC: B-24
DATE: Mar 03,2005
DIV: STATEWIDE
CHECKED BY:

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

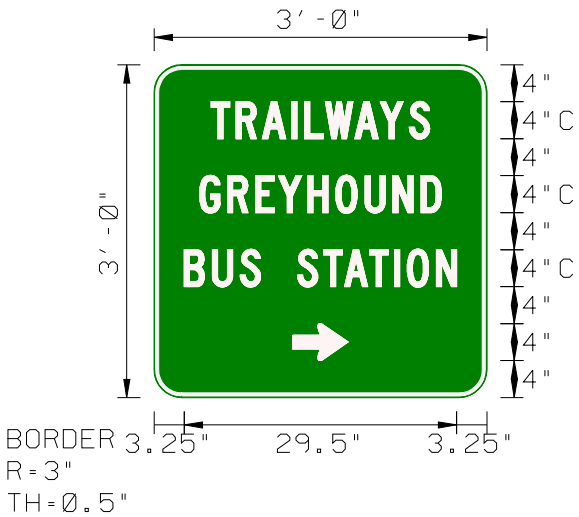

LETTER POSITIONS

Letter spacings are to start of next letter

																												Series/Size Text Length
		T	R	A	I	L	W	A	Y	S																		C4
	6.2	2.7	2.9	3.2	1.4	2.2	3.2	2.7	3.2	2.2	6.2																	23.6
		G	R	E	Y	H	O	U	N	D																		C4
	4.9	3	3	2.5	3.2	3	3.2	3	3	2.2	4.9																	26.1
		B	U	S		S	T	A	T	I	O	N																C4
	3.3	3	3	2.2	4	2.9	2.2	2.7	2.7	1.4	3.2	2.2	3.3															29.5

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP05068
TYPE: D
QUANTITY: 1

SIGN WIDTH: 3'-6"
HEIGHT: 2'-0"
TOTAL AREA: 7.0 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.5"
RADII: 3"

NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
RIGHT AR	18	3	6	4

MAT'L: 0.080" (2.0 mm) ALUMINUM

DESIGN BY: BSESSOMS DATE: Feb 24,2005 CHECKED BY:
TEPPL TOPIC: B-24 DIV: STATEWIDE

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

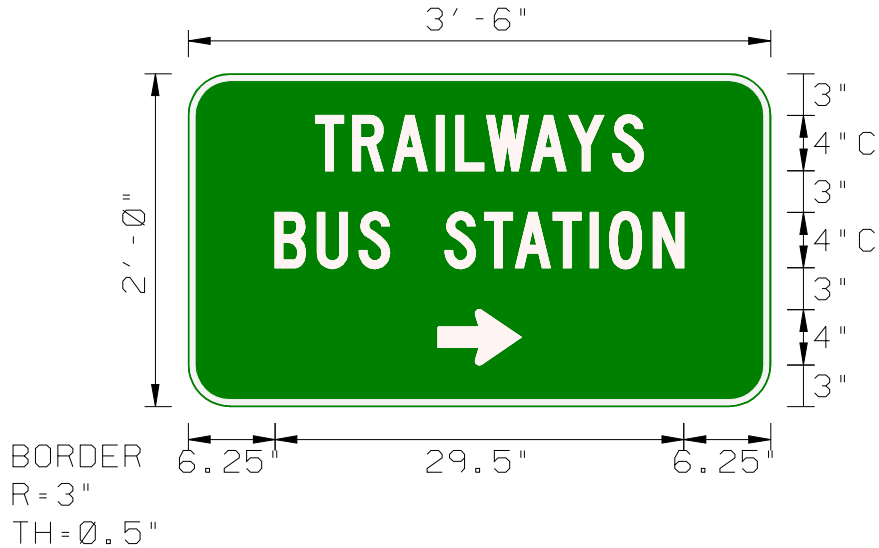

LETTER POSITIONS

Letter spacings are to start of next letter

																											Series/Size Text Length
		T	R	A	I	L	W	A	Y	S																	C4
	9.2	2.7	2.9	3.2	1.4	2.2	3.2	2.7	3.2	2.2	9.2																23.6
		B	U	S		S	T	A	T	I	O	N															C4
	6.3	3	3	2.2	4	2.9	2.2	2.7	2.7	1.4	3.2	2.2	6.3														29.5

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP05069
TYPE: B
QUANTITY: 1

SIGN WIDTH: 5'-6"
HEIGHT: 4'-0"
TOTAL AREA: 22.0 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.75"
RADII: 6"

NO. Z BARS: 2
LENGTH: 58.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
RIGHT AR	28.5	5	9	6

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: BSESSOMS
TEPPL TOPIC: B-24
DATE: Feb 24,2005
DIV: STATEWIDE
CHECKED BY:

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

LETTER POSITIONS

Letter spacings are to start of next letter

																											Series/Size Text Length
		T	R	A	I	L	W	A	Y	S																	D6
	11.1	4.8	5.2	6.1	2.4	4	5.6	5.4	6.2	4	11.1																43.8
		G	R	E	Y	H	O	U	N	D																	D6
	9.2	5.5	5.5	4.4	6.2	5.5	5.6	5.5	5.5	4	9.2																47.6
		B	U	S		S	T	A	T	I	O	N															D6
	6.8	5.5	5.5	4	6	5.2	4	5.4	4.8	2.4	5.6	4	6.8														52.5

Spacing Factor is 1 unless specified otherwise