SIGN NUMBER: SP04415
TYPE: A
QUANTITY: 1

SIGN WIDTH: 13'-6"
HEIGHT: 2'-6"
TOTAL AREA: 33.8 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 1.5"
RADII: 3"

NO. Z BARS: 2
LENGTH: 154.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: BSESSOMS
TEPPL TOPIC: R-08

DATE: Aug 11,2004
DIV: STATEWIDE

CHECKED BY:

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

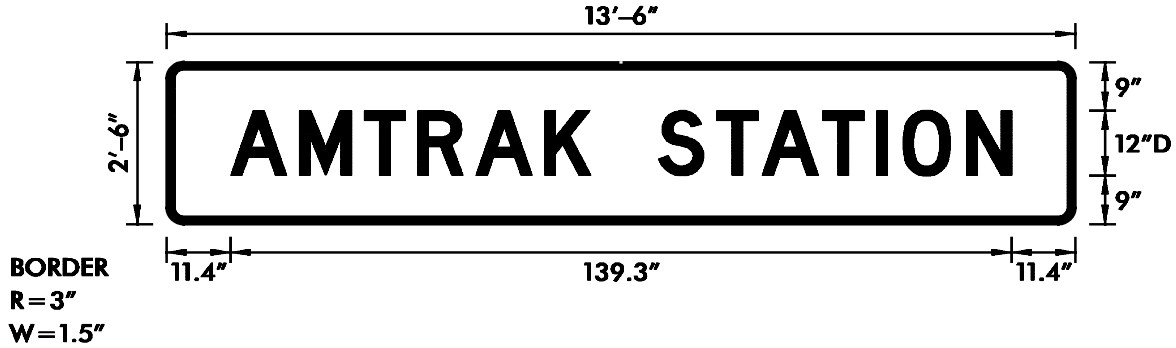

LETTER POSITIONS

Letter spacings are to start of next letter

		A	M	T	R	A	K		S	T	A	T	I	O	N													Series/Size Text Length
	11.4	12.3	11.5	9.6	10.4	12.3	8.3	12	10.3	8.1	10.8	9.6	4.7	11.3	8.1	11.4												D12 139.3

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP04414
TYPE: A
QUANTITY: 1

SIGN WIDTH: 8'-0"
HEIGHT: 5'-6"
TOTAL AREA: 44.0 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 1.5"
RADII: 9"

NO. Z BARS: 2
LENGTH: 88.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: BSESSOMS
DATE: Aug 11,2004
CHECKED BY:
TEPPL TOPIC: R-08
DIV: STATEWIDE

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

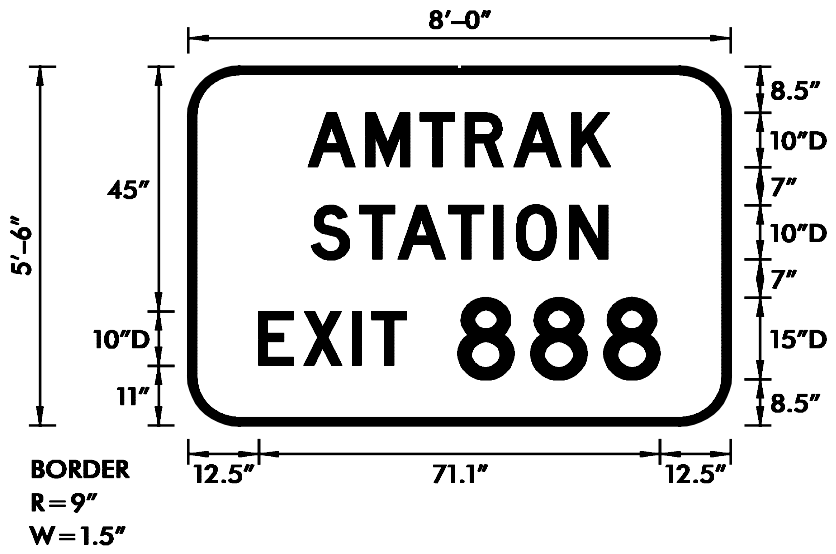

LETTER POSITIONS

Letter spacings are to start of next letter

																											Series/Size Text Length
		A	M	T	R	A	K																				D10
	21.2	10.3	9.6	8	8.6	10.3	6.9	21.2																			53.6
		S	T	A	T	I	O	N																			D10
	21.8	8.6	6.8	9	8	3.9	9.4	6.8	21.8																		52.5
		E	X	I	T		8	8	8																		D10,D15
	12.5	8	8.6	3.5	6.1	9.1	12.9	12.9	10	12.5																	71.1

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP04413
TYPE: B
QUANTITY: 1

SIGN WIDTH: 11'-6"
HEIGHT: 4'-6"
TOTAL AREA: 51.8 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 1.5"
RADII: 6"

NO. Z BARS: 2
LENGTH: 130.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: BSESSOMS
DATE: Aug 11,2004
CHECKED BY:
TEPPL TOPIC: R-08
DIV: STATEWIDE

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

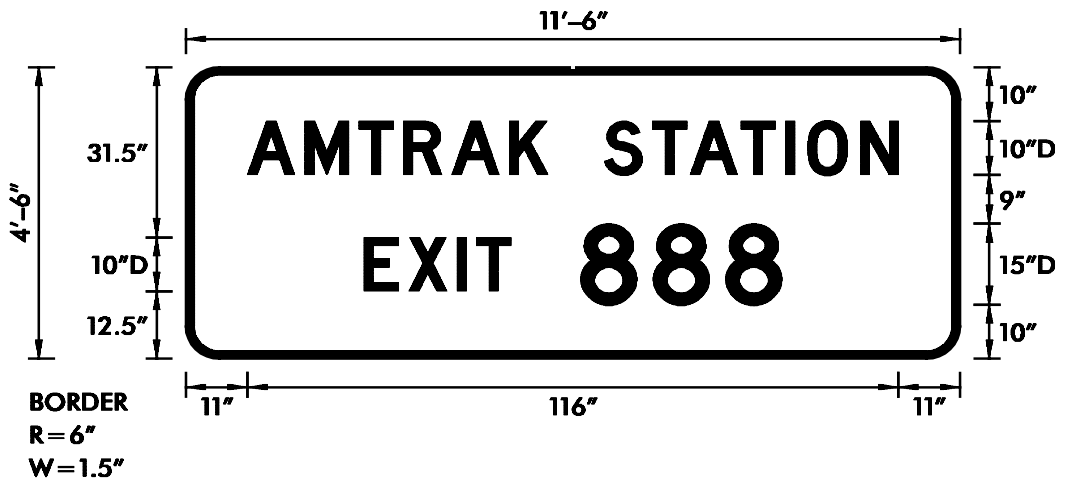

LETTER POSITIONS

Letter spacings are to start of next letter

																											Series/Size Text Length
		A	M	T	R	A	K		S	T	A	T	I	O	N												D10
	11	10.3	9.6	8	8.6	10.3	6.9	10	8.6	6.8	9	8	3.9	9.4	6.8	11											116
		E	X	I	T		8	8	8																		D10,D15
	31.8	8	8.6	3.5	6.1	12.5	12.9	12.9	10	31.8																	74.5

Spacing Factor is 1 unless specified otherwise