

MAT'L: 0.063" (1.6 mm) ALUMINUM

R4-3

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

Spacing Factor is 1 unless specified otherwise

NORTH CAROLINA D.O.T. SIGN DETAIL



LENGTH:

COPY COLOR: Black

TEPPL TOPIC: S-28


DIV: STATEWIDE

[illegible]

MAT'L: 0.125" (3.2 mm) ALUMINUM

USE NOTES: 2.4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting.
Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

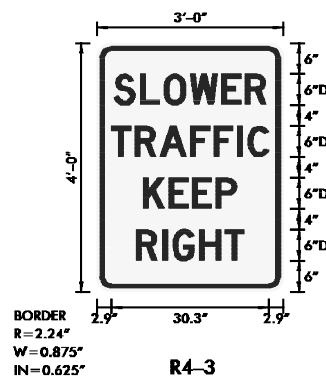

LETTER POSITIONS

[illegible]

Spacing Factor is 1 unless specified otherwise

FILENAMEBSESS_4


NORTH CAROLINA P.O.T. SIGN DETAIL



LENGTH:

MAT'L: 0.125" (3.2 mm) ALUMINUM

DIV: STATEWIDE

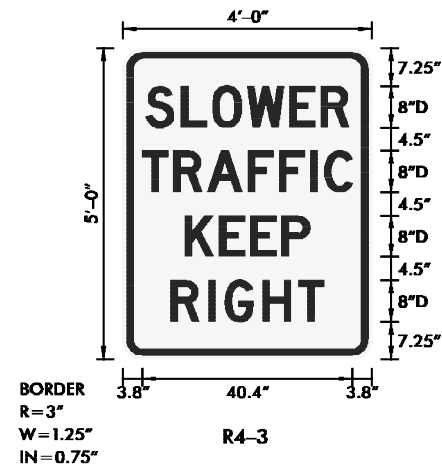

Series/Size	Text Length
-------------	-------------

[illegible]

NORTH CAROLINA D.O.T. SIGN DETAIL