SIGN NUMBER: SP05172
TYPE: E
QUANTITY:

SIGN WIDTH: 2′-6″
HEIGHT: 2′-6″
TOTAL AREA: 6.25 Sq.Ft.

BORDER TYPE: RECESSED
RECESS: 0.5″
WIDTH: 0.75″
RADII: 1.88″

NO. Z BARS:
LENGTH:

BACKG COLOR: Yellow
COPY COLOR: Black

| SYMBOL | X | Y | WID | HT |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

MAT'L: 0.063″ (1.6 mm) ALUMINUM

DESIGN BY: S OVERTON
TEPPL TOPIC: B-10

DATE: Jun 02,2005
DIV: STATEWIDE

CHECKED BY:

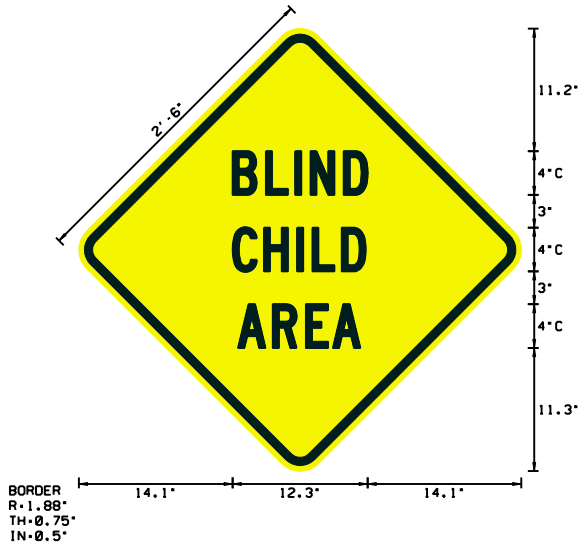


USE NOTES: 2, 4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032″ (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

LETTER POSITIONS

Letter spacings are to start of next letter

| | | | | | | | | | | | | | | | | | | | | | | | | | | Series/Size Text Length |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | B | L | I | N | D | | | | | | | | | | | | | | | | | | | | | C4 |
| | 14.1 | 3 | 2.7 | 1.4 | 3 | 2.2 | 14.1 | | | | | | | | | | | | | | | | | | | | 12.3 |
| | | C | H | I | L | D | | | | | | | | | | | | | | | | | | | | | C4 |
| | 14.1 | 2.9 | 3 | 1.4 | 2.7 | 2.2 | 14.2 | | | | | | | | | | | | | | | | | | | | 12.2 |
| | | A | R | E | A | | | | | | | | | | | | | | | | | | | | | | C4 |
| | 14.6 | 3.2 | 3 | 2.5 | 2.5 | 14.7 | | | | | | | | | | | | | | | | | | | | | 11.2 |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP05173
TYPE: E
QUANTITY:

SIGN WIDTH: 2'-0"
HEIGHT: 2'-0"
TOTAL AREA: 4.0 Sq.Ft.

BORDER TYPE: RECESSED
RECESS: 0.38"
WIDTH: 0.63"
RADII: 1.5"

NO. Z BARS:
LENGTH:

BACKG COLOR: Yellow
COPY COLOR: Black

| SYMBOL | X | Y | WID | HT |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

MAT'L: 0.063" (1.6 mm) ALUMINUM

DESIGN BY: S OVERTON
TEPPL TOPIC: B-10

DATE: Jun 02,2005
DIV: STATEWIDE

CHECKED BY:

USE NOTES: 2, 4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

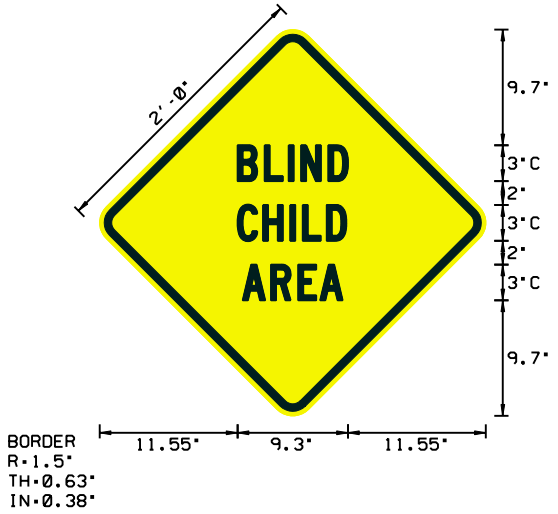


LETTER POSITIONS

Letter spacings are to start of next letter

| | | | | | | | | | | | | | | | | | | | | | | | | | | Series/Size Text Length |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | B | L | I | N | D | | | | | | | | | | | | | | | | | | | | | C3 |
| | 11.6 | 2.3 | 2 | 1 | 2.3 | 1.6 | 11.6 | | | | | | | | | | | | | | | | | | | | 9.3 |
| | | C | H | I | L | D | | | | | | | | | | | | | | | | | | | | | C3 |
| | 11.6 | 2.1 | 2.3 | 1 | 2 | 1.6 | 11.7 | | | | | | | | | | | | | | | | | | | | 9.1 |
| | | A | R | E | A | | | | | | | | | | | | | | | | | | | | | | C3 |
| | 12 | 2.4 | 2.3 | 1.8 | 1.9 | 12 | | | | | | | | | | | | | | | | | | | | | 8.4 |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Spacing Factor is 1 unless specified otherwise