

SIGN NUMBER: SPO4298A

BACKG COLOR: Green

DESIGN BY: BSESSOMS

CHECKED BY:

*C.B. [Signature]*

TYPE: D

COPY COLOR: White

TEPPL TOPIC: C-3

DIV: STATEWIDE

QUANTITY: 1

SYMBOL	X	Y	WID	HT
ARUP	3.4	9.5	5	7.5

SIGN WIDTH: 4'-6"

HEIGHT: 2'-0"

TOTAL AREA: 9.0 Sq.Ft.

BORDER TYPE: FLUSH

RECESS: 0"

WIDTH: 0.5"

RADII: 3"


NO. Z BARS:

LENGTH:

MAT'L: 0.125" (3.2 mm) ALUMINUM

**USE NOTES: 1,4**

- 1. Legend and border shall be direct applied Type III reflective sheeting.
- 2. Legend and border shall be direct applied non-reflective sheeting.
- 3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
- 4. Background shall be Type III reflective sheeting.
- 5. Background shall be Type I reflective sheeting.
- 6. Center arrow(s) vertically on sign.
- 7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

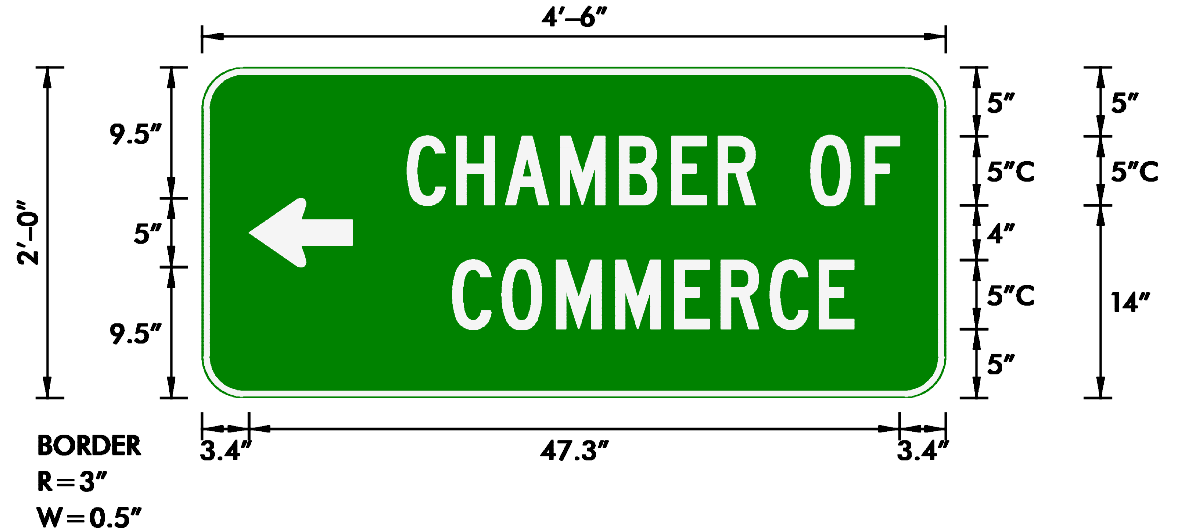

**LETTER POSITIONS**

**Letter spacings are to start of next letter**

Series/Size  
Text Length

	C	H	A	M	B	E	R	O	F															C5 35.8
14.9	3.6	3.6	4	4.3	3.8	3.4	2.7	4	4	2.5	3.4													
	C	O	M	M	E	R	C	E																C5 29.1
18.2	3.6	4	4.3	4.3	3.4	3.6	3.6	2.5	6.7															

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP04298B

TYPE: D

QUANTITY: 1

SIGN WIDTH: 4'-6"

HEIGHT: 2'-0"

TOTAL AREA: 9.0 Sq.Ft.

BORDER TYPE: FLUSH

RECESS: 0"

WIDTH: 0.5"

RADII: 3"

NO. Z BARS:

LENGTH:

BACKG COLOR: Green

COPY COLOR: White

SYMBOL	X	Y	WID	HT
ARUP	43.1	9.5	5	7.5


MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: BSESSONS

TEPPL TOPIC: C-3

CHECKED BY: *C.B. S...*

DIV: STATEWIDE

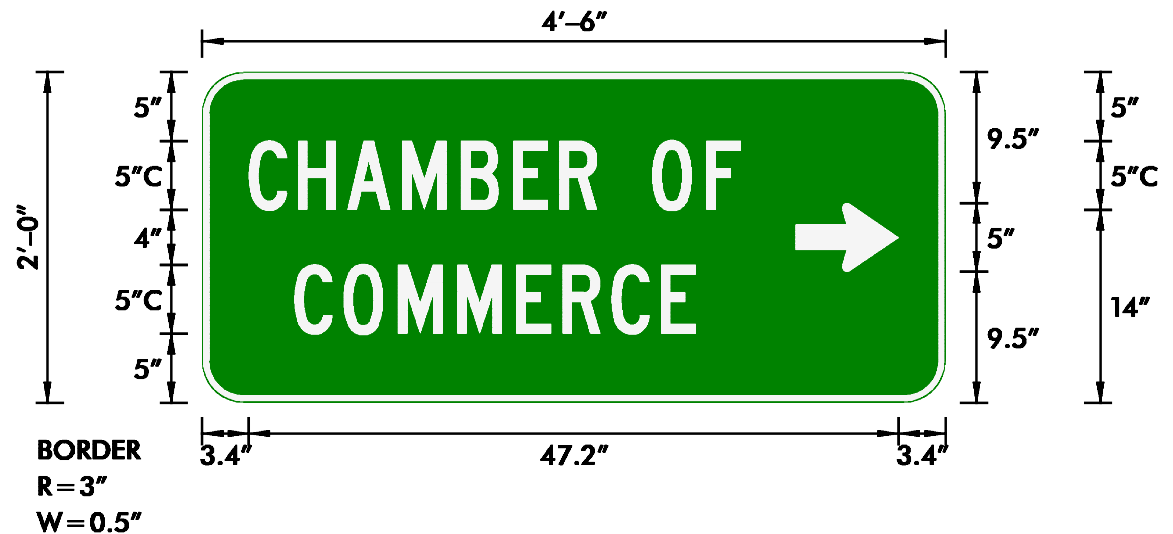

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

LETTER POSITIONS

Letter spacings are to start of next letter																			Series/Size
																			Text Length
	C	H	A	M	B	E	R		O	F									C5
3.4	3.6	3.6	4	4.3	3.8	3.4	2.7	4	4	2.5	14.9								35.7
	C	O	M	M	E	R	C	E											C5
6.7	3.6	4	4.3	4.3	3.4	3.6	3.6	2.5	18.2										29.1

Spacing Factor is 1 unless specified otherwise