



N. C. DEPARTMENT OF TRANSPORTATION
 DIVISION OF HIGHWAYS
 TRAFFIC ENGINEERING BRANCH
 SIGNING DEPARTMENT

SIGN NUMBER: SP04199
 TYPE: D

QUANTITY: 1

SIGN WIDTH: 2'-6"
 HEIGHT: 3'-6"
 TOTAL AREA: 8.8 Sq.Ft.

BORDER TYPE: FLUSH
 RECESS: 0"
 WIDTH: 0.50"
 RADII: 3"

NO. Z BARS:
 LENGTH:


BACKG COLOR: Green
 COPY COLOR: White

SYMBOL	X	Y	WID	HT
ARRIGHT	11	3.5	5	8

MAT'L: 0.080" (2.0 mm) ALUMINUM

DESIGN BY: S. PIOTROWSKI
 TEPPL TOPIC: D-20

CHECKED BY: *K. B. [Signature]*
 DIV: STATEWIDE

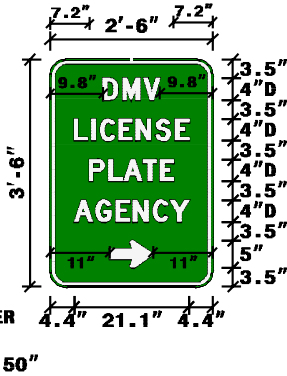

USE FOR SPEEDS OF 50 MPH OR LESS

- USE NOTES: 1, 4
- Legend and border shall be direct applied Type III reflective sheeting.
 - Legend and border shall be direct applied non-reflective sheeting.
 - Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
 - Background shall be Type III reflective sheeting.
 - Background shall be Type I reflective sheeting.
 - Center arrow(s) vertically on sign.
 - Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

LETTER POSITIONS

Letter spacings are to start of next letter												Series/Size
												Text Length
		D	M	V								D4
		9.8	3.6	3.8	3	9.8						10.5
		L	I	C	E	N	S	E				D4
		4.4	3.2	1.6	3.5	3.2	3.6	3.6	2.5	4.4		21.1
		P	L	A	T	E						D4
		7.2	3.6	2.7	3.6	3.2	2.4	7.2				15.6
		A	G	E	M	C	Y					D4
		4.4	4.1	3.7	3.2	3.6	3.2	3.4	4.4			21.1

Spacing Factor is 1 unless specified otherwise

FILENAME: DMV

NORTH CAROLINA D.O.T. SIGN DETAIL



N. C. DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
TRAFFIC ENGINEERING BRANCH
SIGNING DEPARTMENT

SIGN NUMBER: SP04232

TYPE: D

QUANTITY: 1

SIGN WIDTH: 2'-6"

HEIGHT: 3'-6"

TOTAL AREA: 8.8 Sq.Ft.

BORDER TYPE: FLUSH

RECESS: 0"

WIDTH: 0.50"

RADII: 3"

NO. Z BARS:

LENGTH:

BACKG COLOR: Green

COPY COLOR: White

SYMBOL	X	Y	WID	HT
ARLEFT	11	3.5	5	8

MAT'L: 0.080" (2.0 mm) ALUMINUM


DESIGN BY: S. PIOTROWSKI

TEPPL TOPIC: D-20

CHECKED BY:

DIV: STATEWIDE

C.B. [Signature]



BORDER 4.4" 21.1" 4.4"
R=3"
TH=0.50"

USE FOR SPEEDS OF 50 MPH OR LESS

- USE NOTES: 1, 4
- Legend and border shall be direct applied Type III reflective sheeting.
 - Legend and border shall be direct applied non-reflective sheeting.
 - Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
 - Background shall be Type III reflective sheeting.
 - Background shall be Type I reflective sheeting.
 - Center arrow(s) vertically on sign.
 - Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

LETTER POSITIONS

Letter spacings are to start of next letter													Series/Size Text Length
	D	M	V										D4
	9.8	3.6	3.8	3	9.8								10.5
	L	I	C	E	N	S	E						D4
	4.4	3.2	1.6	3.5	3.2	3.6	3.6	2.5	4.4				21.1
	P	L	A	T	E								D4
	7.2	3.6	2.7	3.6	3.2	2.4	7.2						15.6
	A	G	E	N	C	Y							D4
	4.4	4.1	3.7	3.2	3.6	3.2	3.4	4.4					21.1

Spacing Factor is 1 unless specified otherwise



SIGN NUMBER: SP04233

TYPE: D

QUANTITY: 1

SIGN WIDTH: 3'-0"

HEIGHT: 4'-0"

TOTAL AREA: 12.0 Sq.Ft.

BORDER TYPE: FLUSH

RECESS: 0"

WIDTH: 0.75"

RADII: 6"

NO. Z BARS:

LENGTH:

BACKG COLOR: Green

COPY COLOR: White

SYMBOL	X	Y	WID	HT
ARLEFT	14	3.5	5	8

MAT'L: 0.125" (3.2 mm) ALUMINUM


DESIGN BY: S. PIOTROWSKI

TEPPL TOPIC: D-20

CHECKED BY:

DIV: STATEWIDE

C.B. SJB

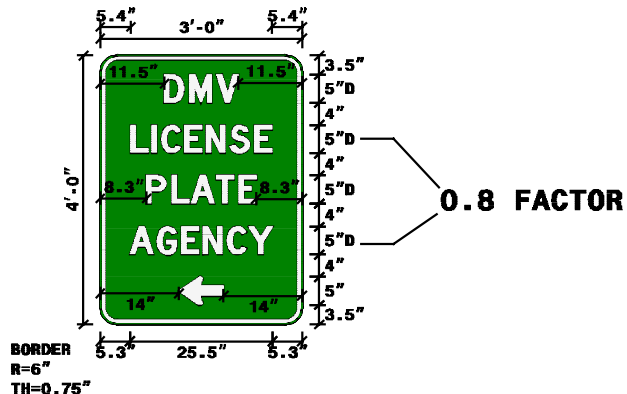

USE FOR SPEEDS OF 55 MPH

USE NOTES: 1, 4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

LETTER POSITIONS

Letter spacings are to start of next letter											Series/Size Text Length	
	D	M	V									D5
	11.5	4.6	4.8	3.7	11.5							13.1
	L	I	C	E	N	S	E					D5
	5.4	3.8	1.7	4.1	3.8	4.3	4.3	3.1	5.4			25.2
	P	L	A	T	E							D5
	8.3	4.6	3.4	4.5	4	3.1	8.3					19.5
	A	G	E	N	C	Y						D5
	5.3	4.9	4.3	3.8	4.3	3.9	4.2	5.3				25.5

Spacing Factor is 1 unless specified otherwise



SIGN NUMBER: SPO4234

TYPE: B

QUANTITY: 1

SIGN WIDTH: 3'-0"

HEIGHT: 4'-0"

TOTAL AREA: 12.0 Sq.Ft.

BORDER TYPE: FLUSH

RECESS: 0"

WIDTH: 0.75"

RADII: 6"

NO. Z BARS:

LENGTH:

SYMBOL	X	Y	WID	HT
ARRIGHT	14	3.5	5	8

MAT'L: 0.125" (3.2 mm) ALUMINUM

USE NOTES: 1, 4


- Legend and border shall be direct applied Type III reflective sheeting.
- Legend and border shall be direct applied non-reflective sheeting.
- Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
- Background shall be Type III reflective sheeting.
- Background shall be Type I reflective sheeting.
- Center arrow(s) vertically on sign.
- Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

DESIGN BY: S PIOTROWSKI

TEPPL TOPIC: D-20

CHECKED BY: *C.B. [Signature]*

DIV: STATEWIDE

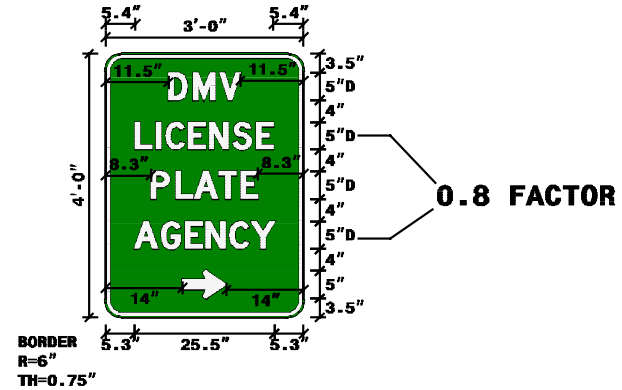

USE FOR SPEEDS OF 55 MPH

LETTER POSITIONS

Letter spacings are to start of next letter											Series/Size
											Text Length
	D	M	V								D5
11.5	4.6	4.8	3.7	11.5							13.1
	L	I	C	E	N	S	E				D5
5.4	3.8	1.7	4.1	3.8	4.3	4.3	3.1	5.4			25.2
	P	L	A	T	E						D5
8.3	4.6	3.4	4.5	4	3.1	8.3					19.5
	A	G	E	N	C	Y					D5
5.3	4.9	4.3	3.8	4.3	3.9	4.2	5.3				25.5

Spacing Factor is 1 unless specified otherwise



N. C. DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
TRAFFIC ENGINEERING BRANCH
SIGNING DEPARTMENT

SIGN NUMBER: SPO4236
TYPE: D
QUANTITY: 1
SIGN WIDTH: 2'-6"
HEIGHT: 3'-6"
TOTAL AREA: 8.8 Sq-Ft.
BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.50"
RADII: 3"
NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
ARLEFT	11	3.5	5	8


MAT'L: 0.080" (2.0 mm) ALUMINUM

USE NOTES: 1, 4

- Legend and border shall be direct applied Type III reflective sheeting.
- Legend and border shall be direct applied non-reflective sheeting.
- Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
- Background shall be Type III reflective sheeting.
- Background shall be Type I reflective sheeting.
- Center arrow(s) vertically on sign.
- Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

DESIGN BY: S. PIOTROWSKI
TEPPL TOPIC: D-20

CHECKED BY: *[Signature]*
DIV: STATEWIDE

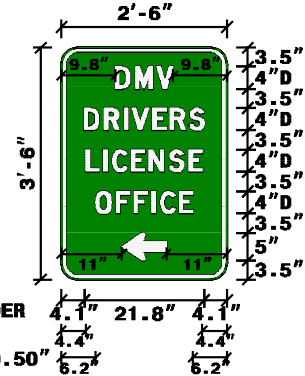

USE FOR SPEEDS OF 50 MPH OR LESS

LETTER POSITIONS

Letter spacings are to start of next letter														Series/Size	
														Text Length	
	D	M	V												D4
	9.8	3.6	3.8	3	9.8										10.5
	D	R	I	V	E	R	S								D4
	4.1	3.6	3.6	1.4	3.8	3.2	3.5	2.7	4.1						21.8
	L	I	C	E	N	S	E								D4
	4.4	3.2	1.6	3.5	3.2	3.6	3.6	2.4	4.4						21.1
	O	F	F	I	C	E									D4
	6.2	3.8	3.2	3.2	1.6	3.5	2.5	6.2							17.6

Spacing Factor is 1 unless specified otherwise

FILENAME: DMV

NORTH CAROLINA D.O.T. SIGN DETAIL



SIGN NUMBER: SP04235

TYPE: D

QUANTITY: 1

SIGN WIDTH: 2'-6"

HEIGHT: 3'-6"

TOTAL AREA: 8.8 Sq.Ft.

BORDER TYPE: FLUSH

RECESS: 0"

WIDTH: 0.50"

RADII: 3"

NO. Z BARS:

LENGTH:

BACKG COLOR: Green

COPY COLOR: White

SYMBOL	X	Y	WID	HT
ARRIGHT	11	3.5	5	8

MAT'L: 0.080" (2.0 mm) ALUMINUM

USE NOTES: 1, 4

- Legend and border shall be direct applied Type III reflective sheeting.
- Legend and border shall be direct applied non-reflective sheeting.
- Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
- Background shall be Type III reflective sheeting.
- Background shall be Type I reflective sheeting.
- Center arrow(s) vertically on sign.
- Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:


DESIGN BY: S. PIOTROWSKI

TEPPL TOPIC: D-20

CHECKED BY:

DIV: STATEWIDE

C.B. S. J.R.

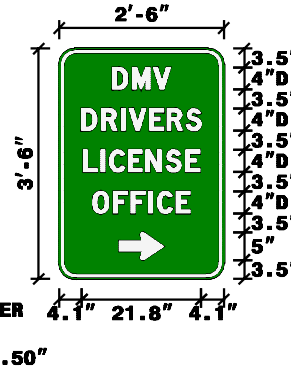

USE FOR SPEEDS OF 50 MPH OR LESS

LETTER POSITIONS

Letter spacings are to start of next letter													Series/Size
													Text Length
	D	M	V										D4
	9.8	3.6	3.8	3	9.8								10.5
	D	R	I	V	E	R	S						D4
	4.1	3.6	3.6	1.4	3.8	3.2	3.5	2.7	4.1				21.8
	L	I	C	E	N	S	E						D4
	4.4	3.2	1.6	3.5	3.2	3.6	3.6	2.4	4.4				21.1
	O	F	F	I	C	E							D4
	6.2	3.8	3.2	3.2	1.6	3.5	2.5	6.2					17.6

Spacing Factor is 1 unless specified otherwise



SIGN NUMBER: SP04237
 TYPE: D
 QUANTITY: 1
 SIGN WIDTH: 3'-0"
 HEIGHT: 4'-0"
 TOTAL AREA: 12.0 Sq.Ft.
 BORDER TYPE: FLUSH
 RECESS: 0"
 WIDTH: 0.75"
 RADII: 6"
 NO. Z BARS:
 LENGTH:


BACKG COLOR: Green
 COPY COLOR: White

SYMBOL	X	Y	WID	HT
ARLEFT	14	3.5	5	8

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: S. PIOTROWSKI
 TEPL TOPIC: D-20
 CHECKED BY: *C.B. BJR*
 DIV: STATEWIDE

- USE NOTES: 1, 4
1. Legend and border shall be direct applied Type III reflective sheeting.
 2. Legend and border shall be direct applied non-reflective sheeting.
 3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
 4. Background shall be Type III reflective sheeting.
 5. Background shall be Type I reflective sheeting.
 6. Center arrow(s) vertically on sign.
 7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

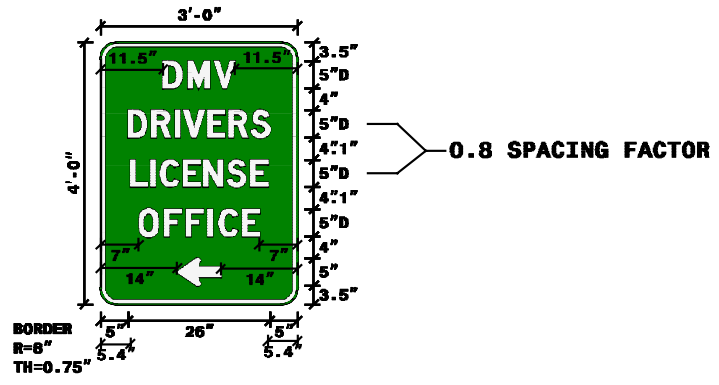

USE FOR SPEEDS OF 55 MPH

LETTER POSITIONS

Letter spacings are to start of next letter												Series/Size Text Length
	D	M	V									D5
	11.5	4.6	4.8	3.7	11.5							13.1
	D	R	I	V	E	R	S					D5
	5	4.3	4.3	1.5	4.5	3.8	4.1	3.4	5			26
	L	I	C	E	N	S	E					D5
	5.4	3.8	1.7	4.1	3.8	4.3	4.3	3.1	5.4			25.2
	O	F	F	I	C	E						D5
	7	4.7	4	4	2	4.3	3.1	7				22

Spacing Factor is 1 unless specified otherwise



N. C. DEPARTMENT OF TRANSPORTATION
 DIVISION OF HIGHWAYS
 TRAFFIC ENGINEERING BRANCH
 SIGNING DEPARTMENT


SIGN NUMBER: SP04238
 TYPE: D
 QUANTITY: 1
 SIGN WIDTH: 3'-0"
 HEIGHT: 4'-0"
 TOTAL AREA: 12.0 Sq.Ft.
 BORDER TYPE: FLUSH
 RECESS: 0"
 WIDTH: 0.75"
 RADII: 6"
 NO. Z BARS:
 LENGTH:

SYMBOL	X	Y	WID	HT
ARRIGHT	14	3.5	5	8

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: S. PIOTROWSKI
 TEPPL TOPIC: D-20

CHECKED BY: *C.B. BJR*
 DIV: STATEWIDE

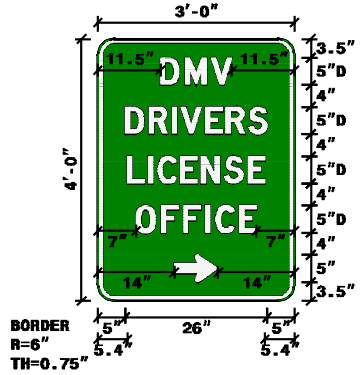

BORDER
 R=6"
 TH=0.75"

USE FOR SPEEDS OF 55 MPH





- USE NOTES: 1, 4
1. Legend and border shall be direct applied Type III reflective sheeting.
 2. Legend and border shall be direct applied non-reflective sheeting.
 3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
 4. Background shall be Type III reflective sheeting.
 5. Background shall be Type I reflective sheeting.
 6. Center arrow(s) vertically on sign.
 7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

LETTER POSITIONS


Letter spacings are to start of next letter											Series/Size
											Text Length
	D	M	V								D5
11.5	4.6	4.8	3.7	11.5							13.1
	D	R	I	V	E	R	S				D5
5	4.3	4.3	1.5	4.5	3.8	4.1	3.4	5			26
	L	I	C	E	N	S	E				D5
5.4	3.8	1.7	4.1	3.8	4.3	4.3	3.1	5.4			25.2
	O	F	F	I	C	E					D5
7	4.7	4	4	2	4.3	3.1	7				22

Spacing Factor is 1 unless specified otherwise




TYPICAL DMV SERVICE SIGN DESIGN FOR LICENSE PLATE AGENCY

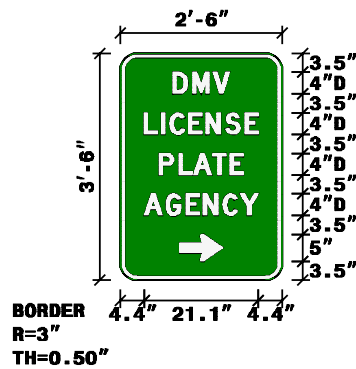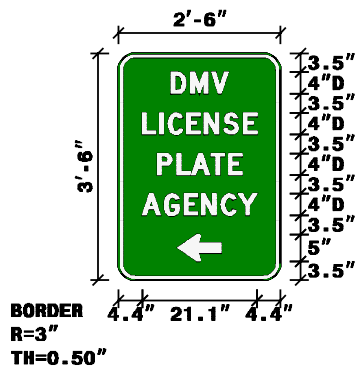

USE FOR SPEEDS OF 50 MPH OR LESS



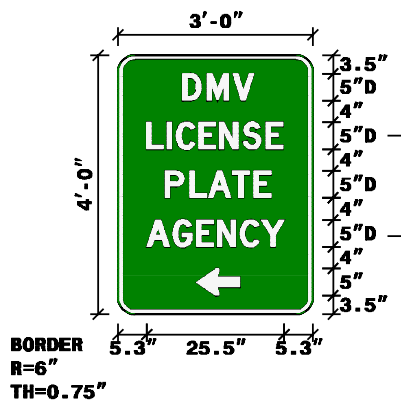


0.8 FACTOR


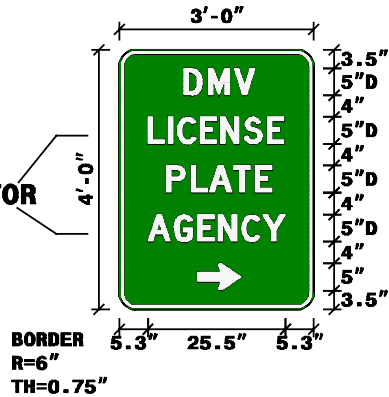


USE FOR SPEEDS OF 55 MPH

TYPICAL DMV SERVICE SIGN DESIGN FOR DRIVERS LICENSE OFFICE

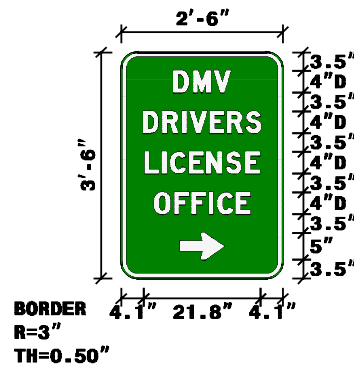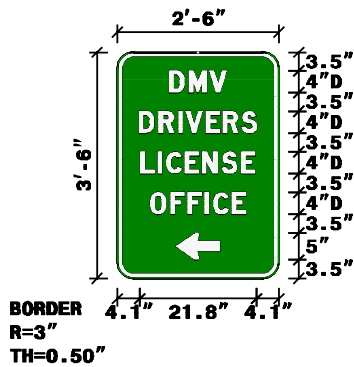

USE FOR SPEEDS OF 50 MPH OR LESS

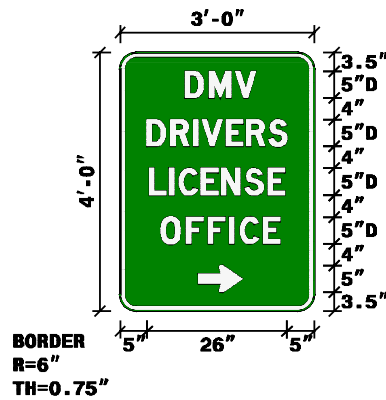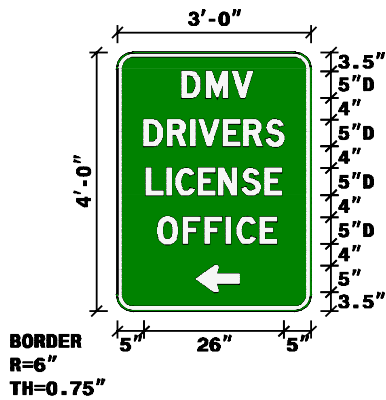

USE FOR SPEEDS OF 55 MPH