

SIGN NUMBER: SP04474

BACKG COLOR: Blue

DESIGN BY: BSESSOMS

DATE: Sep 21,2004

CHECKED BY:

TYPE: D

COPY COLOR: White

TEPPL TOPIC: F-06

DIV: STATEWIDE

QUANTITY: 1

SYMBOL	X	Y	WID	HT

SIGN WIDTH: 0'-9"

HEIGHT: 2'-1"

TOTAL AREA: 1.6 Sq.Ft.

BORDER TYPE: N/A

RECESS: 0"

WIDTH: 0"

RADII: 0"


NO. Z BARS:

MAT'L: 0.063" (1.6 mm) ALUMINUM

LENGTH:

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

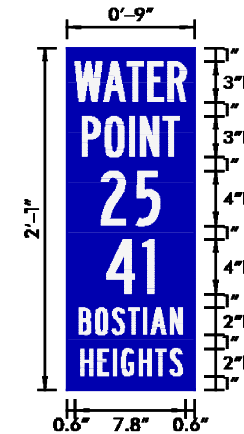

0.700 Spacing Factor  
MOUNTED ON 1 U-POST

LETTER POSITIONS

Letter spacings are to start of next letter

Series/Size  
Text Length

																			Series/Size Text Length	
		W	A	T	E	R														B3
	0.6	2	1.7	1.4	1.4	1.3	0.6													7.8
		P	O	I	N	T														B3
	1.1	1.6	1.8	0.8	1.6	1.1	1.1													6.8
		2	5																	B4
	2.4	2.5	1.7	2.4																4.1
		4	1																	B4
	2.8	2.5	0.8	2.8																3.4
		B	O	S	T	I	A	N												B2
	0.9	1.2	1.2	1.2	1.1	0.6	1.4	0.8	0.9											7.3
		H	E	I	G	H	T	S												B2
	1	1.2	1.1	0.6	1.2	1.2	1.1	0.8	0.9											7.2

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP04475

BACKG COLOR: Blue

DESIGN BY: BSESSOMS

DATE: Sep 21,2004

CHECKED BY: *Walter R. Stewart*

TYPE: D

COPY COLOR: White

TEPPL TOPIC: F-06

DIV: STATEWIDE

QUANTITY: 1

SYMBOL	X	Y	WID	HT

SIGN WIDTH: 0'-9"

HEIGHT: 2'-1"

TOTAL AREA: 1.6 Sq.Ft.

BORDER TYPE: FLUSH

RECESS: 0"


WIDTH: 0.5"

RADII: 1.5"

MAT'L: 0.063" (1.6 mm) ALUMINUM

NO. Z BARS:

LENGTH:

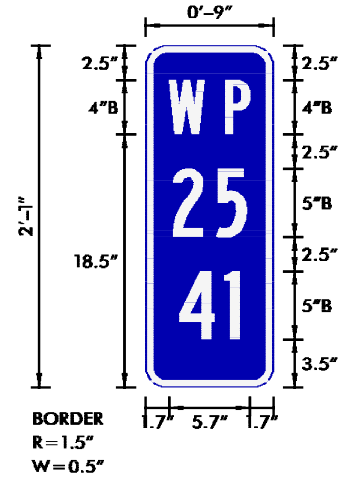

MOUNTED ON 1 U-POST

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

LETTER POSITIONS

Letter spacings are to start of next letter

Letter spacings are to start of next letter																	Series/Size
																	Text Length
		W		P													B4
	1.7	2.5	1.5	1.7	1.7												5.7
		2	5														B5
	1.9	3.1	2.1	1.9													5.2
		4	1														B5
	2.4	3.2	1	2.4													4.2

Spacing Factor is 1 unless specified otherwise