

SIGN NUMBER: SP04427

BACKG COLOR: Blue

DESIGN BY: BSESSOMS

DATE: Aug 11, 2004

CHECKED BY:



TYPE: A

COPY COLOR: White

TEPPL TOPIC: H-25

DIV: STATEWIDE

QUANTITY: 1

SYMBOL	X	Y	WID	HT

SIGN WIDTH: 11'-6"

HEIGHT: 7'-6"

TOTAL AREA: 86.3 Sq.Ft.

BORDER TYPE: FLUSH

RECESS: 0"

WIDTH: 2"

RADII: 12"

NO. Z BARS: 3

LENGTH: 130.0

MAT'L: 0.125" (3.2 mm) ALUMINUM

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:



BORDER
R=12"
W=2"

LETTER POSITIONS

Letter spacings are to start of next letter

Letter spacings are to start of next letter																				Series/Size Text Length
	H	O	S	P	I	T	A	L												D12
31.3	10.9	10.7	10.9	10.9	4.1	8.1	12.3	7.3	31.3											75.4
	E	X	I	T		1	2	B												D10,D15
35.4	8	8.6	3.5	6.1	10	7.2	13.7	10.1	35.4											67.2
	T	R	A	U	M	A		C	E	N	T	E	R							D10
13.1	8	8.6	10.3	9.1	9.6	8.4	10	8.6	8	8.6	8	8	6.8	13.1						111.9

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP04428

BACKG COLOR: Blue

DESIGN BY: BSESSOMS

DATE: Aug 11, 2004

CHECKED BY: *Stephen J. Robinson*

TYPE: B

COPY COLOR: White

TEPPL TOPIC: H-25

DIV: STATEWIDE

QUANTITY: 1

SYMBOL	X	Y	WID	HT
ARUP	13.1	26	6	10
ARUP	107.9	8.5	6	10

SIGN WIDTH: 10'-6"

HEIGHT: 3'-0"

TOTAL AREA: 31.5 Sq.Ft.

BORDER TYPE: FLUSH

RECESS: 0"

WIDTH: 0.75"

RADII: 3"


NO. Z BARS: 2

LENGTH: 118.0

MAT'L: 0.125" (3.2 mm) ALUMINUM

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

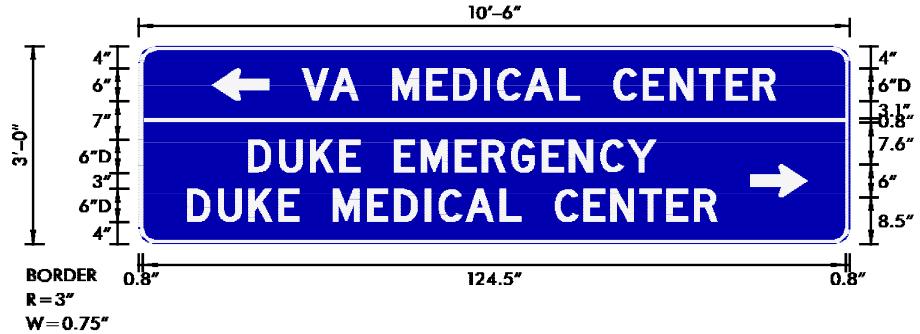

LETTER POSITIONS

Letter spacings are to start of next letter

Letter spacings are to start of next letter																					Series/Size
																					Text Length
	V	A		M	E	D	I	C	A	L		C	E	N	T	E	R				D6
29.1	4.9	5	6	6.1	4.8	5.5	2.4	4.8	6.2	3.7	6	5.2	4.8	5.2	4.8	4.8	4	13			83.9
	D	U	K	E		E	M	E	R	G	E	N	C	Y							D6
18.9	5.5	5.5	5.3	3.7	6	4.8	6.1	4.8	5.2	5.5	4.8	5.5	4.8	5.1	34.9						72.2
	D	U	K	E		M	E	D	I	C	A	L		C	E	N	T	E	R		D6
8.1	5.5	5.5	5.3	3.7	6	6.1	4.8	5.5	2.4	4.8	6.2	3.7	6	5.2	4.8	5.2	4.8	4.8	4	24	93.9

Spacing Factor is 1 unless specified otherwise

