SIGN NUMBER: SP04486
TYPE: D
QUANTITY: 1

SIGN WIDTH: 2'-6"
HEIGHT: 1'-0"
TOTAL AREA: 2.5 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.5"
RADII: 1.5"

NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.063" (1.6 mm) ALUMINUM

DESIGN BY: BSESSOMS DATE: Oct 19,2004 CHECKED BY:
TEPPL TOPIC: M-32 DIV: STATEWIDE

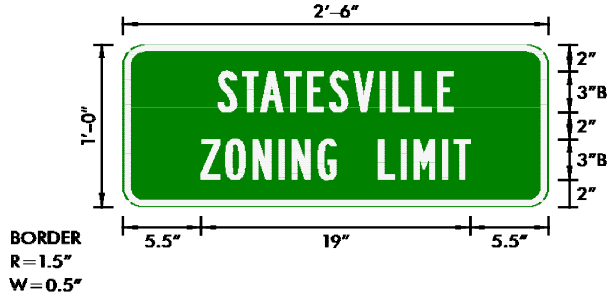

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

LETTER POSITIONS

Letter spacings are to start of next letter

																											Series/Size Text Length
		S	T	A	T	E	S	V	I	L	L	E															B3
	6.7	1.7	1.3	1.8	1.6	1.6	1.7	1.8	0.9	1.6	1.6	1.1	6.7														16.6
		Z	O	N	I	N	G		L	I	M	I	T														B3
	5.5	1.7	1.9	1.8	0.9	1.8	1.3	3	1.6	0.9	2	0.8	1.1	5.5													19

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP04487
TYPE: D
QUANTITY: 1

SIGN WIDTH: 2'-6"
HEIGHT: 1'-0"
TOTAL AREA: 2.5 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.5"
RADII: 1.5"

NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.063" (1.6 mm) ALUMINUM

DESIGN BY: BSESSOMS
DATE: Oct 19,2004
CHECKED BY:
TEPPL TOPIC: M-32
DIV: STATEWIDE

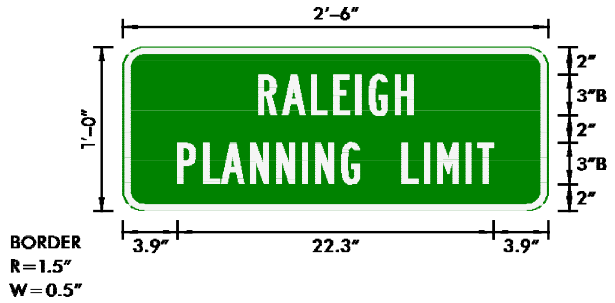

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

LETTER POSITIONS

Letter spacings are to start of next letter

																												Series/Size Text Length
		R	A	L	E	I	G	H																				B3
	9.5	1.7	2	1.6	1.6	0.9	1.8	1.3	9.6																			10.9
		P	L	A	N	N	I	N	G		L	I	M	I	T													B3
	3.9	1.8	1.3	2	1.8	1.8	0.9	1.8	1.3	3	1.6	0.9	2	0.8	1.1	3.9												22.3

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP04488
TYPE: D
QUANTITY: 1

SIGN WIDTH: 3'-6"
HEIGHT: 1'-0"
TOTAL AREA: 3.5 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.5"
RADII: 1.5"

NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.080" (2.0 mm) ALUMINUM

DESIGN BY: BSESSOMS DATE: Oct 19,2004 CHECKED BY:
TEPPL TOPIC: M-32 DIV: STATEWIDE

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

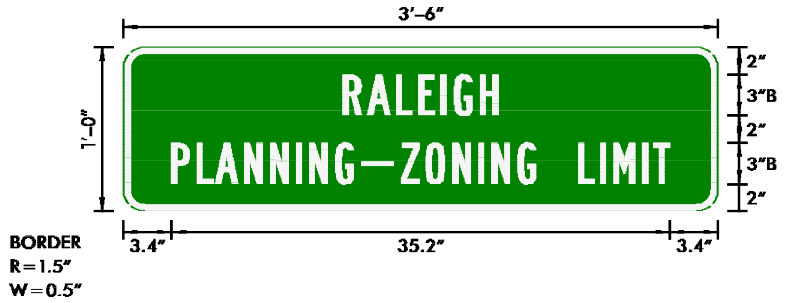

LETTER POSITIONS

Letter spacings are to start of next letter

Series/Size Text Length

		R	A	L	E	I	G	H																			B3
	15.5	1.7	2	1.6	1.6	0.9	1.8	1.3	15.5																		10.9
		P	L	A	N	N	I	N	G	-	Z	O	N	I	N	G		L	I	M	I	T					B3
	3.4	1.8	1.3	2	1.8	1.8	0.9	1.8	1.9	2.8	1.7	1.9	1.8	0.9	1.8	1.3	3	1.6	0.9	2	0.8	1.1	3.4					35.2

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP04489
TYPE: D
QUANTITY: 1

SIGN WIDTH: 0'-6"
HEIGHT: 0'-6"
TOTAL AREA: 0.3 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.5"
RADII: 1"

NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
ARUP	2	2.6	1	2
DM	2.8	1.1	0.5	1

MAT'L: 0.063" (1.6 mm) ALUMINUM

DESIGN BY: BSESSOMS
DATE: Oct 26,2004
CHECKED BY:
TEPPL TOPIC: M-32
DIV: STATEWIDE

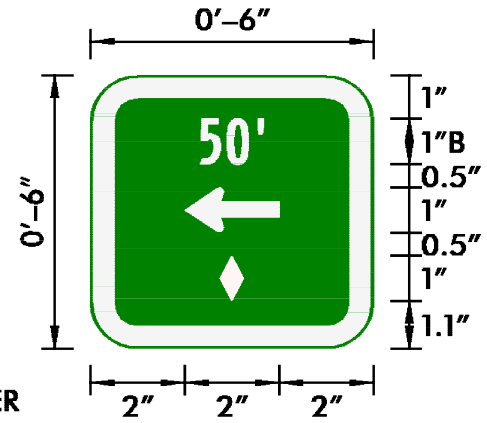

BORDER
R=1"
W=0.5"

USE NOTES: 1,4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

LETTER POSITIONS

Letter spacings are to start of next letter

Series/Size
Text Length

		5	0	'																								B1
	2.3	0.6	0.6	0.1	2.3																							1.3

Spacing Factor is 1 unless specified otherwise