SIGN NUMBER: SP04158
TYPE: D
QUANTITY: 1

SIGN WIDTH: 2'-0"
HEIGHT: 2'-0"
TOTAL AREA: 4.0 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.75"
RADII: 3"

NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT

MAT'L: 0.063" (1.6 mm) ALUMINUM

USE NOTES: 1 & 4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

DESIGN BY: CBB
PROJECT ID: P-30
CHECKED BY:

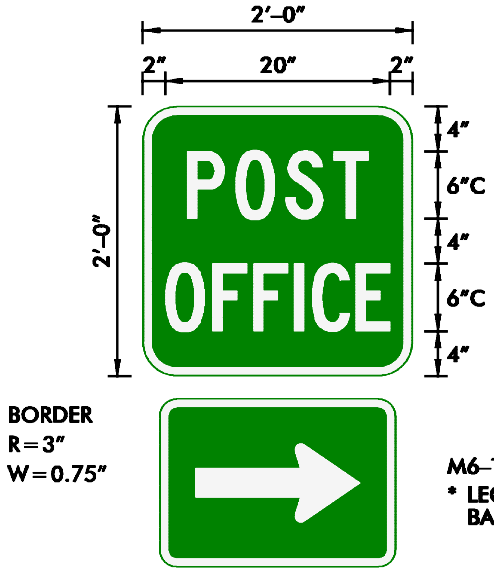

M6-1
* LEGEND – WHITE
BACKGROUND – GREEN

0.6 SPACING FACTOR FOR "OFFICE"

LETTER POSITIONS

Letter spacings are to start of next letter

																											Series/Size Text Length
		P	O	S	T																						C6
	4	4.3	4.4	4.3	3	4																					16.1
		O	F	F	I	C	E																				C6
	2	4.2	3.6	3.6	1.6	3.9	3	2																			19.9

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP04155
TYPE: D
QUANTITY: 1

SIGN WIDTH: 5'-6"
HEIGHT: 1'-3"
TOTAL AREA: 6.9 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.75"
RADII: 1.5"

NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
ARUP	6.4	3.5	5	8

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: CBB
PROJECT ID: P-30
CHECKED BY:

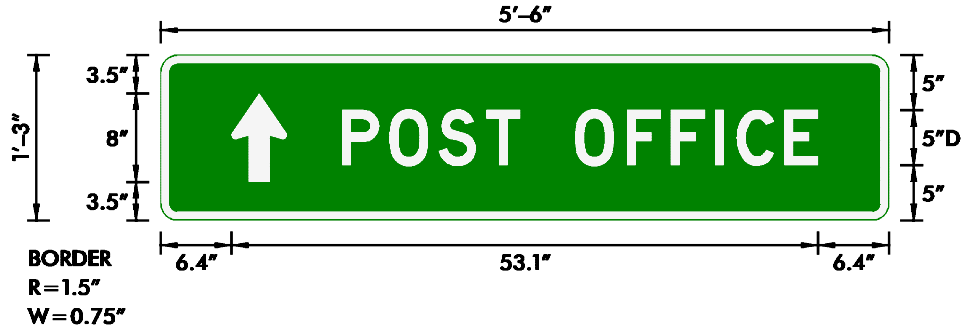

USE NOTES: 1 & 4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

LETTER POSITIONS

Letter spacings are to start of next letter

																												Series/Size Text Length
		P	O	S	T		O	F	F	I	C	E																D5
	16.4	4.3	4.5	4.3	3.1	5	4.7	4	4	2	4.3	3.1	6.4															43.1

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP04156
TYPE: D
QUANTITY: 1

SIGN WIDTH: 5'-6"
HEIGHT: 1'-3"
TOTAL AREA: 6.9 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.75"
RADII: 1.5"

NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
ARLEFT	4.9	5	5	8

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: CBB
PROJECT ID: P-30

CHECKED BY:

USE NOTES: 1 & 4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

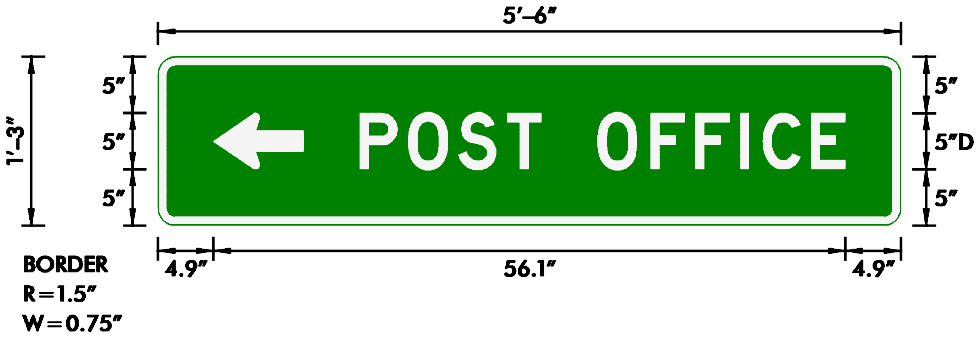

LETTER POSITIONS

Letter spacings are to start of next letter

		P	O	S	T		O	F	F	I	C	E																Series/Size Text Length
																												D5
	17.9	4.3	4.5	4.3	3.1	5	4.7	4	4	2	4.3	3.1	4.9															43.1

Spacing Factor is 1 unless specified otherwise

SIGN NUMBER: SP04157
TYPE: D
QUANTITY: 1

SIGN WIDTH: 5'-6"
HEIGHT: 1'-3"
TOTAL AREA: 6.9 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 0.75"
RADII: 1.5"

NO. Z BARS:
LENGTH:

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
ARRIGHT	53.1	5	5	8

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: CBB
PROJECT ID: P-30
CHECKED BY:

USE NOTES: 1 & 4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

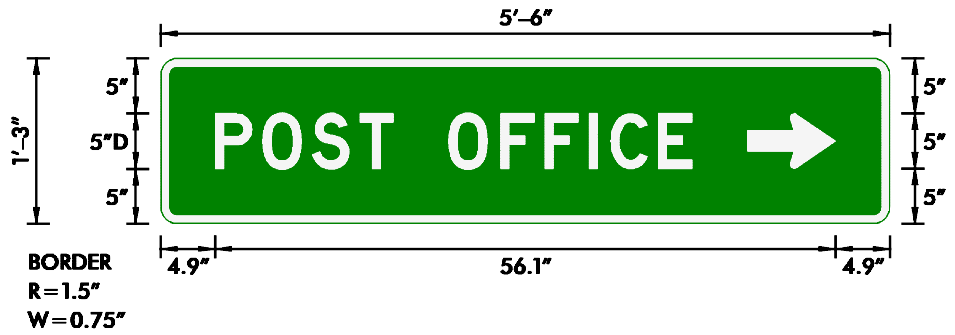

LETTER POSITIONS

Letter spacings are to start of next letter

Series/Size: D5
Text Length: 43.1

	P	O	S	T		O	F	F	I	C	E																
4.9	4.3	4.4	4.3	3.1	5	4.7	4	4	2	4.3	3.1	17.9															

Spacing Factor is 1 unless specified otherwise