N. C. DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
TRAFFIC ENGINEERING BRANCH
SIGNING DEPARTMENT

SIGN NUMBER: SP04402
TYPE: D
QUANTITY: 1

SIGN WIDTH: 8'-0"
HEIGHT: 3'-6"
TOTAL AREA: 28.0 Sq.Ft.

BORDER TYPE: RECESSED
RECESS: 0.63"
WIDTH: 0.88"
RADII: 2.25"

NO. Z BARS:
LENGTH:

BACKG COLOR: White/Yellow
COPY COLOR: Black

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: CBB
TEPPL PRACTICE: Q-1
DATE: Jan 07,2004
DIV: STATEWIDE
CHECKED BY:

USE NOTES: 2, 4, 7

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Top panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting.

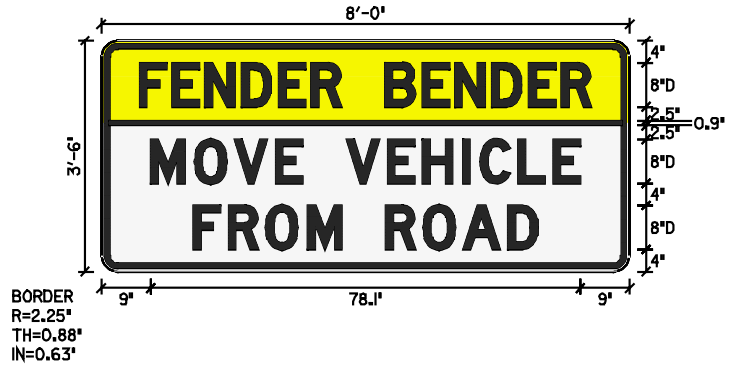

LETTER POSITIONS

Letter spacings are to start of next letter

																												Series/Size Text Length
		F	E	N	D	E	R		B	E	N	D	E	R														D8
	7	5.9	5.9	6.7	6.7	5.9	5.4	8	6.7	5.9	6.7	6.7	5.9	5.4	7													82.1
		M	O	V	E		V	E	H	I	C	L	E															D8
	9	8.1	7.1	7.5	4.9	8	7.5	6.4	7.3	3.2	6.9	6.4	4.9	9														78.1
		F	R	O	M		R	O	A	D																		D8
	16.7	6.4	6.9	7.5	6.2	8	6.9	7.1	8.2	5.4	16.7																	62.6

Spacing Factor is 1 unless specified otherwise

FILENAME: FENDER

NORTH CAROLINA D.O.T. SIGN DETAIL

N. C. DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
TRAFFIC ENGINEERING BRANCH
SIGNING DEPARTMENT

SIGN NUMBER: SP04403
TYPE: D
QUANTITY: 1

SIGN WIDTH: 6'-6"
HEIGHT: 3'-0"
TOTAL AREA: 19.5 Sq.Ft.

BORDER TYPE: RECESSED
RECESS: 0.63"
WIDTH: 0.88"
RADII: 2.25"

NO. Z BARS:
LENGTH:

BACKG COLOR: White/Yellow
COPY COLOR: Black

SYMBOL	X	Y	WID	HT

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: CBB
TEPPL TOPIC: Q-1
DATE: Jan 07,2004
DIV: STATEWIDE
CHECKED BY:

USE NOTES: 2, 4, 7

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Top panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting.

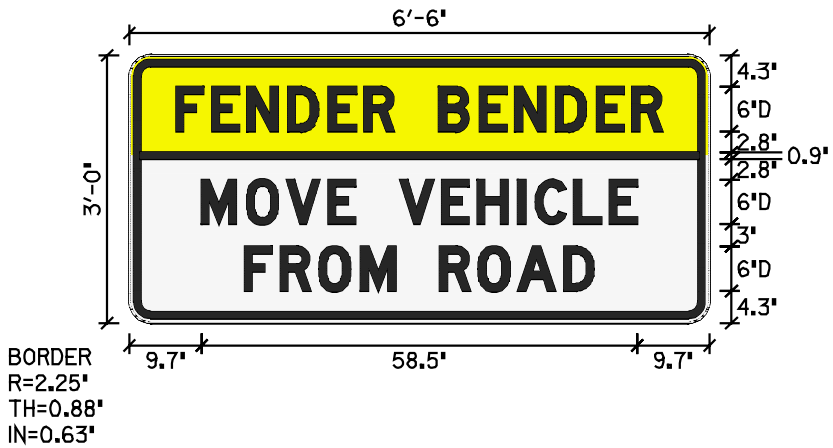

LETTER POSITIONS

Letter spacings are to start of next letter

																											Series/Size Text Length
	F	E	N	D	E	R		B	E	N	D	E	R														D6
6.3	4.8	4.8	5.5	5.5	4.8	4	6	5.5	4.8	5.5	5.5	4.8	4	6.3													65.4
	N	O	V	E		V	E	H	I	C	L	E															D6
9.7	6.1	5.4	5.6	3.7	6	5.6	4.8	5.5	2.4	5.2	4.8	3.7	9.7														58.5
	F	R	O	M		R	O	A	D																		D6
15.5	4.8	5.2	5.7	4.6	6	5.2	5.4	6.2	4	15.5																	46.9

Spacing Factor is 1 unless specified otherwise

FILENAME: FENDER

NORTH CAROLINA D.O.T. SIGN DETAIL