



SIGN NUMBER: SPO5200

TYPE: D

QUANTITY:

SIGN WIDTH: 3'-6"

HEIGHT: 2'-0"

TOTAL AREA: 7.0 Sq.Ft.

BORDER TYPE: FLUSH

RECESS: 0"

WIDTH: 0.75"

RADII: 3"

NO. Z BARS:

LENGTH:

BACKG COLOR: Green

COPY COLOR: White

SYMBOL	X	Y	WID	HT
ARUP	4.5	8.3	5	7.5

MAT'L: 0.080" (2.0 mm) ALUMINUM

USE NOTES: 1, 4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:


DESIGN BY: S OVERTON

DATE: Jun 09, 2005

CHECKED BY: *John A. Robinson*

TEPPL TOPIC: S-67

DIV: STATEWIDE

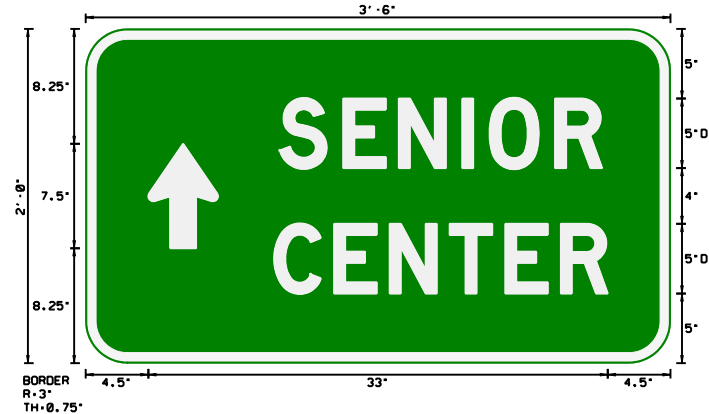

LETTER POSITIONS

Letter spacings are to start of next letter

Letter positions											Series/Size
Letter spacings are to start of next letter											Text Length
	S	E	N	I	O	R					D5
13.9	4.6	4	4.6	2	4.7	3.4	4.9				23.1
	C	E	N	T	E	R					D5
13.5	4.3	4	4.3	4	4	3.4	4.5				24

Spacing Factor is 1 unless specified otherwise



SIGN NUMBER: SP05201

TYPE: D

QUANTITY:

SIGN WIDTH: 4'-0"

HEIGHT: 2'-0"

TOTAL AREA: 8.0 Sq.Ft.

BORDER TYPE: FLUSH

RECESS: 0"

WIDTH: 0.75"

RADII: 3"

NO. Z BARS:

LENGTH:

BACKG COLOR: Green

COPY COLOR: White

SYMBOL	X	Y	WID	HT
ARUP	34.7	9.5	5	7.5

MAT'L: 0.125" (3.2 mm) ALUMINUM

USE NOTES: 1, 4

1. Legend and border shall be direct applied Type III reflective sheeting.
2. Legend and border shall be direct applied non-reflective sheeting.
3. Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
4. Background shall be Type III reflective sheeting.
5. Background shall be Type I reflective sheeting.
6. Center arrow(s) vertically on sign.
7. Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:


DESIGN BY: S OVERTON

DATE: Jun 13, 2005

CHECKED BY: *Stephen J. Reston*

TEPPL TOPIC: S-67

DIV: STATEWIDE

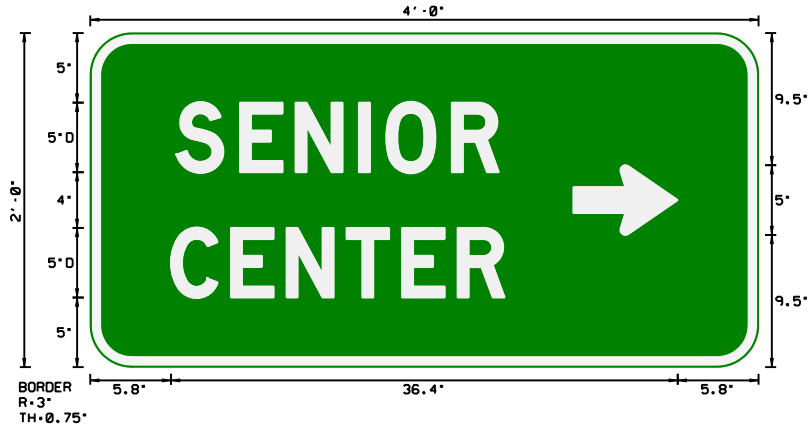

LETTER POSITIONS

Letter spacings are to start of next letter													Series/Size
													Text Length
	S	E	N	I	O	R							D5
6.2	4.6	4	4.6	2	4.7	3.4	18.7						23.1
	C	E	N	T	E	R							D5
5.8	4.3	4	4.3	4	4	3.4	18.2						24

Spacing Factor is 1 unless specified otherwise

FILENAME: S-67s

NORTH CAROLINA D.O.T. SIGN DETAIL



SIGN NUMBER: SP05202  
 TYPE: D

QUANTITY:  
 SIGN WIDTH: 4'-0"  
 HEIGHT: 2'-0"  
 TOTAL AREA: 8.0 Sq.Ft.

BORDER TYPE: FLUSH  
 RECESS: 0"  
 WIDTH: 0.75"  
 RADII: 3"

NO. Z BARS:  
 LENGTH:

BACKG COLOR: Green  
 COPY COLOR: White

SYMBOL	X	Y	WID	HT
ARUP	5.8	9.5	5	7.5

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: S OVERTON  
 TEPPL TOPIC: S-67

DATE: Jun 13, 2005  
 DIV: STATEWIDE

CHECKED BY: *[Signature]*



- USE NOTES: 1, 4
- Legend and border shall be direct applied Type III reflective sheeting.
  - Legend and border shall be direct applied non-reflective sheeting.
  - Shields shall be Type III reflective sheeting on 0.032" (0.8mm) aluminum and demountable.
  - Background shall be Type III reflective sheeting.
  - Background shall be Type I reflective sheeting.
  - Center arrow(s) vertically on sign.
  - Bottom panel shall be yellow Type III sheeting. Legend shall be direct applied black non-reflective sheeting. Yellow panel is:

LETTER POSITIONS

Letter spacings are to start of next letter

Letter Positions												Series/Size Text Length	
	S	E	N	I	O	R							D5
18.7	4.6	4	4.6	2	4.7	3.4	6.2						23.1
	C	E	N	T	E	R							D5
18.3	4.3	4	4.3	4	4	3.4	5.7						24

Spacing Factor is 1 unless specified otherwise