


TYPICALS NOT
TO SCALE

TYPICAL SECTION

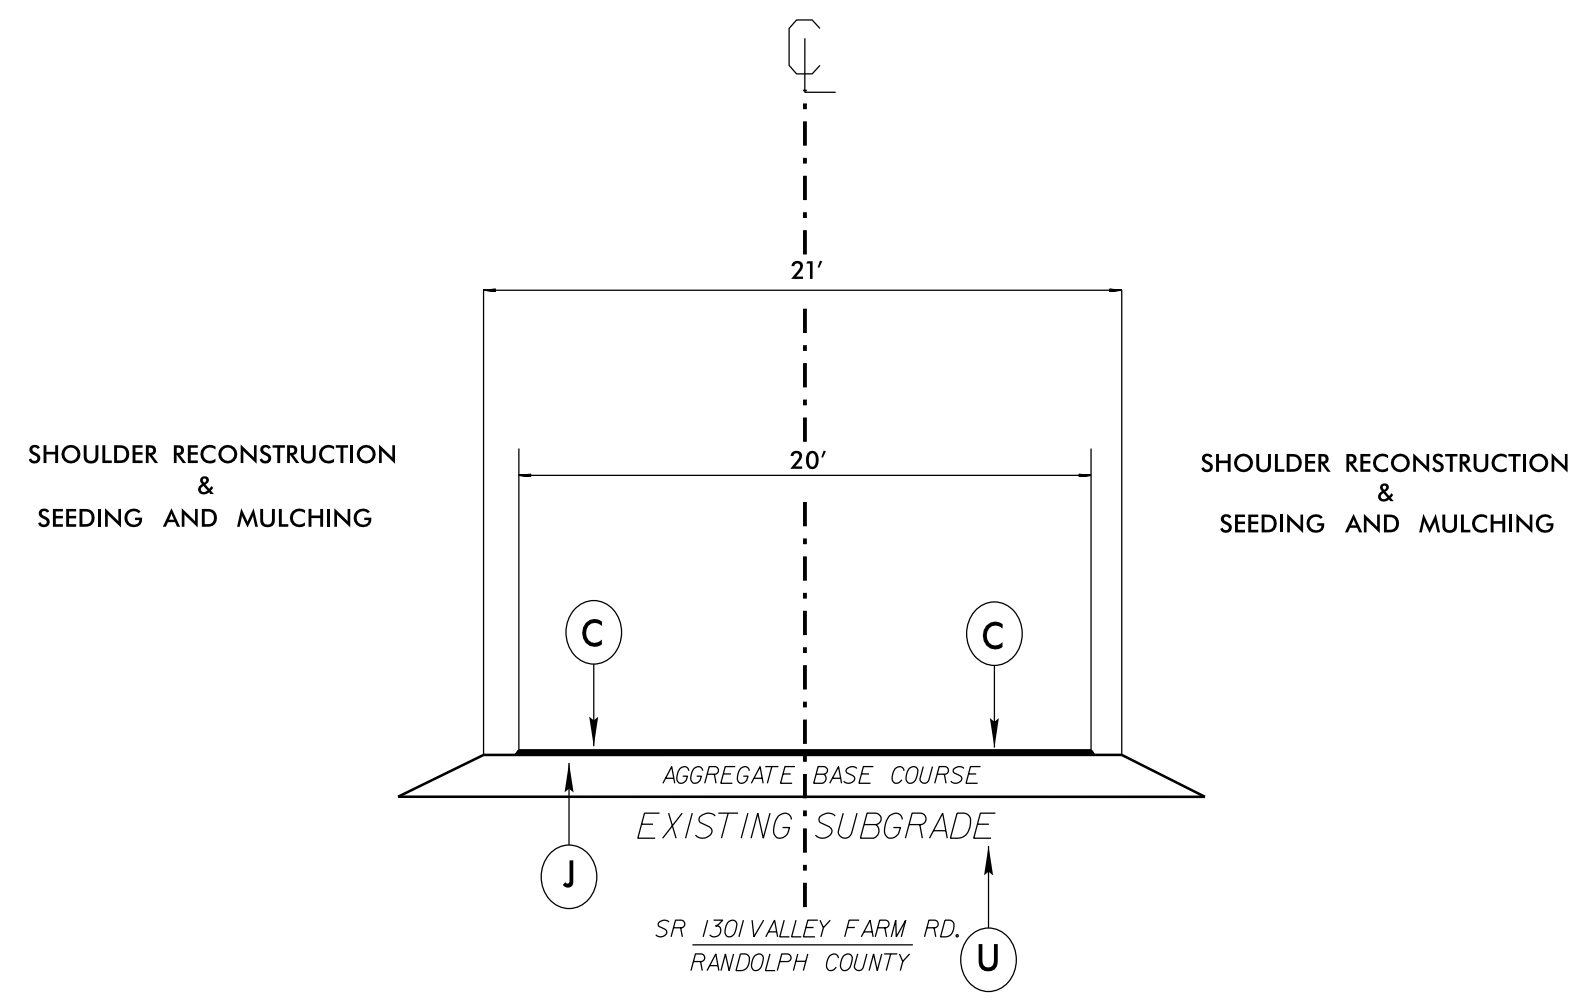

PAVEMENT SCHEDULE

C	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE SF 9.5A, PLACED IN 2 LIFTS AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.
J	PROP. 10" COMPACTED AGGREGATE BASE COURSE.
U	EXISTING SUBGRADE

20-JAN-2015 16:23
 S:\Shared\Projects\SR1301 Valley Farm Rd\SR_1301_Randolph Typical.dgn
 81 11/11/14

PROJECT NO.	SHEET NO.	TOTAL NO.
8C.076153	4	

SUMMARY OF QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	LANES	FINAL SURFACE TESTING REQUIRED	WARM MIX ASPHALT REQUIRED	LENGTH MI	WIDTH FT	FINE GRADING LS	AGGREGATE BASE COURSE TON	INCIDENTAL STONE BASE TON	SHOULDER RECONSTRUCTION SMI	PRIME COAT GAL	SURFACE COURSE, SF9.5A TON	ASPHALT BINDER FOR PLANT MIX TON	BLOTTING SAND TON
8C.076153	Randolph	1	SR 1301 VALLEY FARM RD	FROM NC 47 TO SR 1303 BRANTLEY GORDON RD	2	NO	NO	1.84	20	1.00	12,100	20	3.68	7,940	2,026	136	40
TOTAL FOR MAP NO. 1								1.84		1.00	12,100	20	3.68	7,940	2,026	136	40
TOTAL FOR PROJ NO. 8C.076153								1.84		1.00	12,100	20	3.68	7,940	2,026	136	40
GRAND TOTAL								1.84		1.00	12,100	20	3.68	7,940	2,026	136	40

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	LANES	FINAL SURFACE TESTING REQUIRED	WARM MIX ASPHALT REQUIRED	LENGTH MI	WIDTH FT	SEED & MULCHING AC	SEED FOR REPAIR SEEDING LB	FERTILIZER FOR REPAIR SEEDING TON	4399000000-N TEMPORARY TRAFFIC CONTROL LS	4810000000-E 4" WHITE PAINT LF	4810000000-E 4" YELLOW PAINT LF
8C.076153	Randolph	1	SR 1301 VALLEY FARM RD	FROM NC 47 TO SR 1303 BRANTLEY GORDON RD	2	NO	NO	1.84	20	2.76	30	0.20	1	39,597	39,597
TOTAL FOR MAP NO. 1								1.84		2.76	30	0.20	1	39,597	39,597
TOTAL FOR PROJ NO. 8C.076153								1.84		2.76	30	0.20	1	39,597	39,597
GRAND TOTAL								1.84		2.76	30	0.20	1	79,194	