


CONTRACT: TIP PROJECT: BO-2408D

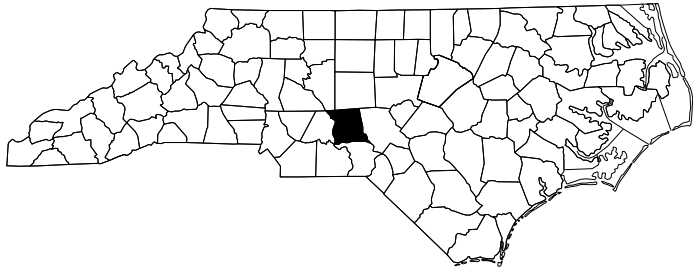

STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

DIVISIONWIDE

LOCATION: MONTGOMERY COUNTY

TYPE OF WORK: CURB RAMP INSTALLATIONS



STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	BO-2408D	1	15
STATE PROJ. NO.	F. A. PROJ. NO.	DESCRIPTION	
50937.1.2	5093701	PE	
50937.3.6	5093706	CON	

Prepared In the Office of:
DIVISION OF HIGHWAYS
1000 Birch Ridge Dr., Raleigh NC, 27610


2024 STANDARD SPECIFICATIONS

RIGHT OF WAY DATE:

MICHAEL RICKETTS
PROJECT ENGINEER

LETTING DATE:

NV5
PROJECT DESIGN ENGINEER



ADA SUMMARY OF QUANTITIES - TOTALS

TIP Number:	BO-2408D
PE WBS Number:	50937.1.2
Con WBS Number:	50937.3.6
County:	Montgomery

Sheet No.
2

TIP Number	County	Municipality	0000100000-N (LS) Mobilization	4457000000-N (LS) Temporary Traffic Control	1704000000-E (TON) Patching Existing Pavement	2549000000-E (LF) 2'-6" Concrete Curb & Gutter	2752000000-E (LF) Remove And Replace 2'-6" Concrete Curb & Gutter	2752000000-E (LF) Remove and Replace 8" x 6" Concrete Curb	2752000000-E (LF) Remove 2'-6" Concrete Curb & Gutter	2591000000-E (SY) 4" Concrete Sidewalk	2738000000-E (SY) Remove And Replace 4" Concrete Sidewalk	2738000000-E (SY) Remove 4" Concrete Sidewalk	2830000000-N (EA) Adjustment of Manholes	2845000000-N (EA) Adjustment of Meter Boxes or Valve Boxes	4116100000-N (EA) Sign Erection, Relocate Type E (Ground Mounted)	2612300000-N (EA) Retrofit Existing Concrete Curb Ramps	2612500000-N (EA) Remove and Replace Concrete Curb Ramps	2605000000-N (EA) Concrete Curb Ramps	2759000000-N (EA) Remove Concrete Curb Ramps
BO-2408D	Montgomery	Troy	1	1	2	178	511	60	127	38	314	85	1	5	1	12	120	13	2
Total			1	1	2	178	511	60	127	38	314	85	1	5	1	12	120	13	2

ADA SUMMARY OF QUANTITIES - TROY

Municipality:	Troy
Project Number:	BO-2408D
PE WBS Number:	50937.1.2
Con WBS Number:	50937.3.6
County:	Montgomery

Sheet No.
3

Ramp ID	Inset Map Number	Route 1	Route 2	1704000000-E (TON) Patching Existing Pavement	2549000000-E (LF) 2'-6" Concrete Curb & Gutter	2752000000-E (LF) Remove And Replace 2'-6" Concrete Curb & Gutter	2752000000-E (LF) Remove and Replace 8" x 6" Concrete Curb	2752000000-E (LF) Remove 2'-6" Concrete Curb & Gutter	2591000000-E (SY) 4" Concrete Sidewalk	2738000000-E (SY) Remove And Replace 4" Concrete Sidewalk	2738000000-E (SY) Remove 4" Concrete Sidewalk	2830000000-N (EA) Adjustment of Manholes	2845000000-N (EA) Adjustment of Meter Boxes or Valve Boxes	4116100000-N (EA) Sign Erection, Relocate Type E (Ground Mounted)	2612300000-N (EA) Retrofit Existing Concrete Curb Ramps	2612500000-N (EA) Remove and Replace Concrete Curb Ramps	2605000000-N (EA) Concrete Curb Ramps	2759000000-N (EA) Remove Concrete Curb Ramps	Improvement Type
1091	1	NC-109 (Albemarle Rd)	Atrium Health (835 Albermarle Rd) South Entrance							3						1			Type 1C - 848.06
1092	2	NC-109 (Albemarle Rd)	Atrium Health (835 Albermarle Rd) North Entrance							3						1			Type 1C - 848.06
1093	2	NC-109 (Albemarle Rd)	Atrium Health (835 Albermarle Rd) North Entrance		3					3						1			Type 1C - 848.06
877	3	NC-109 (Albemarle Rd)	SR-1551 (Oscar Rd)							3						1			Type 1C - 848.06
878	3	NC-109 (Albemarle Rd)	SR-1551 (Oscar Rd)							3						1			Type 1C - 848.06
1094	4	NC-109 (Albemarle Rd)	Dollar General (717 Albemarle Rd)							3						1			Type 1C - 848.06
1095	4	NC-109 (Albemarle Rd)	Dollar General (717 Albemarle Rd)			20										1			Type 1C - 848.06
1096	4	NC-109 (Albemarle Rd)	Advance Auto Parts (713 Albemarle Rd)							3						1			Type 1C - 848.06
1097	4	NC-109 (Albemarle Rd)	Advance Auto Parts (713 Albemarle Rd)													1			Type 1C - 848.06
1098	5	NC-109 (Albemarle Rd)	Shopping Center (707 Albemarle Rd)													1			Type 1C - 848.06
1099	6	NC-109 (Albemarle Rd)	Sir Pizza of Troy (703 Albemarle Rd)						5							1			Type 1 Modified - 848.06
1100	6	NC-109 (Albemarle Rd)	Sir Pizza of Troy (703 Albemarle Rd)						5							1			Type 1 Modified - 848.06
875	6	NC-109 (Albemarle Rd)	Covington Rd													1			Type 1C - 848.06
876	6	NC-109 (Albemarle Rd)	Covington Rd		10											1			Type 1C - 848.06
879	7	NC-109 (Albemarle Rd)	Reynolds St													1			Type 1C - 848.06
880	7	NC-109 (Albemarle Rd)	Reynolds St		10											1			Type 1C - 848.06
1101	7	NC-109 (Albemarle Rd)	Cross St	1						3						1			Type 1 Modified - 848.06
1102	8	NC-109 (Albemarle Rd)	Shopping Center (426 Albemarle Rd) South Entrance		5					3						1			Type 1C - 848.06
1103	8	NC-109 (Albemarle Rd)	Shopping Center (426 Albemarle Rd) South Entrance		5											1			Type 1C - 848.06
882	9	NC-109 (Albemarle Rd)	Watkins St							3						1			Type 1C - 848.06
883	9	NC-109 (Albemarle Rd)	Watkins St		5											1			Type 1C - 848.06
881	10	NC-109 (Albemarle Rd)	Shopping Center (426 Albemarle Rd) North Entrance		7					3						1			Type 1C - 848.06
884	10	NC-109 (Albemarle Rd)	Shopping Center (426 Albemarle Rd) North Entrance		7					3						1			Type 1C - 848.06
1104	10	NC-109 (Albemarle Rd)	Bojangles (422 Albemarle Rd)		3											1			Type 1C - 848.06
1107	11	NC-24 BUS (Albemarle Rd)	BP Gas Station (403 Albemarle Rd)							3						1			Type 1C - 848.06
1108	11	NC-24 BUS (Albemarle Rd)	BP Gas Station (403 Albemarle Rd)													1			Type 1 Modified - 848.06
1109	11	NC-24 BUS (Albemarle Rd)	BP Gas Station (403 Albemarle Rd)													1			Type 1 Modified - 848.06
1110	11	NC-24 BUS (Albemarle Rd)	BP Gas Station (403 Albemarle Rd)													1			Type 1 - 848.06
886	12	NC-24 BUS (Albemarle Rd)	Hanover St		10											1			Type 1C - 848.06
887	12	NC-24 BUS (Albemarle Rd)	Hanover St													1			Type 1C - 848.06
1116	13	NC-24 BUS (Albemarle Rd)	McDonalds (322 Albemarle Rd) North Entrance													1			Type 1C - 848.06
1117	13	NC-24 BUS (Albemarle Rd)	McDonalds (322 Albemarle Rd) North Entrance													1			Type 1C - 848.06
Sub-Total				1	65	20	0	0	10	39	0	0	0	0	0	32	0	0	

Notes: (1) ADA quantity totals are provided on the project 'ADA SUMMARY OF QUANTITIES - TOTALS' page. (2) *Contingency line item amount provided for adjustments outside of curb ramp pay limits.

ADA SUMMARY OF QUANTITIES - TROY

Municipality:	Troy
Project Number:	BO-2408D
PE WBS Number:	50937.1.2
Con WBS Number:	50937.3.6
County:	Montgomery

Sheet No.
4

Ramp ID	Inset Map Number	Route 1	Route 2	1704000000-E (TON) Patching Existing Pavement	2549000000-E (LF) 2'-6" Concrete Curb & Gutter	2752000000-E (LF) Remove And Replace 2'-6" Concrete Curb & Gutter	2752000000-E (LF) Remove and Replace 8" x 6" Concrete Curb	2752000000-E (LF) Remove 2'-6" Concrete Curb & Gutter	2591000000-E (SY) 4" Concrete Sidewalk	2738000000-E (SY) Remove And Replace 4" Concrete Sidewalk	2738000000-E (SY) Remove 4" Concrete Sidewalk	2830000000-N (EA) Adjustment of Manholes	2845000000-N (EA) Adjustment of Meter Boxes or Valve Boxes	4116100000-N (EA) Sign Erection, Relocate Type E (Ground Mounted)	2612300000-N (EA) Retrofit Existing Concrete Curb Ramps	2612500000-N (EA) Remove and Replace Concrete Curb Ramps	2605000000-N (EA) Concrete Curb Ramps	2759000000-N (EA) Remove Concrete Curb Ramps	Improvement Type
1114	13	NC-24 BUS (Albemarle Rd)	McDonalds (322 Albemarle Rd) South Entrance													1			Type 1C - 848.06
1115	13	NC-24 BUS (Albemarle Rd)	McDonalds (322 Albemarle Rd) South Entrance													1			Type 1C - 848.06
1336	14	NC-109 (South Bilhen St)	Apartments (203 S Bihen St)				10			6							1		Type 1B - 848.06
1337	14	NC-109 (South Bilhen St)	Apartments (203 S Bihen St)				6			6							1		Type 1 Modified - 848.06
1338	15	NC-109 (South Bilhen St)	West Spring St				10			9							1		Type 1B - 848.06
1339	16	NC-109 (South Bilhen St)	West Main St													1			Type 1C - 848.06
871	17	NC-109 BUS (Eldorado St)	Greensboro St							3						1			Type 1 Modified - 848.06
872	17	NC-109 BUS (Eldorado St)	Greensboro St							3						1			Type 1 Modified - 848.06
1342	18	NC-109 BUS (Eldorado St)	Morris Dr												1				Retrofit Warnings - 848.06
1343	18	NC-109 BUS (Eldorado St)	Morris Dr												1				Retrofit Warnings - 848.06
1134	19	NC-109 BUS (Eldorado St)	West Roswell St													1			Type 1B - 848.06
873	20	NC-109 BUS (Eldorado St)	Dennis St							3						1			Type 1 Modified - 848.06
874	20	NC-109 BUS (Eldorado St)	Dennis St										1			1			Type 2A - 848.06
1132	21	NC-109 BUS (Smitherman St)	Crouch St							3						1			Type 1B - 848.06
1133	21	NC-109 BUS (Smitherman St)	Crouch St							3						1			Type 1 Modified - 848.06
1130	22	NC-109 BUS (Smitherman St)	Tremont St													1			Type 1 Modified - 848.06
1131	22	NC-109 BUS (Smitherman St)	Tremont St							10							1		Type 1 Modified - 848.06
1128	23	NC-109 BUS (Smitherman St)	North Liberty St		10			22	6		12						1		Type 1C - 848.06
1129	23	NC-109 BUS (Smitherman St)	North Liberty St													1			Type 1B - 848.06
1493	23	NC-109 BUS (Smitherman St)	Railroad Track												1				Retrofit Warnings - 848.06
1494	23	NC-109 BUS (Smitherman St)	Railroad Track													1			Type 1 Modified - 848.06
829	24	NC-134 (North Main St)	SR-1333 (Bruton St)										1			1			Standard - 848.06
832	24	NC-134 (North Main St)	SR-1333 (Bruton St)							6						1			Standard - 848.06
830	24	NC-134 (North Main St)	SR-1333 (Bruton St)													1			Type 2A - 848.06
837	25	NC-134 (North Main St)	Byrd St			10				6						1			Type 2A - 848.06
838	25	NC-134 (North Main St)	Byrd St		6											1			Type 1B - 848.06
839	26	NC-134 (North Main St)	East Roswell St													1			Type 1 Modified - 848.06
840	26	NC-134 (North Main St)	East Roswell St							6						1			Type 2A Modified - 848.06
841	26	NC-134 (North Main St)	East Roswell St							10						1			Standard - 848.06
1074	27	NC-134 (North Main St)	Taylor Law (609 N Main St)													1			Type 1B - 848.06
1075	27	NC-134 (North Main St)	Taylor Law (609 N Main St)													1			Standard - 848.06
1076	27	NC-134 (North Main St)	Post Office (601 N Main St)						3							1			Type 1 Modified - 848.06
Sub-Total				0	16	10	0	48	9	53	33	0	2	0	3	24	5	0	

Notes: (1) ADA quantity totals are provided on the project 'ADA SUMMARY OF QUANTITIES - TOTALS' page. (2) *Contingency line item amount provided for adjustments outside of curb ramp pay limits.

ADA SUMMARY OF QUANTITIES - TROY

Municipality:	Troy
Project Number:	BO-2408D
PE WBS Number:	50937.1.2
Con WBS Number:	50937.3.6
County:	Montgomery

Sheet No.
5

Ramp ID	Inset Map Number	Route 1	Route 2	1704000000-E (TON) Patching Existing Pavement	2549000000-E (LF) 2'-6" Concrete Curb & Gutter	2752000000-E (LF) Remove And Replace 2'-6" Concrete Curb & Gutter	2752000000-E (LF) Remove and Replace 8" x 6" Concrete Curb	2752000000-E (LF) Remove 2'-6" Concrete Curb & Gutter	2591000000-E (SY) 4" Concrete Sidewalk	2738000000-E (SY) Remove And Replace 4" Concrete Sidewalk	2738000000-E (SY) Remove 4" Concrete Sidewalk	2830000000-N (EA) Adjustment of Manholes	2845000000-N (EA) Adjustment of Meter Boxes or Valve Boxes	4116100000-N (EA) Sign Erection, Relocate Type E (Ground Mounted)	2612300000-N (EA) Retrofit Existing Concrete Curb Ramps	2612500000-N (EA) Remove and Replace Concrete Curb Ramps	2605000000-N (EA) Concrete Curb Ramps	2759000000-N (EA) Remove Concrete Curb Ramps	Improvement Type
1077	27	NC-134 (North Main St)	Post Office (601 N Main St)						3							1			Type 1 Modified - 848.06
842	28	NC-134 (North Main St)	Broughton St							3						1			Type 1 Modified - 848.06
843	28	NC-134 (North Main St)	Broughton St													1			Type 2A - 848.06
844	29	NC-134 (North Main St)	Guilford St							6						1			Type 1 - 848.06
845	29	NC-134 (North Main St)	Guilford St		6					6						1			Type 1 Modified - 848.06
1072	30	NC-134 (North Main St)	Leslie St													1			Type 1C - 848.06
1073	30	NC-134 (North Main St)	Leslie St							3						1			Type 1C - 848.06
1071	31	NC-134 (North Main St)	Capel Rugs (912 N Main St)												1				Retrofit Warnings - 848.06
862	32	SR-1383 (Wood St)	SR-1332 (Page St)													1			Type 1A - 848.06
860	33	SR-1383 (Wood St)	Broughton St							3						1			Type 1C - 848.06
861	33	SR-1383 (Wood St)	Broughton St			15				9						1			Type 1C - 848.06
1346	34	SR-1383 (Wood St)	FirstHealth Memorial Hospital (520 Allen St) Wood St Crossing							9			1		1				Type 2 - 848.06
1347	34	SR-1383 (Wood St)	FirstHealth Memorial Hospital (520 Allen St) Wood St Crossing			10				6				1		1			Type 2 - 848.06
1348	34	SR-1383 (Wood St)	FirstHealth Memorial Hospital (520 Allen St) Outpatient Service Entrance							3		1				1			Type 1C - 848.06
1508	35	SR-1383 (Wood St)	FirstHealth Memorial Hospital (520 Allen St) Emergency Department							3						1			Type 1 Modified - 848.06
856	36	SR-1383 (Wood St)	Byrd St		3					6						1			Type 3 - 848D0609
857	36	SR-1383 (Wood St)	Byrd St		3					6						1			Type 3 - 848D0609
858	36	SR-1383 (Wood St)	Byrd St													1			Type 1C - 848.06
859	36	SR-1383 (Wood St)	Byrd St							3						1			Type 1C - 848.06
852	37	SR-1333 (Bruton St)	SR-1403 (North Russell St)													1			Type 2B - 848.06
853	37	SR-1333 (Bruton St)	SR-1403 (North Russell St)							6						1			Type 2B - 848.06
1345	37	SR-1333 (Bruton St)	Willow Ridge Apartments (222D Bruton St)	1				15			6						1		Type 1C - 848.06
868	38	SR-1403 (North Russell St)	Troy Elementary School (310 N Russell St)													1			Type 2A Modified - 848.06
869	38	SR-1403 (North Russell St)	Blair St							6						1			Type 2A - 848.06
867	38	SR-1403 (North Russell St)	Troy Elementary School (310 N Russell St)			10				6						1			Type 2B - 848.06
870	38	SR-1403 (North Russell St)	Blair St													1			Type 2A - 848.06
863	39	SR-1403 (North Russell St)	East Chestnut St													1			Type 2A - 848.06
864	39	SR-1403 (North Russell St)	East Chestnut St													1			Type 2A - 848.06
Sub-Total				1	12	35	0	15	3	84	6	1	1	1	2	25	1	0	

Notes: (1) ADA quantity totals are provided on the project 'ADA SUMMARY OF QUANTITIES - TOTALS' page. (2) *Contingency line item amount provided for adjustments outside of curb ramp pay limits.

ADA SUMMARY OF QUANTITIES - TROY

Municipality:	Troy
Project Number:	BO-2408D
PE WBS Number:	50937.1.2
Con WBS Number:	50937.3.6
County:	Montgomery

Sheet No.
6

Ramp ID	Inset Map Number	Route 1	Route 2	1704000000-E (TON) Patching Existing Pavement	2549000000-E (LF) 2'-6" Concrete Curb & Gutter	2752000000-E (LF) Remove And Replace 2'-6" Concrete Curb & Gutter	2752000000-E (LF) Remove and Replace 8" x 6" Concrete Curb	2752000000-E (LF) Remove 2'-6" Concrete Curb & Gutter	2591000000-E (SY) 4" Concrete Sidewalk	2738000000-E (SY) Remove And Replace 4" Concrete Sidewalk	2738000000-E (SY) Remove 4" Concrete Sidewalk	2830000000-N (EA) Adjustment of Manholes	2845000000-N (EA) Adjustment of Meter Boxes or Valve Boxes	4116100000-N (EA) Sign Erection, Relocate Type E (Ground Mounted)	2612300000-N (EA) Retrofit Existing Concrete Curb Ramps	2612500000-N (EA) Remove and Replace Concrete Curb Ramps	2605000000-N (EA) Concrete Curb Ramps	2759000000-N (EA) Remove Concrete Curb Ramps	Improvement Type
865	39	SR-1403 (North Russell St)	East Chestnut St													1			Type 2A - 848.06
866	39	SR-1403 (North Russell St)	East Chestnut St			2										1			Type 2A - 848.06
916	40	NC-24 BUS (East Main St)	Troy First Baptist Church (401 East Main St) Frye St Crossing		15													1	Remove Ramp
917	40	NC-24 BUS (East Main St)	Frye St												1				Retrofit Warnings - 848.06
915	41	NC-24 BUS (East Main St)	North Lineberry St							3						1			Type 1 Modified - 848.06
913	41	NC-24 BUS (East Main St)	South Lineberry St												1				Retrofit Warnings - 848.06
914	41	NC-24 BUS (East Main St)	South Lineberry St												1				Retrofit Warnings - 848.06
821	42	NC-134 (North Main St)	East Chestnut St										1			1			Type 2A - 848.06
822	42	NC-134 (North Main St)	East Chestnut St							6						1			Type 2A - 848.06
823	42	NC-134 (North Main St)	West Chestnut St							6						1			Type 2A - 848.06
824	42	NC-134 (North Main St)	West Chestnut St													1			Type 2A - 848.06
1078	43	NC-134 (North Main St)	Discover Uwharrie Welcome Center (106 W Main St) N Main St Back Entrance							3						1			Type 1 Modified - 848.06
1079	43	NC-134 (North Main St)	Courthouse Sq													1			Type 2A - 848.06
1080	43	NC-134 (North Main St)	Discover Uwharrie Welcome Center (106 W Main St) N Main St Back Entrance							6						1			Standard - 848.06
901	44	NC-24 BUS (East Main St)	NC-134 (North Main St)													1			Type 2B - 848.06
902	44	NC-24 BUS (East Main St)	SR-1005 (South Main St)							8						1			Type 2B - 848.06
903	44	NC-24 BUS (West Main St)	SR-1005 (South Main St)													1			Type 2A - 848.06
904	44	NC-24 BUS (West Main St)	NC-134 (North Main St)							6						1			Type 2B - 848.06
1118	45	NC-24 BUS (West Main St)	Discover Uwharrie Welcome Center (106 W Main St)				15			6							1		Type 1 - 848.06
1119	45	NC-24 BUS (West Main St)	Discover Uwharrie Welcome Center (106 W Main St)												1				Retrofit Warnings - 848.06
1120	45	NC-24 BUS (West Main St)	Sheffield St			8				6						1			Type 1C - 848.06
897	46	NC-24 BUS (West Main St)	North Liberty St			11				6						1			Type 2A - 848.06
898	46	NC-24 BUS (West Main St)	South Liberty St							9						1			Standard - 848.06
899	46	NC-24 BUS (West Main St)	South Liberty St			16										1			Type 2A - 848.06
900	46	NC-24 BUS (West Main St)	North Liberty St							6						1			Type 2A - 848.06
894	47	NC-24 BUS (Albemarle Rd)	South Elm St													1			Type 1C - 848.06
895	47	NC-24 BUS (Albemarle Rd)	South Elm St		3											1			Type 1 Modified - 848.06
896	47	NC-24 BUS (Albemarle Rd)	North Elm St													1			Type 1C - 848.06
890	48	NC-24 BUS (Albemarle Rd)	West Spring St							3			1			1			Type 1 Modified - 848.06
Sub-Total				0	18	37	0	15	0	68	6	0	2	0	4	23	1	1	

Notes: (1) ADA quantity totals are provided on the project 'ADA SUMMARY OF QUANTITIES - TOTALS' page. (2) *Contingency line item amount provided for adjustments outside of curb ramp pay limits.

ADA SUMMARY OF QUANTITIES - TROY

Municipality:	Troy
Project Number:	BO-2408D
PE WBS Number:	50937.1.2
Con WBS Number:	50937.3.6
County:	Montgomery

Sheet No.
7

Ramp ID	Inset Map Number	Route 1	Route 2	1704000000-E (TON) Patching Existing Pavement	2549000000-E (LF) 2'-6" Concrete Curb & Gutter	2752000000-E (LF) Remove And Replace 2'-6" Concrete Curb & Gutter	2752000000-E (LF) Remove and Replace 8" x 6" Concrete Curb	2752000000-E (LF) Remove 2'-6" Concrete Curb & Gutter	2591000000-E (SY) 4" Concrete Sidewalk	2738000000-E (SY) Remove And Replace 4" Concrete Sidewalk	2738000000-E (SY) Remove 4" Concrete Sidewalk	2830000000-N (EA) Adjustment of Manholes	2845000000-N (EA) Adjustment of Meter Boxes or Valve Boxes	4116100000-N (EA) Sign Erection, Relocate Type E (Ground Mounted)	2612300000-N (EA) Retrofit Existing Concrete Curb Ramps	2612500000-N (EA) Remove and Replace Concrete Curb Ramps	2605000000-N (EA) Concrete Curb Ramps	2759000000-N (EA) Remove Concrete Curb Ramps	Improvement Type
891	48	NC-24 BUS (Albemarle Rd)	West Spring St							6						1			Type 2B - 848.06
893	48	NC-24 BUS (Albemarle Rd)	West Spring St			10										1			Type 1C - 848.06
892	48	NC-24 BUS (Albemarle Rd)	West Spring St		10					6						1			Type 3 - 848D0609
825	49	SR-1005 (South Main St)	Sheffield St					15			12						1		Type 1C - 848.06
826	49	SR-1005 (South Main St)	Sheffield St		10	10			6	6						1			Type 1D - 848.06
1081	50	SR-1005 (South Main St)	Montgomery County Courthouse (108 E Main St) S Main St Parking Lot					6			6						1		Type 1 Modified - 848.06
1082	50	SR-1005 (South Main St)	Montgomery County Courthouse (108 E Main St) S Main St Parking Lot			12		6		4	6						1		Type 1 Modified - 848.06
1083	50	SR-1005 (South Main St)	Montgomery County Courthouse (108 E Main St) S Main St Parking Lot			11		6	4		10						1		Type 1 Modified - 848.06
817	51	SR-1005 (South Main St)	East Spring St			6		7			6						1		Type 1A - 848.06
818	51	SR-1005 (South Main St)	East Spring St		12				6									1	Remove Ramp
819	51	SR-1005 (South Main St)	West Spring St							6						1			Type 1B - 848.06
820	51	SR-1005 (South Main St)	West Spring St							6						1			Type 1B - 848.06
1084	51	SR-1005 (South Main St)	County Administration (102 E Spring St) South Main St Entrance													1			Type 1C - 848.06
1085	51	SR-1005 (South Main St)	County Administration (102 E Spring St) South Main St Entrance													1			Type 1C - 848.06
1539	51	SR-1005 (South Main St)	East Spring St		5			9									1		Type 1A - 848.06
1086	52	SR-1005 (South Main St)	Montgomery County Department of Health (217 S Main St)													1			Type 1C - 848.06
815	53	SR-1005 (South Main St)	Rush Ave												1				Retrofit Warnings - 848.06
816	53	SR-1005 (South Main St)	Rush Ave												1				Retrofit Warnings - 848.06
1087	54	SR-1005 (South Main St)	Montgomery Learning Academy (310 S Main St) North Entrance				20			6						1			Type 1 Modified - 848.06
1088	54	SR-1005 (South Main St)	Montgomery Learning Academy (310 S Main St) North Entrance				20			3						1			Type 1 Modified - 848.06
1090	55	SR-1005 (South Main St)	Montgomery Learning Academy (310 S Main St) South Entrance													1			Type 1 Modified - 848.06
Sub-Total				0	37	49	40	49	16	43	40	0	0	0	2	12	6	1	

Notes: (1) ADA quantity totals are provided on the project 'ADA SUMMARY OF QUANTITIES - TOTALS' page. (2) *Contingency line item amount provided for adjustments outside of curb ramp pay limits.





ADA SUMMARY OF QUANTITIES - TROY

Municipality:	Troy
Project Number:	BO-2408D
PE WBS Number:	50937.1.2
Con WBS Number:	50937.3.6
County:	Montgomery

Sheet No.
8

Ramp ID	Inset Map Number	Route 1	Route 2	1704000000-E (TON) Patching Existing Pavement	2549000000-E (LF) 2'-6" Concrete Curb & Gutter	2752000000-E (LF) Remove And Replace 2'-6" Concrete Curb & Gutter	2752000000-E (LF) Remove and Replace 8" x 6" Concrete Curb	2752000000-E (LF) Remove 2'-6" Concrete Curb & Gutter	2591000000-E (SY) 4" Concrete Sidewalk	2738000000-E (SY) Remove And Replace 4" Concrete Sidewalk	2738000000-E (SY) Remove 4" Concrete Sidewalk	2830000000-N (EA) Adjustment of Manholes	2845000000-N (EA) Adjustment of Meter Boxes or Valve Boxes	4116100000-N (EA) Sign Erection, Relocate Type E (Ground Mounted)	2612300000-N (EA) Retrofit Existing Concrete Curb Ramps	2612500000-N (EA) Remove and Replace Concrete Curb Ramps	2605000000-N (EA) Concrete Curb Ramps	2759000000-N (EA) Remove Concrete Curb Ramps	Improvement Type
1089	55	SR-1005 (South Main St)	Montgomery Learning Academy (310 S Main St) South Entrance				20									1			Type 1 Modified - 848.06
813	56	SR-1005 (South Main St)	West Fairground Ave		10					6						1			Type 1 Modified - 848.06
814	56	SR-1005 (South Main St)	West Fairground Ave												1				Retrofit Warnings - 848.06
812	57	SR-1005 (South Main St)	West Clairmont St		10					15						1			Type 1 Modified - 848.06
811	57	SR-1005 (South Main St)	West Clairmont St		10					6						1			Type 1 Modified - 848.06
-	-	-	-	-	-	360*	-	-	-	-	-	-	-	-	-	-	-	-	
Sub-Total				0	30	360	20	0	0	27	0	0	0	0	1	4	0	0	
Sub-Total for Troy				2	178	511	60	127	38	314	85	1	5	1	12	120	13	2	

Notes: (1) ADA quantity totals are provided on the project 'ADA SUMMARY OF QUANTITIES - TOTALS' page. (2) *Contingency line item amount provided for adjustments outside of curb ramp pay limits.

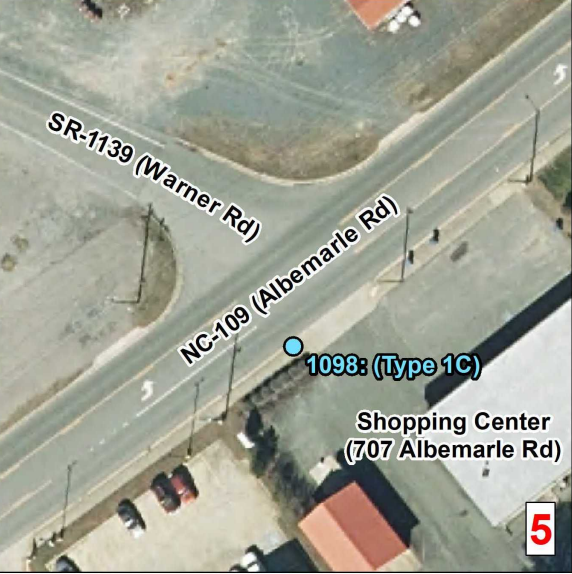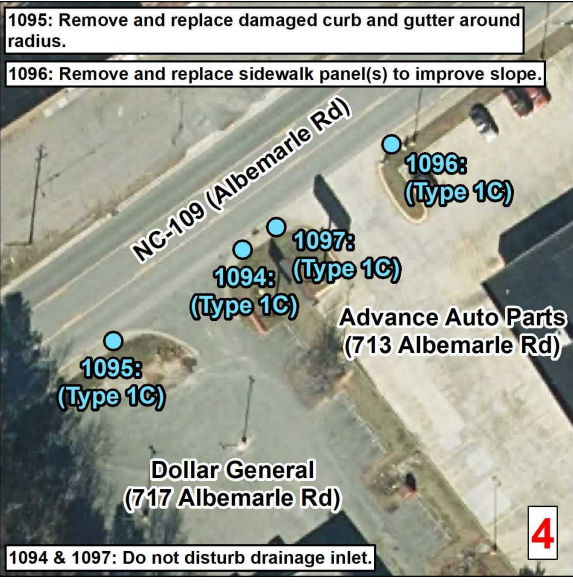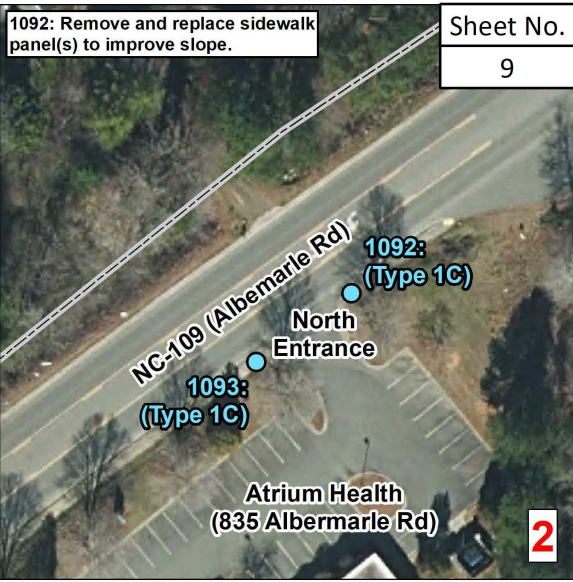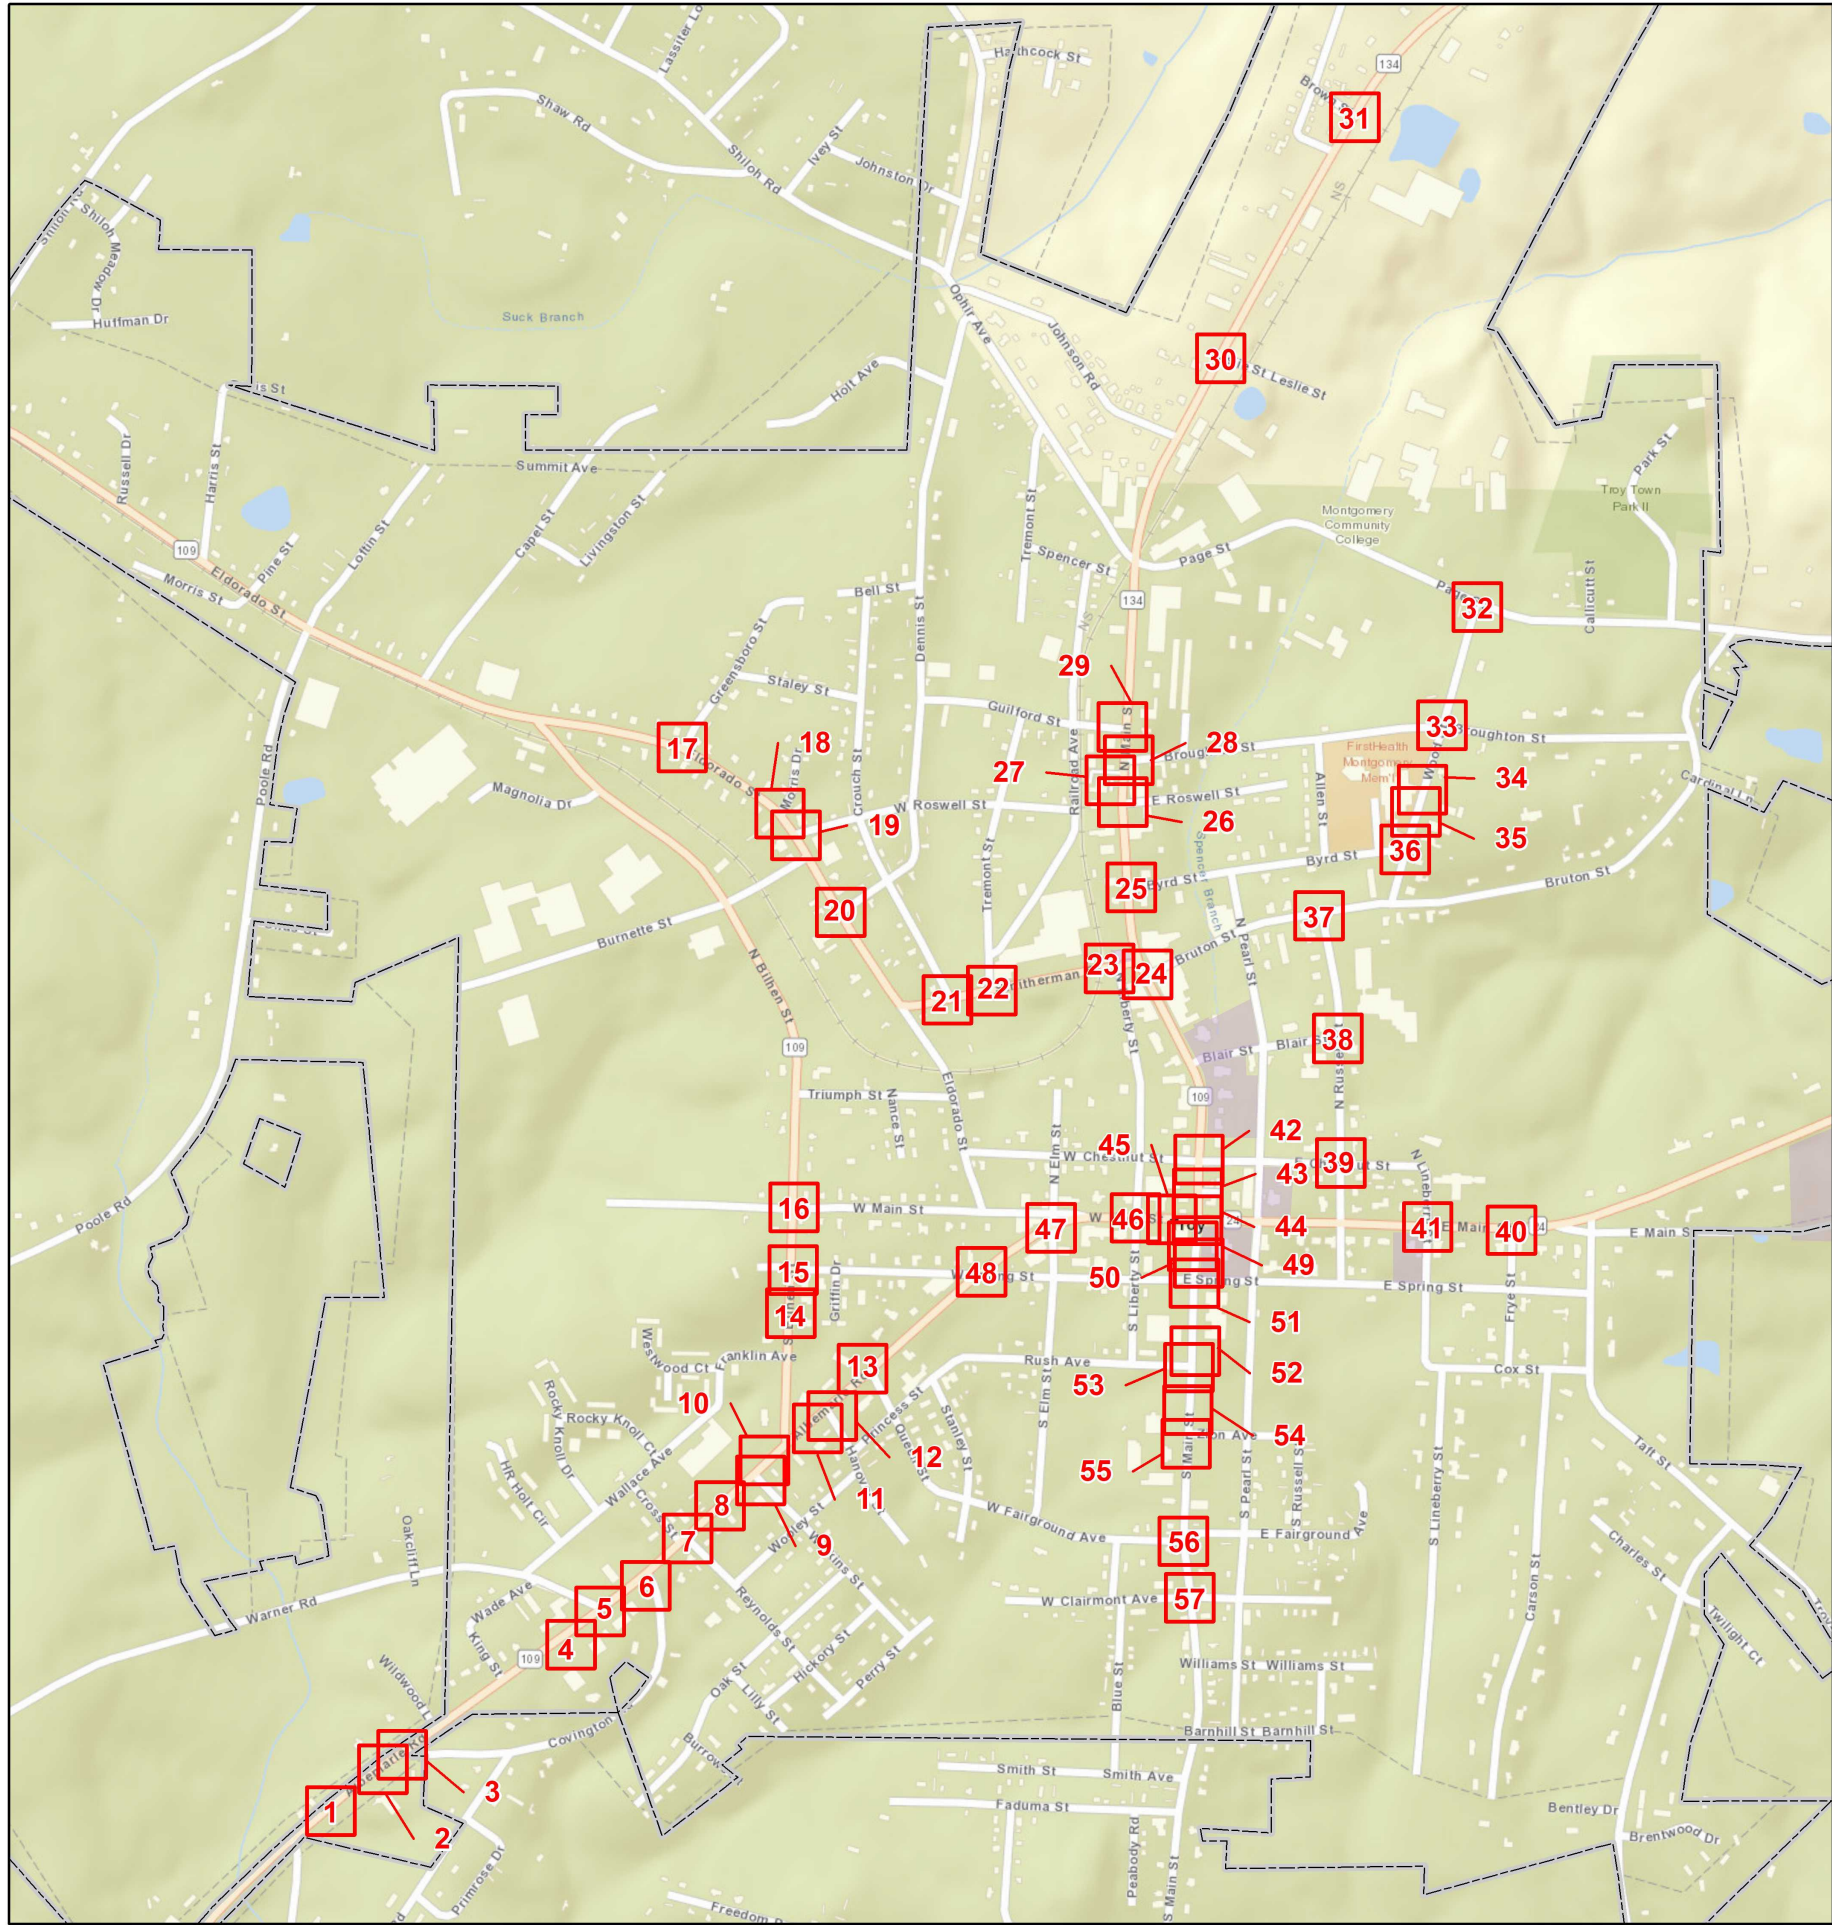

Curb Ramps To Be Repaired

- Retrofit
- Remove and Replace
- New Curb Ramp
- Remove Ramp
- Other

Municipal Boundary

Census Urban Areas (>5,000 Pop)

NCHPO Historic Boundary (NR and LHD)

Curb Ramps in Areas <5,000 Population

Municipality: Troy

TIP Number: BO-2408D








PE WBS Number: 50937.1.2

CON WBS Number: 50937.3.6

County: Montgomery

 NORTH CAROLINA DEPARTMENT OF TRANSPORTATION DIVISION 8

Source: NV5 Engineers and Consultants Inc., ESRI, NC OneMap, NCDOT, NCHPO

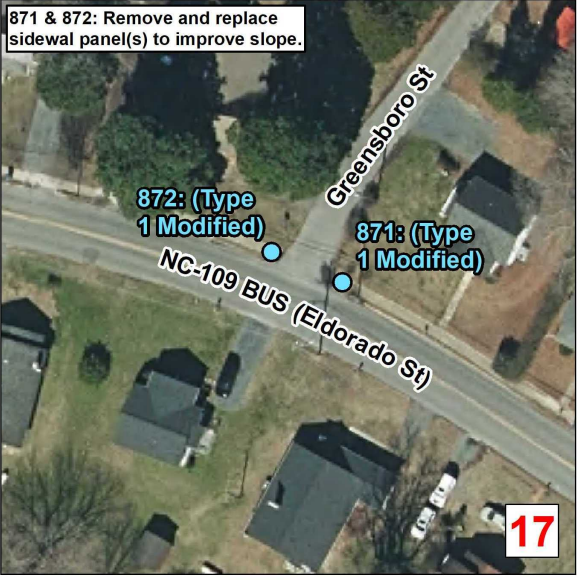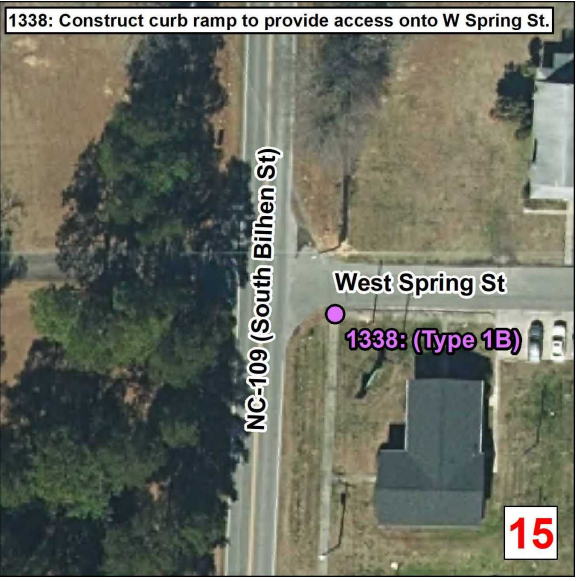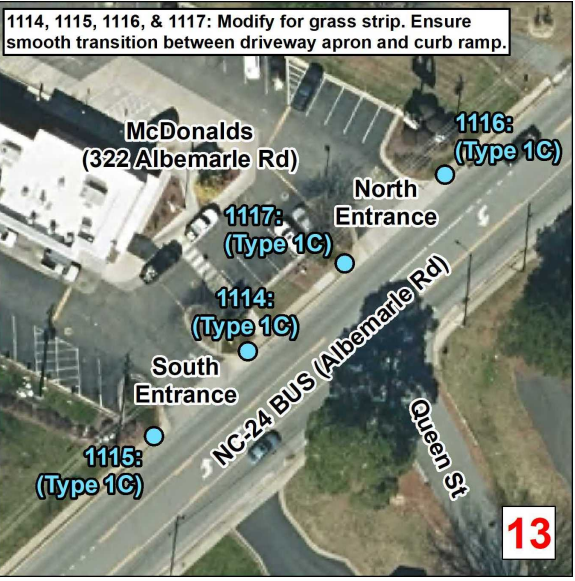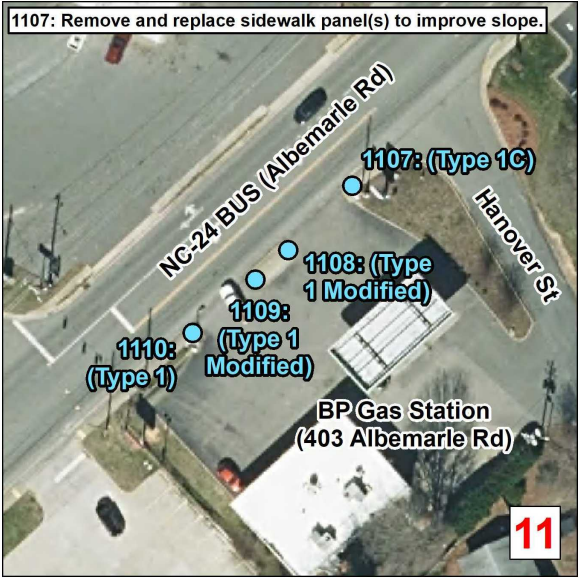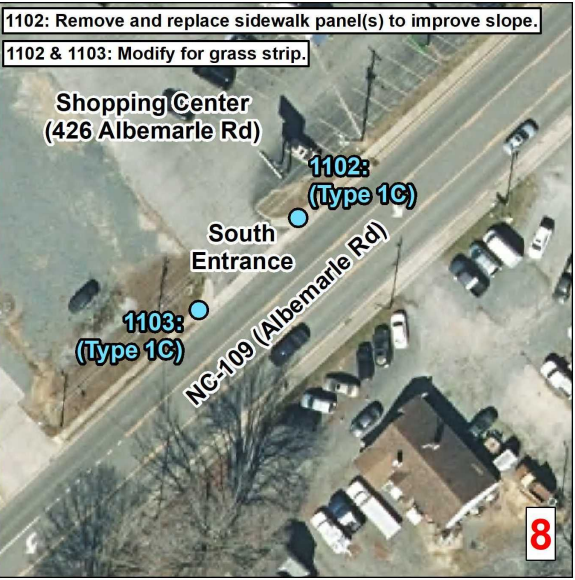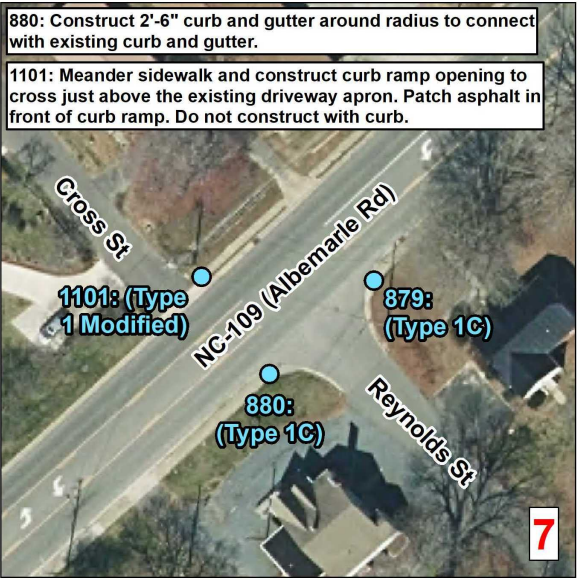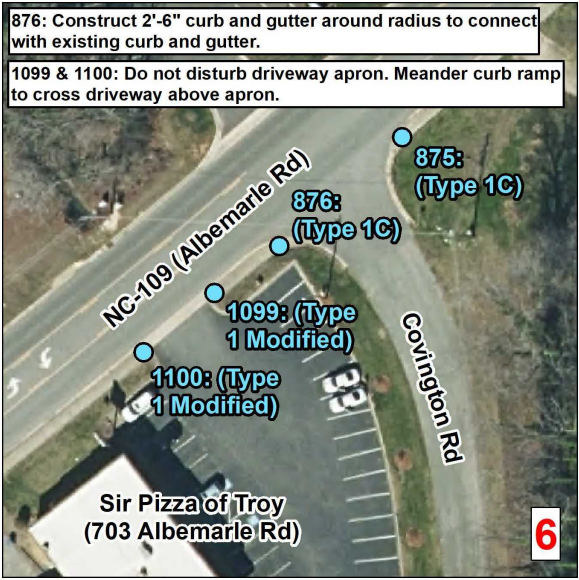

Curb Ramps To Be Repaired











- Retrofit
- Remove and Replace
- New Curb Ramp
- Remove Ramp
- Other

Municipal Boundary
Census Urban Areas (>5,000 Pop)
NCHPO Historic Boundary (NR and LHD)

Curb Ramps in Areas <5,000 Population
Municipality: Troy
TIP Number: BO-2408D
PE WBS Number: 50937.1.2
CON WBS Number: 50937.3.6
County: Montgomery

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION 8

Source: NV5 Engineers and Consultants Inc., ESRI, NC OneMap, NCDOT, NCHPO

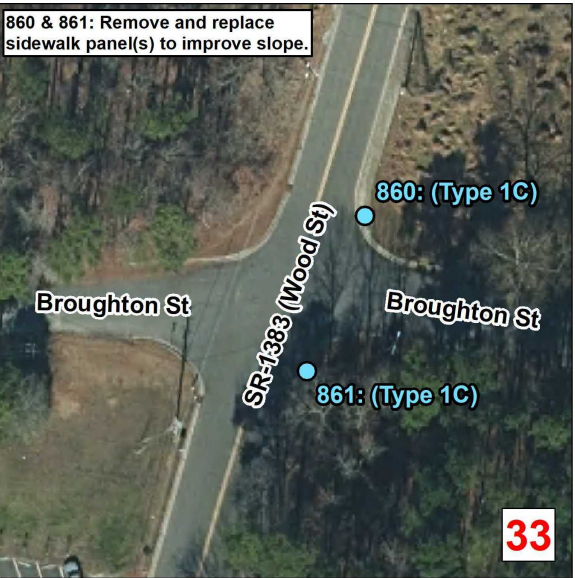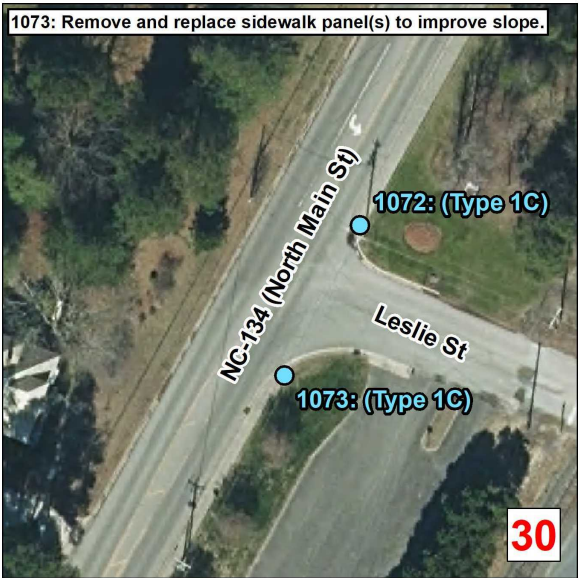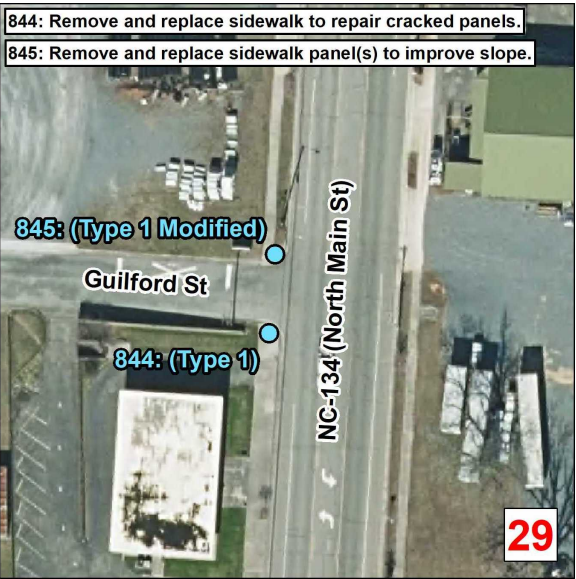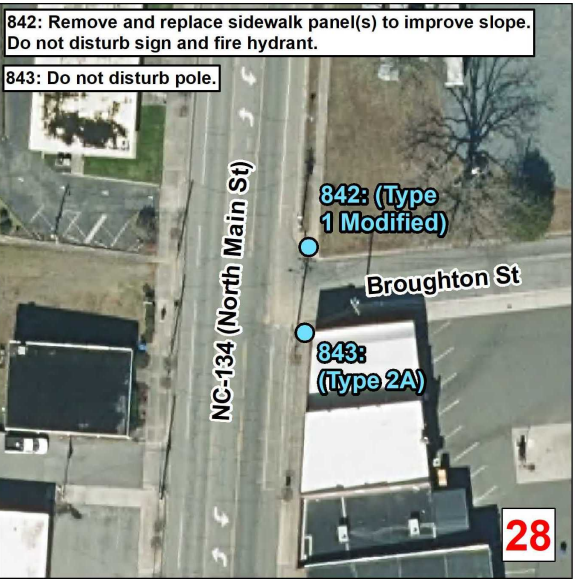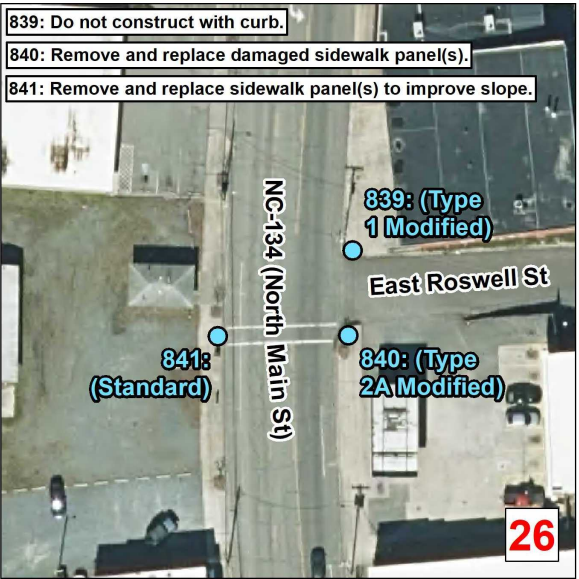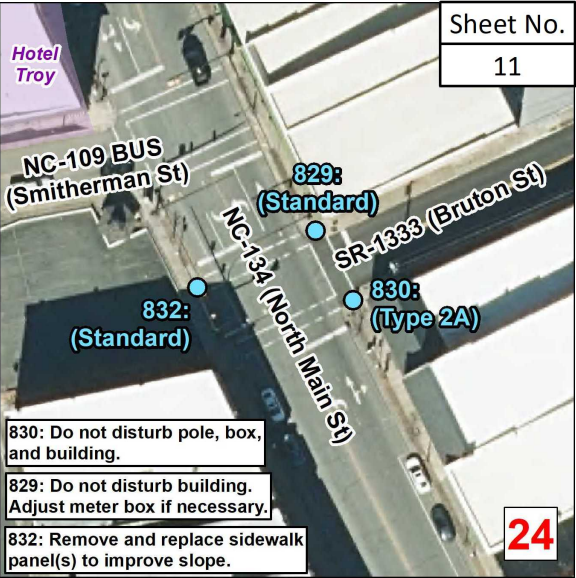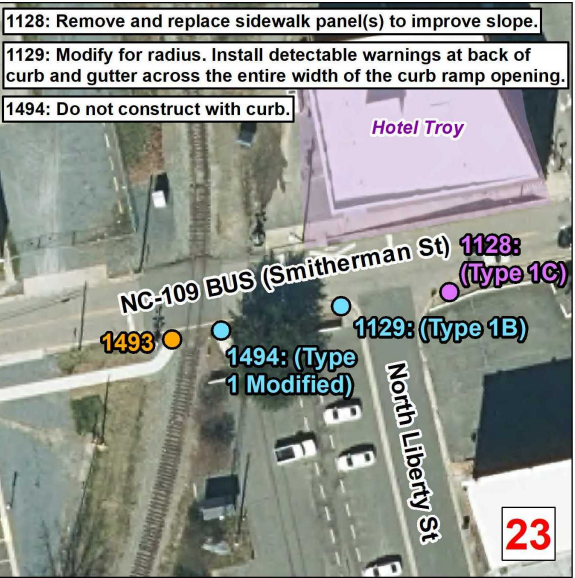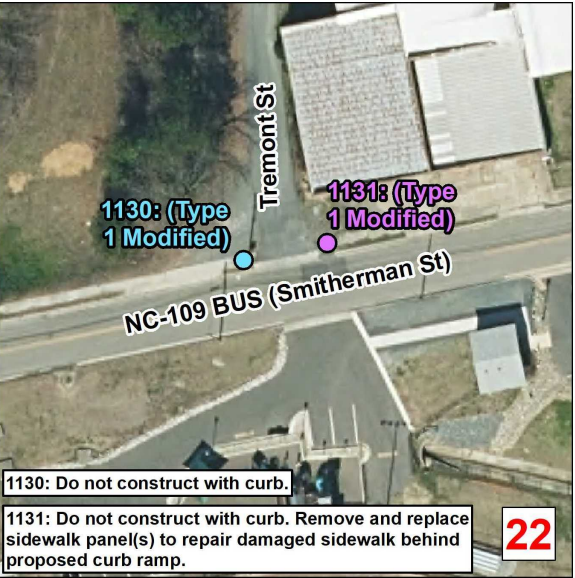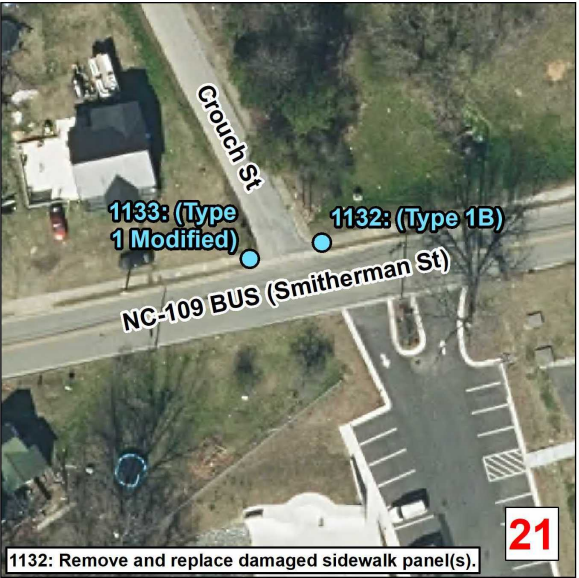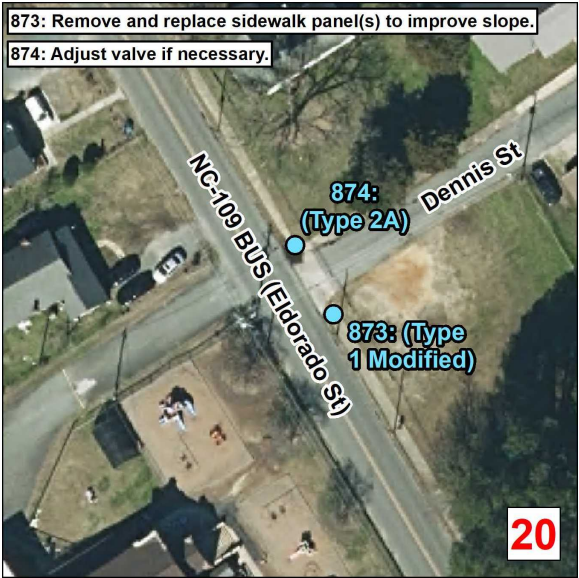

Curb Ramps To Be Repaired















- Retrofit
- Remove and Replace
- New Curb Ramp
- Remove Ramp
- Other







▬ Municipal Boundary
▬ Census Urban Areas (>5,000 Pop)
▬ NCHPO Historic Boundary (NR and LHD)

Curb Ramps in Areas <5,000 Population
Municipality: Troy
TIP Number: BO-2408D
PE WBS Number: 50937.1.2
CON WBS Number: 50937.3.6
County: Montgomery

 NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION 8

Source: NV5 Engineers and Consultants Inc., ESRI, NC OneMap, NCDOT, NCHPO

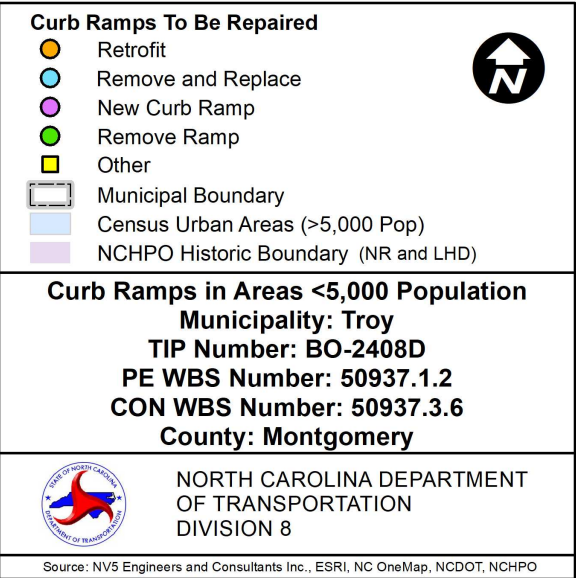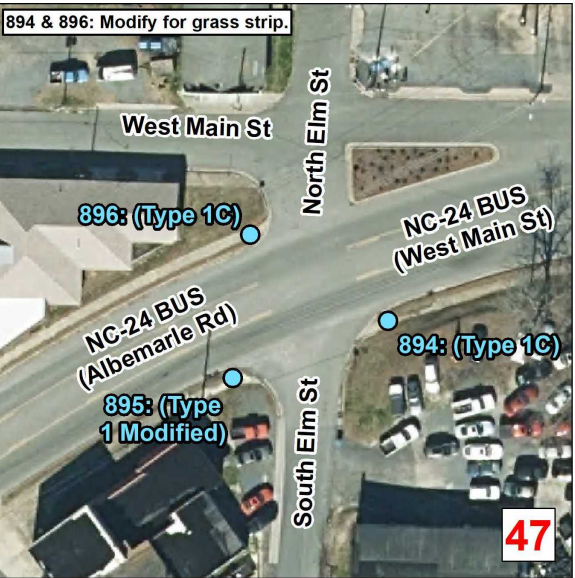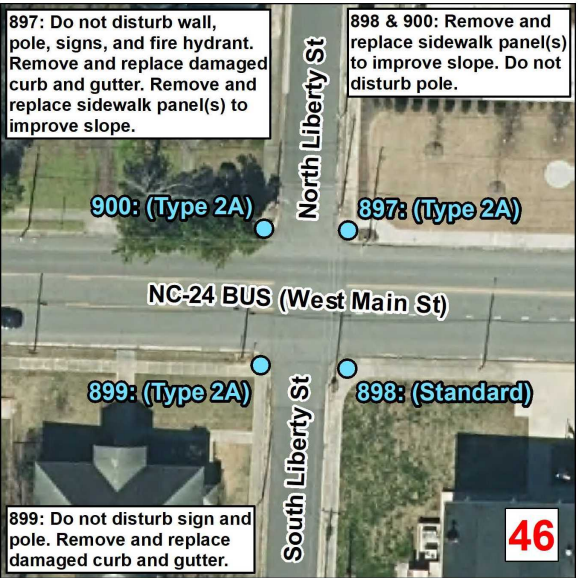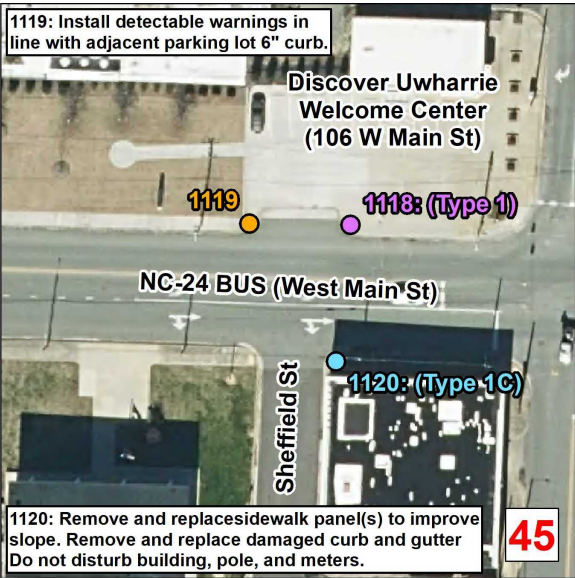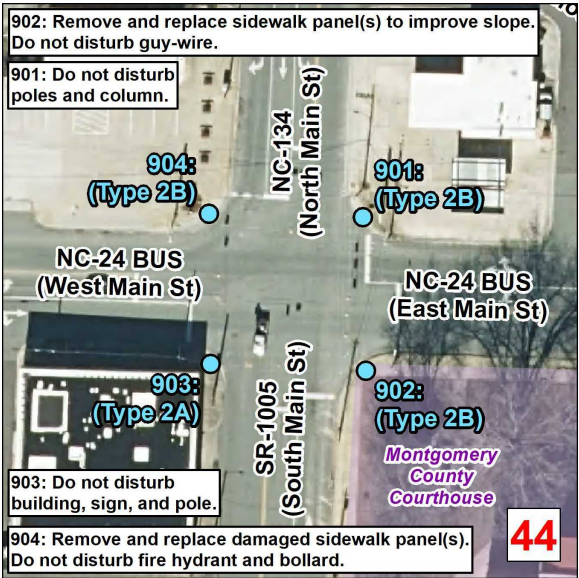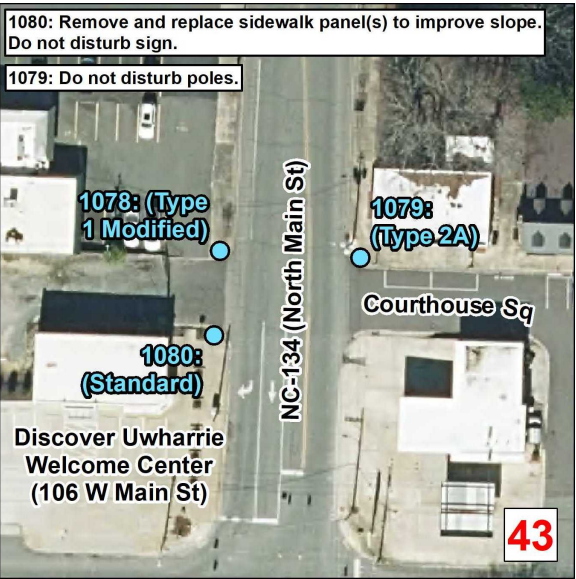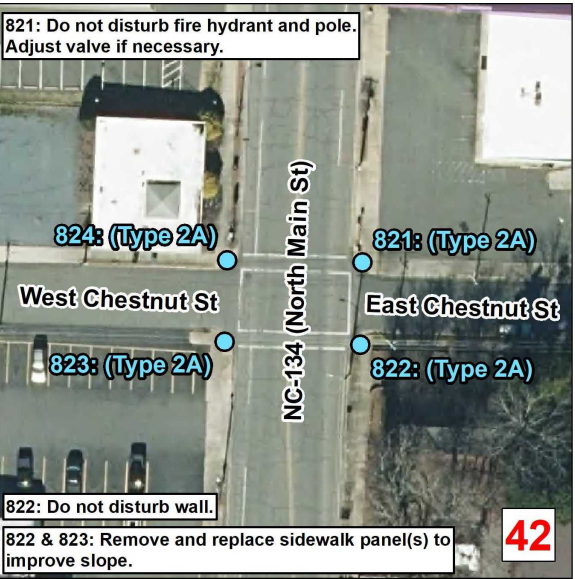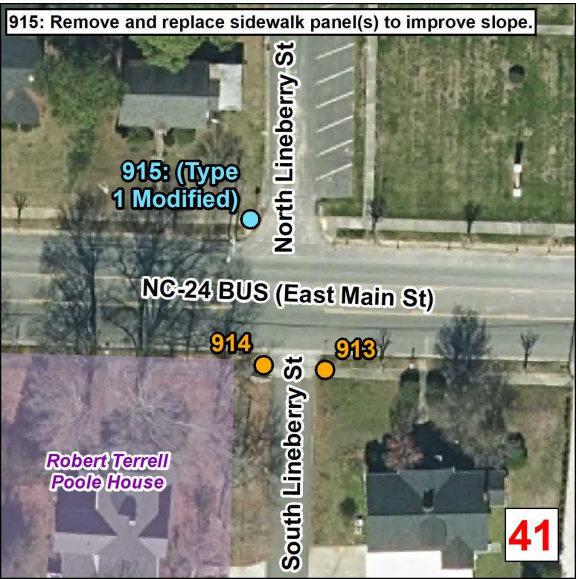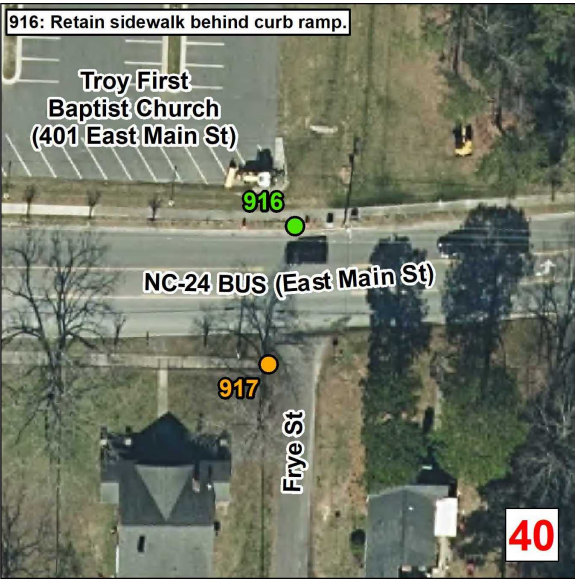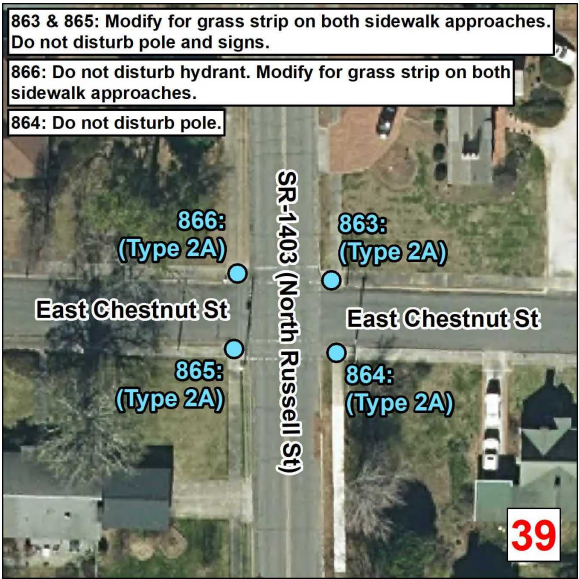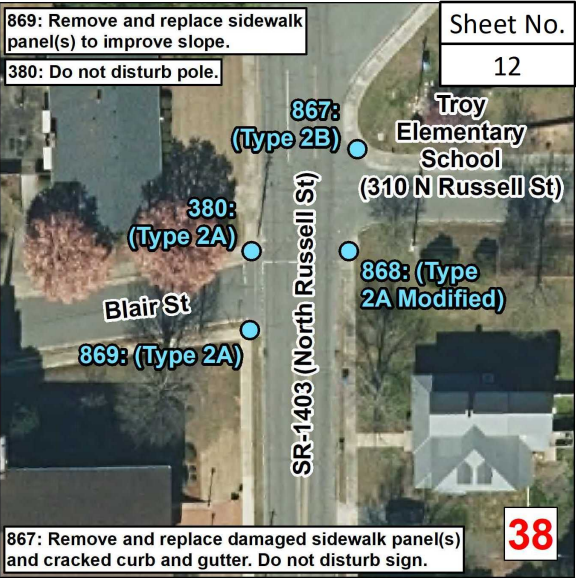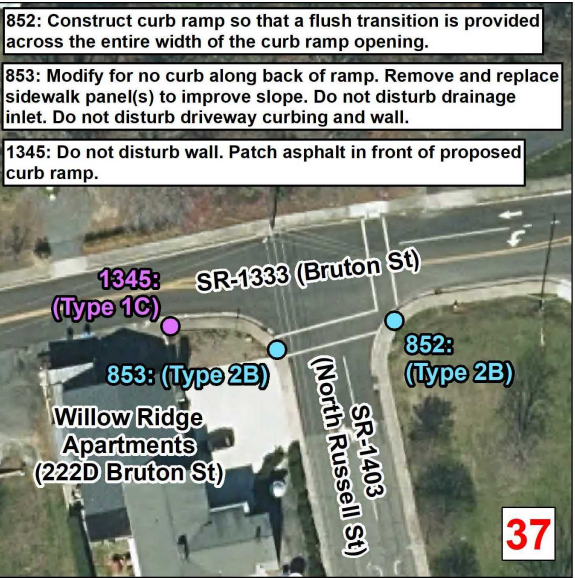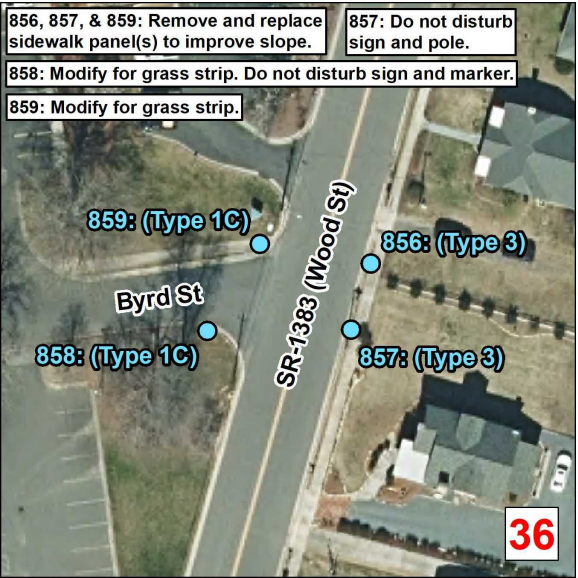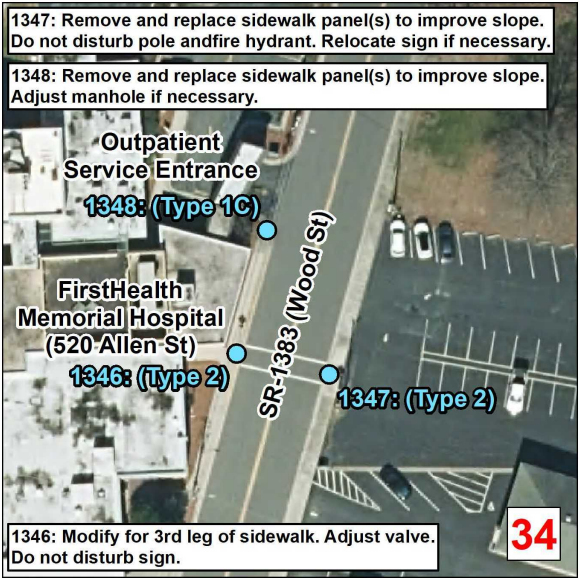

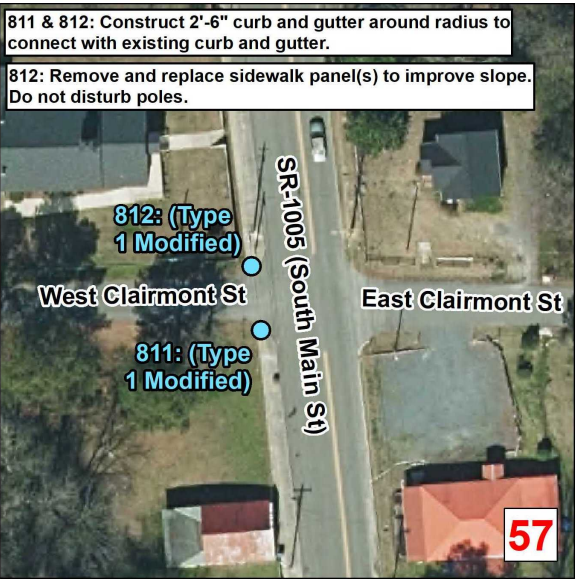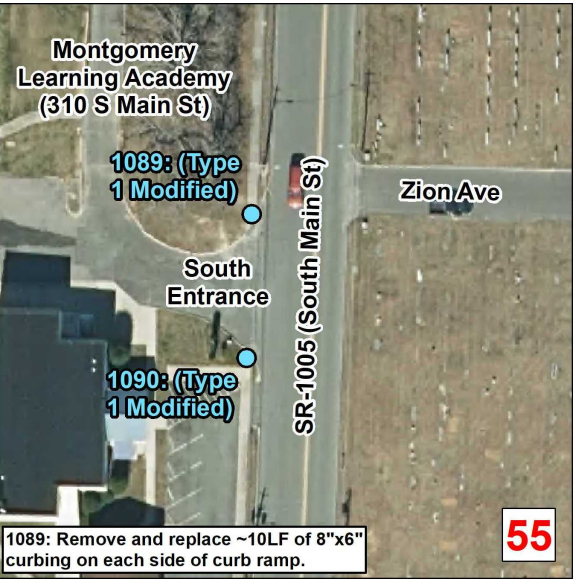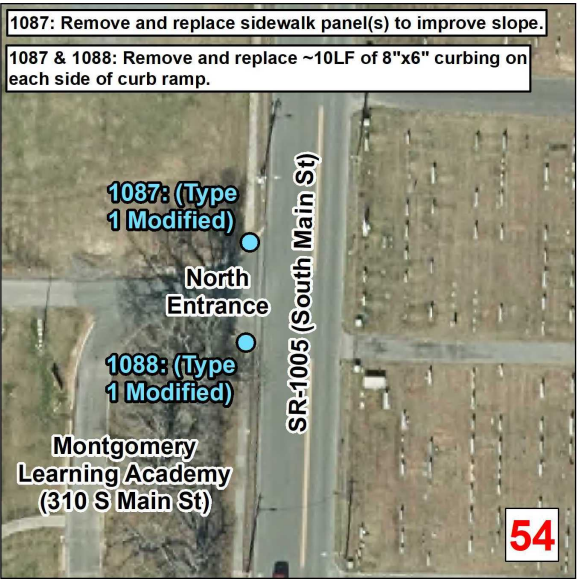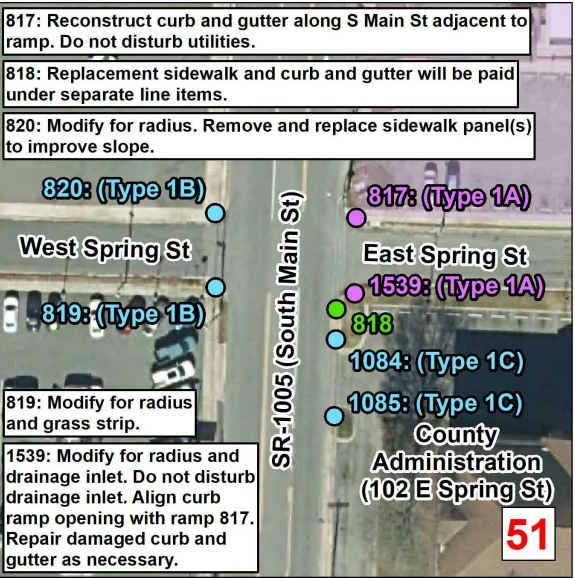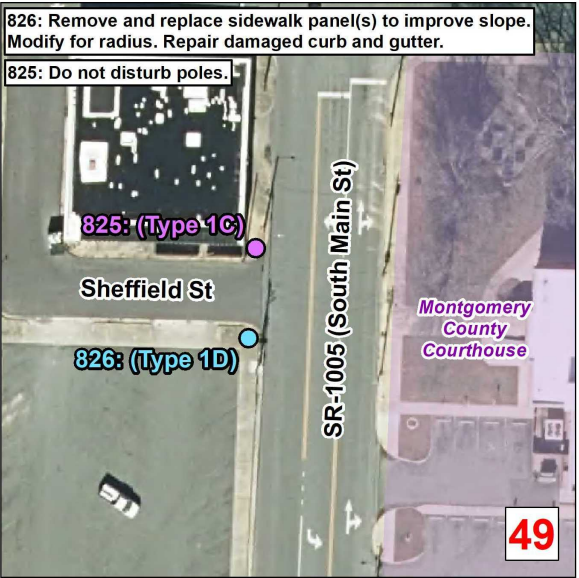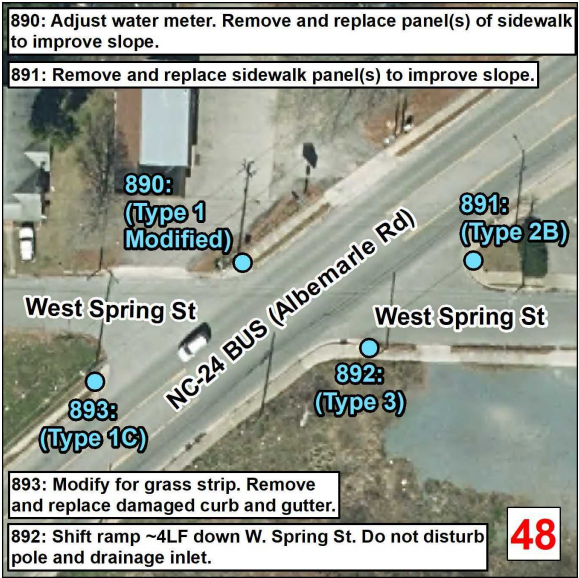

Curb Ramps To Be Repaired

Retrofit

Remove and Replace

New Curb Ramp

Remove Ramp

Other

Municipal Boundary

Census Urban Areas (>5,000 Pop)

NCHPO Historic Boundary (NR and LHD)

Curb Ramps in Areas <5,000 Population

Municipality: Troy

TIP Number: BO-2408D

PE WBS Number: 50937.1.2

CON WBS Number: 50937.3.6

County: Montgomery

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION 8


Source: NV5 Engineers and Consultants Inc., ESRI, NC OneMap, NCDOT, NCHPO

NOTES:


CONSTRUCT STANDARD SIDEWALK 5' WIDE AND 4" THICK UNLESS OTHERWISE DENOTED ON PLANS.

PLACE A GROOVE JOINT 1" DEEP WITH 1/8" RADII IN THE CONCRETE SIDEWALK AT 5' INTERVALS. ONE 1/2" EXPANSION JOINT WILL BE REQUIRED AT 50' INTERVALS. A 1/2" EXPANSION JOINT WILL BE REQUIRED WHERE THE SIDEWALK JOINS ANY RIGID STRUCTURE.

SEE STD. DWG. 848.06 FOR CURB RAMP LOCATION REQUIREMENTS AND CONSTRUCTION GUIDELINES.

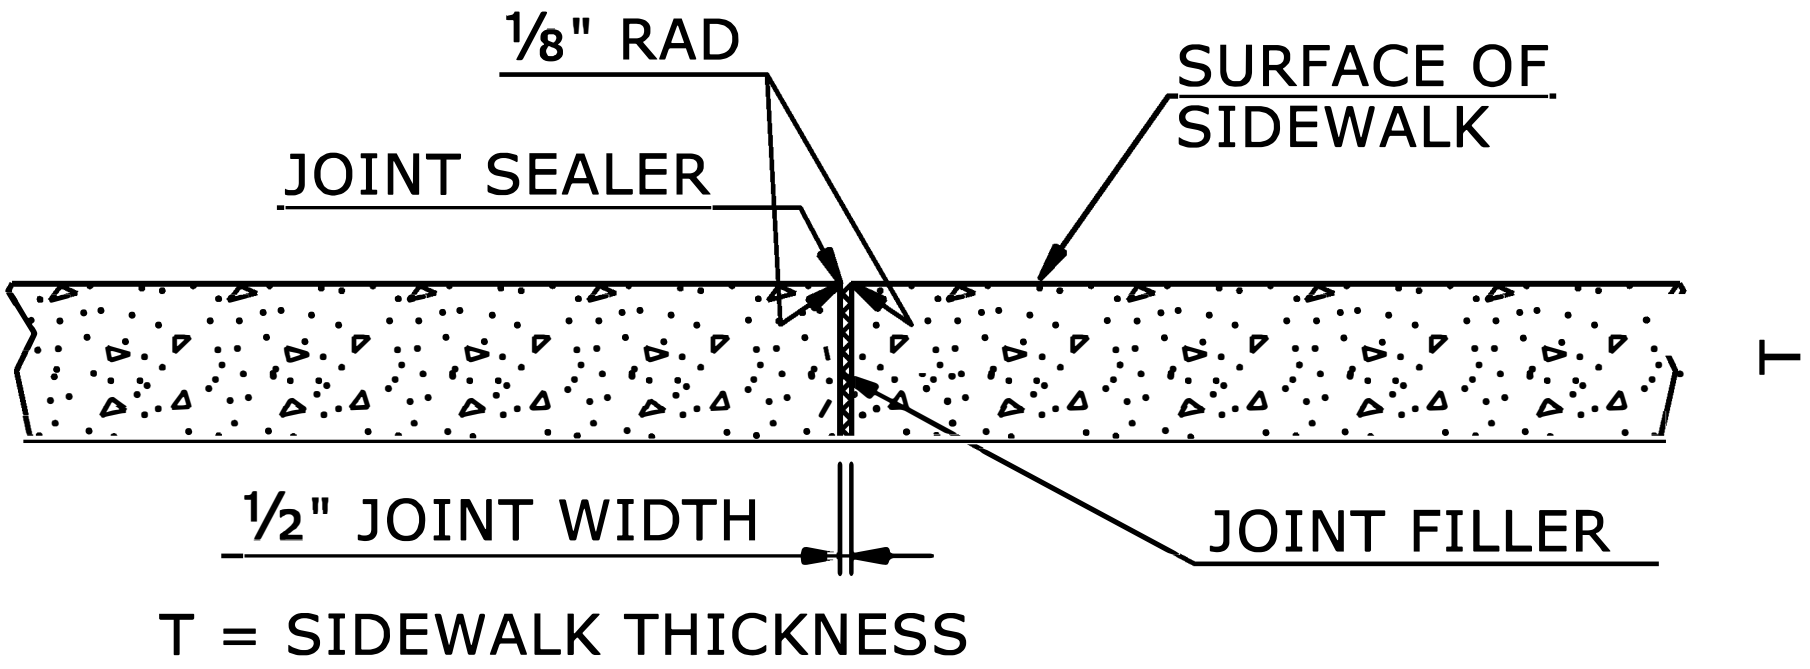


TRANSVERSE EXPANSION JOINT
IN SIDEWALK

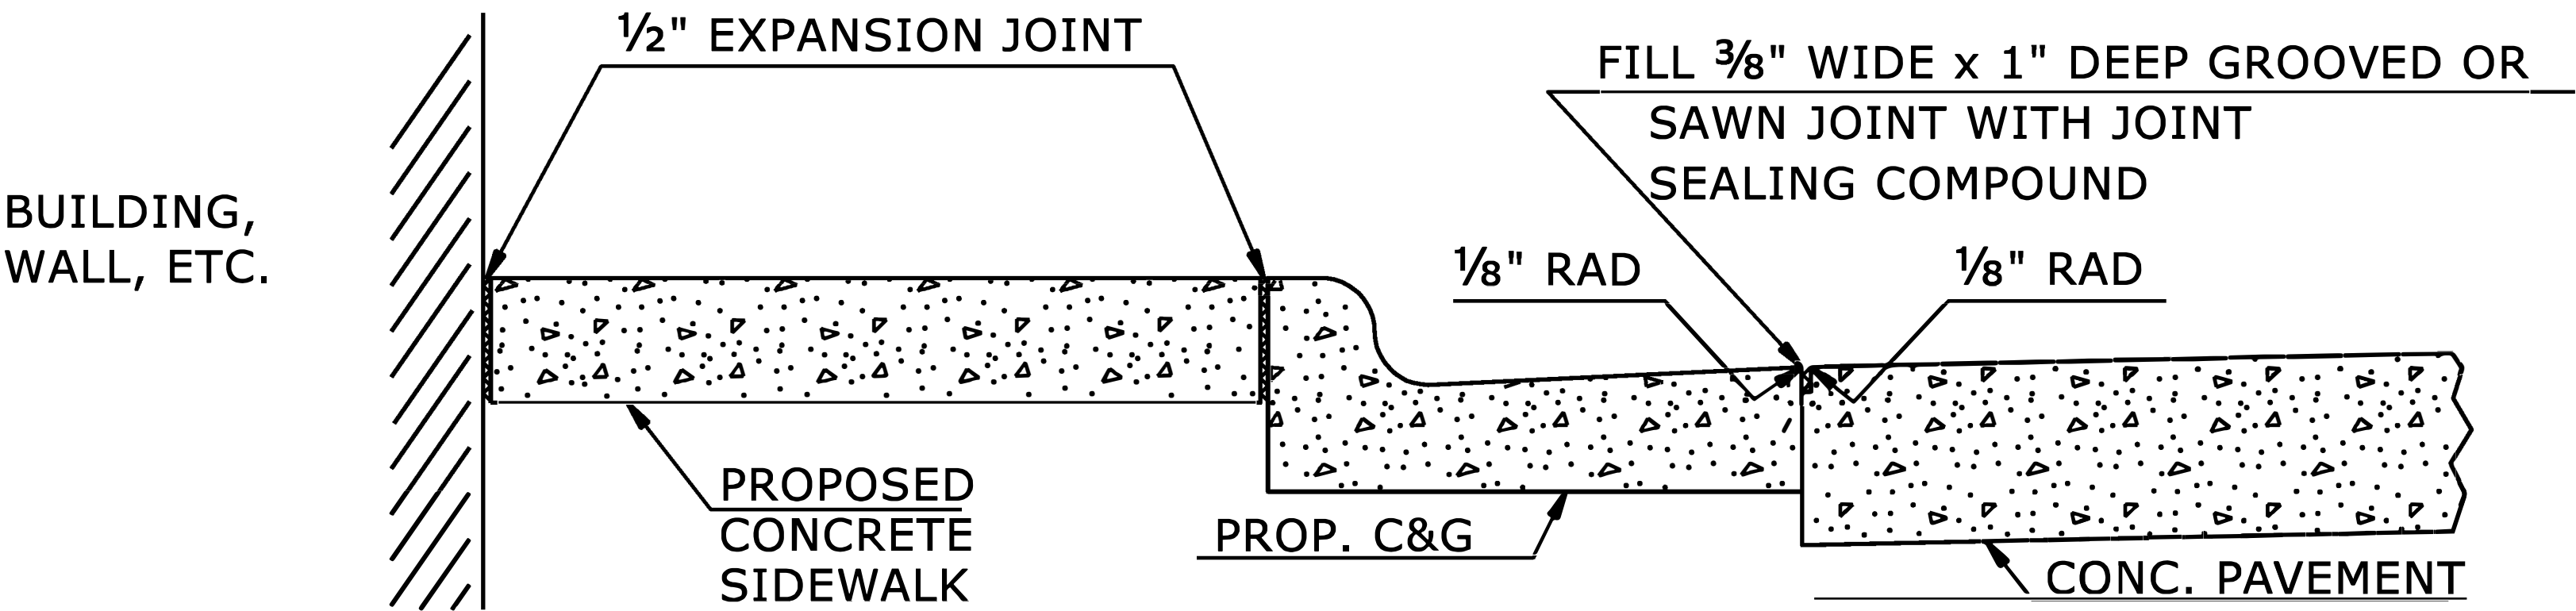

DETAILS SHOWING JOINTS IN CONCRETE SIDEWALK

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

ROADWAY DETAIL DRAWING FOR
CONCRETE SIDEWALK

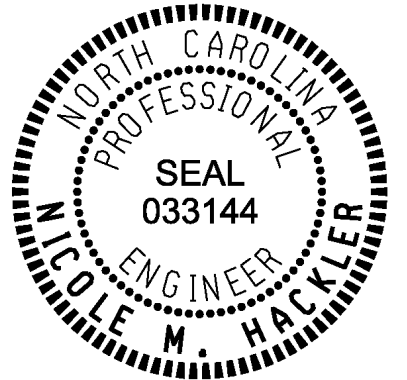

Signed by:
Nicole M. Hackler
588432034164CS
1/9/2025

SHEET 1 OF 1
848D01

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED



**CONTRACTS STANDARDS
AND DEVELOPMENT UNIT**

Office 919-707-6950 FAX 919-250-4119

SEE TITLE BLOCK

ORIGINAL BY: S.CALHOUN DATE: 7-25-2024
MODIFIED BY: DATE:
CHECKED BY: DATE:
FILE SPEC.: DATE:

PROJECT REFERENCE NO.	SHEET NO.
BO-2408D	15

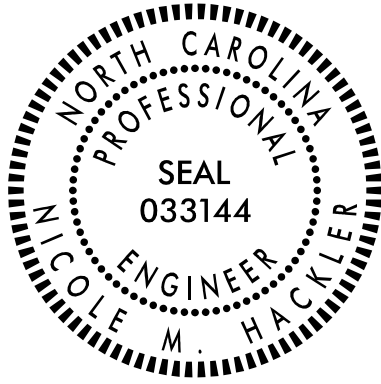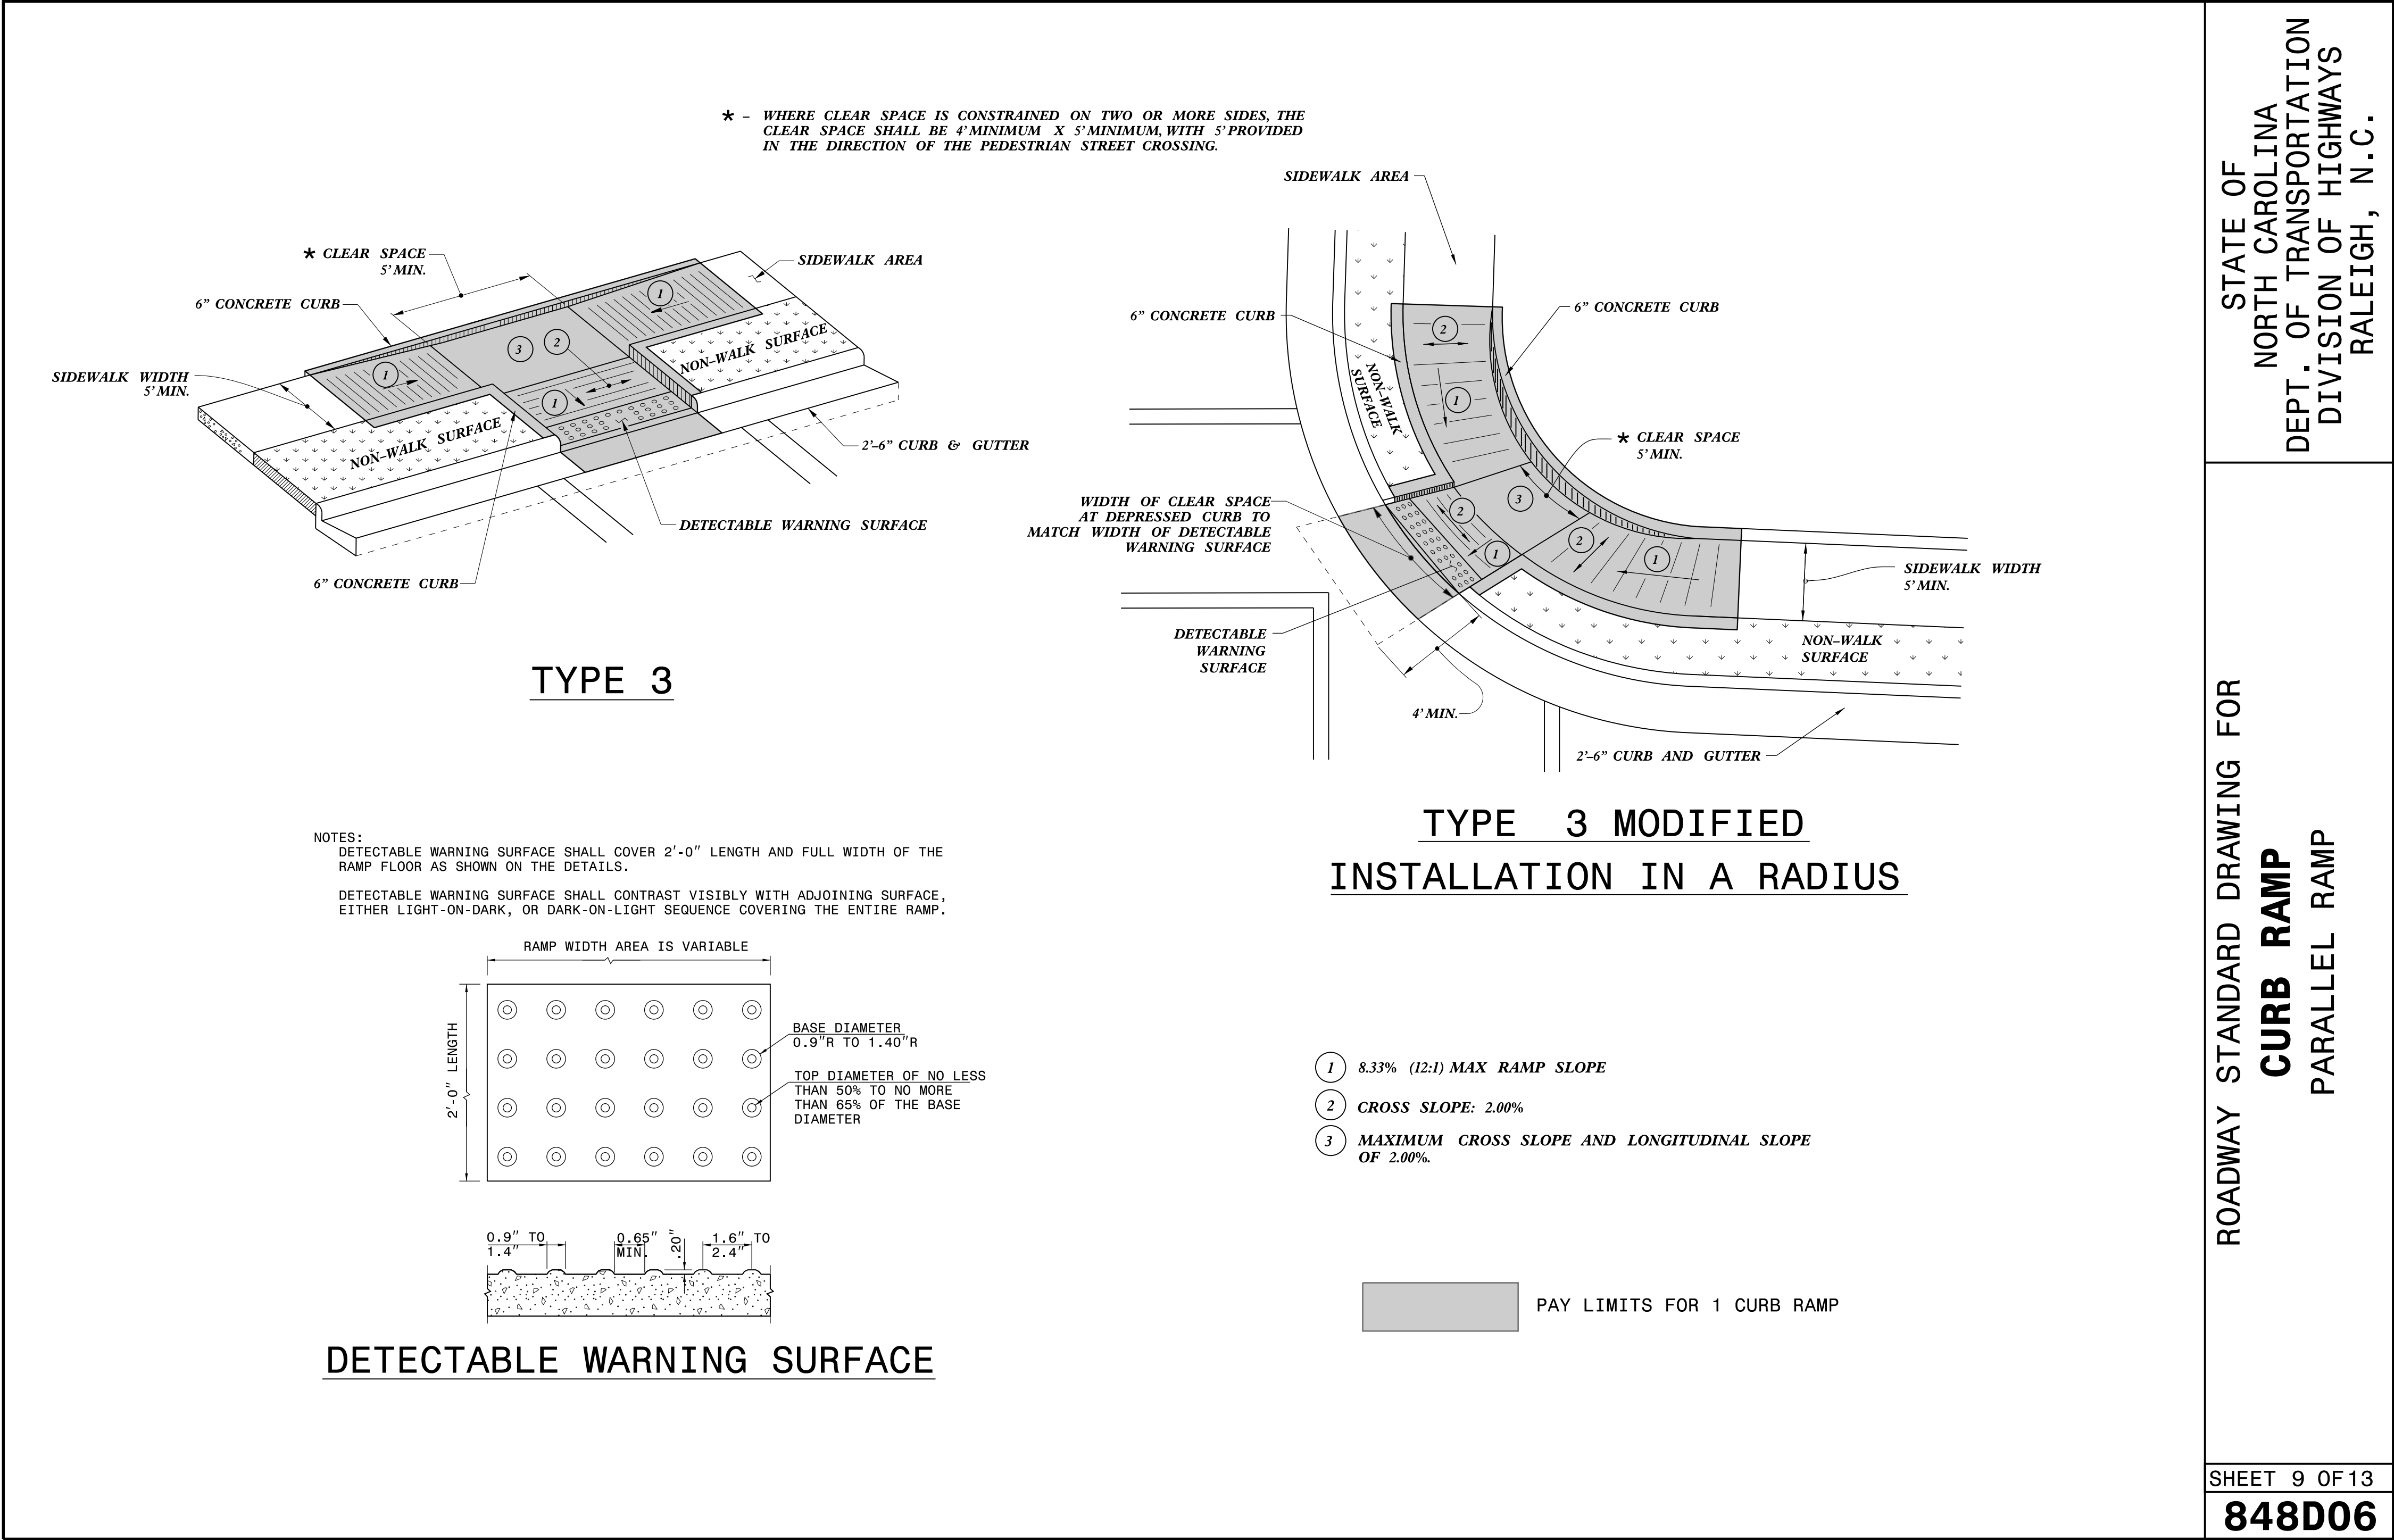

Signed by:
Nicole M. Hickler
5884323034164C5
1/9/2025

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

CONTRACTS STANDARDS
AND DEVELOPMENT UNIT
Office 919-707-6950 FAX 919-250-4119

SEE TITLE BLOCK

ORIGINAL BY: S.CALHOUN DATE: 12-22-2023
MODIFIED BY: DATE:
CHECKED BY: DATE:
FILE SPEC.: special_details\nmhackler\DO609.dgn