PROJECT REFERENCE NO.	SHEET NO.
SS-4908AN	2
R/W SHEET NO.	

NORTH CAROLINA PROFESSIONAL SEAL 26930 ENGINEER GREG S. DAVIS

DocuSigned by: Greg S. Davis 33D47B5FD78E4A8...

6/12/2015

DIVISION DESIGN / CONSTRUCT ENGINEER

TYPICAL SECTION NO. 1

–L– STA. 21+77.00 TO 26+27.00

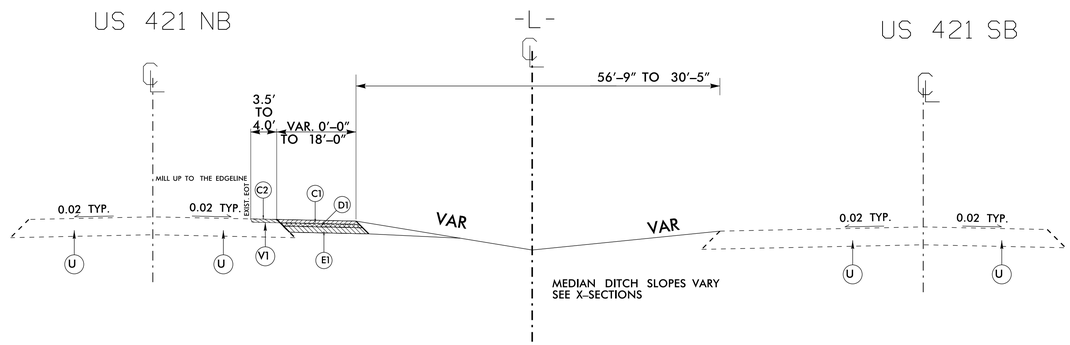

TYPICAL SECTION NO. 1

–L– STA. 26+27.00 TO 26+97.00

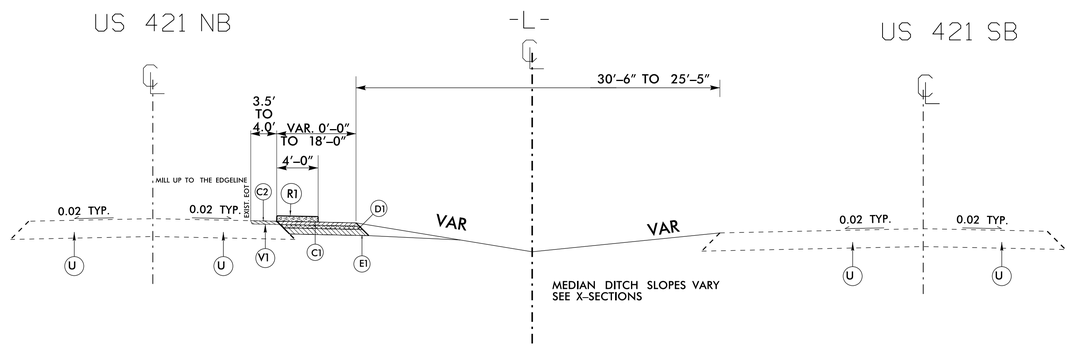

TYPICAL SECTION NO. 3

–L– STA. 26+97 TO 27+54.50

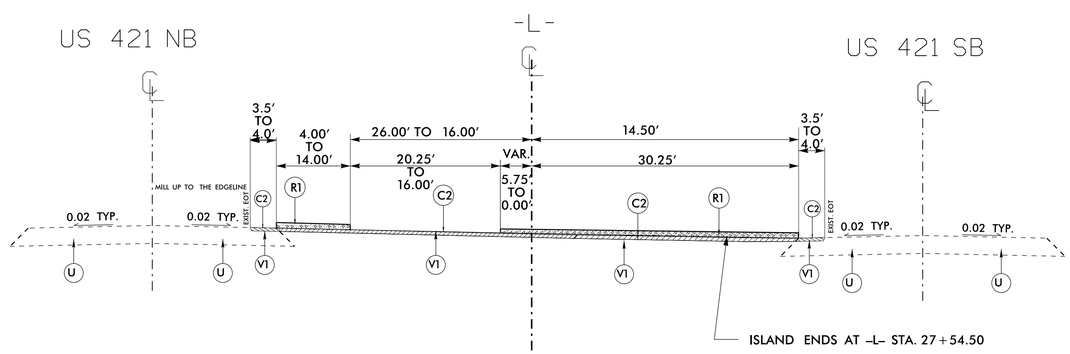

PAVEMENT SCHEDULE

C1	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. PER 1½" DEPTH. TO BE PLACED IN TWO LAYERS.
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
D1	PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.B, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.
E1	PROP. APPROX. 5.00" ASPHALT CONCRETE BASE COURSE, TYPE B25.B, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD.
R1	5" MONOLITHIC CONCRETE ISLAND. (KEYED IN)
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.
V1	1.5" MILLING

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

REVISIONS

8/17/99

12-JUN-2015 10:56
C:\pwworking\ddot\us421@sr_2434\psh\typ\SS-4908AN_421_typ.dgn
$$$$USER ATT PROJ=270410