PROJECT REFERENCE NO.	SHEET NO.
SS–4908AN	2–A
R/W SHEET NO.	

DocuSigned by: Greg S. Davis 33D47B5FD78F4A8...

NORTH CAROLINA PROFESSIONAL SEAL 26930 ENGINEER GREG S. DAVIS

6/12/2015

DIVISION DESIGN / CONSTRUCT ENGINEER

TYPICAL SECTION NO. 4

–L– STA. 27+54.50 TO 27+67.00

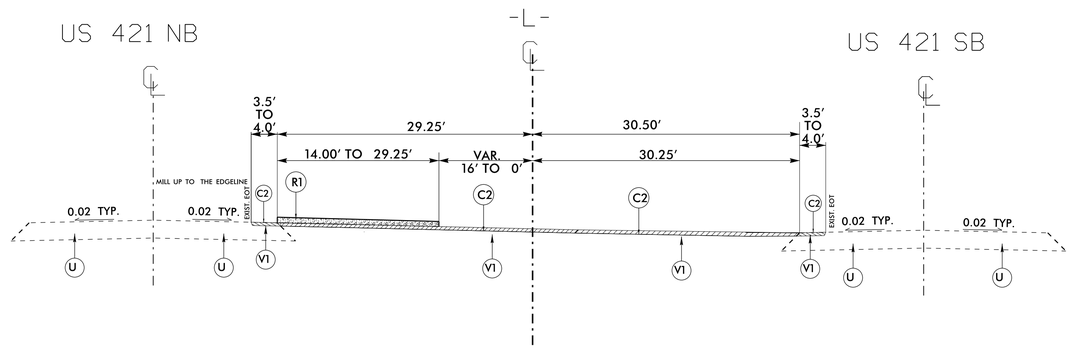

TYPICAL SECTION NO. 5

–L– STA. 27+67.00 TO 27+76.50

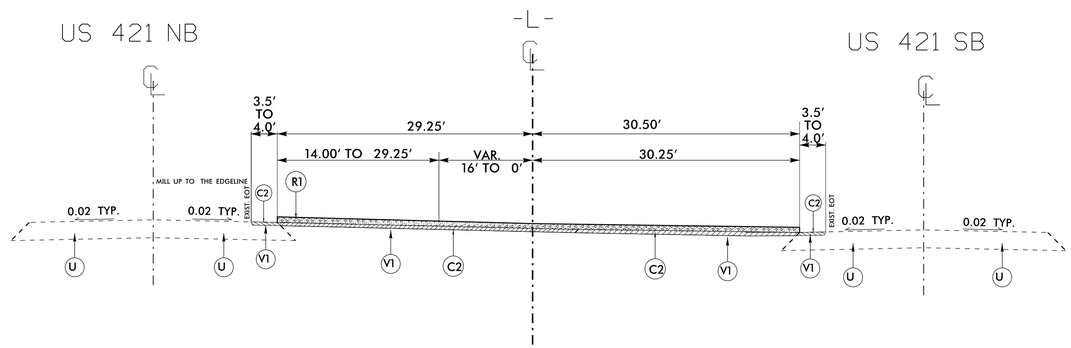

TYPICAL SECTION NO. 6

–Y10– STA. 15+60 TO 16+47.50
–Y11– STA. 10+95 TO 11+87.50

NC 49 (-Y10-)
SR 2438 (-Y11-)

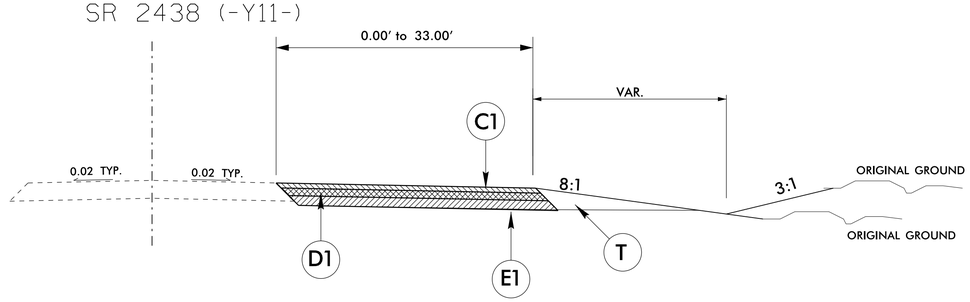

PAVEMENT SCHEDULE

C1	PROP. APPROX. 3″ ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. PER 1½″ DEPTH. TO BE PLACED IN TWO LAYERS.
C2	PROP. APPROX. 1.5″ ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
D1	PROP. APPROX. 3″ ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.B, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.
E1	PROP. APPROX. 5.00″ ASPHALT CONCRETE BASE COURSE, TYPE B25.B, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD.
R1	5″ MONOLITHIC CONCRETE ISLAND. (KEYED IN)
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.
V1	1.5″ MILLING

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

REVISIONS

8/17/99

12-JUN-2015 10:57
z:\dgn\proj\ss\ss_4908an_421_2434\psh\typ\SS-4908AN_421_typ.dgn
Greg Davis
ds0ovs
AT 08:AD 270410