



Covington & Associates
"Reshaping Reality"

ADDENDUM No. 2

July 11, 2017

**NC Department of Transportation
Wagram Equipment Shop
Scotland County, NC**

SCO ID# 14-11279-01A

The following items supersede the Bid Documents "Issue for Bidding" dated 06.30.17 and shall become a part of those Bid Documents with full force and effect as set forth here-in. Bidders shall acknowledge receipt of this Addendum No. 002 on the Form of Proposal.

1. Construction Plan, Sheets C2.0 and C3.0: As indicated on Sheet C2.0 and Sheet C3.0, the curb and gutter as detailed on Sheet C-4.0 is to be constructed at each end of the building, northeast and southwest, around the mulch islands as indicated. The mulch shall be bark mulch.
2. Technical Specifications, Section 329200 – TURF AND GRASSES, Part 2.7, Paragraph D: The "HARD MULCH" as referenced in the landscape areas on Sheet C2.0 and Sheet C3.0 shall be dyed wood fiber mulch as indicated in the technical specification reference of this paragraph. Only hard mulch is to be installed into the landscape island areas.
3. Construction Plan, Sheet C3.0: The proposed entrance to the site connecting the proposed Equipment Shop with the existing site shall be graded as indicated on the referenced sheet; thereby, requiring no driveway piping. The proposed flow over the drive flows to PROP. YARD INLET NO. 2.
4. Construction Plan, Sheets C2.0 and C3.0: Upon installing the proposed 15" RCP under the existing pavement area of the existing NC DOT site to make the storm drain connection, the pavement shall be repaired in accordance with the attached detail requiring 2" 9.5A Surface Course and 6" CABC over the compacted subgrade disturbance. See attached "Pavement Repair Detail".
5. Construction Materials Testing for the sitework such as subgrade, stone base, asphalt binder and surface, and concrete paving shall be provided by the Owner.
6. Construction Plan, Sheet C2.0, "SITE PAVING ALTERNATE:" legend at top center of Sheet C2.0:
 - "BASE BID" which reads as:
 - 6" THICK CRUSHER RUN GRAVEL ON COMPACTED SUBGRADE

Is replaced as follows and replaces all other references to "BASE BID" for pavement schedule throughout the Advertisement, Bid Documents, Informal Contract, Technical Specifications, and Construction Plans:

- 4" THICK CRUSHER RUN GRAVEL INSTALLED ON 8" THICK COMPACTED AGREGATE BASE COURSE (CABC) WHICH IS INSTALLED ON THE COMPACTED EARTH SUBGRADE.
7. Construction Plan, Sheet C2.0, "SITE PAVING ALTERNATE:" legend at top center of Sheet C2.0:
 - "ADD ALTERNATE #2" which reads as:
 - PROVIDE PAVEMENT IN AREA 1 (FRONT OF SHOP) IN LIEU OF GRAVEL BASE BID.

Is replaced as follows and replaces all other references to "ADD ALTERNATE #2" for pavement schedule throughout the Advertisement, Bid Documents, Informal Contract, Technical Specifications, and Construction Plans:

- PROVIDE BINDER AND SURFACE PAVEMENT IN AREA 1 (FRONT OF SHOP) AS DETAILED ON THE "**ASPHALT PAVEMENT DETAIL**" ON SHEET C4.0 IN LIEU OF 4" THICK CRUSHER RUN GRAVEL SURFACE IN THE "BASE BID".

8. Construction Plan, Sheet C2.0, "SITE PAVING ALTERNATE:" legend at top center of Sheet C2.0:

- "ADD ALTERNATE #3" which reads as:
 - PROVIDE PAVEMENT IN AREAS 1 AND 2 IN LIEU OF GRAVEL BASE BID, ETC.

Is replaced as follows and replaces all other references to "ADD ALTERNATE #3" for pavement schedule throughout the Advertisement, Bid Documents, Informal Contract, Technical Specifications, and Construction Plans:

- PROVIDE BINDER AND SURFACE PAVEMENT IN AREAS 1 AND 2 AS DETAILED ON THE "**ASPHALT PAVEMENT DETAIL**" ON SHEET C4.0 IN LIEU OF 4" THICK CRUSHER RUN GRAVEL SURFACE IN THE "BASE BID".

9. Construction Plan, Sheet C2.0, "SITE PAVING ALTERNATE:" legend at top center of Sheet C2.0:

- "ADD ALTERNATE #4" which reads as:
 - PROVIDE PAVEMENT IN AREAS 1, 2, AND 3 IN LIEU OF GRAVEL BASE BID, ETC.

Is replaced as follows and replaces all other references to "ADD ALTERNATE #4" for pavement schedule throughout the Advertisement, Bid Documents, Informal Contract, Technical Specifications, and Construction Plans:


- PROVIDE BINDER AND SURFACE PAVEMENT IN AREAS 1, 2, AND 3 AS DETAILED ON THE "**ASPHALT PAVEMENT DETAIL**" ON SHEET C4.0 IN LIEU OF 4" THICK CRUSHER RUN GRAVEL SURFACE IN THE "BASE BID".

All other requirements of the Bid Documents, Technical Specifications, and Construction Plans remain unchanged. Bidding Plan Holders: Please acknowledge the receipt of **Addendum No. 2** by e-mail response.



7/11/2017

D T A L

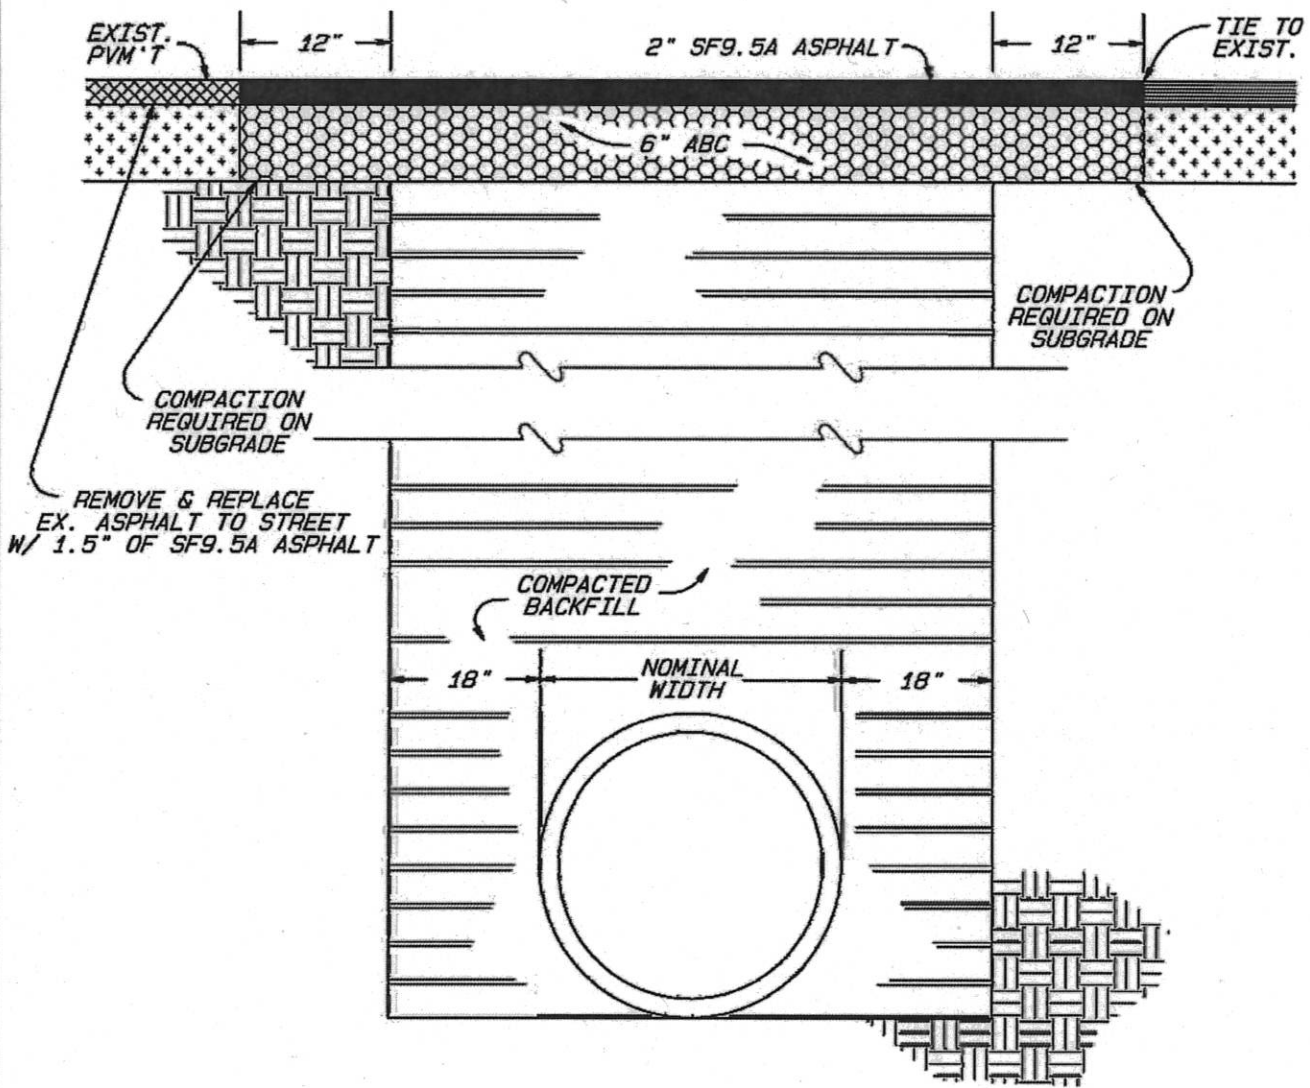

ASPHALT DRIVEWAYS

PAVEMENT REPAIR DETAIL

Y:\009423...P
8
5