


8/17/99

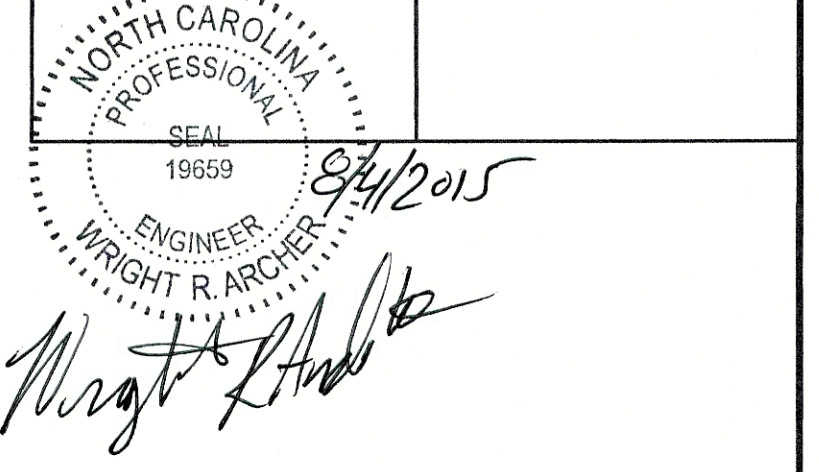

DRAINAGE STRUCTURES


Structures	Grate Types	Total Amount (Approx.)
CB's	G	5
DI's	NARROW	7

PIPES


Types	Total Length (Approx.)
15" RCP	513' +/-
15" HDPE	161' +/-
18" RCP	79' +/-
18" HDPE	168' +/-

PIPE TABLE DATA

From	To	Type	Length +/-	% Slope
DI 7	CB 5	15" HDPE	111'	F/D
DI 6	CB 5	15" HDPE	25'	F/D
CB 5	CB 4	15" RCP	101'	2.5 %
DI 5	CB 4	15" HDPE	18'	F/D
CB 4	CB 3	15" RCP	155'	3.0 %
CB 3	CB 2	15" RCP	75'	3.3 %
DI 4	CB 2	15" HDPE	6'	F/D
CB 2	CB 1	15" RCP	94'	2.9 %
CB 1	DI 3	15" RCP	12'	F/D
DI 3	DI 2	18" RCP	79'	F/D
DI 2	DI 1	18" HDPE	86'	F/D
DI 1	DITCH	18" HDPE	82'	F/D

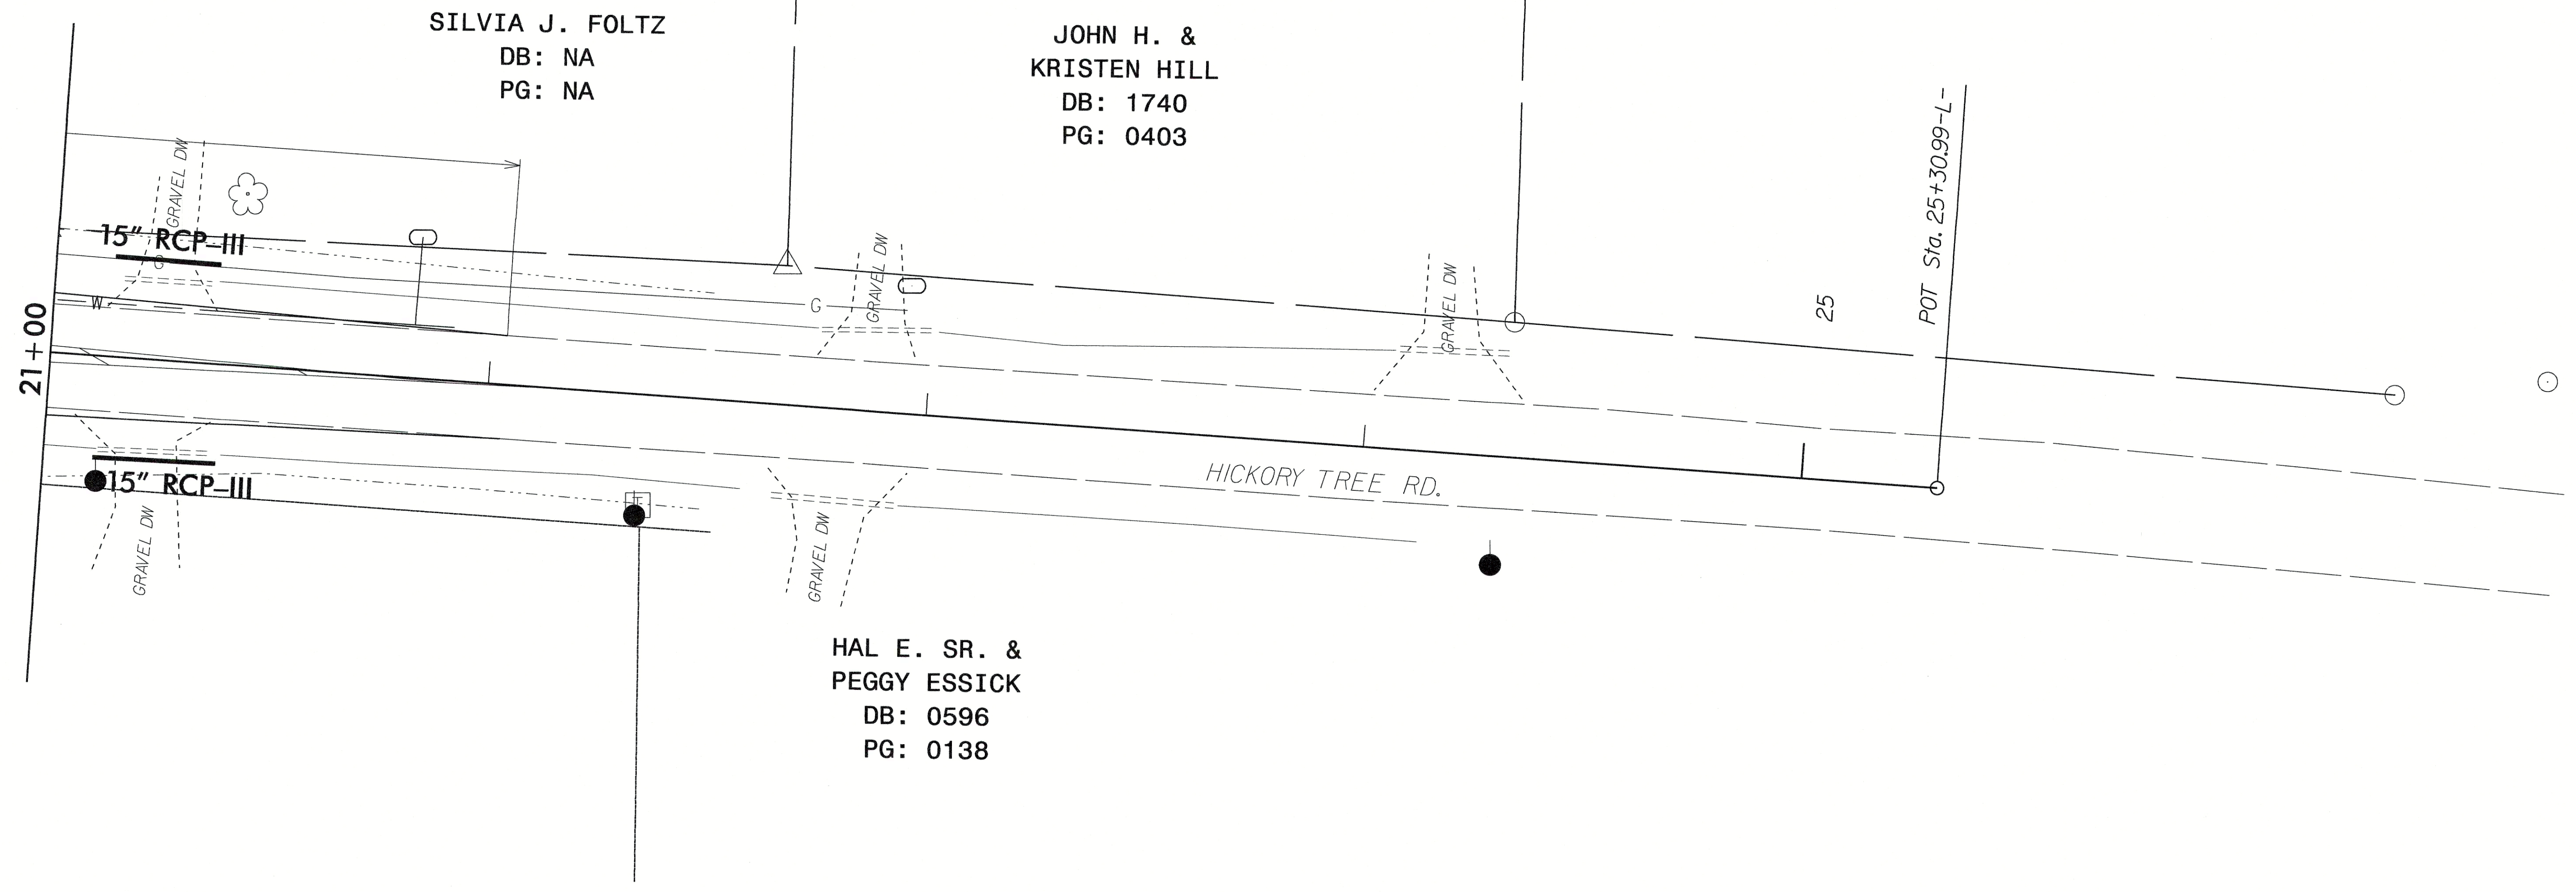

CB	STATION	B.O.C.	INVERT	GRATE
1	13 + 18.81-L-	844.71	841.31	G
2	14 + 15.90-L-	847.43	844.03	G
3	14 + 94.17-L-	849.89	846.49	G
4	16 + 51.60-L-	854.57	851.17	G
5	17 + 55.42-L-	857.19	853.79	G

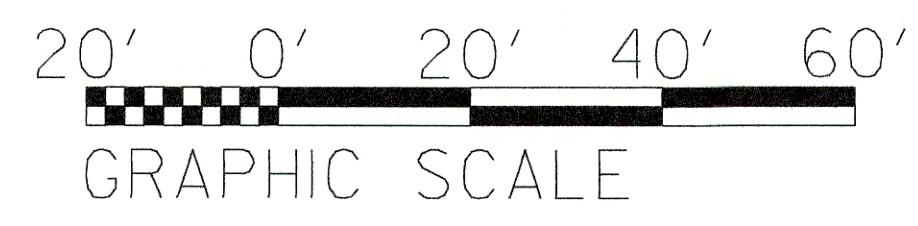

DATE	REVISIONS
11/18/14	DRAINAGE & ROW
1/13/15	ROW
2/06/15	ROW
2/13/15	PROP. ROW TO EX. ROW

Prepared in the Office of:
DEPARTMENT OF TRANSPORTATION
 375 SILAS CREEK PKWY, WINSTON SALEM, NC 27127

2006 STANDARD SPECIFICATIONS

PROJECT NAME	HICKORY TREE @ MENDENHALL
PROJECT NUMBER	NA
SR # / ROAD NAME	SR 1508 HICKORY TREE ROAD
DATE DRAWN	DAVIDSON COUNTY

APP. BY DIST. ENG.	DATE
APP. BY DIV. TRAFFIC ENG.	DATE
REVISOR	DATE
CHECKED BY	DATE
DRAWN BY	DATE

SCALE 1" = 20'

REVISIONS

04-AUG-2015 08:42:11 C:\CURRENT\HICKORY TREE RD - MENDENHALL RD\DWG\HICKORYTREE_PSH3.dgn