

8/17/99
04-AUG-2015 08:40
C:\PSS\2015\08\40\PROJECTS\HICKORY TREE RD\DWG\HICKORY TREE.PSH.dwg
MENDENHALL RD\DWG\HICKORY TREE RD



PIPE TABLE DATA

From	To	Type	Length +/-	% Slope
DI 7	CB 5	15" HDPE	11'	2.2 %
DI 6	CB 5	15" HDPE	25'	1.0 %
CB 5	CB 4	15" RCP	10'	2.9 %
DI 5	CB 4	15" HDPE	18'	1.0 %
CB 4	CB 3	15" RCP	155'	2.1 %
CB 3	CB 2	15" RCP	75'	3.3 %
DI 4	CB 2	15" HDPE	6'	1.0 %
CB 2	CB 1	15" RCP	94'	2.9 %
CB 1	DI 3	15" RCP	12'	20.0 %
DI 3	DI 2	18" RCP	79'	1.0 %
DI 2	DI 1	18" HDPE	86'	1.0 %
DI 1	DITCH	18" HDPE	82'	1.0 %


CURVE TABLE

CURVE	LENGTH	RADIUS	CHORD	CH. BEARING
C1	287.9'	2864.26'	287.07'	S 88°47'23" E
C2	285.02'	2826.26'	284.89'	N 88°48'23" W

OWNER NAME (Now or Formerly)	DB/ PG	ROW AREA
RACHEL Y. HODGES	DB 507 PG 631	25803 SQ.FT. 0.592 ACRES

PROJECT REFERENCE NO. HICKORY TREE RD	SHEET NO. 5
UTILITY SHEET NO. 1 OF 3	
DISTRICT ENGINEER NORTH CAROLINA PROFESSIONAL ENGINEER SEAL 19659 WRIGHT R. ARCHER	HYDRAULICS ENGINEER

8/1/2015
Wright R. Archer

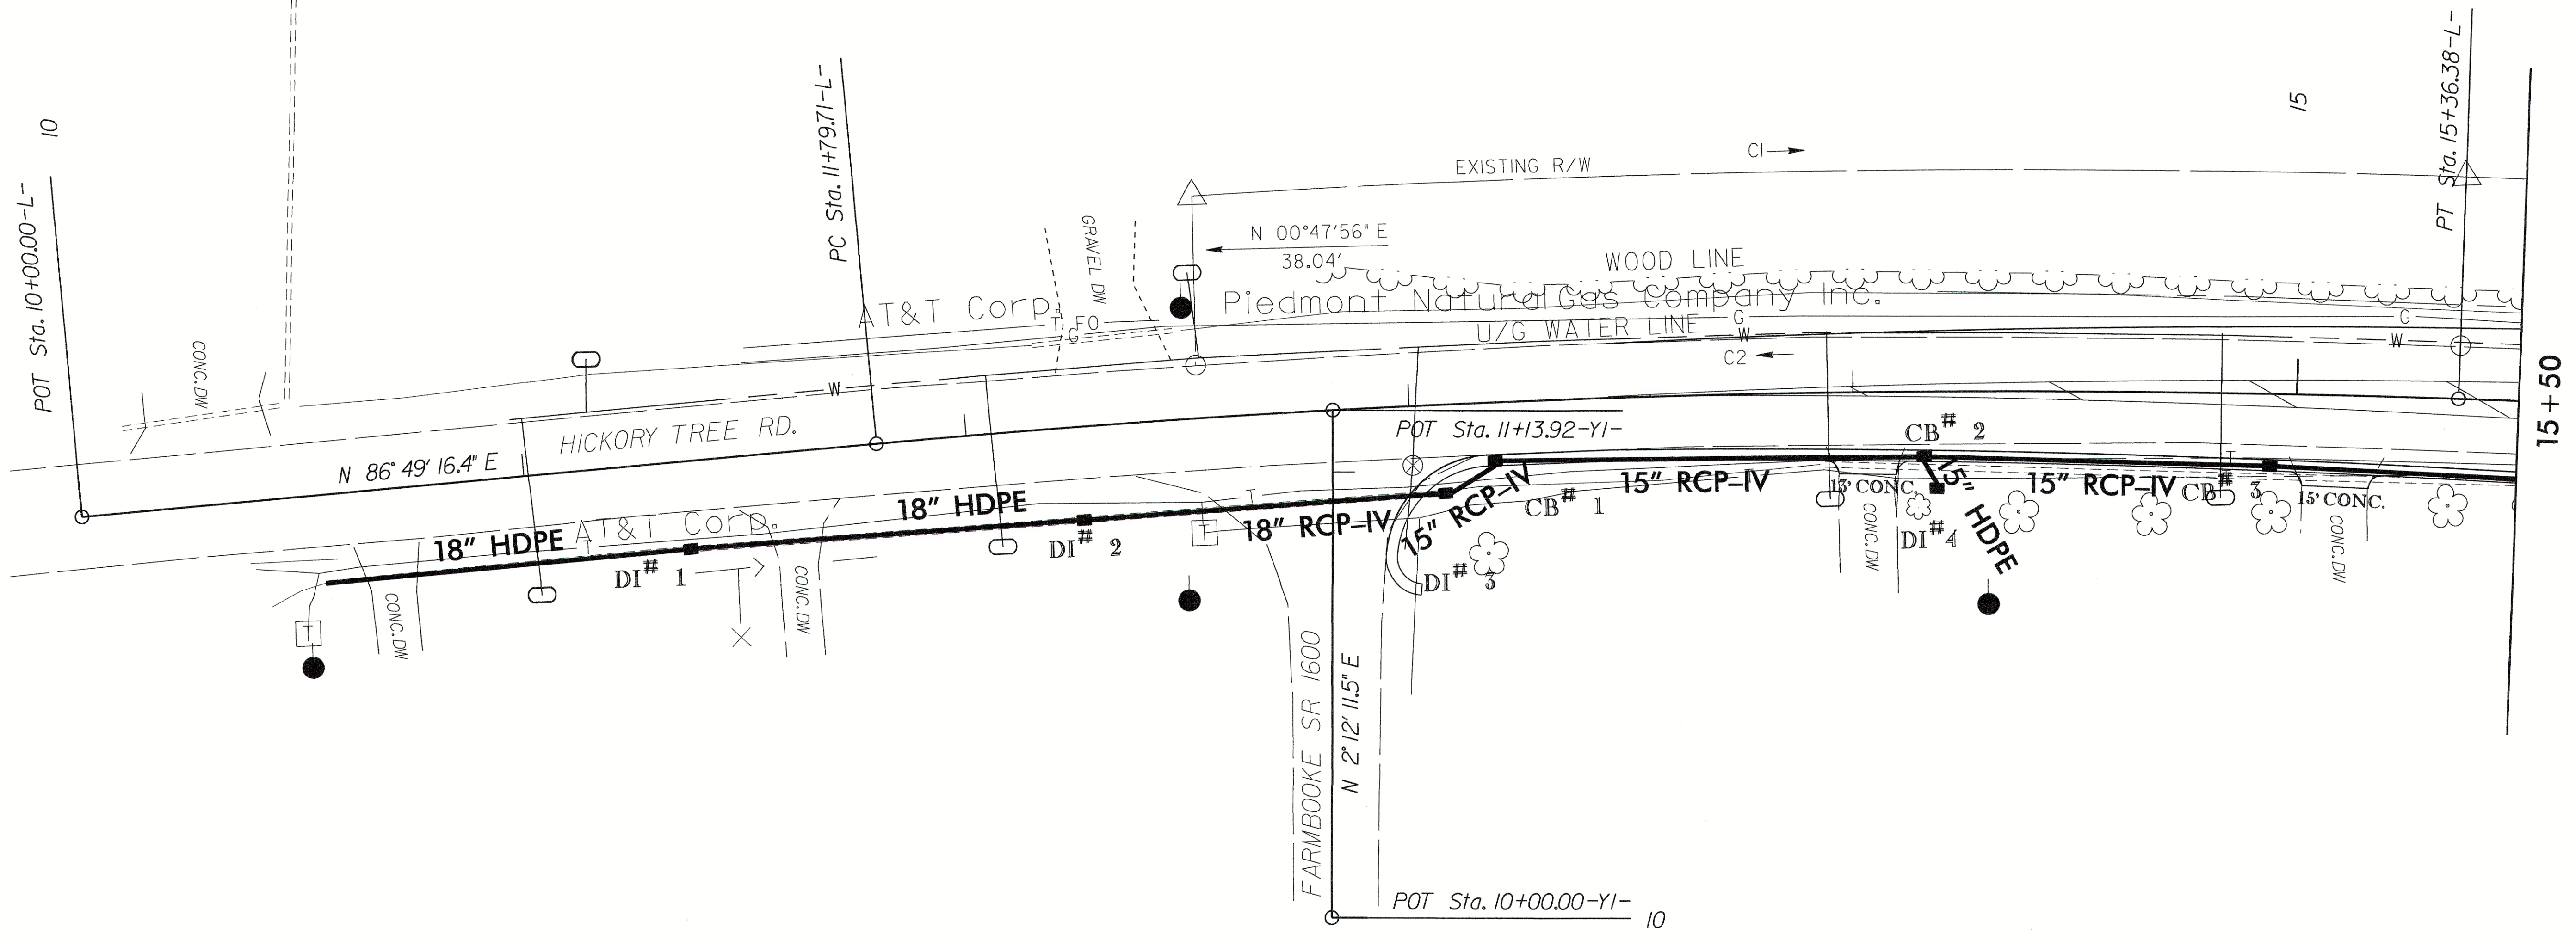


PIPES

Types	Total Length (Approx.)
15" RCP	513' +/-
15" HDPE	161' +/-
18" RCP	79' +/-
18" HDPE	168' +/-

DRAINAGE STRUCTURES

Structures	Grate Types	Total Amount (Approx.)
CB's	G	5
DI's	NARROW	7

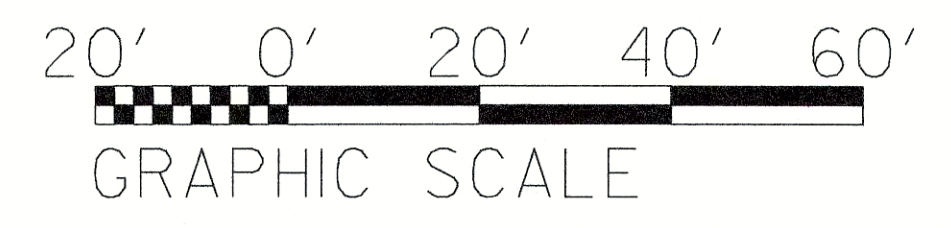

DATE	REVISIONS
11/18/14	DRAINAGE & ROW
1/13/15	ROW
2/6/15	ROW
4/06/15	PROP. ROW TO EX. ROW

Prepared in the Office of:
DEPARTMENT OF TRANSPORTATION
375 SILAS CREEK PKWY, WINSTON SALEM, NC 27127

2006 STANDARD SPECIFICATIONS	HICKORY TREE @ MENDENHALL	APP. BY DIST. ENG.	DATE
PROJECT NAME	NA	APP. BY DIV. TRAFFIC ENG.	DATE
W.O. NUMBER	SR 1508 HICKORY TREE ROAD	REVISED	NTSII
SR # / ROAD NAME	DAVIDSON COUNTY	DATE DRAWN	GWG
DATE DRAWN	DAVIDSON COUNTY	DRAWN BY	SCALE 1" = 20'