CAMDEN COUNTY REST AREA REFURBISHMENT
BID DOCUMENTS

SCO ID #: 14-11342-01A

2356 HWY 17 NORTH, SOUTH MILLS, NC
NC DEPARTMENT OF TRANSPORTATION
FACILITIES MANAGEMENT DIVISION

ARCHITECT OF RECORD

LISA L. KEEL, AIA (919) 707-4548
NORTH CAROLINA DEPARTMENT OF TRANSPORTATION llkeel@ncdot.gov
FACILITIES MANAGEMENT DIVISION

PLUMBING / MECHANICAL / ELECTRICAL ENGINEER OF RECORD

BURKE DESIGN GROUP, BEN BURKE, P.E. (919) 771-1916
benburke@rr.nc.com

TABLE 1: EXIT WIDTH, NUMBER & ARRANGEMENTS OF EXITS

EXIT WIDTH												NUMBER AND ARRANGEMENT OF EXITS			
USE GROUP OR SPACE DESCRIPTION	OCCUPANCY TYPE (SEE NOTE 1)	(A) AREA SQ. FT.	(B) AREA PER OCCUPANT (TABLE 1004.1.1)	CALCULATED OCCUPANT LOAD	TOTAL OCCUP. LOAD PER GROUP	(C) EGRESS WIDTH PER OCCUPANT (1005.1)		EXIT WIDTH (in) REQUIRED WIDTH (SECTION 1005.1) (a÷b)xc		EXIT WIDTH (in) ACTUAL WIDTH SHOWN ON PLANS		MINIMUM NUMBER OF EXITS		TRAVEL DISTANCE	
						STAIR	LEVEL	STAIR	LEVEL	STAIR	LEVEL	REQUIRED	SHOWN ON PLANS	ALLOWABLE TRAVEL DISTANCE (TABLE 1016.1)	ACTUAL TRAVEL DISTANCE SHOWN ON PLANS
RESTROOMS	BUSINESS	1560	100	16	8	.3"	.2"	N/A	3.2"	N/A	36"	1	2	200	43'-6""

EGRESS/LIFE SAFETY NOTES:

1. THE BUILDING IS RECEIVING NEW FINISHES AND NEW PLUMBING; NO WALLS OR DOORS ARE BEING ALTERED; EXIT PATTERNS REMAIN THE SAME.

INDEX OF DRAWINGS

T1 TITLE SHEET/ EGRESS PLAN
T2 BUILDING CODE SUMMARY

ARCHITECTURAL

A1.0 DEMOLITION PLAN
A1.1 FLOOR PLAN
A1.2 REFLECTED CEILING PLAN
A2.1 KEY PLAN, FLOOR PATTERN, GENERAL NOTES
A2.2 FINISH ELEVATIONS, WALL PATTERNS
A2.3 ENLARGED PLAN–WALL LEGEND; FINISH SCHEDULE
A2.4 ENLARGED FLOOR PLAN & INTERIOR ELEVATIONS
A3.1 DOOR SCHEDULE, WINDOW TRIM, HEAD, JAMB & SILL DETAILS

PLUMBING

P1 PLUMBING SPECIFICATIONS
P2 DEMO PLAN
P3 REVISED DWV PLAN
P4 REVISED SUPPLY PLAN
P5 RISERS

MECHANICAL

M1 FLOOR PLAN–SPECIFICATIONS
M2 EXISTING HVAC PLAN–RETURN & SUPPLY SYSTEMS
M3 REVISED HVAC PLAN–RETURN & SUPPLY SYSTEMS

ELECTRICAL

E1 ELECTRICAL NOTES & DETAILS/ SPECIFICATIONS
E2 LIGHTING FLOOR PLAN; DEMO & REVISED
E3 POWER FLOOR PLAN; DEMO & REVISED
E4 ELECTRICAL PANELS & RISERS

ABBREVIATIONS AND SYMBOLS

EARTH
OTHER SOIL, MULCH
POROUS FILL, GRAVEL
BRICK, OTHER MATL
CMU
CONCRETE
BATT INSULATION
RIGID INSULATION
FIBER CEMENT BOARD
FINISH WOOD
ROUGH WOOD CONTINUOUS
ROUGH WOOD BLOCKING
PLYWOOD, OSB
STEEL, METAL
GYPSUM BOARD, OTHER MATERIAL
GLASS, GLAZING
ACOUSTICAL TILE

E6 / A1 — DETAIL NUMBER / SHEET NUMBER
3 — KEYED NOTE
203 — ROOM NUMBER
101A — DOOR MARKER
B — WINDOW MARKER
CENTER LINE, DATUM LINE
HIDDEN LINE
BREAK LINE
PROPERTY LINE
269 — EXISTING CONTOUR
269 — NEW CONTOUR
FENCE
SILT FENCE
SPOT ELEVATION OR DATUM
B1 — SOIL BORING NO. 1

LEGEND- EXIT

36"—CLEAR EXIT WIDTH
12—ACTUAL EXIT DOOR OCCUPANT LOAD
180—EXIT DOOR CAPACITY
OCCUPANCY CLASSIFICATION
B /1560 /16 —OCCUPANT LOAD
AREA SF

LEGEND- LIFE SAFETY

TRAVEL DIRECTION TO EXIT
EXIT DISCHARGE
EGRESS PATH (200'- MAX)
EXIT SIGN
F.E.C. FIRE EXTINGUISHER CABINET
REMOTE POINT

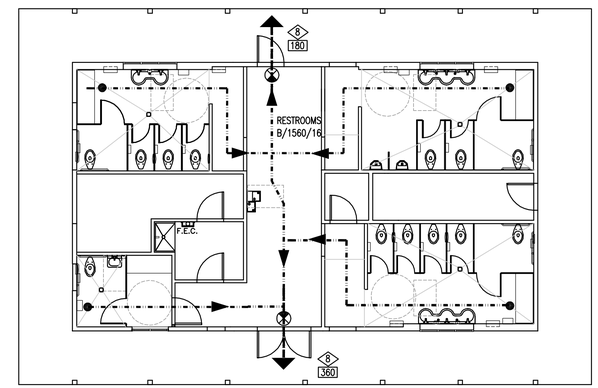

1 / T1 EGRESS PLAN
SCALE: 1/8" = 1'-0"

BUILDING NORTH

∠	ANGLE, LENGTH
AL	ALUMINUM
AB	ANCHOR BOLT
AFF	ABOVE FINISH FLOOR
ALT	ALTERNATE
APRX	APPROXIMATE
ARCH	ARCHITECTURAL
AVG	AVERAGE
BB	BACK TO BACK
BSMT	BASEMENT
BRG	BEARING
BM	BENCHMARK
BLKG	BLOCKING
BD	BOARD
BLDG	BUILDING
CAB	CABINET
CANTL	CANTILEVER
CB	CATCH BASIN
C&G	CURB AND GUTTER
CIP	CAST IRON PIPE
CJ	CONTROL JT, CEILING JST
℄	CENTERLINE
CL	CLOSET
CLR AN	CLEAR ANODIZED
CLG	CEILING
CLKG	CAULKING
CMU	CONCRETE MASONRY UNIT
COL	COLUMN
CONC	CONCRETE
CONT	CONTINUOUS
CRS	COURSES
D	DEEP, DEPTH
DBL	DOUBLE
DET	DETAIL
DIA	DIAMETER
DIAG	DIAGONAL
DIM	DIMENSION
DN	DOWN
DS	DOWNSPOUT
EA	EACH
EW	EACH WAY
ELEC	ELECTRICAL
EL	ELEVATION
ELEV	ELEVATOR
EXIST	EXISTING
EJ	EXPANSION JOINT
EXT	EXTERIOR
EWC	ELECTRIC WATER COOLER
FE, FEC	FIRE EXTINGUISHER, CABINET
FD	FLOOR DRAIN
FF	FACTORY FINISH
FFE	FINISH FLOOR ELEVATION
FIN FL	FINISH FLOOR
FTG	FOOTING
FV	FIELD VERIFY
FOM	FACE OF MASONRY
FOS	FACE OF STUD
FOF	FACE OF FINISH
GALV	GALVANIZED
GA	GAUGE
GL	GLASS, GLAZING
GWB	GYPSUM WALL BOARD
GYP	GYPSUM
HB	HOSE BIB
HM	HOLLOW METAL
HORIZ	HORIZONTAL
H	HIGH, HEIGHT
INSUL	INSULATION
INT	INTERIOR
INV	INVERT
JC	JANITOR'S CLOSET
JST	JOIST
KS	KNEE SPACE
LAV	LAVATORY
LB, #	POUND
MFR	MANUFACTURER
MH	MANHOLE
MO	MASONRY OPENING
MATL	MATERIAL
MAX	MAXIMUM
MIN	MINIMUM
MTD	MOUNTED
MLD	MOULDING
NIC	NOT IN CONTRACT
NTS	NOT TO SCALE
NO.	NUMBER
OC	ON CENTER
OPNG	OPENING
OSB	ORIENTED STRAND BOARD
PNL	PANEL
PL LAM	PLASTIC LAMINATE
PL	PLATE
PLMB	PLUMBING
PLWD	PLYWOOD
PREFAB	PREFABRICATED
PSI	POUNDS PER SQ INCH
R	RISER, ROD
RD	ROOF DRAIN
REF	REFRIGERATOR
REQD	REQUIRED
REV	REVERSED, REVISION
SAC	SUSPENDED ACOUSTICAL TILE
SCT	SUSPENDED CEILING TILE
SAN	SANITARY
SECT	SECTION
SFGL	SAFTY GLASS
SH	SHELF, SHELVES
SHT	SHEET
SHTG	SHEATHING
SIM	SIMILAR
SPEC	SPECIFICATION
SQ	SQUARE
SS	STAINLESS STEEL, SANITARY SEWER
STD	STANDARD
STL	STEEL
STO	STORAGE
T	TREAD
T&G	TONGUE AND GROOVE
TLT	TOILET
TOF	TOP OF FOOTING
TOJ	TOP OF JOIST
TOS	TOP OF STEEL
TOW	TOP OF WALL
TRTD	TREATED
TYP	TYPICAL
UNFIN	UNFINISHED
UON	UNLESS OTHERWISE NOTED
VERT	VERTICAL
W	WIDE, WIDTH
W/	WITH
WWF	WOVEN WIRE FABRIC
WD	WOOD

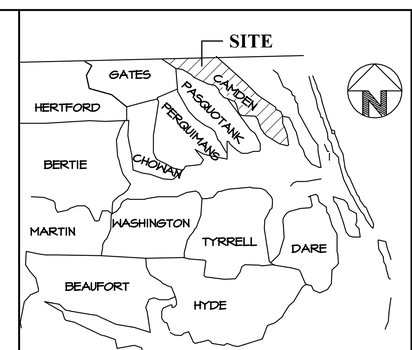

LOCATION MAP

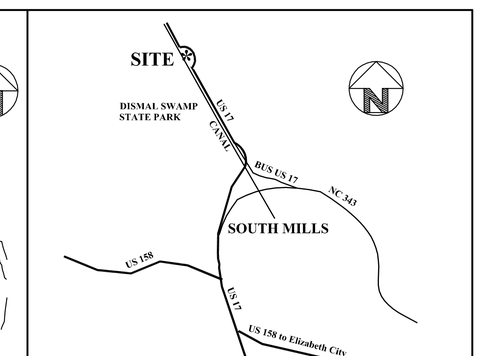

VICINITY MAP

BID DOCUMENTS

LISA LARKIN KEEL REGISTERED ARCHITECT 6195 NORTH CAROLINA RALEIGH, N.C.
Docusigned by: Lisa L. Keel 8/12/2014
SEAL: SEAL NOT VALID UNLESS SIGNED AND DATED

DESIGNED BY:
FACILITIES DESIGN
ARCHITECTS & ENGINEERS
FACILITIES MANAGEMENT DIVISION, NCDOT
1 SOUTH WILMINGTON STREET
RALEIGH, NORTH CAROLINA 27601
PH:919/707-4540 FAX:919/715-0369

CONSULTANT:

DRAWING TITLE / DESCRIPTION: TITLE SHEET/ EGRESS PLAN

PROJECT TITLE: CAMDEN COUNTY REST AREA REFURBISHMENT
2356 HWY 17 NORTH, SOUTH MILLS NC 27976
CAMDEN COUNTY, NORTH CAROLINA

SCO ID NO.	14-11342-01A
-	-
WBS NO.	36059.27
-	-

ASSET NUMBER: CO.# 15 - SITE.# 04 - BLDG.# 02

REVISIONS
NO. DATE

DATE ISSUED: 4/17/15
DRAWN BY: LK
CHECKED BY: -
SHEET NO.
T1