

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	DF15416.2150010 ETC.	1	
STATE PROJ. NO.	F.A. PROJ. NO.	DESCRIPTION	




STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

BEAUFORT COUNTY

LOCATIONS: LOCATION # 1 (NC 306) BAYVIEW FERRY TERMINAL
LOCATION # 2 (NC 306) AURORA FERRY TERMINAL

TYPE OF WORK: FERRY TERMINAL SITE WORK

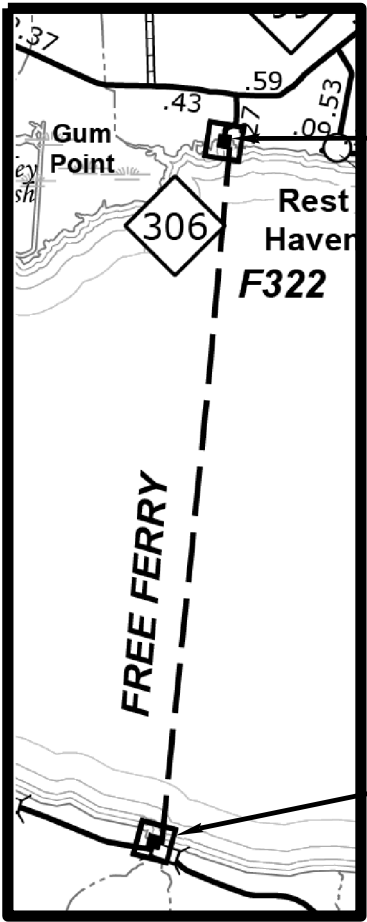

LOCATION # 1 BAYVIEW FERRY TERMINAL

LOCATION # 2 AURORA FERRY TERMINAL

CONTRACT NO.: DA00452 WBS ELEMENT : DF15416.2150010, ETC.

NOT TO SCALE

PROJECT LENGTH

N /A

Prepared in the Office of:
DIVISION OF HIGHWAYS


2018 STANDARD SPECIFICATIONS

LETTING DATE:

W.B. HOBBS, P.E.
DIVISION PROJECT MANAGER

C.E. SLACHTA
DIVISION PROPOSALS ENGINEER

DIVISION OF HIGHWAYS
STATE OF NORTH CAROLINA




PROJECT NO.	SHEET NO.
DF15416.2150010, DF15416.2151010	2

SUMMARY OF QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	TYP NO	LANES	LANE TYPE	FINAL SURFACE TESTING REQUIRED	WARM MIX ASPHALT REQUIRED	LENGTH	WIDTH	MOBILIZATION	POTABLE WATER HOSE SYSTEM	RESET LIGHT POLE	FENCE REMOVAL	REPLACE BATHROOM WALL	BREAKING AND RELOCATING EXISTING CONCRETE	CLEARING & GRUBBING	FINE GRADING	BORROW	FABRIC FOR SOIL STABILIZATION	15" DRAINAGE PIPE	15" CS PIPE CULVERT RESET	4" CONCRETE SIDEWALK	4" CONCRETE PICNIC TABLE PAD
										MI	FT														
DF15416.2150010	Beaufort	1.00	NC 306	BAYVIEW FERRY TERMINAL	1.00	2.00	2WU	NO	NO	0.10	22.00	1.00	1.00		260.00		90.00	1.00	1.00	300.00	100.00	50.00	1.00	50.00	32.00
DF15416.2151010	Beaufort	2.00	NC 306	AURORA FERRY TERMINAL	2.00	2.00	2WU	NO	NO	0.10	20.00	-	-	1.00	275.00	720.00		-	1.00	80.00		10.00			
GRAND TOTAL												1.00	1.00	1.00	535.00	720.00	90.00	1.00	2.00	380.00	100.00	60.00	1.00	50.00	32.00

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	TYP NO	LANES	LANE TYPE	FINAL SURFACE TESTING REQUIRED	WARM MIX ASPHALT REQUIRED	LENGTH	WIDTH	METAL LINE POSTS FOR 48" CHAINLINK FENCE	METAL TERMINAL POSTS FOR 48" CHAINLINK FENCE	METAL GATE POSTS FOR 48" CHAINLINK FENCE, DOUBLE GATE	DOUBLE GATES, 48" HIGH, 20' WIDE, 20' OPENING	CHAIN LINK FENCE	RIP RAP, CLASS B	TEMPORARY SILT FENCE	PERMANENT SOIL REINFORCEMENT MATTING	SEEDING & MULCHING	RESPONSE FOR EROSION CONTROL	CONCRETE WASHOUT STRUCTURE	CONCRETE STEPS	RESET HANDRAIL
										MI	FT													
DF15416.2150010	Beaufort	1.00	NC 306	BAYVIEW FERRY TERMINAL	1.00	2.00	2WU	NO	NO	0.10	20.00	18.00	2.00			215.00	40.00	600.00	230.00	1.00	2.00	1.00	10.00	2.00
DF15416.2151010	Beaufort	2.00	NC 306	AURORA FERRY TERMINAL	2.00	2.00	2WU	NO	NO	0.10	20.00	23.00	6.00	2.00	1.00	275.00	40.00	260.00		1.00	2.00			
GRAND TOTAL												41.00	8.00	2.00	1.00	490.00	80.00	860.00	230.00	2.00	4.00	1.00	10.00	2.00

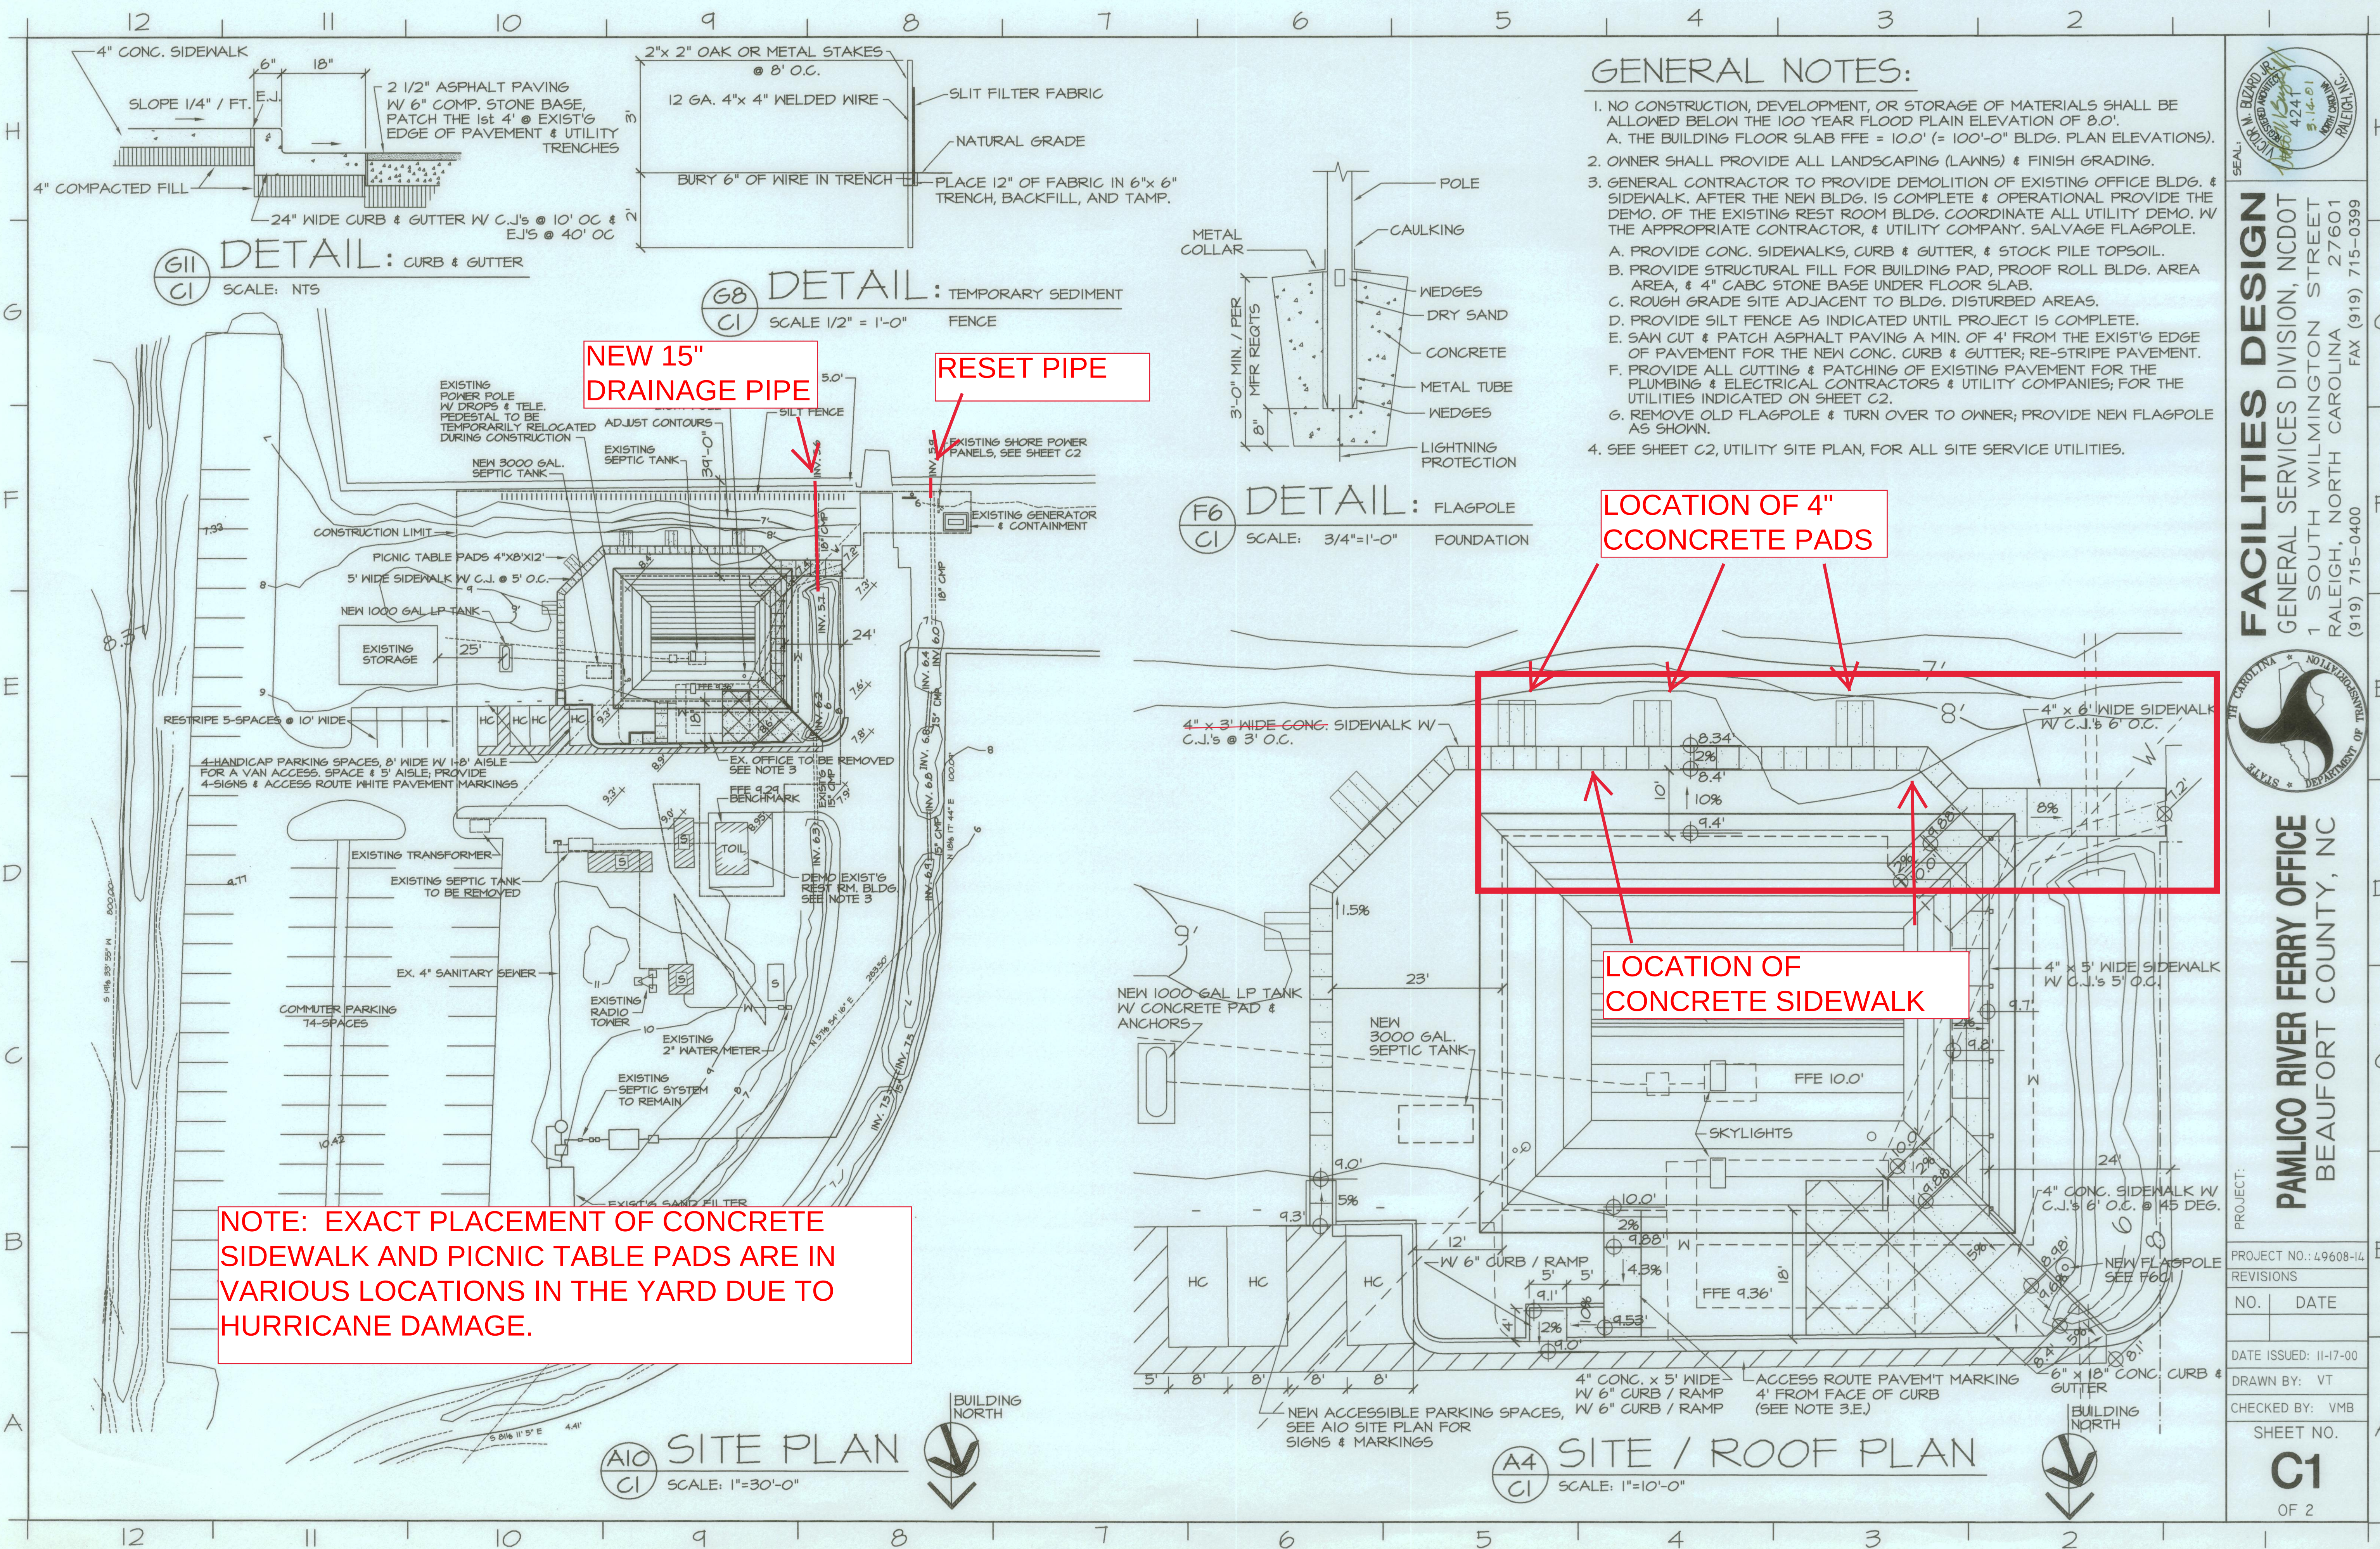

BAYVIEW:




LOCATIONS TO PLACE BROKEN CONCRETE



— = Existing Fence to be Removed

— = Install New Fence on top of Bulkhead

AURORA:

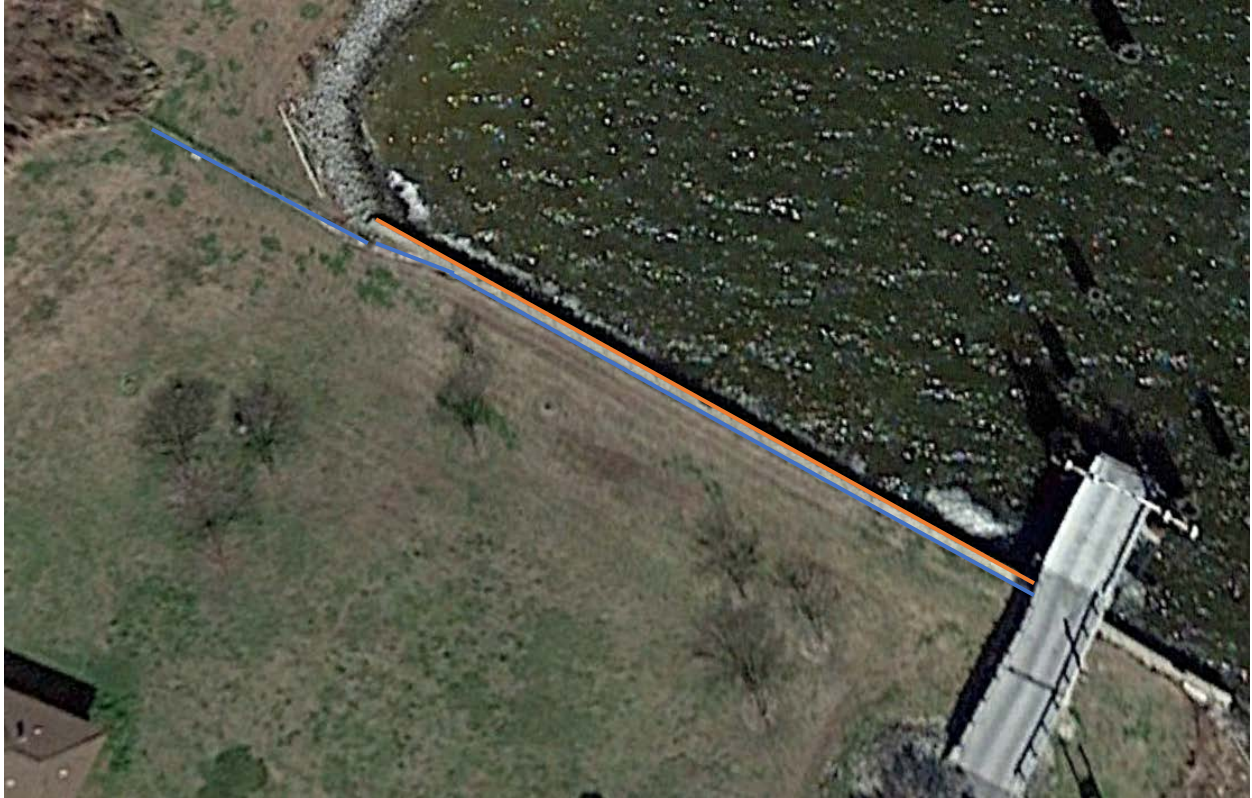

— = Existing Fence to be Removed
— = Install New Fence on top of Bulkhead



**PROPOSED 15"
DRAINAGE PIPE**