



PAT McCRORY
Governor

NICHOLAS J. TENNYSON
Secretary

ADDENDUM NO. 1

July 18, 2016

Contract No.: DK00144
TIP No.: EB-4411J
WBS Elements: 36333.3.FD10 & 2016CPT.11.18.10991
County: Yadkin
Description: Widening, Paving, Shoulder Construction, and Pavement Markings on NC 67
from SR 1549 to Bridge No. 35 over Yadkin River

July 21, 2016 Bid Opening

To Whom It May Concern:

Reference is made to the Contract Proposal recently furnished to you on the above-mentioned project. The following revisions have been made to the Contract Proposal:

Page 1, CONTRACT PROPOSAL COVER, has been revised. This revision corrected the WBS Element Number. Please void **Page 1** in your proposal and staple the **Revised Page 11** thereto.

Pages 105 and 106, CONTRACT BID FORMS, have been revised. This revision changed the Quantities for Pay Items #7 (Asphalt Concrete Base Course, Type B25.0B), #8 (Asphalt Concrete Intermediate Course, Type I19.0B), #10 (Asphalt Binder for Plant Mix). Also, the WBS Element Number has been corrected. Please void **Pages 105 and 106** in your proposal and staple the **Revised Page 105 and 106** thereto.

Reference is also made to the Project Plans for the above-mentioned project. The Typical Section found on Page 6 of the Project Plans has been revised to include pavement removal, up to 1' in width, within the existing pavement width to accommodate the 2' additional widening. The pavement removal areas will be denoted by the engineer and will be paid for as part of Pay Item # 2 (Grading).

The Acknowledgement of Receipt for this Addendum shall be signed by an authorized agent of the company and returned with the bid proposal. Bid Proposals submitted without this Addendum shall be considered irregular and will not be considered for award.

If you have any questions regarding this matter, please feel free to contact me at 336-903-9138.

Sincerely,

A handwritten signature in black ink that reads 'Joe L. Laws'.

Joe L. Laws, PE
Division Project Manager



Page 2
Contract DK00144
Addendum No. 1

cc: M. A. Pettyjohn, PE, Division Engineer
C. C. Reinhardt, PE, Division Maintenance Engineer
B. W. Whitaker, PE, District Engineer

Acknowledgement of Receipt

Company Name

Signature

Date

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
HIGHWAY DIVISION 11

PROPOSAL

DATE AND TIME OF BID OPENING: JULY 21, 2016 AT 2:00 PM

CONTRACT ID: DK00144

WBS ELEMENT NO.: 36333.3.FD10

FEDERAL AID NO.: STPEB-0067(007)

COUNTY: YADKIN

TIP NO.: EB-4411J

MILES: 4.16 MILES

ROUTE NO.: NC 67

LOCATION: FROM SR 1549 TO BRIDGE NO. 35 OVER YADKIN RIVER

**TYPE OF WORK: WIDENING, PAVING, SHOULDER CONSTRUCTION, AND
PAVEMENT MARKINGS**

NOTICE:

ALL BIDDERS SHALL COMPLY WITH ALL APPLICABLE LAWS REGULATING THE PRACTICE OF GENERAL CONTRACTING AS CONTAINED IN CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA WHICH REQUIRES THE BIDDER TO BE LICENSED BY THE N.C. LICENSING BOARD FOR CONTRACTORS WHEN BIDDING ON ANY NON-FEDERAL AID PROJECT WHERE THE BID IS \$30,000 OR MORE, EXCEPT FOR CERTAIN SPECIALTY WORK AS DETERMINED BY THE LICENSING BOARD. BIDDERS SHALL ALSO COMPLY WITH ALL OTHER APPLICABLE LAWS REGULATING THE PRACTICES OF ELECTRICAL, PLUMBING, HEATING AND AIR CONDITIONING AND REFRIGERATION CONTRACTING AS CONTAINED IN CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA. NOTWITHSTANDING THESE LIMITATIONS ON BIDDING, THE BIDDER WHO IS AWARDED ANY FEDERAL - AID FUNDED PROJECT SHALL COMPLY WITH CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA FOR LICENSING REQUIREMENTS WITHIN 60 CALENDAR DAYS OF BID OPENING.

BIDS WILL BE RECEIVED AS SHOWN BELOW:

THIS IS A ROADWAY PROJECT.

BID BONDS ARE REQUIRED.

NAME OF BIDDER

NC CONTRACTOR'S LICENSE NUMBER

ADDRESS OF BIDDER

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION BID FORM

WBS Element: 36333.3.FD10

Contract Number: DK00144

DESCRIPTION: Widening, Paving, Shoulder Construction, and Pavement Markings on NC 67 from SR 1549 to Bridge No. 35 over Yadkin River

PAGE 1 OF 2

LINE	ITEM NUMBER	SECT	DESCRIPTION	QUAN	UNIT	UNIT BID	AMOUNT BID
1	0000100000-N	800	MOBILIZATION	1	LS		
2	0043000000-N	226	GRADING	1	LS		
3	0106000000-E	230	BORROW EXCAVATION	832	CY		
4	1220000000-E	545	INCIDENTAL STONE BASE	500	TON		
5	1243000000-E	SP	SHOULDER CONSTRUCTION	8.32	SMI		
6	1330000000-E	607	INCIDENTAL MILLING	2,000	SY		
7	1489000000-E	610	ASPHALT CONC BASE COURSE, TYPE B25.0B	3,415	TON		
8	1498000000-E	610	ASPHALT CONC INTERMED COURSE, TYPE I19.0B	2,090	TON		
9	1519000000-E	610	ASPHALT CONC SURFACE COURSE, TYPE S9.5B	5,000	TON		
10	1575000000-E	620	ASPHALT BINDER FOR PLANT MIX	551	TON		
11	4413000000-E	SP	WORK ZONE ADV/GENERAL WARNING SIGNING	360	SF		
12	4457000000-N	SP	TEMP TRAFFIC CONTROL	1	LS		
13	4810000000-E	1205	PAINT PAVEMENT MARKING LINES (4")	175,718	LF		
14	4905000000-N	1253	SNOWPLOWABLE PAVEMENT MARKERS	275	EA		
15	6000000000-E	1605	TEMPORARY SILT FENCE	400	LF		
16	6009000000-E	1610	STONE FOR EROSION CONTROL, CLASS B	50	TON		
17	6012000000-E	1610	SEDIMENT CONTROL STONE	75	TON		
18	6015000000-E	1615	TEMPORARY MULCHING	0.50	AC		
19	6036000000-E	1631	MATTING FOR EROSION CONTROL	50	SY		
20	6042000000-E	1632	1/4" HARDWARE CLOTH	100	LF		
21	6071010000-E	SP	WATTLE	100	LF		
22	6084000000-E	1660	SEEDING & MULCHING	5.20	AC		

CONTINUED ON PAGE 2

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION BID FORM

WBS Element: 36333.3.FD10

Contract Number: DK00144

DESCRIPTION: Widening, Paving, Shoulder Construction, and Pavement Markings on NC 67 from SR 1549 to Bridge No. 35 over Yadkin River

PAGE 2 OF 2


LINE	ITEM NUMBER	SECT	DESCRIPTION	QUAN	UNIT	UNIT BID	AMOUNT BID
23	6090000000-E	1661	SEED FOR REPAIR SEEDING	50	LB		
24	6093000000-E	1661	FERTILIZER FOR REPAIR SEEDING	0.75	TON		

TOTAL BID FOR PROJECT: _____

THIS SECTION TO BE COMPLETED BY NORTH CAROLINA DEPARTMENT OF TRANSPORTATION


This bid has been reviewed in accordance with Article 103-1 of the Standard Specifications for Roads and Structures 2012.

Reviewed by _____ (date)

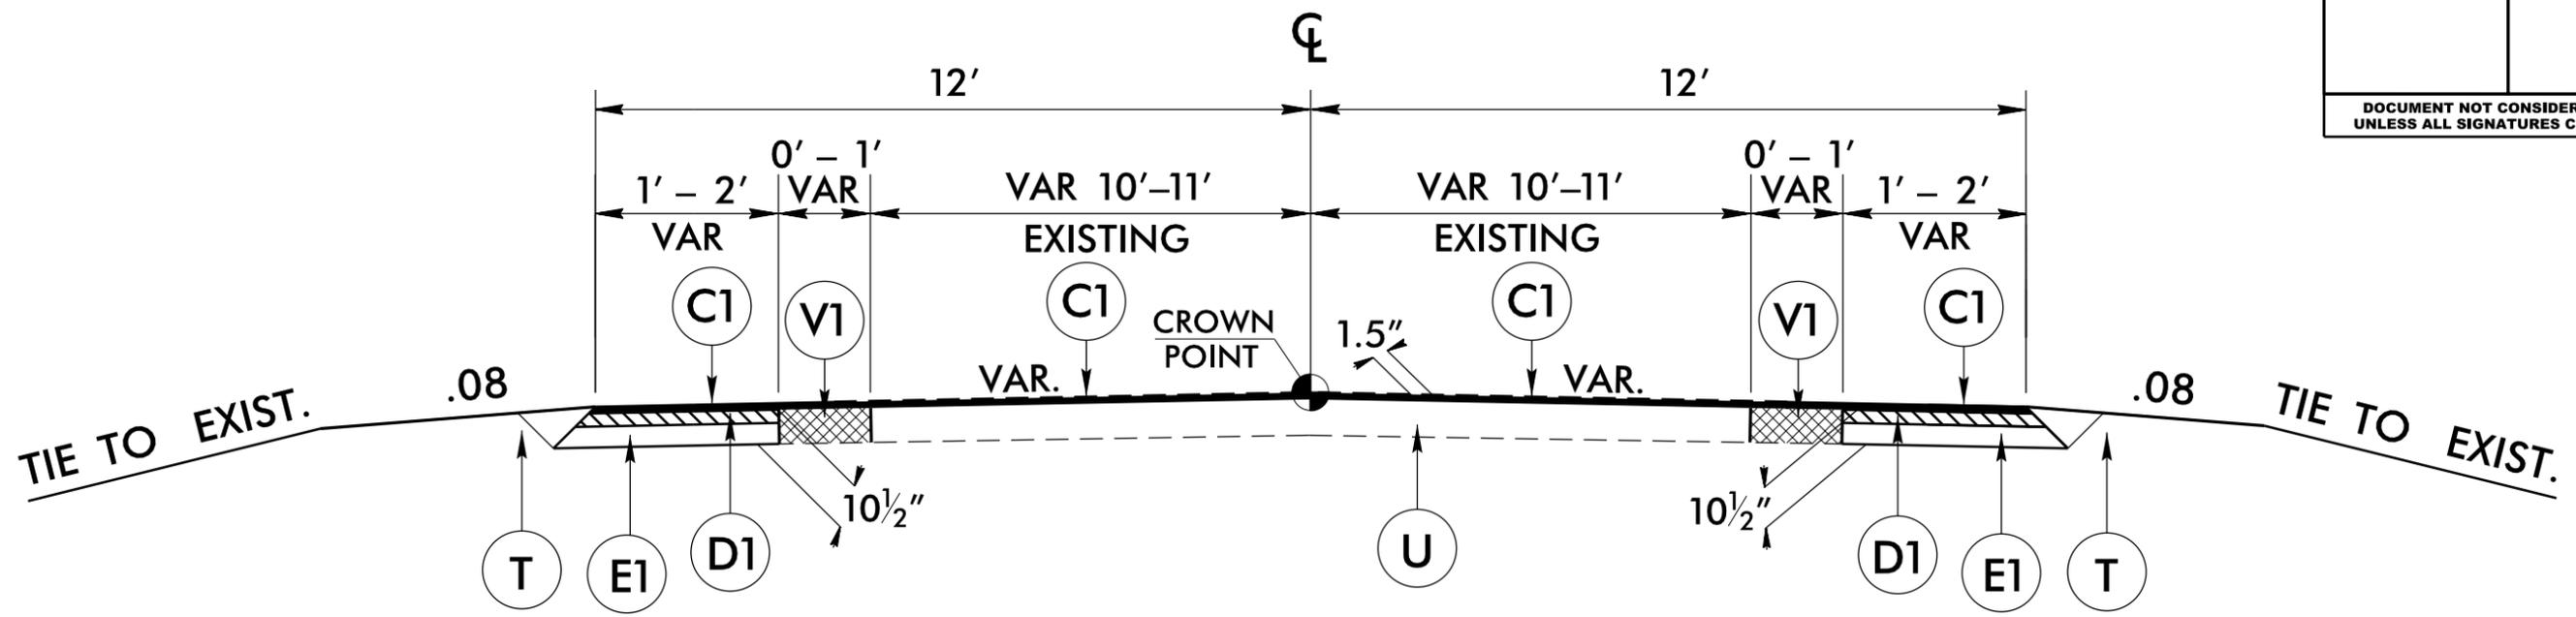

TYPICAL SECTION NO. 1

-L- STA. 10+00.00 TO STA. 229+43.47

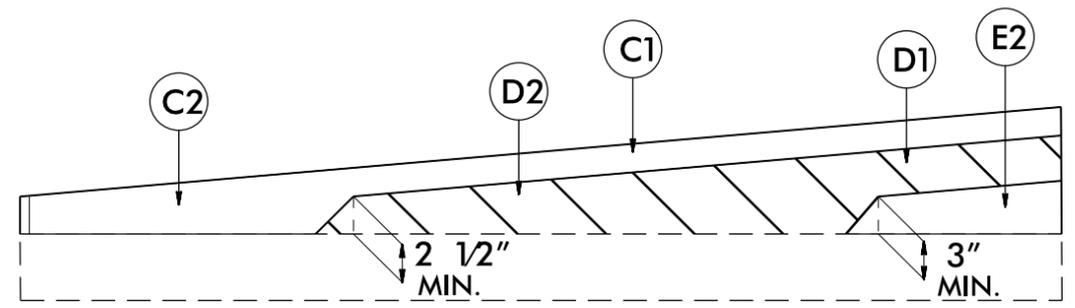

Wedging Detail For Resurfacing

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 1 1/2" IN DEPTH.
D1	PROP. APPROX. 3 1/2" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 399 LBS. PER SQ. YD.
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 2 1/2" IN DEPTH OR GREATER THAN 4" IN DEPTH.
E1	PROP. APPROX. 5 1/2" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD. CONTRACTOR MAY SUBSTITUTE I19.0B FOR B25.0B IF APPROVED BY ENGINEER.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5 1/2" IN DEPTH.
T	EARTH MATERIAL
U	EXISTING PAVEMENT
V1	PAVEMENT REMOVAL - 9" MIN. DEPTH. PAID FOR AS PART OF GRADING.
W	VARIABLE DEPTH ASPHALT PAVING (SEE WEDGING DETAIL)

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

6/2/99
18-JUL-2016 15:55
C:\Users\j\Documents\Projects\Manager\Contracts\Division\DK00144 - EB-4411J\CADD Files\EB-4411J_Rdy.txd