PROJECT REFERENCE NO.	SHEET NO.
WBS#: 43996.3.1	3-A
ROADWAY DESIGN ENGINEER	

PAVEMENT SCHEDULE

(FINAL PAVEMENT DESIGN)

C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B AT AN AVERAGE RATE OF 168lbs/sy.	C5	PROP. APPROX. 3" ASPHALT CONCRETE BASE COURSE WEDGING TYPE, I-19 B AT AN AVERAGE RATE OF 342 lbs/sy
C2	PROP. APPROX. 3" I-19 B AT AN AVERAGE RATE OF 342 LBS/SY	C6	EARTH SHOULDER
C3	PROP APPROX. 8" AGGREGATE BASE COURSE	U	EXISTING PAVEMENT.
C4	PROP. APPROX. 11" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B AT AN AVERAGE RATE OF 1254 lbs/sy.	T	EARTH MATERIAL.

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE

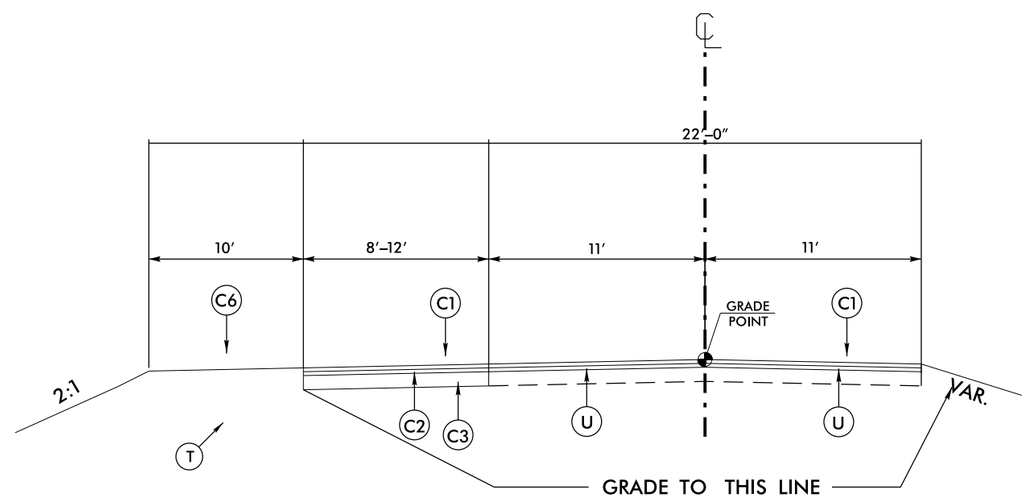

TYPICAL SECTION NO. 2

–L– Sta 18+75 to Sta. 26+45

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE

6/2/99
06-MAR-2005 08:27
S:\Dis\Che\Ser\NC141_TURNLANE_Rowland Hill\dgn\TITLE SHEETS & MISC\nc 141_TURNLANE 43996.3.1 TYPICAL PAVEMENT SECTIONS.dgn
Schroeder
ALTRIA\FOD\22\166