PROJECT REFERENCE NO.		SHEET NO.
14CR.20871.13		4
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION
14CR.20871.13		

TYPICAL 3

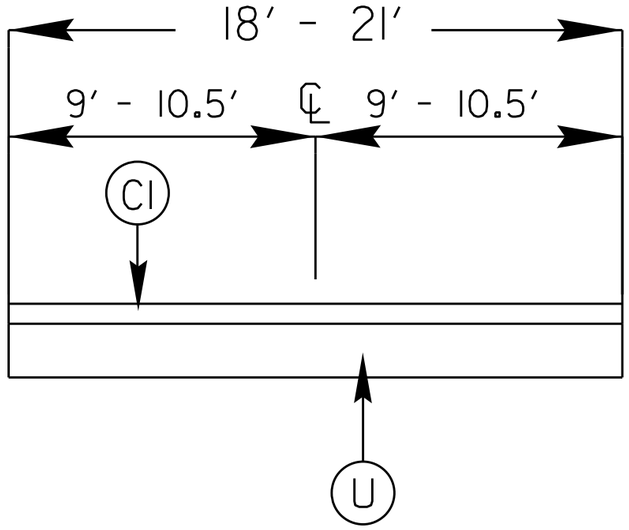

SURFACING SCHEDULE

ITEM NO	DESCRIPTION
C1	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS PER SQ. YD.
C2	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 336 LBS PER SQ. YD. PLACE IN 2 EQUAL 1½" LIFTS
D1	PROP. APPROX. 3" ASPHALT CONCRETE INTEMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 342 LBS PER SQ. YD.
V1	MILLED ASPHALT PAVEMENT 1 1/2" IN DEPTH AT LOCTIONS AS DIRECTED BY PROJECT ENGINEER
V2	MILLED ASPHALT PAVEMENT 3" IN DEPTH AT LOCTIONS AS DIRECTED BY PROJECT ENGINEER
U	EXISTING ASPHALT