PROJECT REFERENCE NO.		SHEET NO.
14CR.10381.6		1
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION
14CR.10381.6		

GRAHAM COUNTY

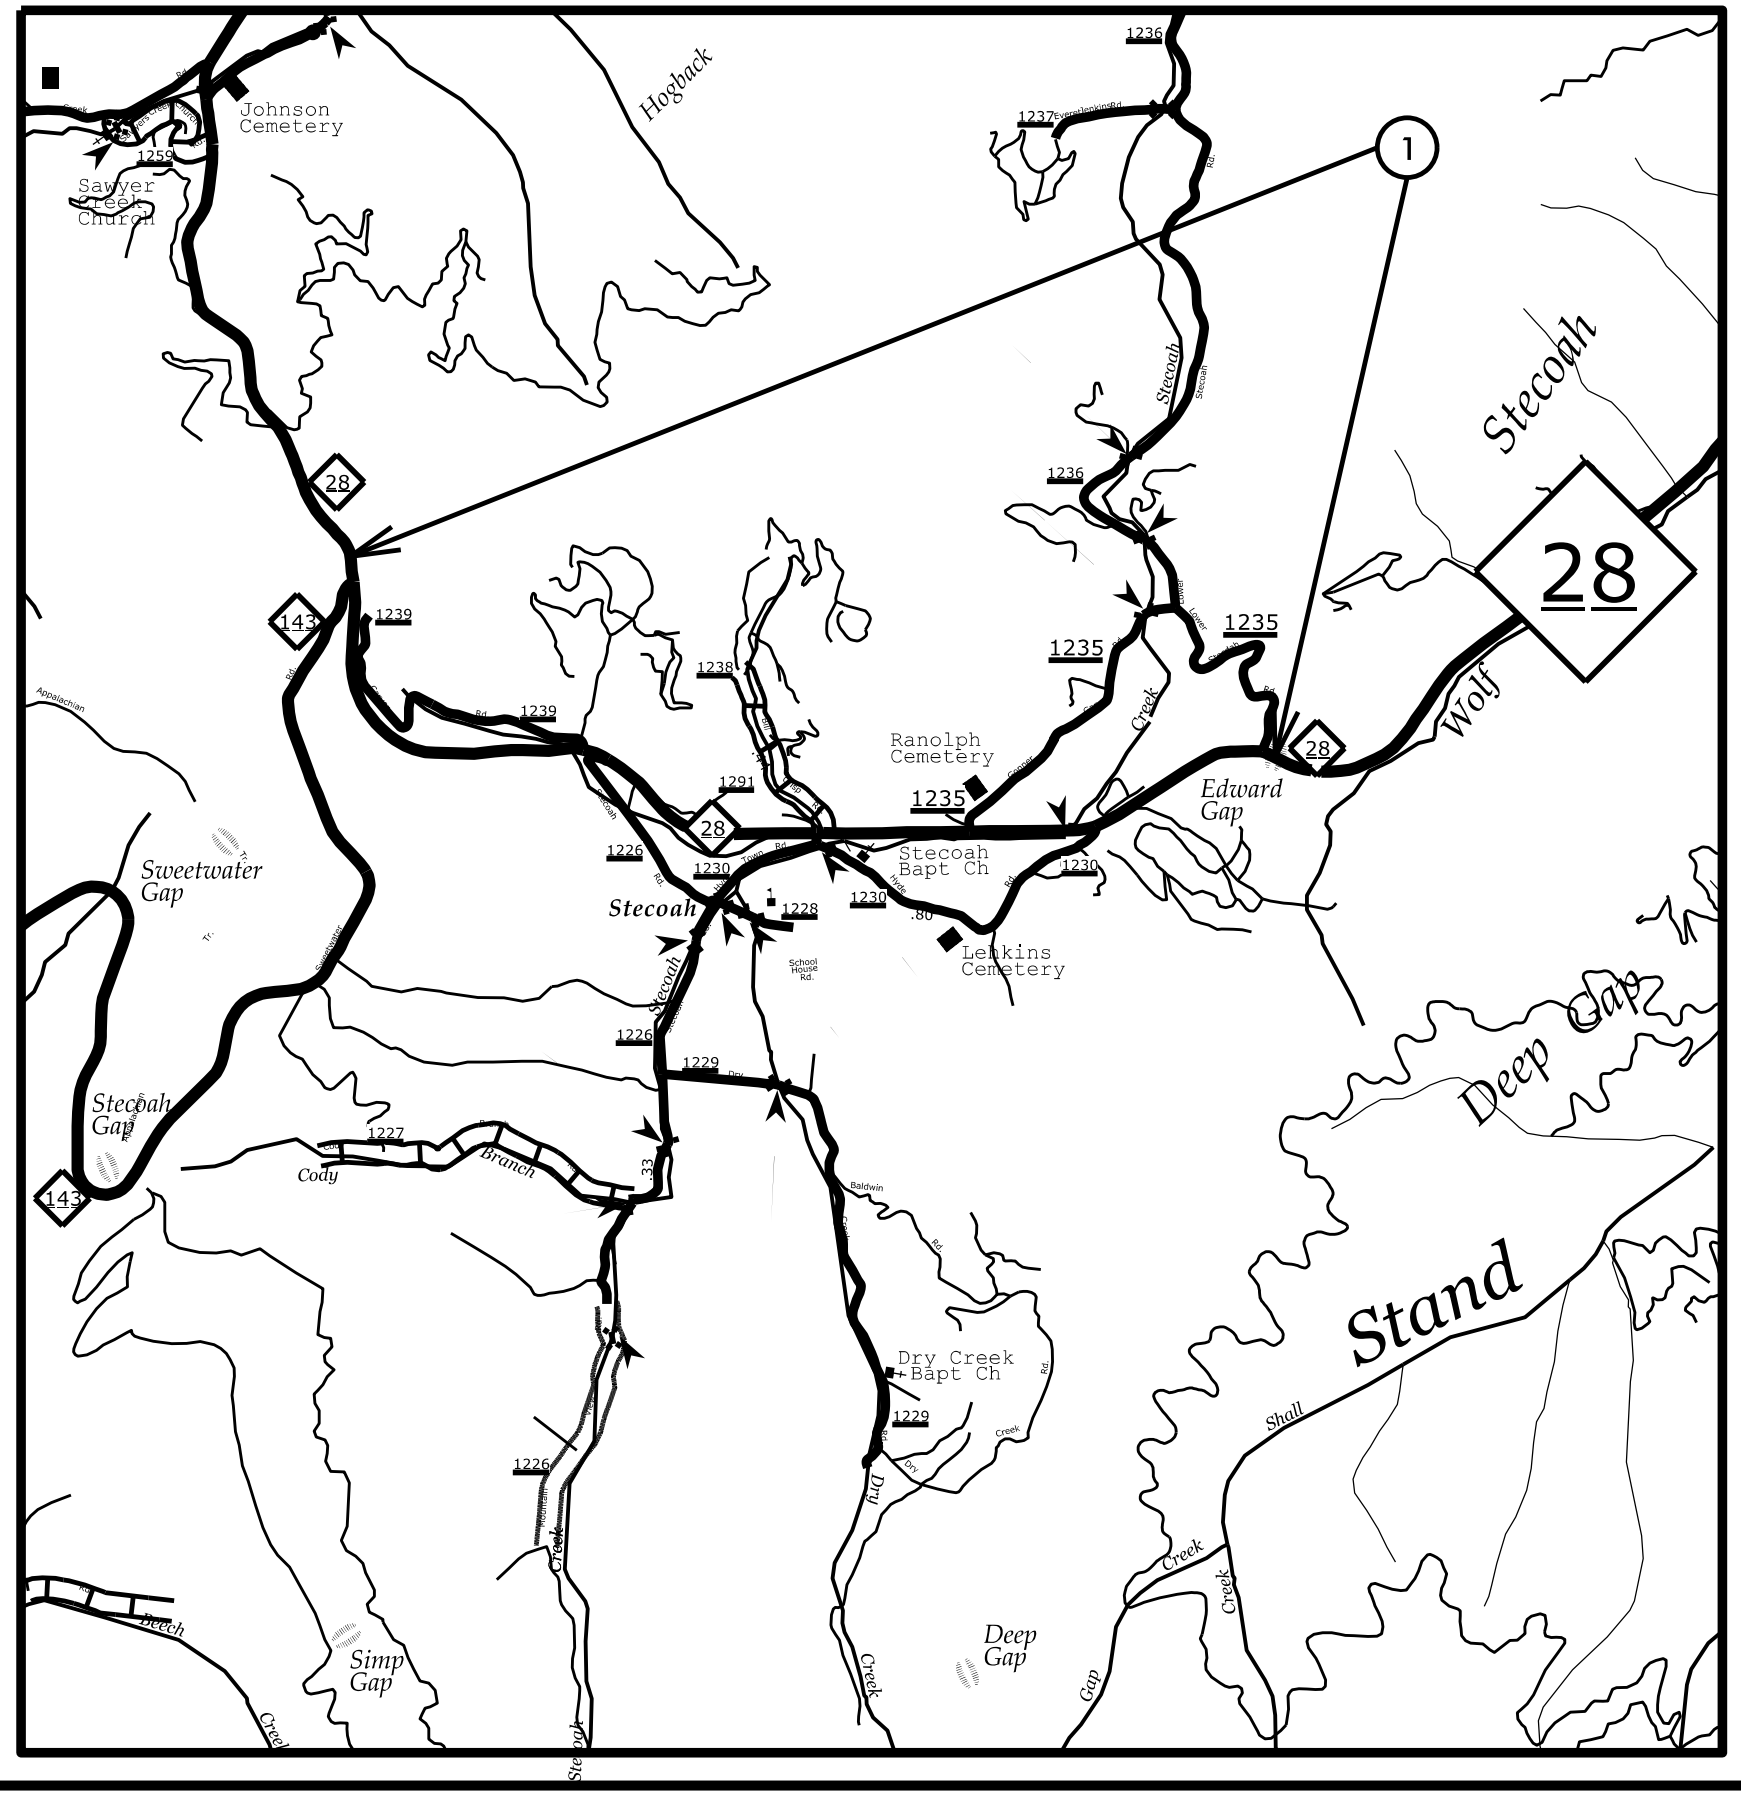

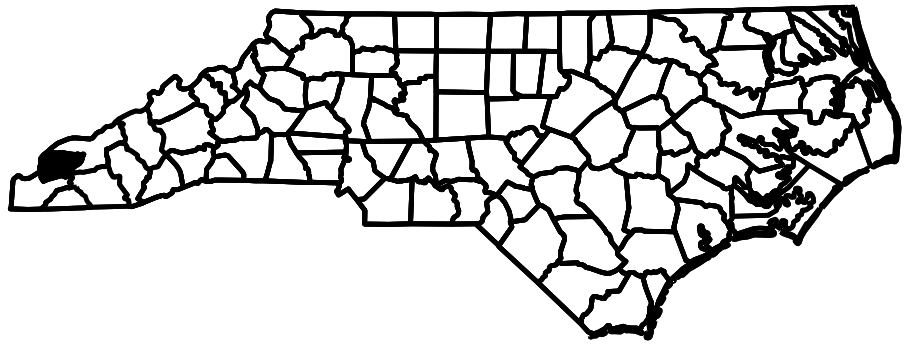

PROJECT REFERENCE NO.		SHEET NO.
14CR.10381.6		2
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION
14CR.10381.6		

TYPICAL 1

NC–28 GRAHAM

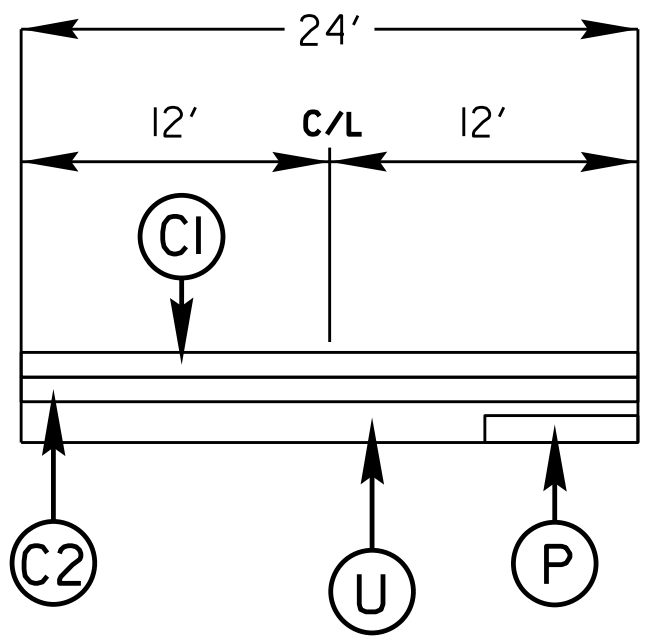

SURFACING SCHEDULE

ITEM NO	DESCRIPTION
C1	PROP. APPROX. 1 ½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. APPROX. 3/4" ASPHALT CONCRETE LEVELING SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 70 LBS. PER SQ. YD.
U	EXISTING ASPHALT
P	ASPHALT PLANT MIX, FOR PAVEMENT REPAIR AT LOCATIONS AS DIRECTED BY PROJECT ENGINEER

PROJECT NO.	SHEET NO	TOTAL NO.
14CR.10381.6	3	3

SUMMARY OF QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	TYP NO	LANES	LANE TYPE	FINAL SURFACE TESTING REQUIRED	WARM MIX ASPHALT REQUI	LENGTH MI	WIDTH FT	SURFACE COURSE, S9.5B TONS	ASPHALT SURFACE COURSE (LEVELIN TN	ASPHALT BINDER FOR TONS	PATCHING EXISTING PAVEMENT TONS
14CR.10381.6	Graham	1	NC28	FROM .01 MILES EAST OF SR-1235 TO .02	1	2	2WU	NO	NO	2.62	24	3,364	2,073	326	568
TOTAL FOR MAP NO. 1										**2.62**		**3,364**	**2,073**	**326**	**568**
TOTAL FOR PROJ NO. 14CR.10381.6										**2.62**		**3,364**	**2,073**	**326**	**568**
GRAND TOTAL										**2.62**		**3,364**	**2,073**	**326**	**568**

THERMOPLASTIC AND PAINT QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	TYP NO	LANES	LANE TYPE	LENGTH	WIDTH	4399000000 TEMORARY TRAFFIC CONTROL LS	0000000 WORK ZONE SIGN (STATIONARY) SF	0000000 24" X 120 M WHITE THERMO LF	4710000000- THERMO LT ARROW 90 M EA	4725000000-E THERMO RT ARROW 90 M EA	4810000000-E 4" WHITE PAINT LF	4810000000-E 4" YELLOW PAINT LF	835000000- 24" WHITE PAINT LF	4845000000-N PAINT LT ARROW EA	4845000000-N PAINT RT ARROW EA	4891000000-E (THERMOPLASTIC PAVEMENT MARKING LINE, 50 MILS 4") LF	4891000000-E (THERMOPLASTIC PAVEMENT MARKING LINE, 50 MILS 8") LF	905000000- SNOW PLOWABLE MARKERS EA
14CR.10381.6	Graham	1	NC28	FROM .01 MILES EAST OF SR-1235 TO .02	1	2	2WU	2.62	24	1	96.0	160	1	2	28,191	28,191	160	2	6	56,382.00	120.00	212
TOTAL FOR MAP NO. 1								**2.62**		**1**	**96**	**160**	**1**	**2**	**28,191**	**28,191**	**160**	**2**	**6**	**56,382**	**120**	**212**
TOTAL FOR PROJ NO. 14CR.10381.6								**2.62**		**1**	**96**	**160**	**1**	**2**	**28,191**	**28,191**	**160**	**2**	**6**	**56,382**	**120**	**212**
													3		**56,382**			**8**		**56,502**		
GRAND TOTAL								**2.62**		**1**	**96**	**160**	**1**	**2**	**28,191**	**28,191**	**160**	**2**	**6**	**56,382**	**120**	**212**
													3		**56,382**			**8**		**56,502**		