T.I.P.: BP-5500BB

TIP NO.	SHEET NO.
BP-5500BB	PMP-1

APPROVED:
DATE: 5/29/14

SEAL
NORTH CAROLINA PROFESSIONAL SEAL 022959 ENGINEER RONALD W. KING

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

PAVEMENT MARKING PLAN
HENDERSON COUNTY
LOCATION: BRIDGE No.30 OVER SR 1834 ON I-26 WB

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	PAVEMENT MARKINGS - TWO-LANE AND MULTILANE ROADWAYS
1205.12	PAVEMENT MARKINGS - BRIDGES
1250.01	RAISED PAVEMENT MARKERS - INSTALLATION SPACING
1251.01	RAISED PAVEMENT MARKERS - PERMANENT AND TEMPORARY
1253.01	RAISED PAVEMENT MARKERS - SNOWPLOWABLE

GENERAL NOTES

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN, OR DIRECTED BY THE ENGINEER.

A) INSTALL PAVEMENT MARKINGS AND PAVEMENT MARKERS ON THE FINAL SURFACE AS FOLLOWS:

ROAD NAME	MARKING	MARKER
I-26 WB BRIDGE DECK	THERMOPLASTIC PAINT	SNOWPLOWABLE NONE

B) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.

C) REMOVE/REPLACE ANY CONFLICTING/DAMAGED PAVEMENT MARKINGS AND MARKERS.

D) REMOVE ALL RESIDUE AND SURFACE LAITANCE BY ACCEPTABLE METHODS ON CONCRETE BRIDGE DECKS PRIOR TO PLACING PAINT PAVEMENT MARKING MATERIAL.

BP-5500BB
BRIDGE #30
HENDERSON COUNTY
I-26WB OVER SR 1834

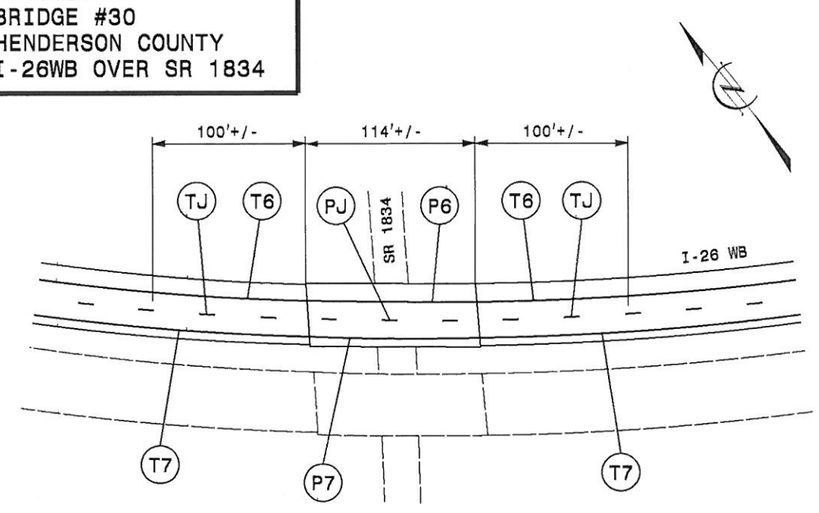

PAINT
- P6 WHITE EDGELINE (6")
- P7 YELLOW EDGELINE (6")
- PJ 10 FT. WHITE SKIP (6")

THERMOPLASTIC
- T6 WHITE EDGELINE (6")
- T7 YELLOW EDGELINE (6")
- TJ 10 FT. WHITE SKIP (6")

PAVEMENT MARKING SCHEDULE

SYMB	DESCRIPTION
	FINAL PAVEMENT MARKINGS
	PAINT (6")
P6	WHITE EDGELINE (2X)
P7	YELLOW EDGELINE (2X)
PJ	10 FT. WHITE SKIP (2X)
	THERMO (6", 120 MILS)
TJ	10 FT. WHITE SKIP
	THERMO (6", 90 MILS)
T6	WHITE EDGELINE
T7	YELLOW EDGELINE
	MARKERS
	SNOWPLOWABLE RAISED PAVEMENT MARKERS
MF	CRYSTAL & RED

NOTE: FOR EACH PAINT PAVEMENT MARKING ITEM, 2X IMPLIES TWO APPLICATIONS.

PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT

KELVIN L. JORDAN	SIGNING & DELINEATION REGIONAL ENGINEER
DERRICK H. BEARD	SIGNING & DELINEATION PROJECT DESIGN ENGINEER

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION

INDEX

SHEET NO.	DESCRIPTION
PMP-1	PAVEMENT MARKING PLAN TITLE AND SCHEDULE SHEET AND PAVEMENT MARKING DETAIL

29-MAY-2014 6:04
S:\OUTTIP\PROJECTS\BP-5500\Pavement Marking Seed.dgn
dbeard AT TE2058382