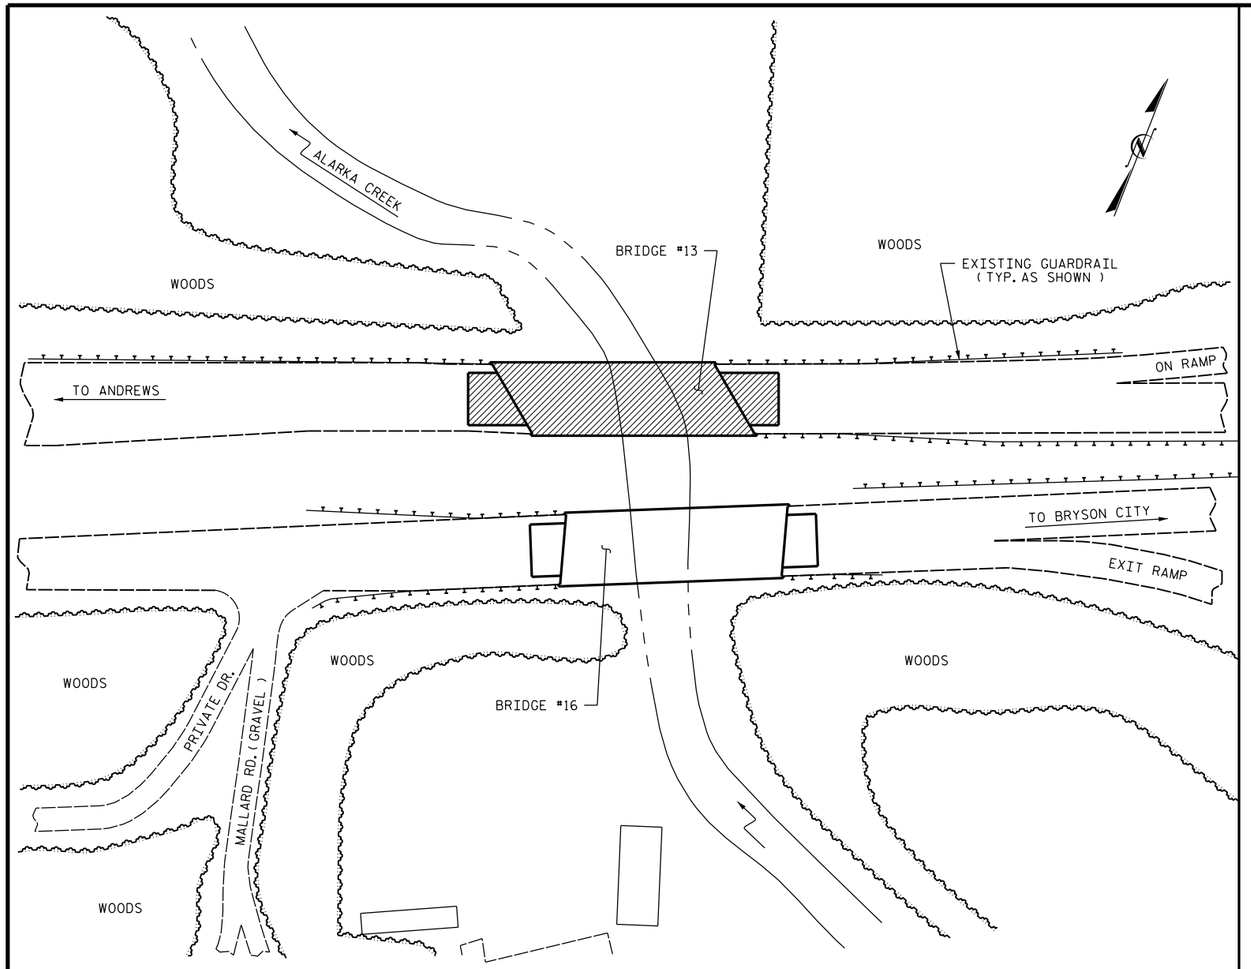

LOCATION SKETCH

NOTES:

EXISTING DIMENSIONS AND BRIDGE CONDITION ARE FROM BEST INFORMATION AVAILABLE. THE CONTRACTOR SHALL FIELD VERIFY THE INFORMATION SHOWN ON THE PLANS AND NOTIFY THE ENGINEER IF ACTUAL DIMENSIONS AND CONDITIONS DIFFER.

IT IS THE CONTRACTOR'S RESPONSIBILITY TO FOLLOW ALL STATE AND FEDERAL SAFETY REQUIREMENTS.

THE CONTRACTOR MUST COLLECT, TREAT AND DISPOSE OF RUN-OFF WATER FROM THE HYDRO-DEMOLITION PROCESS, SEE "MANAGING HYDRO-DEMOLITION WATER" SPECIAL PROVISION.

EXISTING JOINTS AND DECK DRAINS SHALL BE SEALED PRIOR TO BEGINNING SURFACE PREPARATION OF BRIDGE DECK.

DURING CONSTRUCTION, BERMS OR APPROPRIATE MEASURES SHALL BE USED TO ENSURE HYDRO-DEMOLITION WATER DOES NOT FLOW OR MIGRATE INTO ACTIVE TRAVEL LANES.

LONGITUDINAL CONSTRUCTION JOINTS OF OVERLAYS SHALL BE LOCATED ALONG THE CENTERLINE OR EDGE OF TRAVEL LANES.

ROADWAY MILLING IS INCLUDED TO ENSURE A SMOOTH TRANSITION ONTO THE BRIDGE FLOOR. DIMENSIONS SHOWN ARE APPROXIMATE. CONTRACTOR SHALL MILL AS REQUIRED TO PROVIDE A SMOOTH TRANSITION TO THE ROADWAY AT BOTH ENDS OF THE BRIDGE.

FOR "SCARIFYING BRIDGE DECK", "HYDRO-DEMOLITION OF BRIDGE DECK", AND "CLASS II SURFACE PREPARATION" SEE "OVERLAY SURFACE PREPARATION" SPECIAL PROVISION.

FOR OVERLAY OF BRIDGE DECK WITH "LATEX MODIFIED CONCRETE", SEE SPECIAL PROVISIONS.

FOR "SUBMITTAL OF WORKING DRAWINGS", SEE SPECIAL PROVISIONS.

FOR "FALSEWORK AND FORMWORK", SEE SPECIAL PROVISIONS.

FOR "CRANE SAFETY", SEE SPECIAL PROVISIONS.

FOR "GROUT FOR STRUCTURES", SEE SPECIAL PROVISIONS.

FOR CONTROL OF TRAFFIC AND LIMITS ON PHASING OF CONSTRUCTION, SEE TRANSPORTATION MANAGEMENT PLAN.

TOTAL BILL OF MATERIAL

INCIDENTAL MILLING	ASPHALT CONCRETE SURFACE COURSE TYPE S9.5B	GROOVING BRIDGE FLOORS	CLASS II SURFACE PREPARATION	LATEX MODIFIED CONCRETE OVERLAY	PLACING & FINISHING LATEX MODIFIED CONCRETE OVERLAY	SHOTCRETE REPAIR	EPOXY RESIN INJECTION	SCARIFYING BRIDGE DECK	HYDRO-DEMOLITION OF BRIDGE DECK
SQ. YDS.	TON	SQ. FT.	SQ. YDS.	CU. YDS.	SQ. YDS.	CU. FT.	LIN. FT.	SQ. YDS.	SQ. YDS.
1,148	97	9,025	1	59.0	1,069	15.2	43.10	1,069	1,069

PROJECT NO. BP-5500DD
SWAIN COUNTY
BRIDGE NO. 13
SHEET 2 OF 2

NORTH CAROLINA PROFESSIONAL SEAL 035635 ENGINEER DAVID N. SNOKE
4/21/14

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

GENERAL DRAWING

BRIDGE 13 ON US19 SOUTH & US74 WEST OVER ALARKA CREEK

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-2
1			3			TOTAL SHEETS
2			4			24

DRAWN BY : P.C. BREWER DATE : 2/14
CHECKED BY : D.N. SNOKE DATE : 4/14
DESIGN ENGINEER OF RECORD: - DATE : -

29-APR-2014 15:08
S:\PRS\POC\Squad C\Preservation_Projects\BP-5500\DD\SWAIN_13\860013_SD_GD.dgn
pbrewer