

**This electronic collection of documents is provided
for the convenience of the user
and is Not a Certified Document –**

**The documents contained herein were originally issued
and sealed by the individuals whose names and license
numbers appear on each page, on the dates appearing
with their signature on that page.**


**This file or an individual page
shall not be considered a certified document.**

TIP PROJECT: N/A


CONTRACT: DN00722

HAYWOOD COUNTY

PROJECT REFERENCE NO.			SHEET NO.
2021.CPT.14.04.20441			1
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION	
2021.CPT.14.04.10501		CONSTRUCTION	
2021.CPT.14.04.20501			
2021.CPT.14.04.20441			
2021.CPT.14.04.10441			

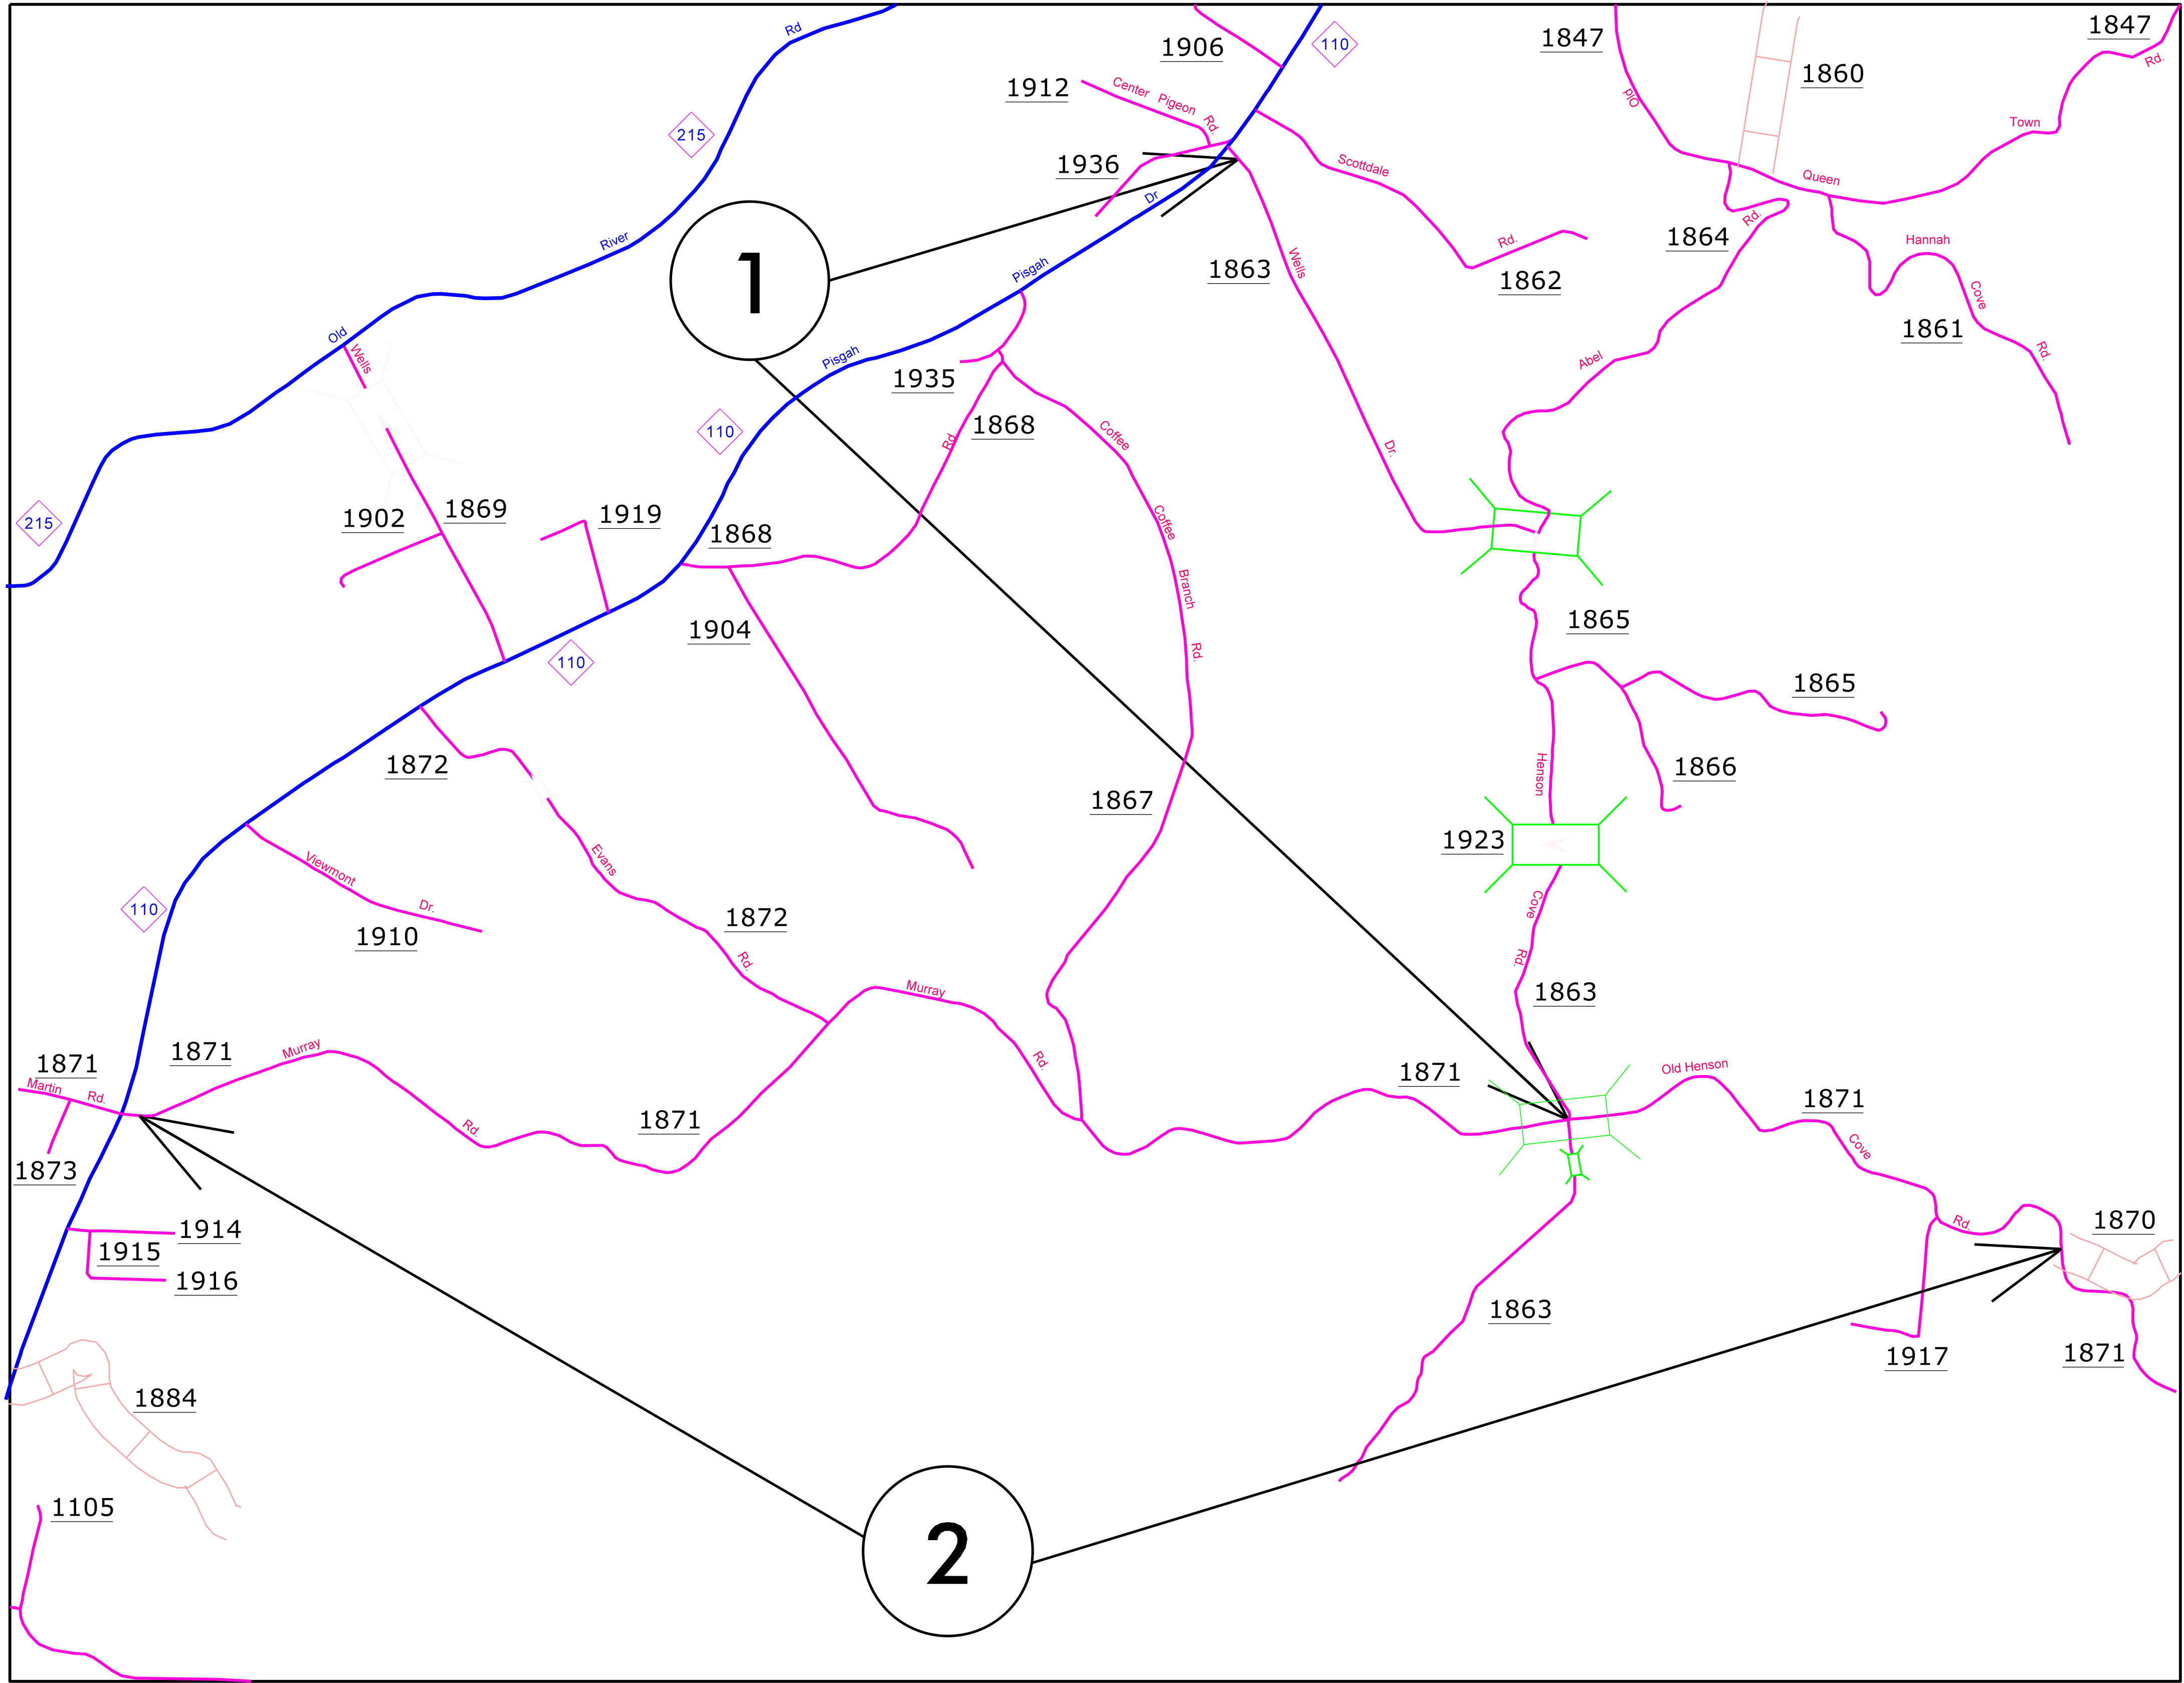


MAP 1

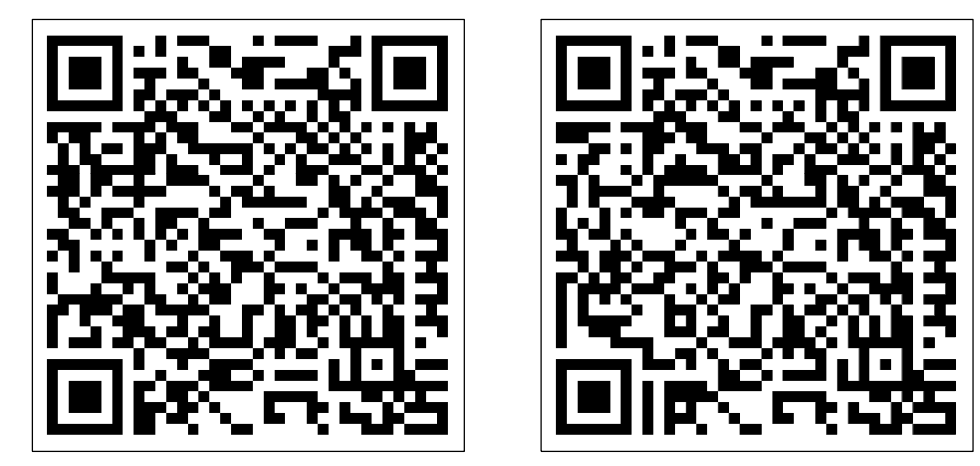

BEG END

MAP 2

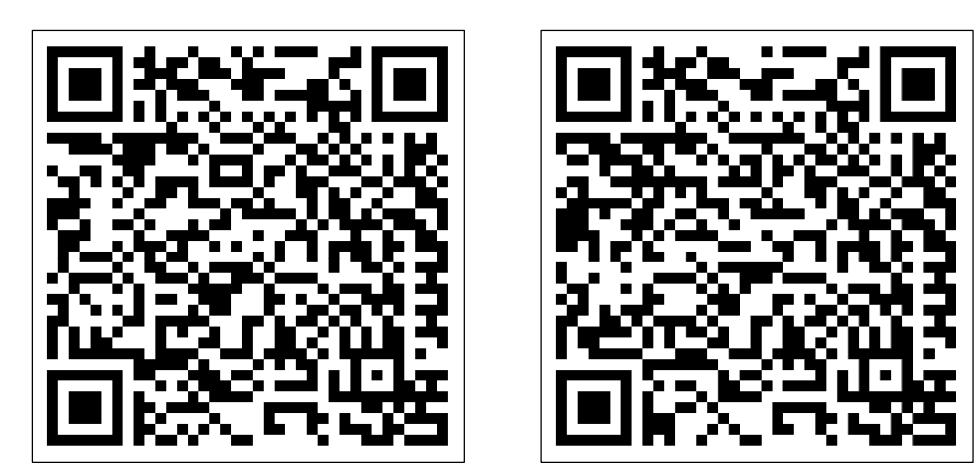


BEG END

CONTRACT: DN00722

TIP PROJECT: N/A

JACKSON COUNTY

PROJECT REFERENCE NO.		SHEET NO.
2021.CPT.14.04.20501		2
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION
2021.CPT.14.04.10501		CONSTRUCTION
2021.CPT.14.04.20501		
2021.CPT.14.04.20441		
2021.CPT.14.04.10441		

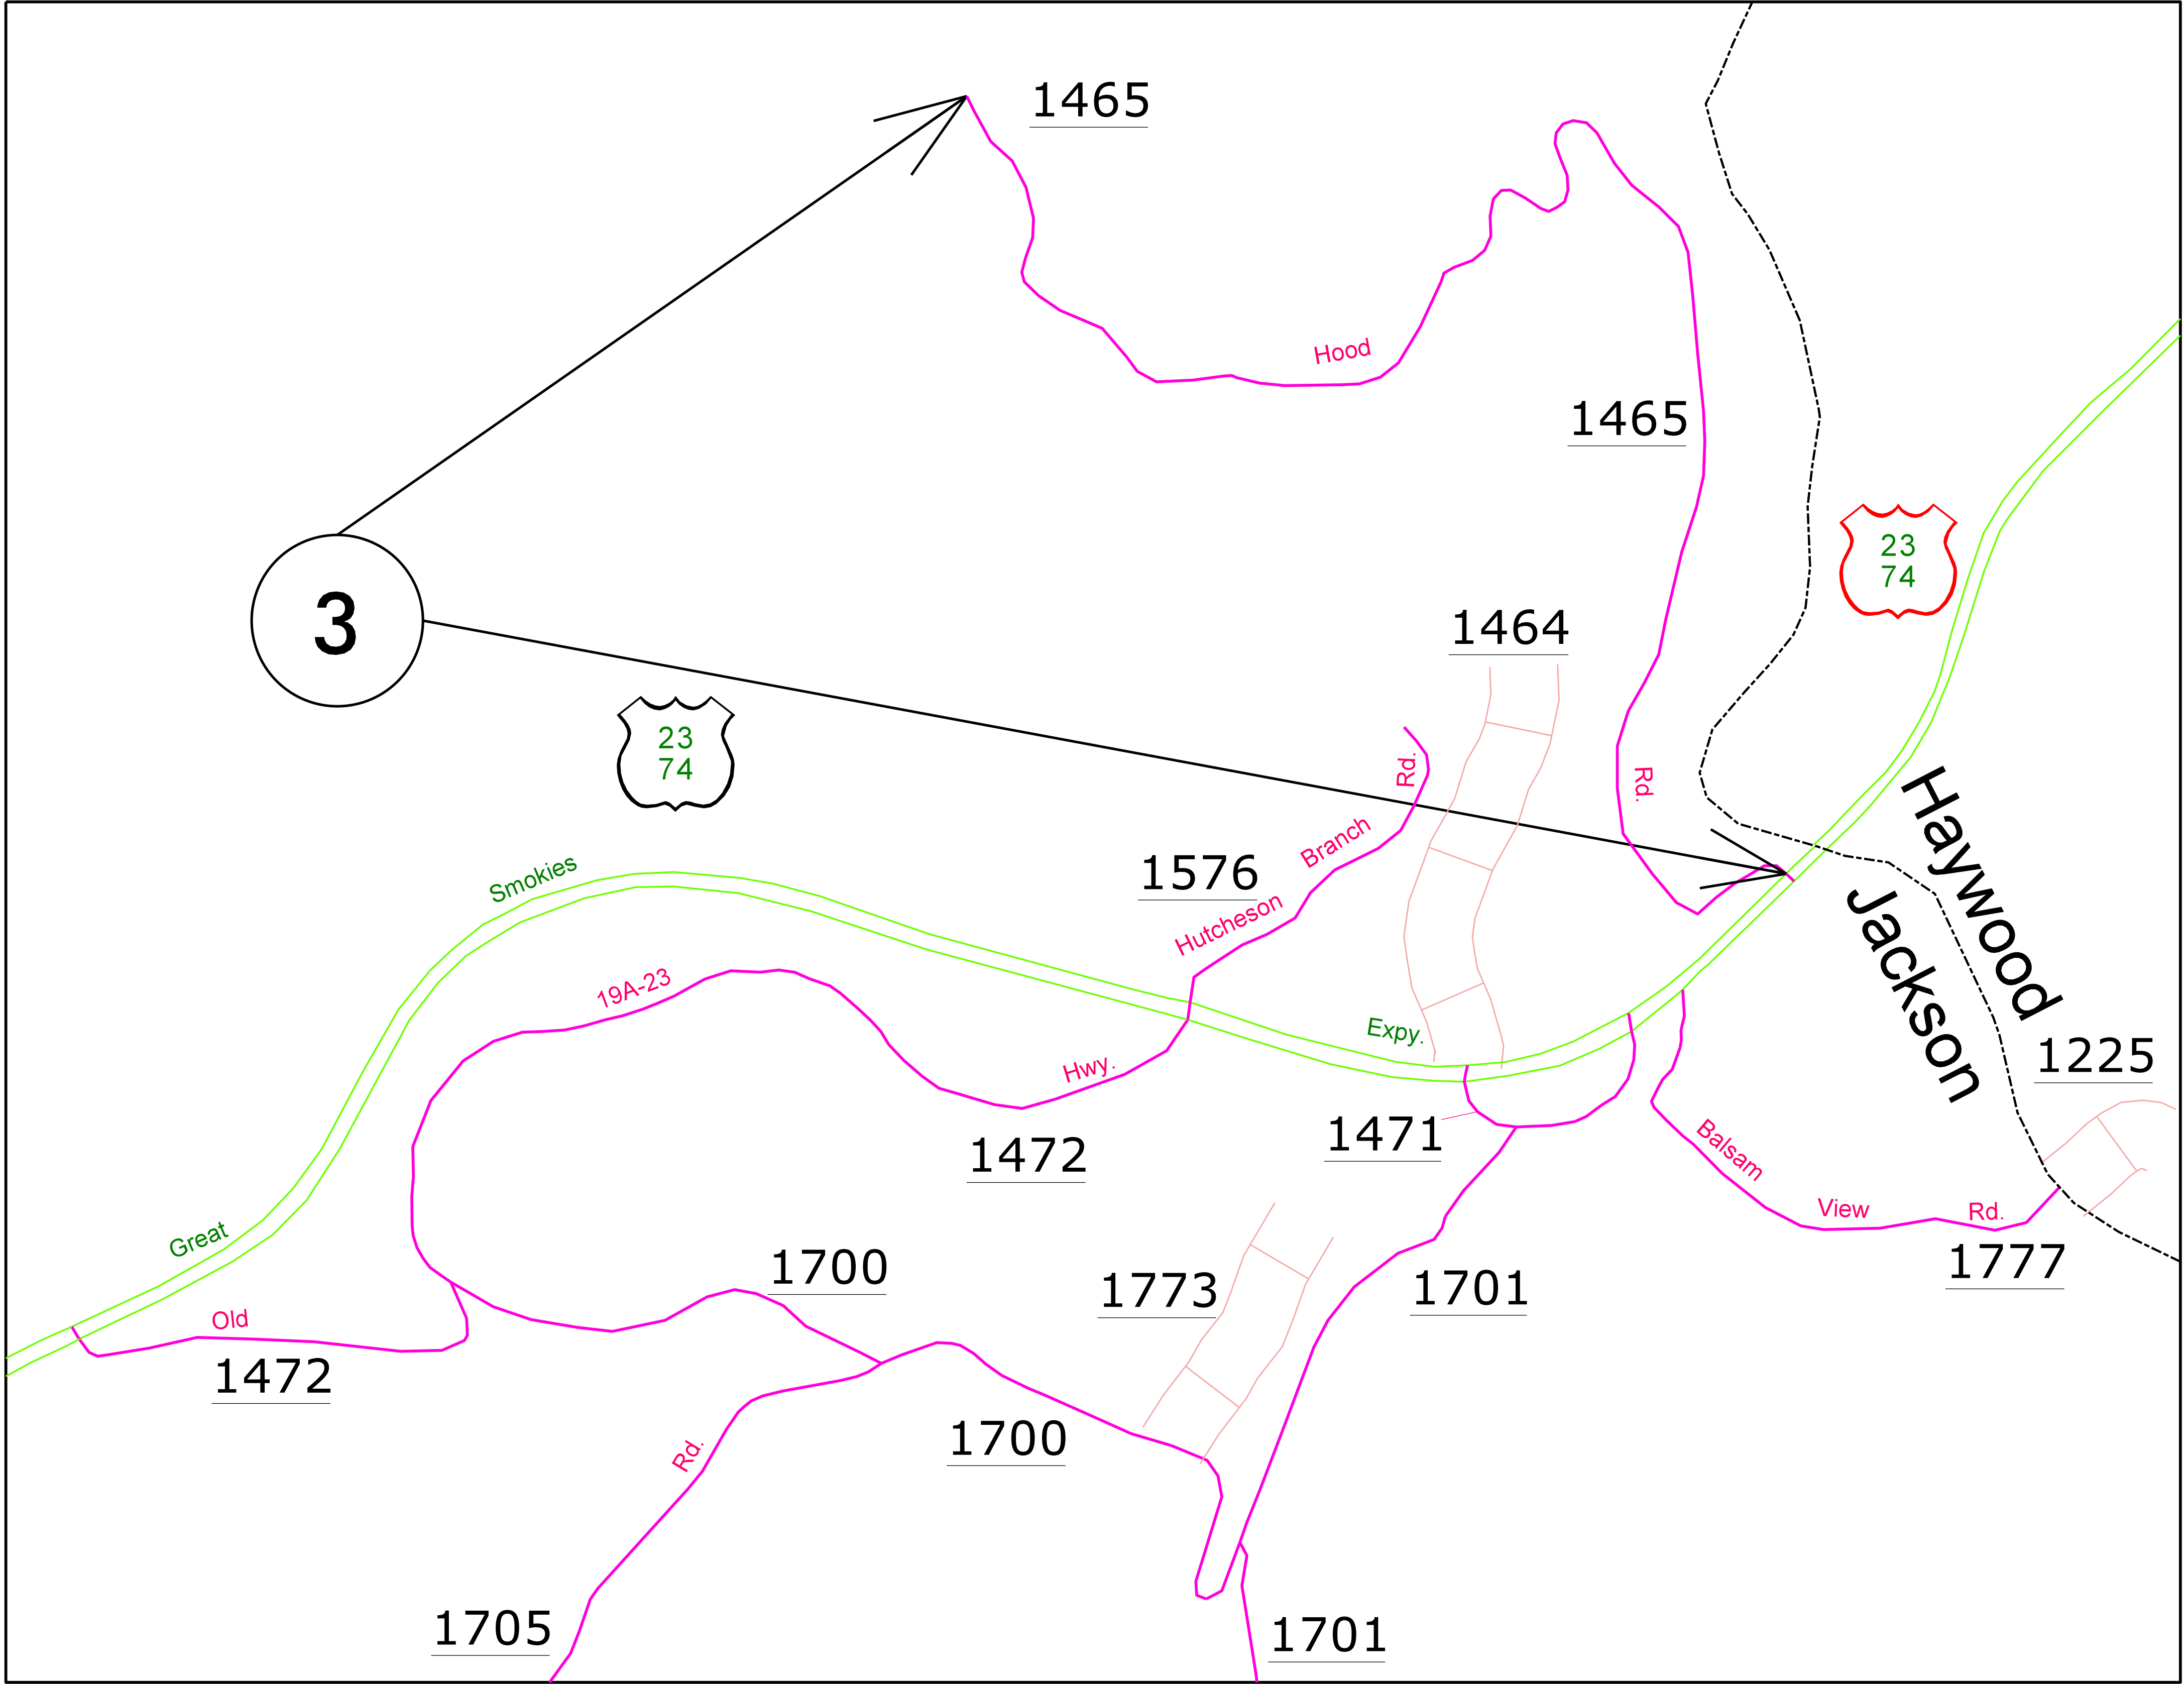

MAP 3



BEG




END

PROJECT REFERENCE NO.		SHEET NO.
2021.CPT.14.04.20501		3
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION
2021.CPT.14.04.10501		CONSTRUCTION
2021.CPT.14.04.20501		
2021.CPT.14.04.20441		
2021.CPT.14.04.10441		

JACKSON COUNTY

TIP PROJECT: N/A

CONTRACT: DN00722

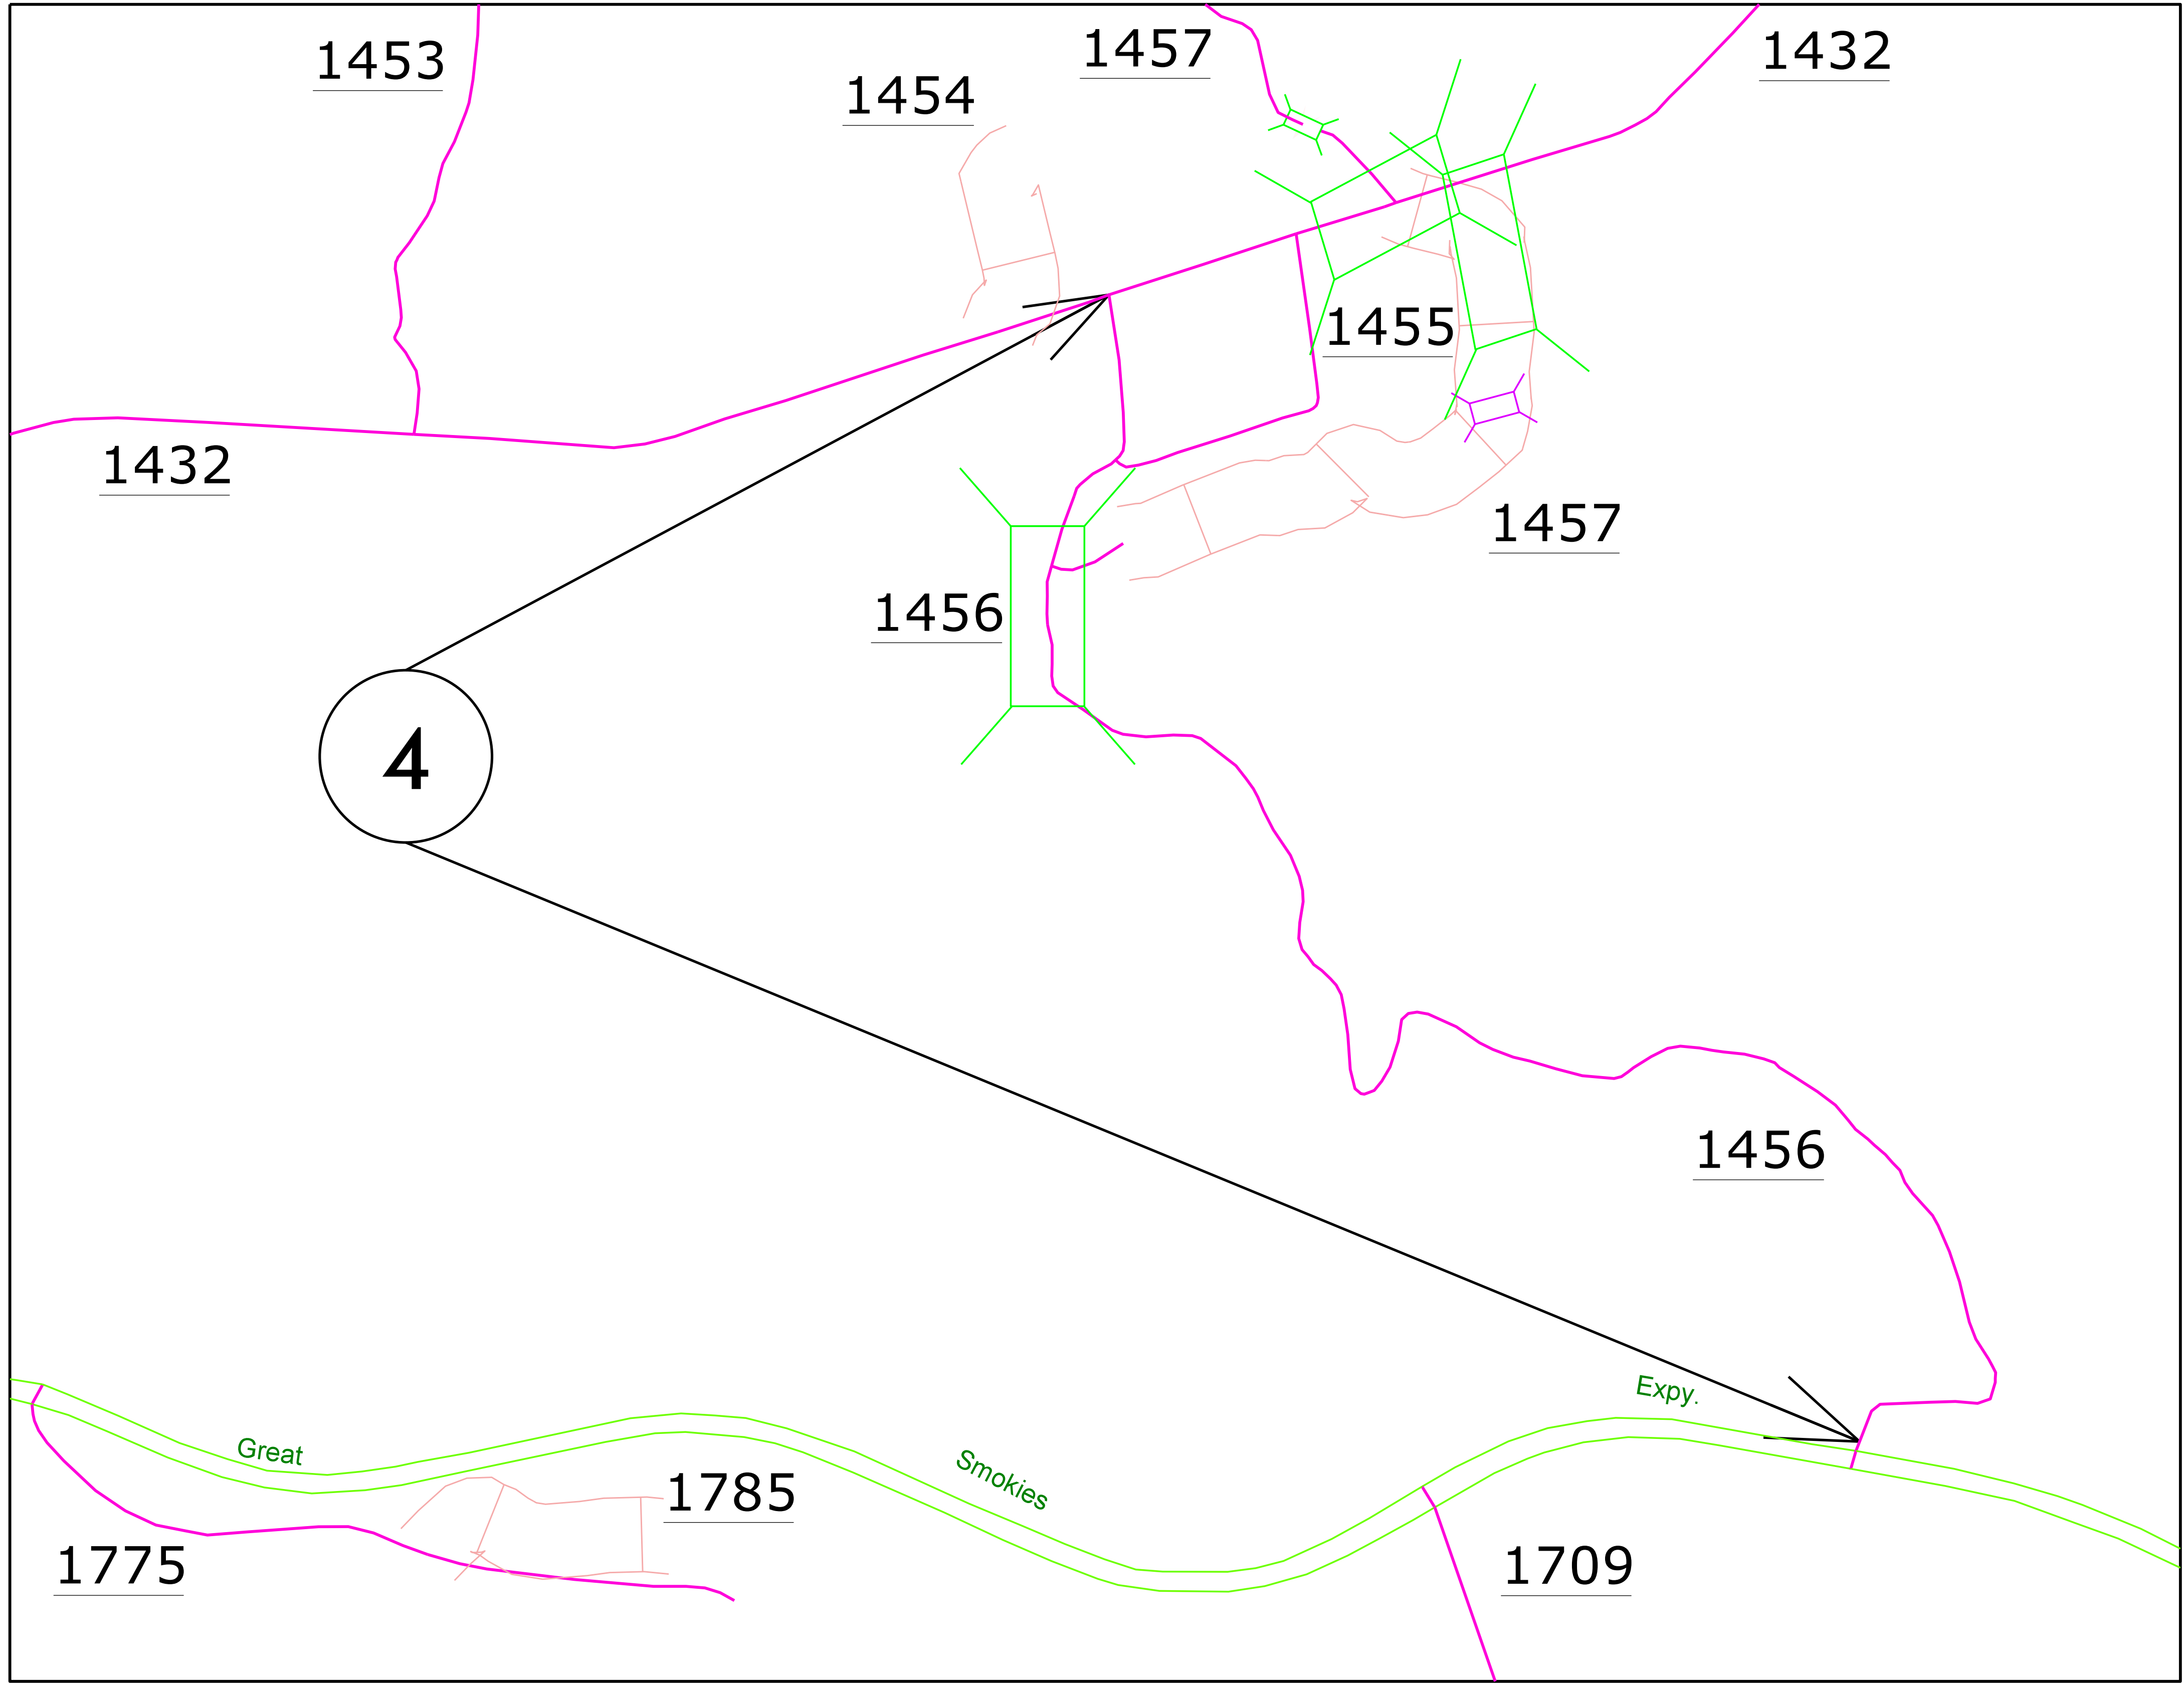

MAP 4



BEG





END

PROJECT REFERENCE NO.		SHEET NO.
2021.CPT.14.04.20501		4
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION
2021.CPT.14.04.10501		CONSTRUCTION
2021.CPT.14.04.20501		
2021.CPT.14.04.20441		
2021.CPT.14.04.10441		

JACKSON COUNTY

TIP PROJECT: N/A

CONTRACT: DN00722

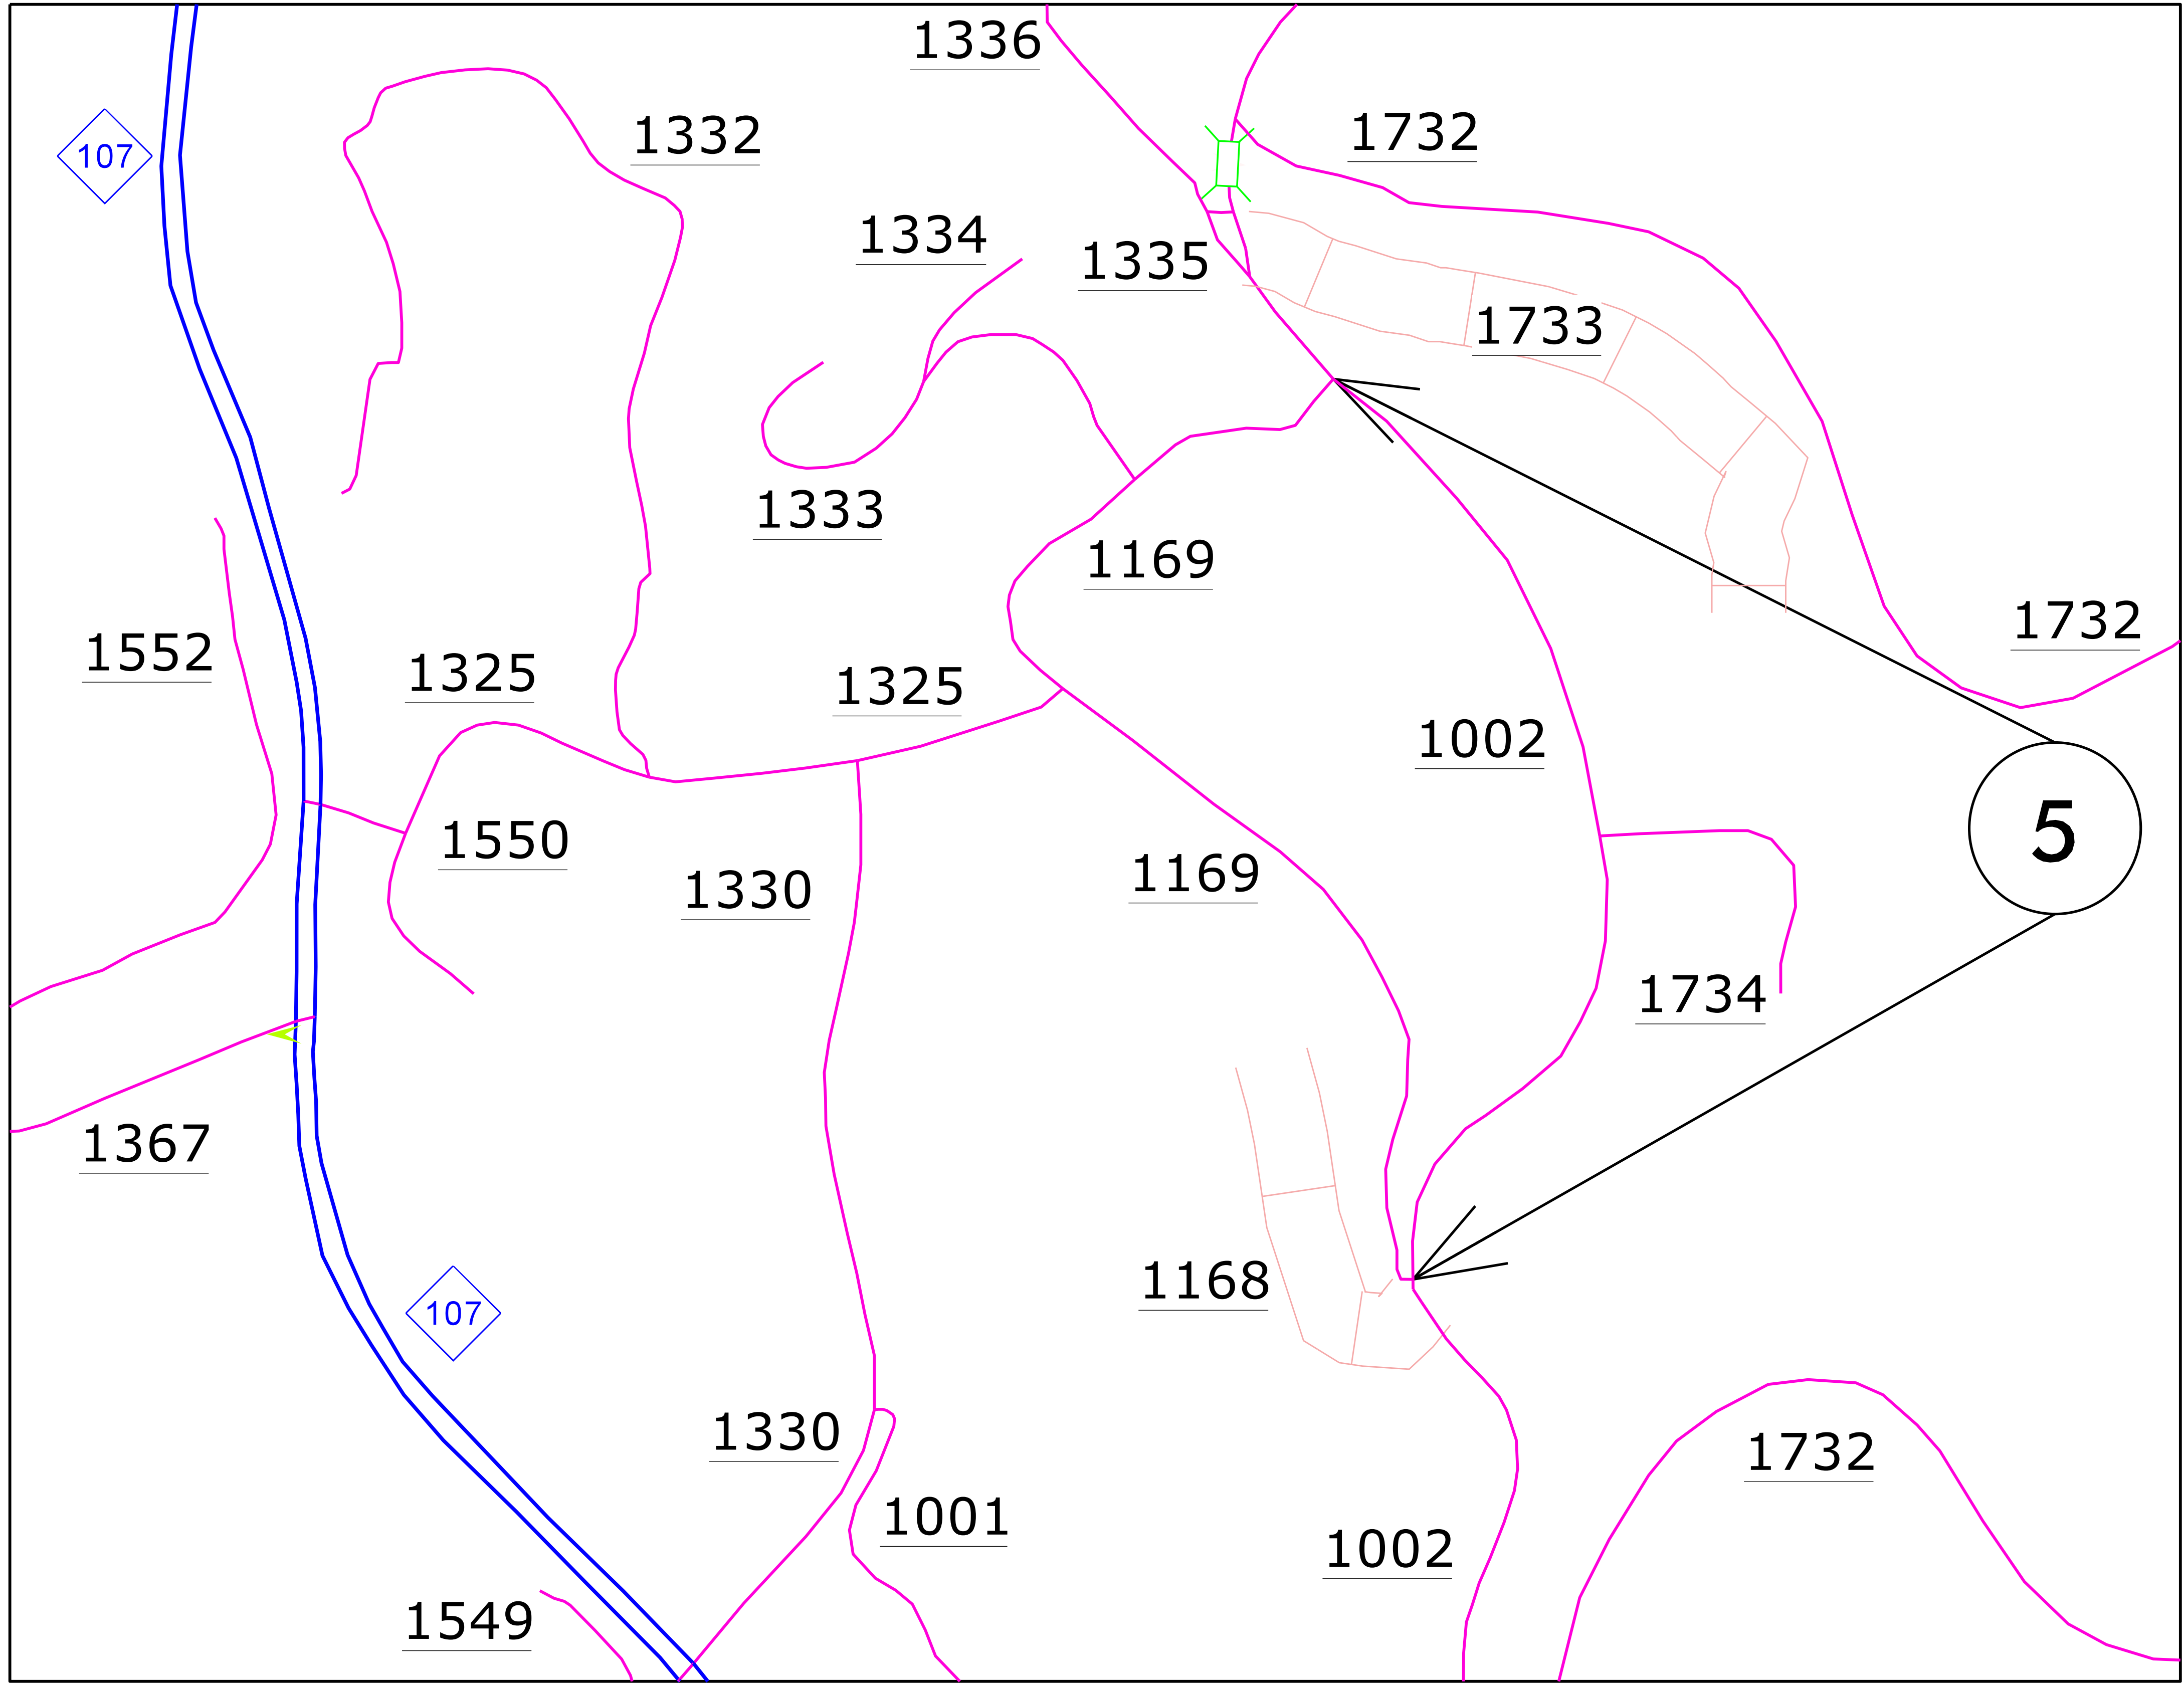

MAP 5



BEG




END

PROJECT REFERENCE NO.		SHEET NO.
2021.CPT.14.04.20501		5
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION
2021.CPT.14.04.10501		CONSTRUCTION
2021.CPT.14.04.20501		
2021.CPT.14.04.20441		
2021.CPT.14.04.10441		

JACKSON COUNTY

TIP PROJECT: N/A

CONTRACT: DN00722

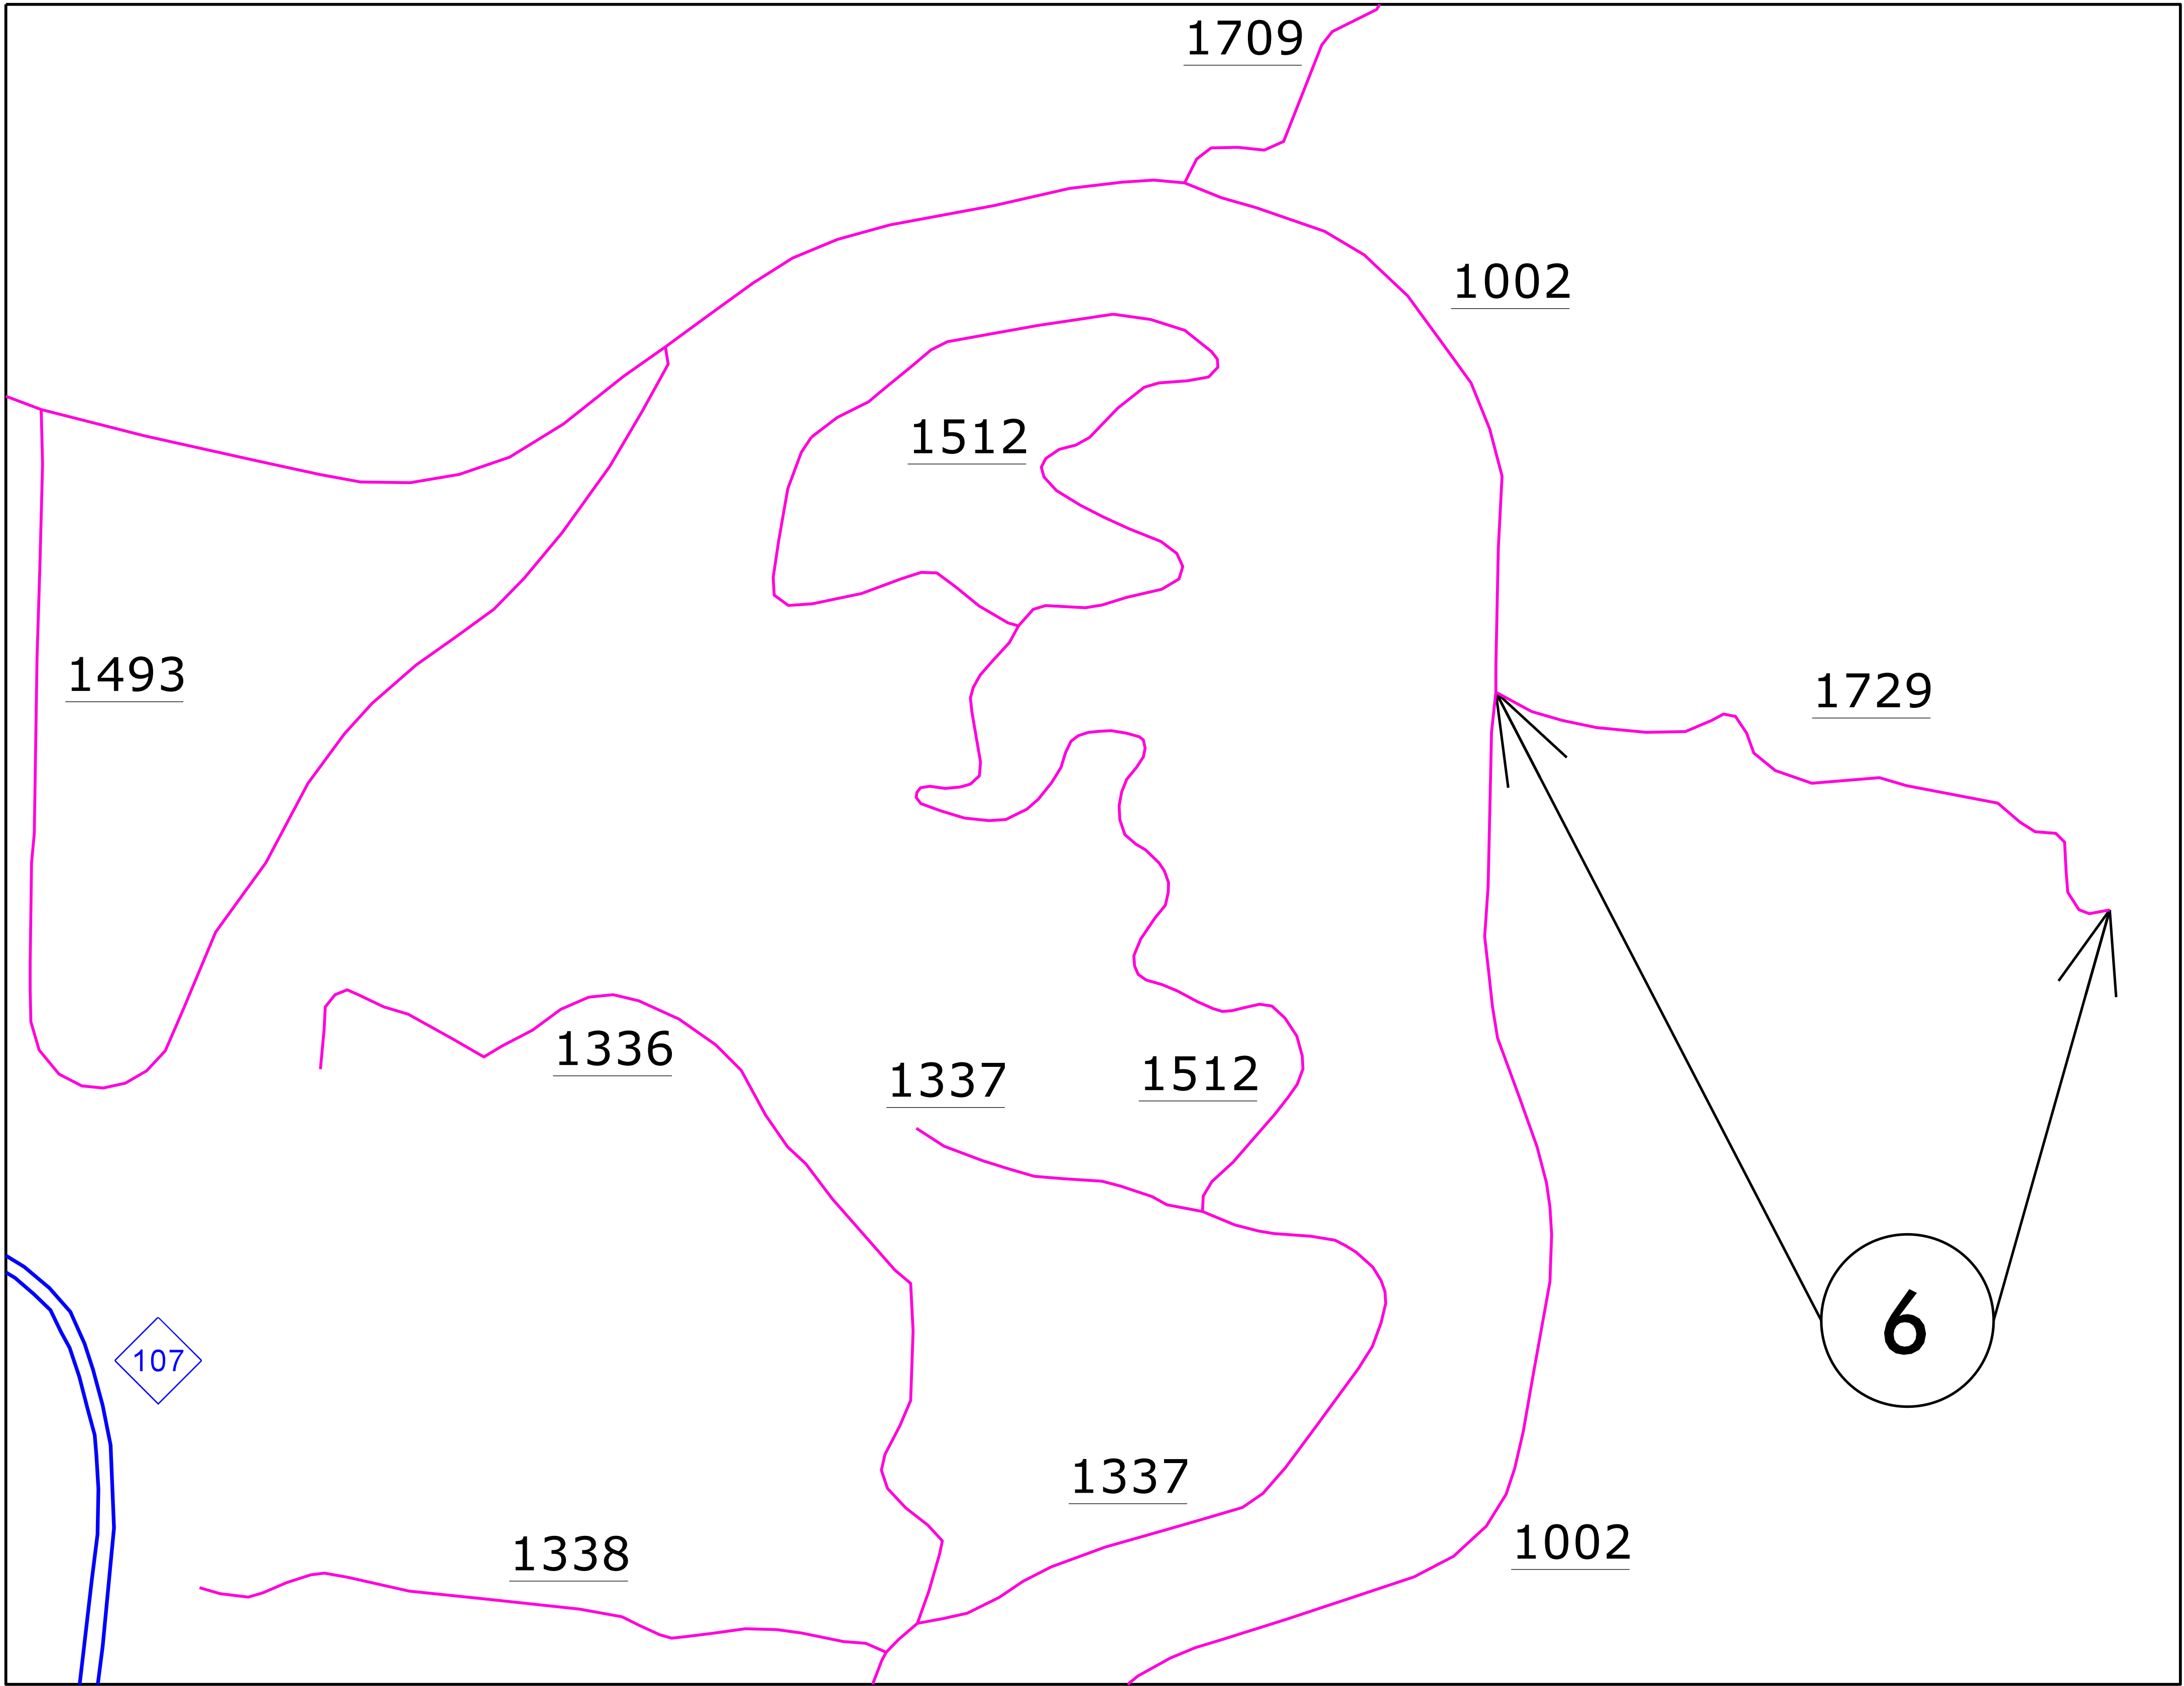

MAP 6



BEG




END

CONTRACT: DN00722

TIP PROJECT: N/A

JACKSON COUNTY

PROJECT REFERENCE NO.		SHEET NO.
2021.CPT.14.04.20501		6
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION
2021.CPT.14.04.10501		CONSTRUCTION
2021.CPT.14.04.20501		
2021.CPT.14.04.20441		
2021.CPT.14.04.10441		

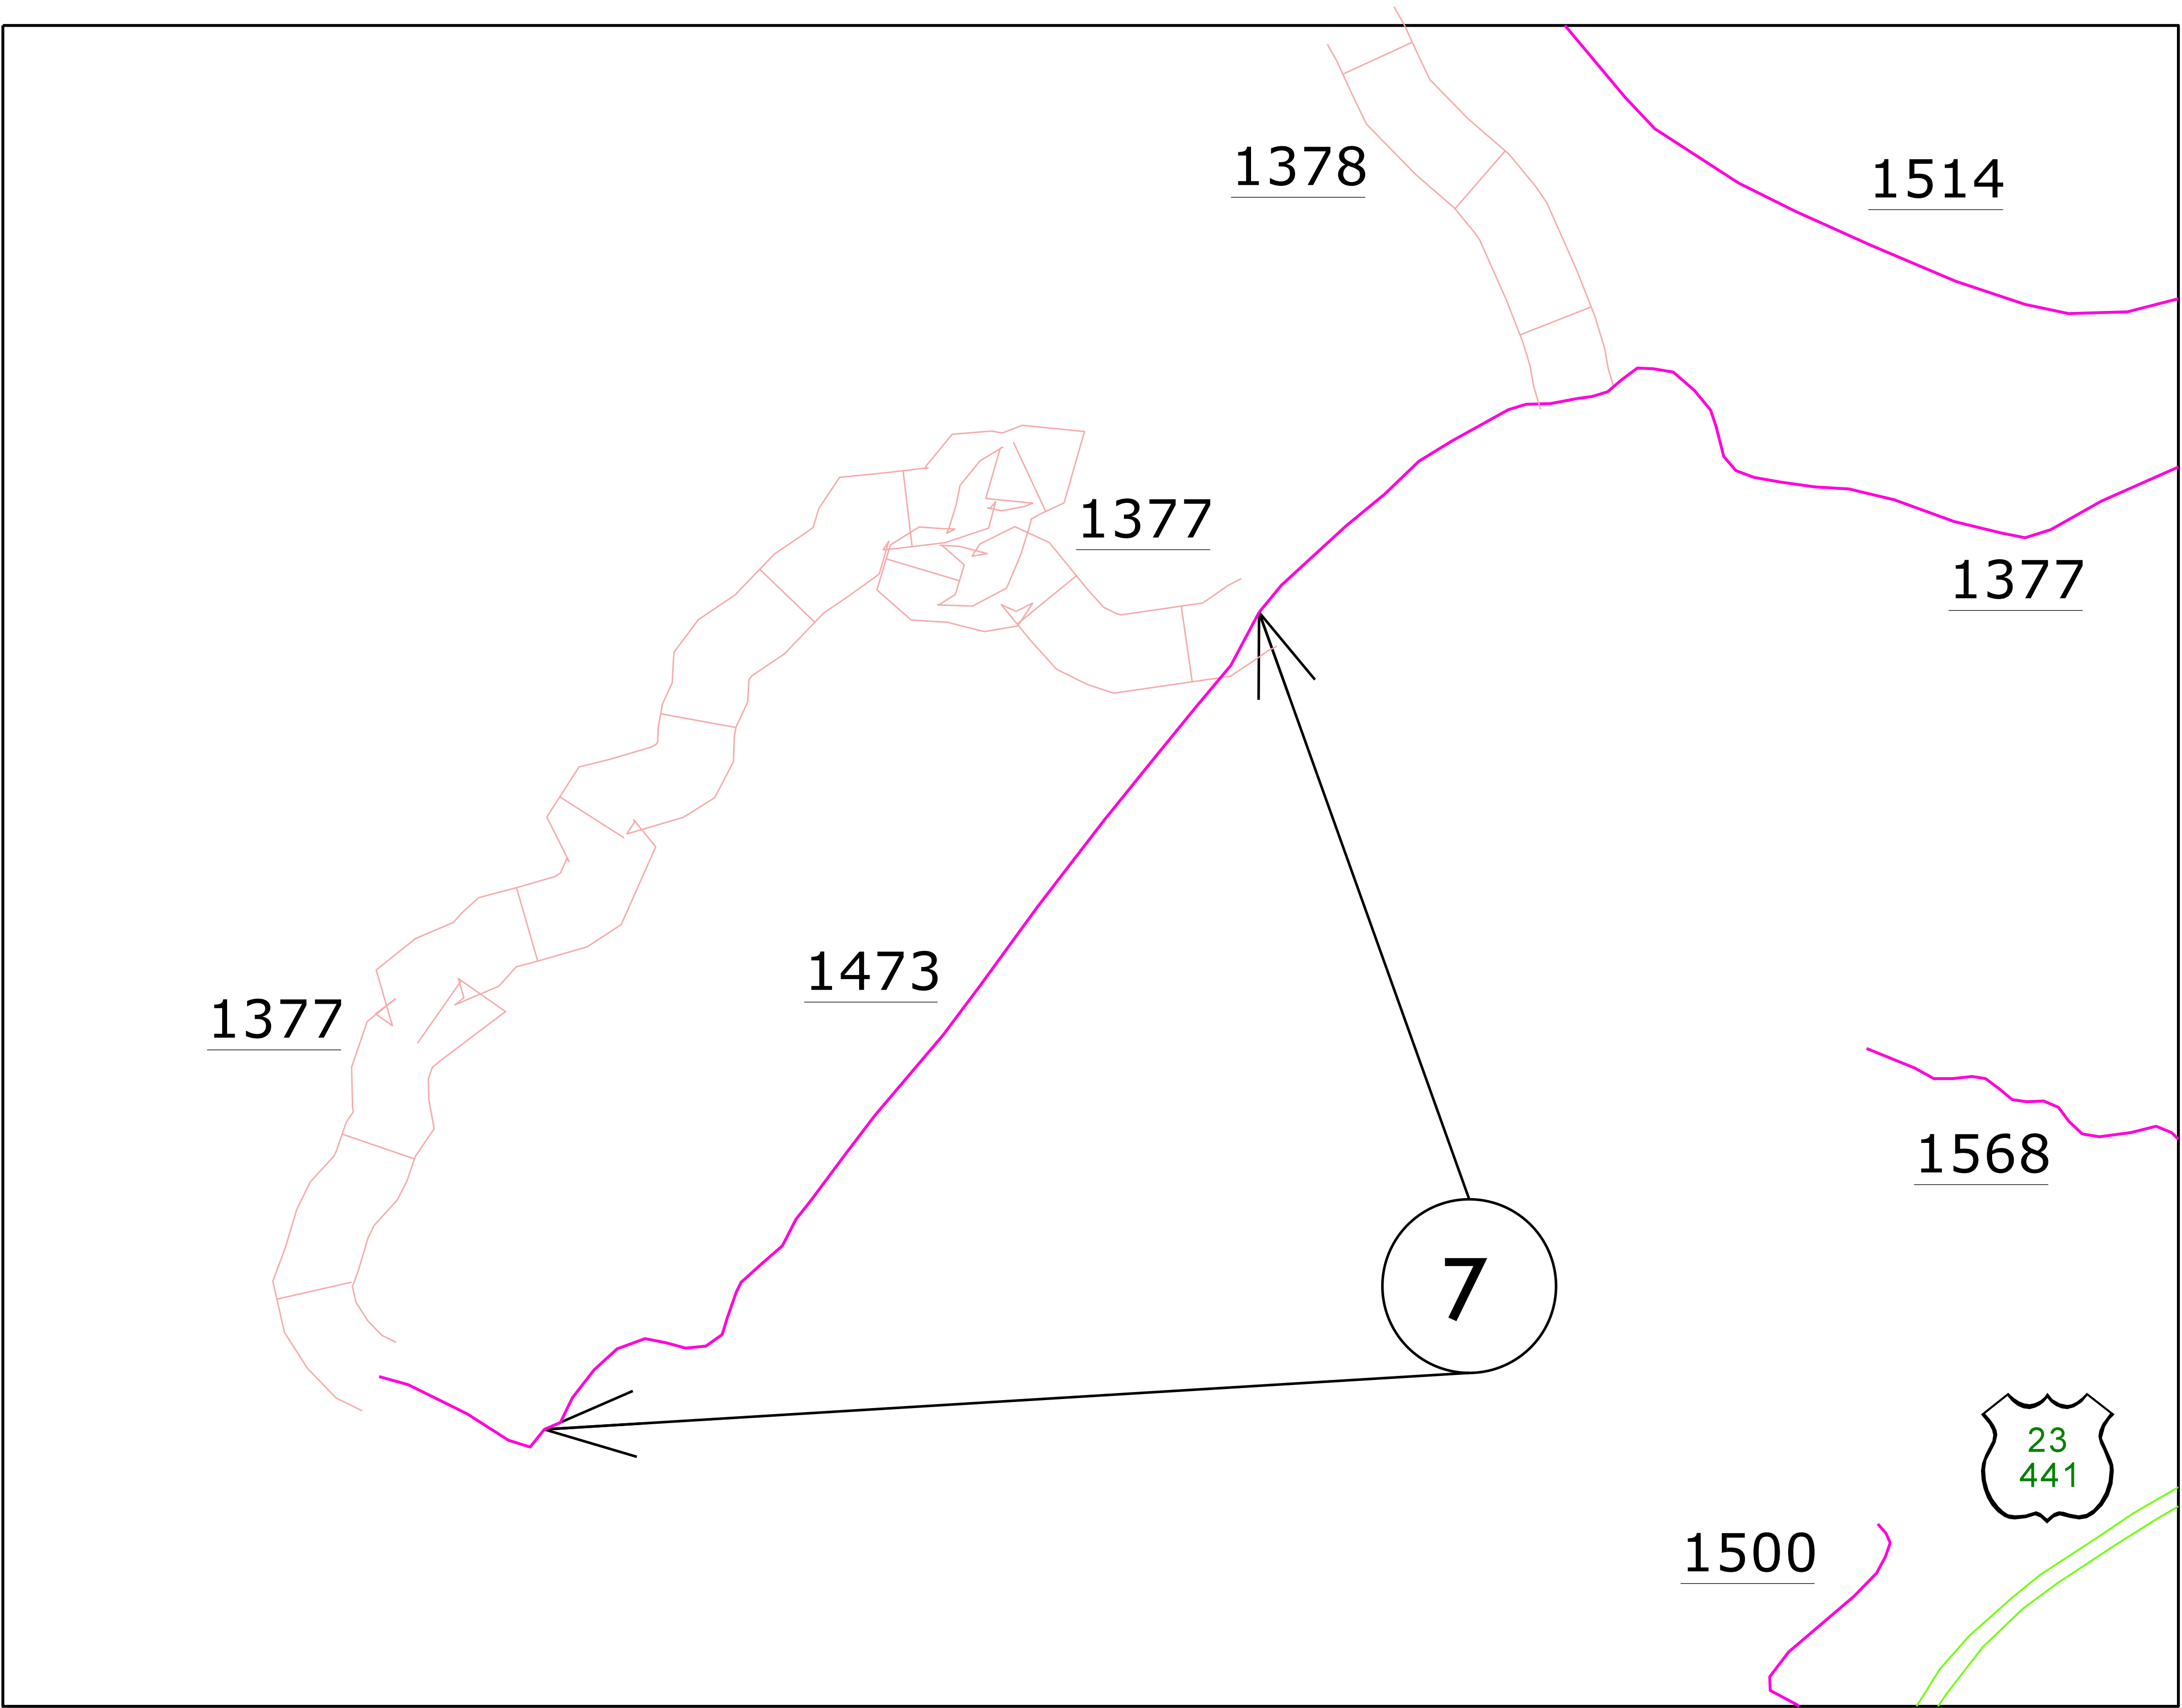

MAP 7



BEG




END

PROJECT REFERENCE NO.		SHEET NO.
2021.CPT.14.04.20501		7
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION
2021.CPT.14.04.10501		CONSTRUCTION
2021.CPT.14.04.20501		
2021.CPT.14.04.20441		
2021.CPT.14.04.10441		

JACKSON COUNTY

TIP PROJECT: N/A

CONTRACT: DN00722

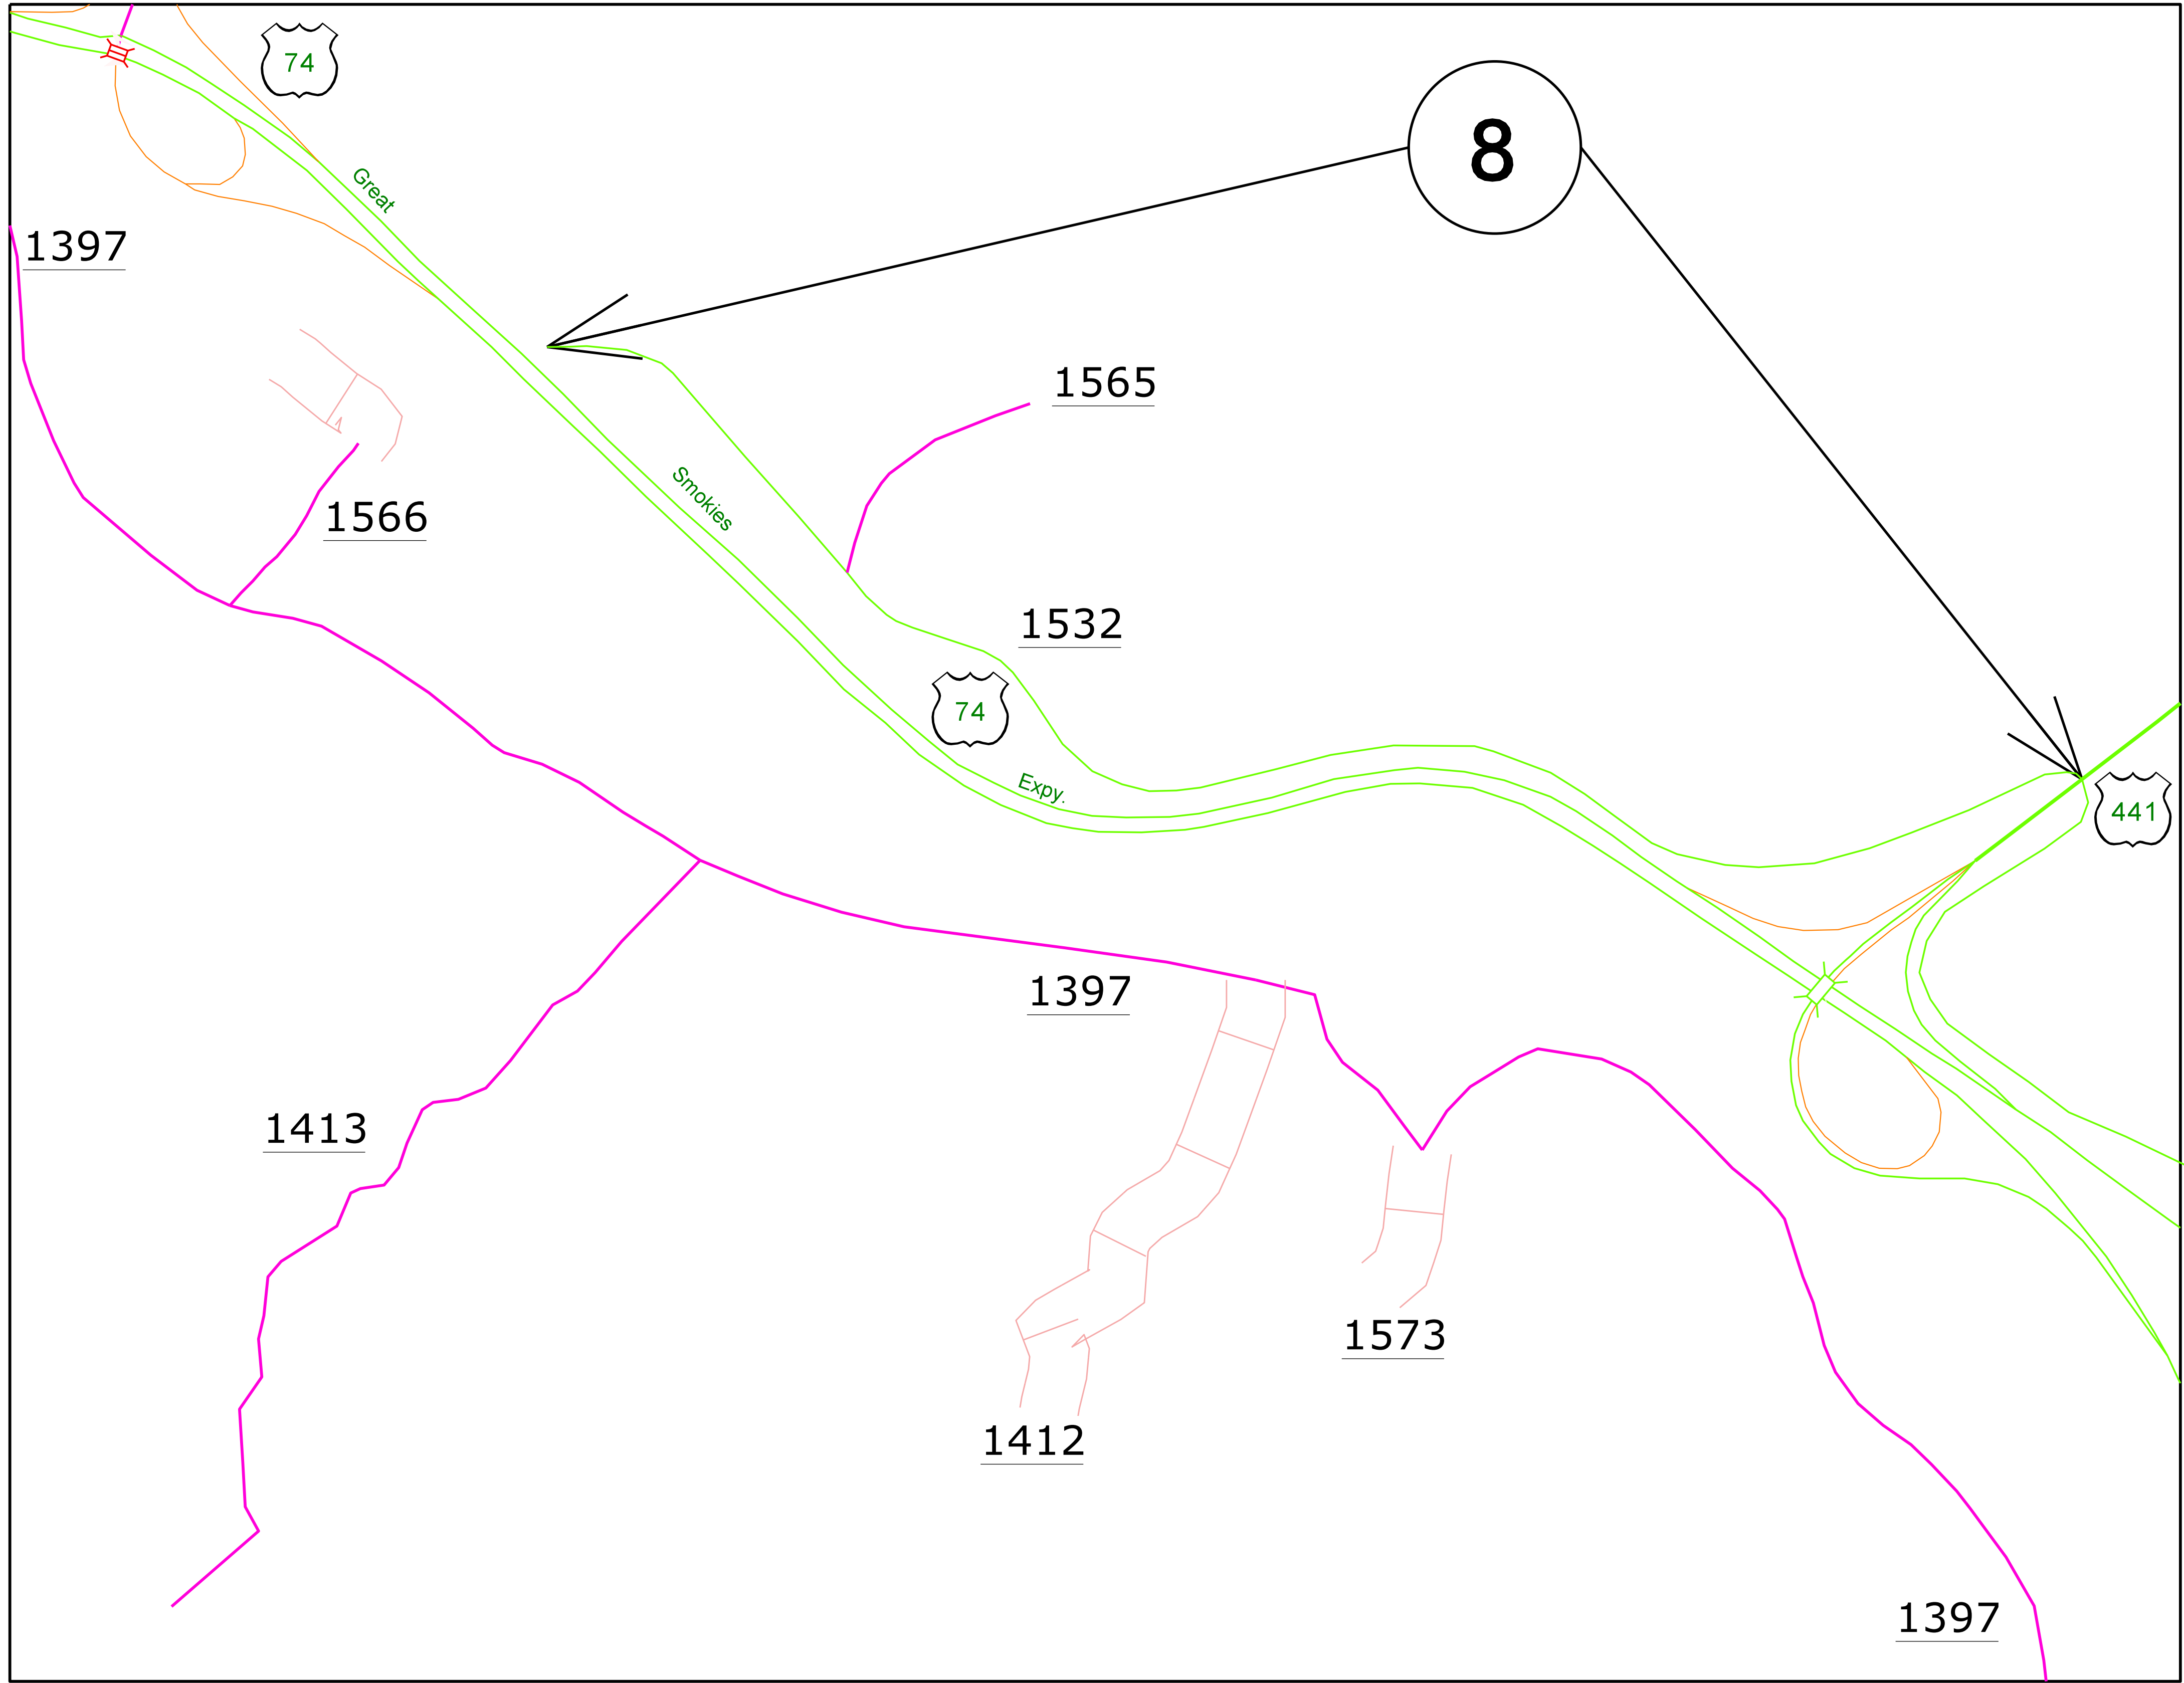


PROJECT REFERENCE NO.		SHEET NO.
2021.CPT.14.04.20501		8
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION
2021.CPT.14.04.10501		CONSTRUCTION
2021.CPT.14.04.20501		
2021.CPT.14.04.20441		
2021.CPT.14.04.10441		

JACKSON COUNTY

TIP PROJECT: N/A

CONTRACT: DN00722

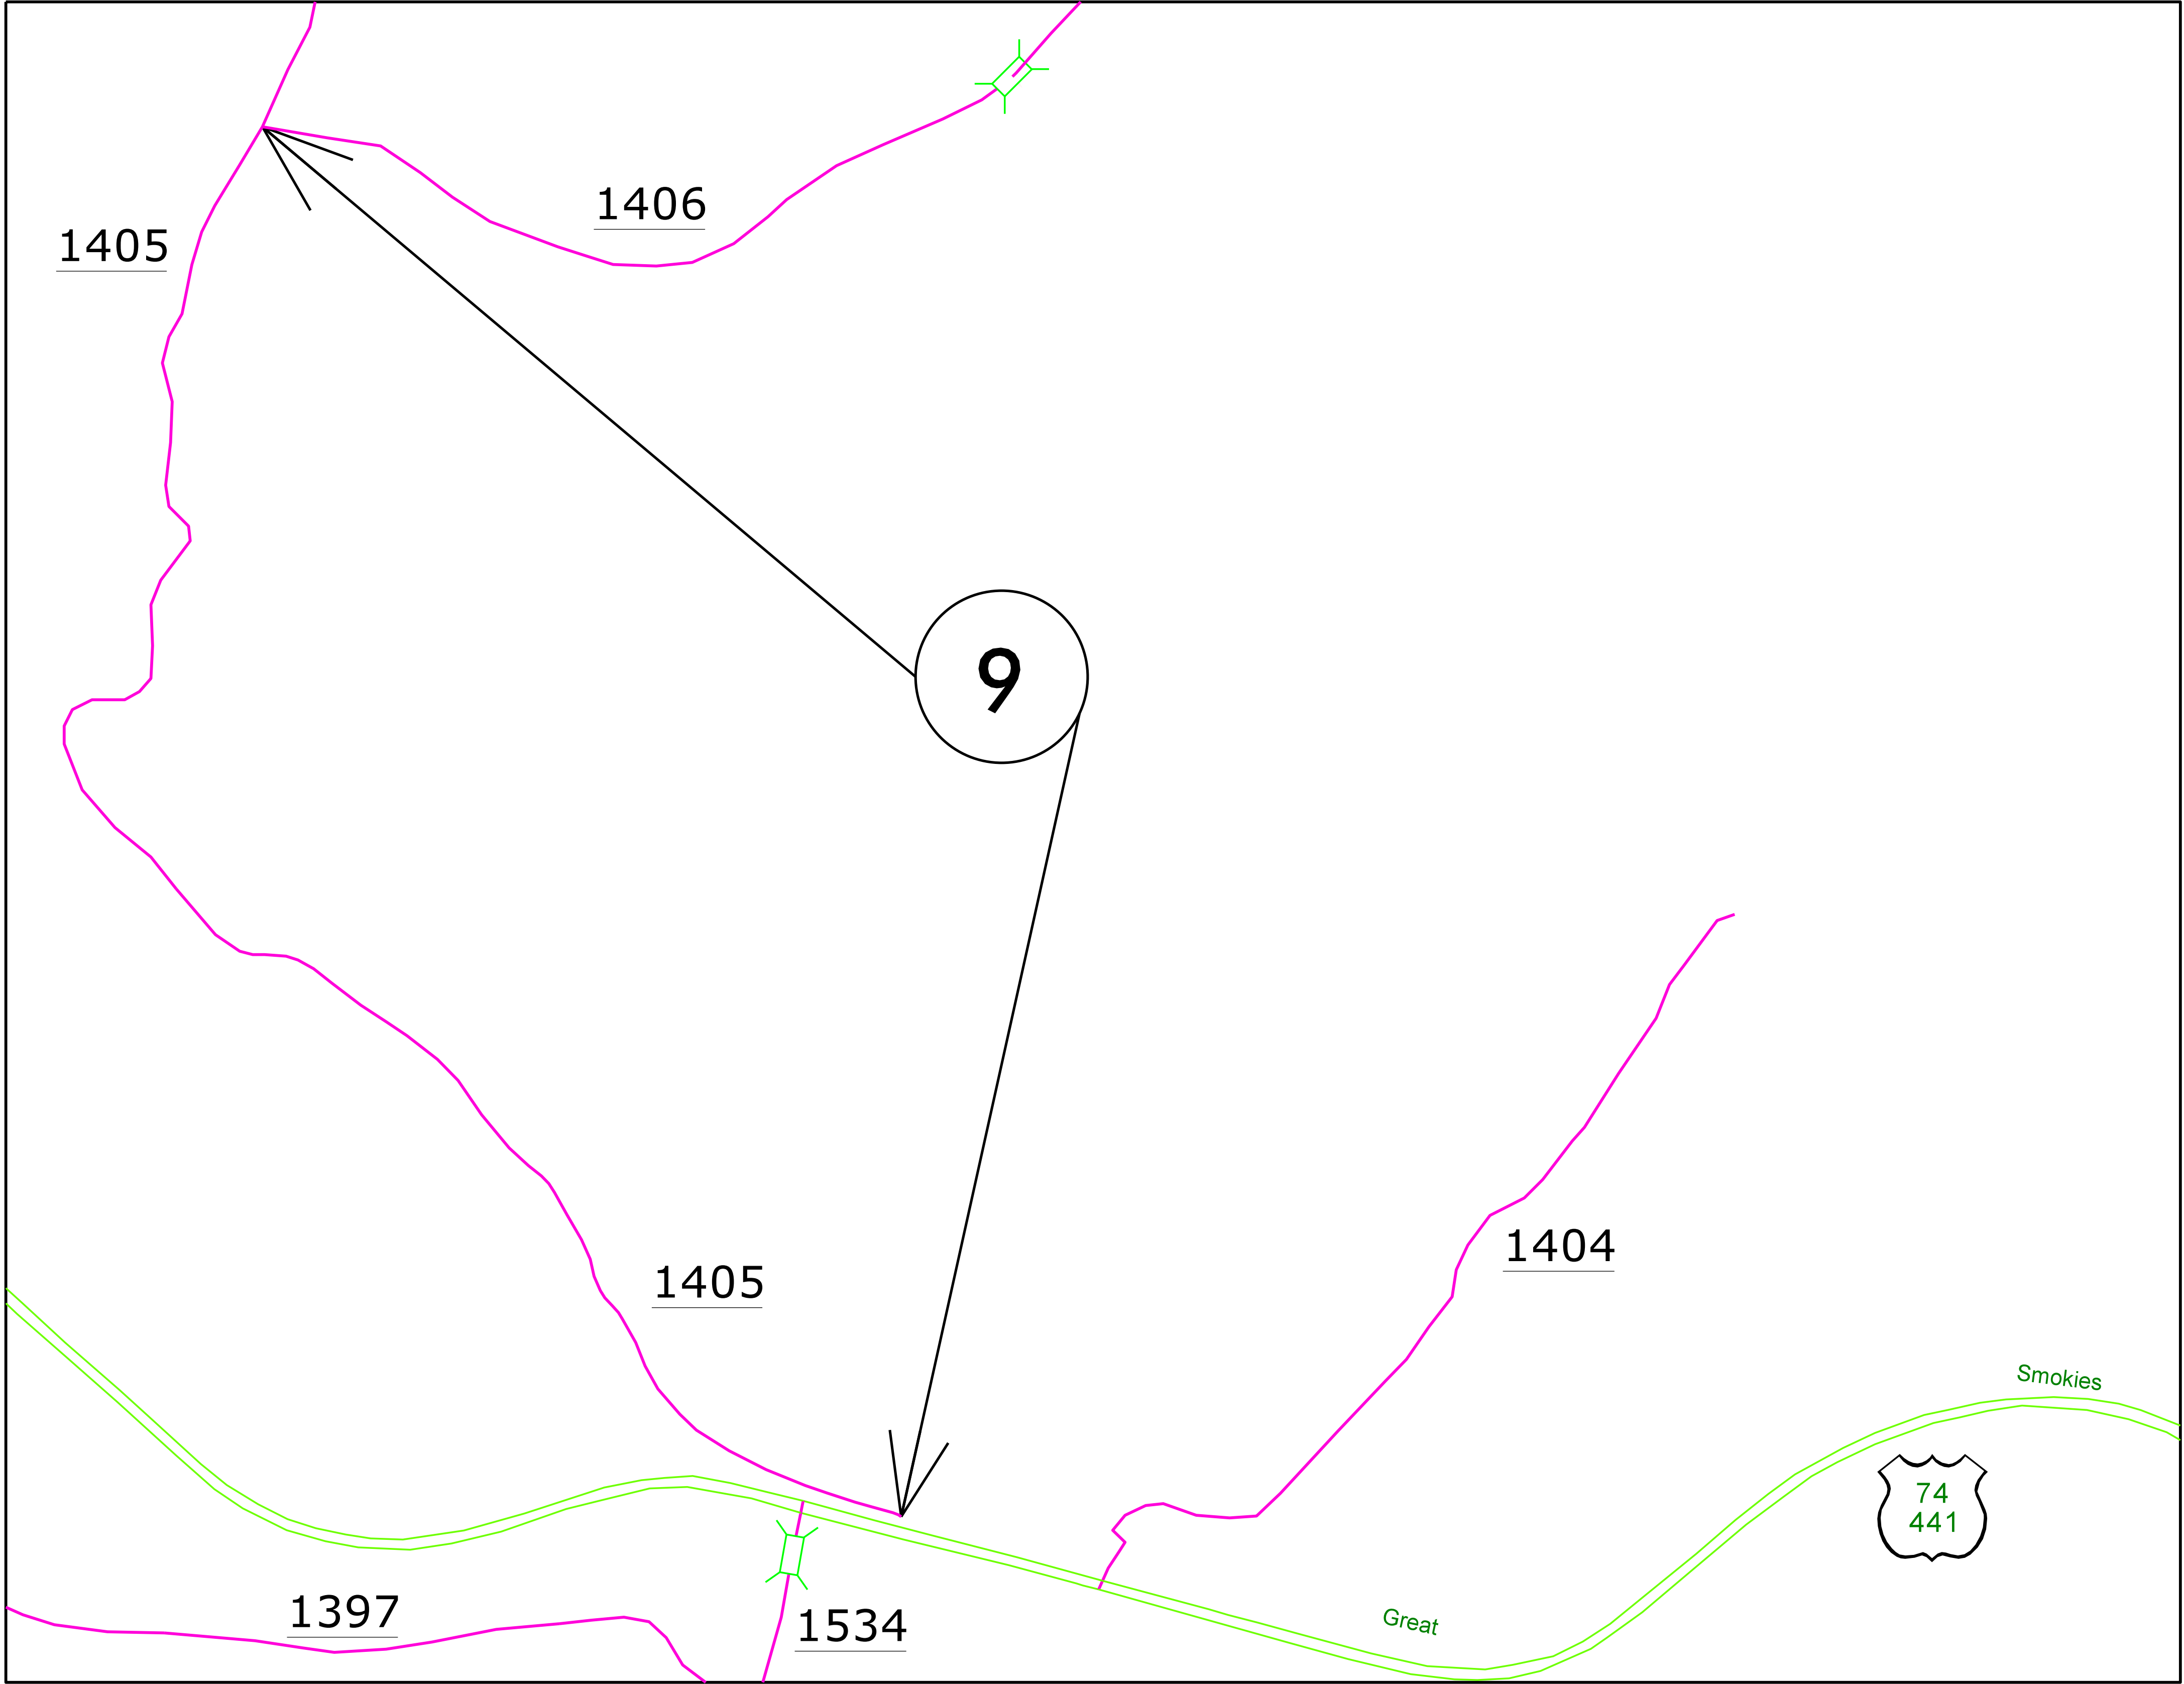

MAP 9



BEG




END

TIP PROJECT: N/A

CONTRACT: DN00722

JACKSON COUNTY

PROJECT REFERENCE NO.			SHEET NO.
2021.CPT.14.04.10501			9
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION	
2021.CPT.14.04.10501		CONSTRUCTION	
2021.CPT.14.04.20501			
2021.CPT.14.04.20441			
2021.CPT.14.04.10441			

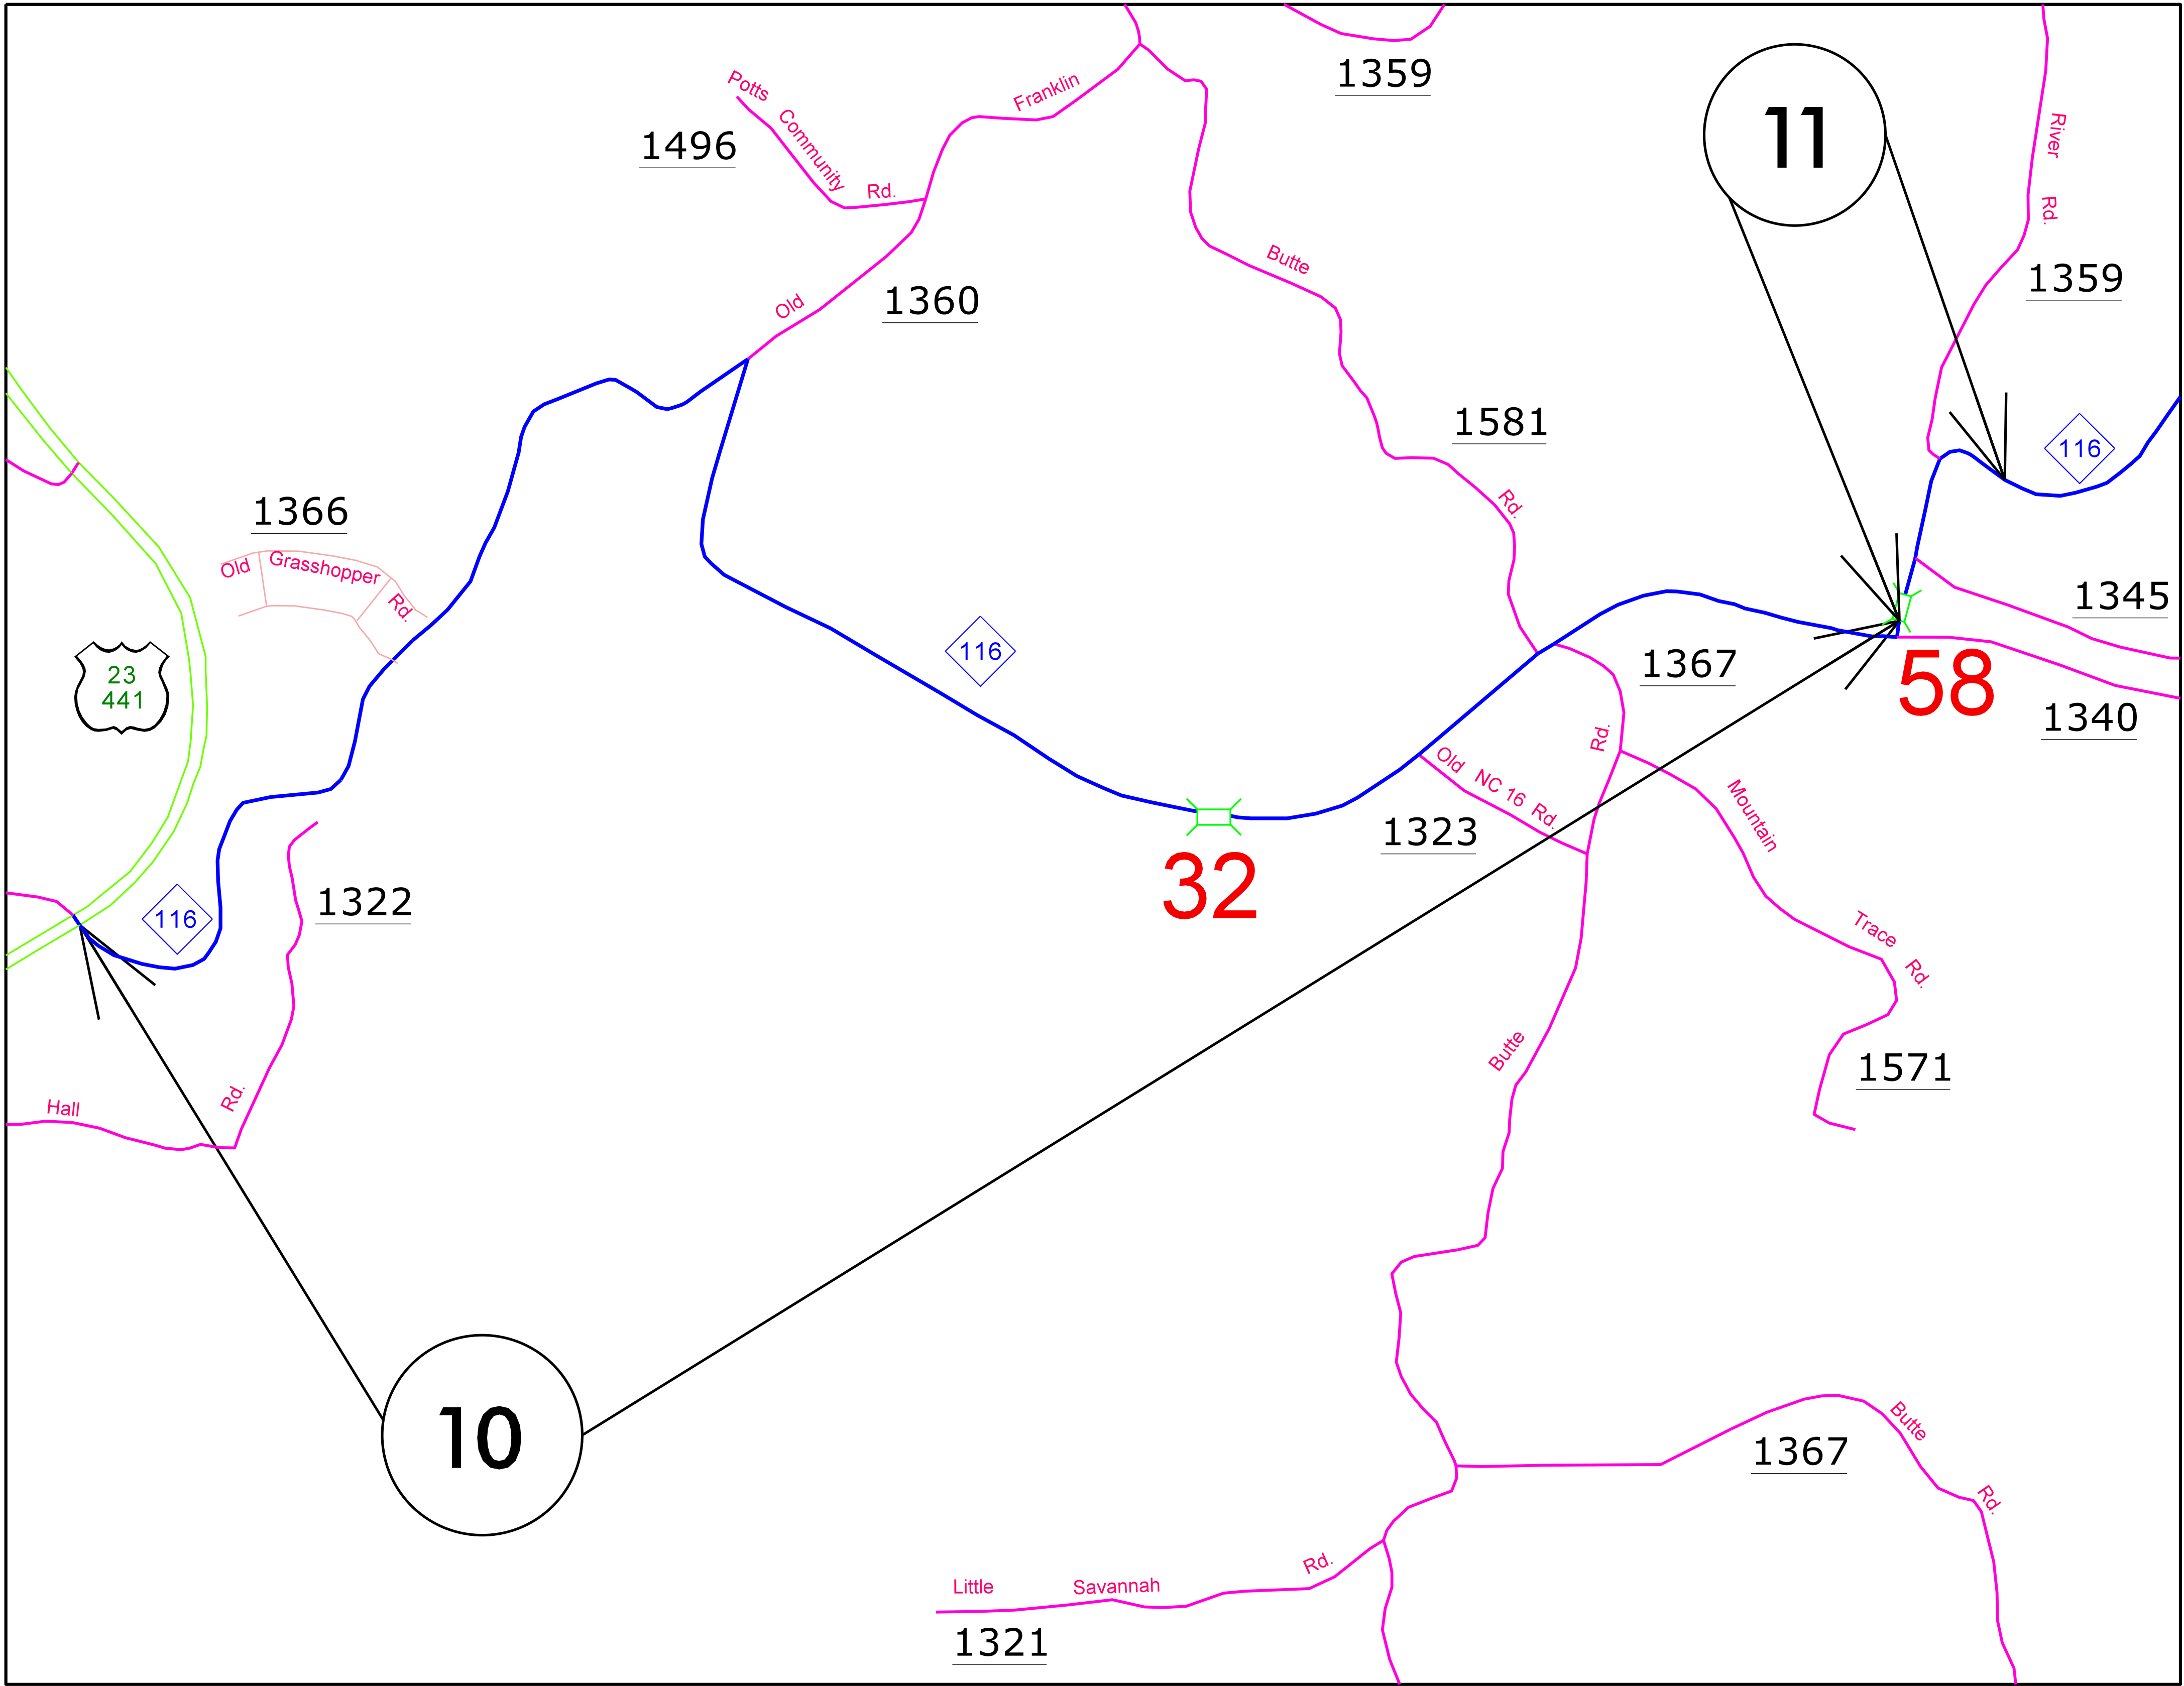

MAP 10



BEG



END

MAP 11



BEG




END

CONTRACT: DN00722

TIP PROJECT: N/A

HAYWOOD COUNTY

PROJECT REFERENCE NO.		SHEET NO.
2021.CPT.14.04.10441		10
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION
2021.CPT.14.04.10501		CONSTRUCTION
2021.CPT.14.04.20501		
2021.CPT.14.04.20441		
2021.CPT.14.04.10441		

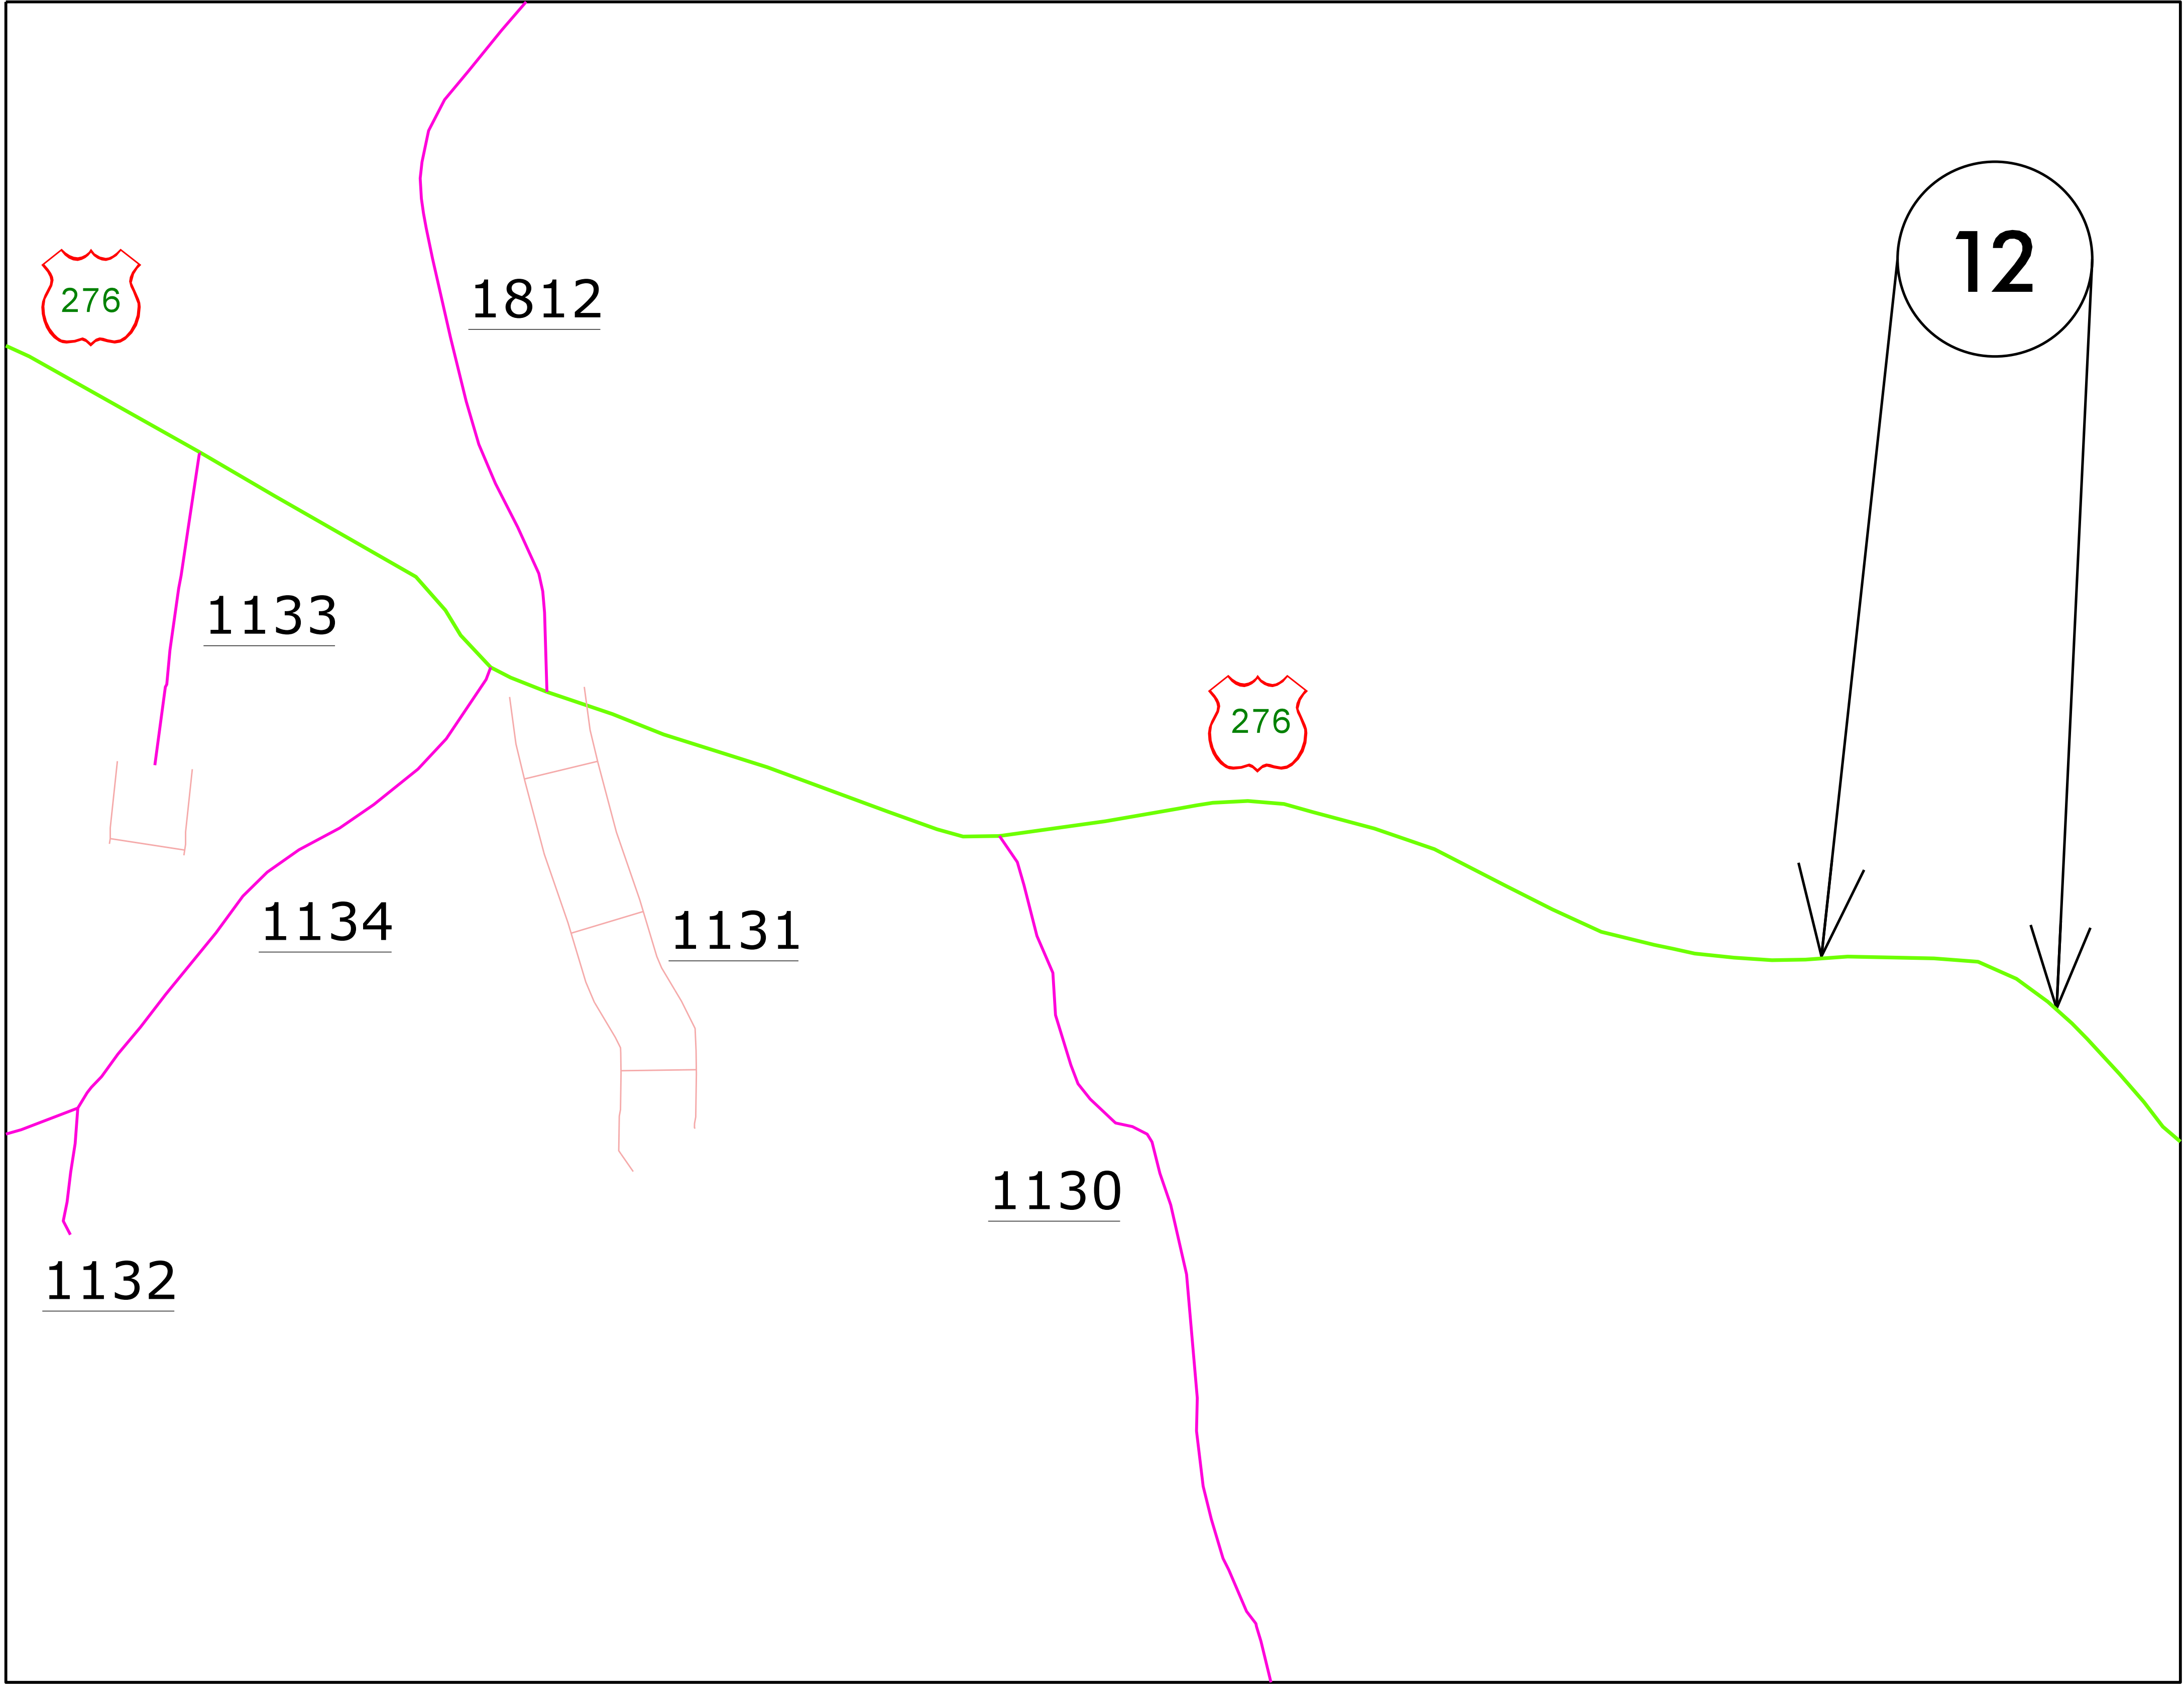

MAP 12




BEG




END

PROJECT REFERENCE NO.			SHEET NO.
2021.CPT.14.04.10441			11
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION	
2021.CPT.14.04.10501		CONSTRUCTION	
2021.CPT.14.04.20501			
2021.CPT.14.04.20441			
2021.CPT.14.04.10441			

TYPICAL 1

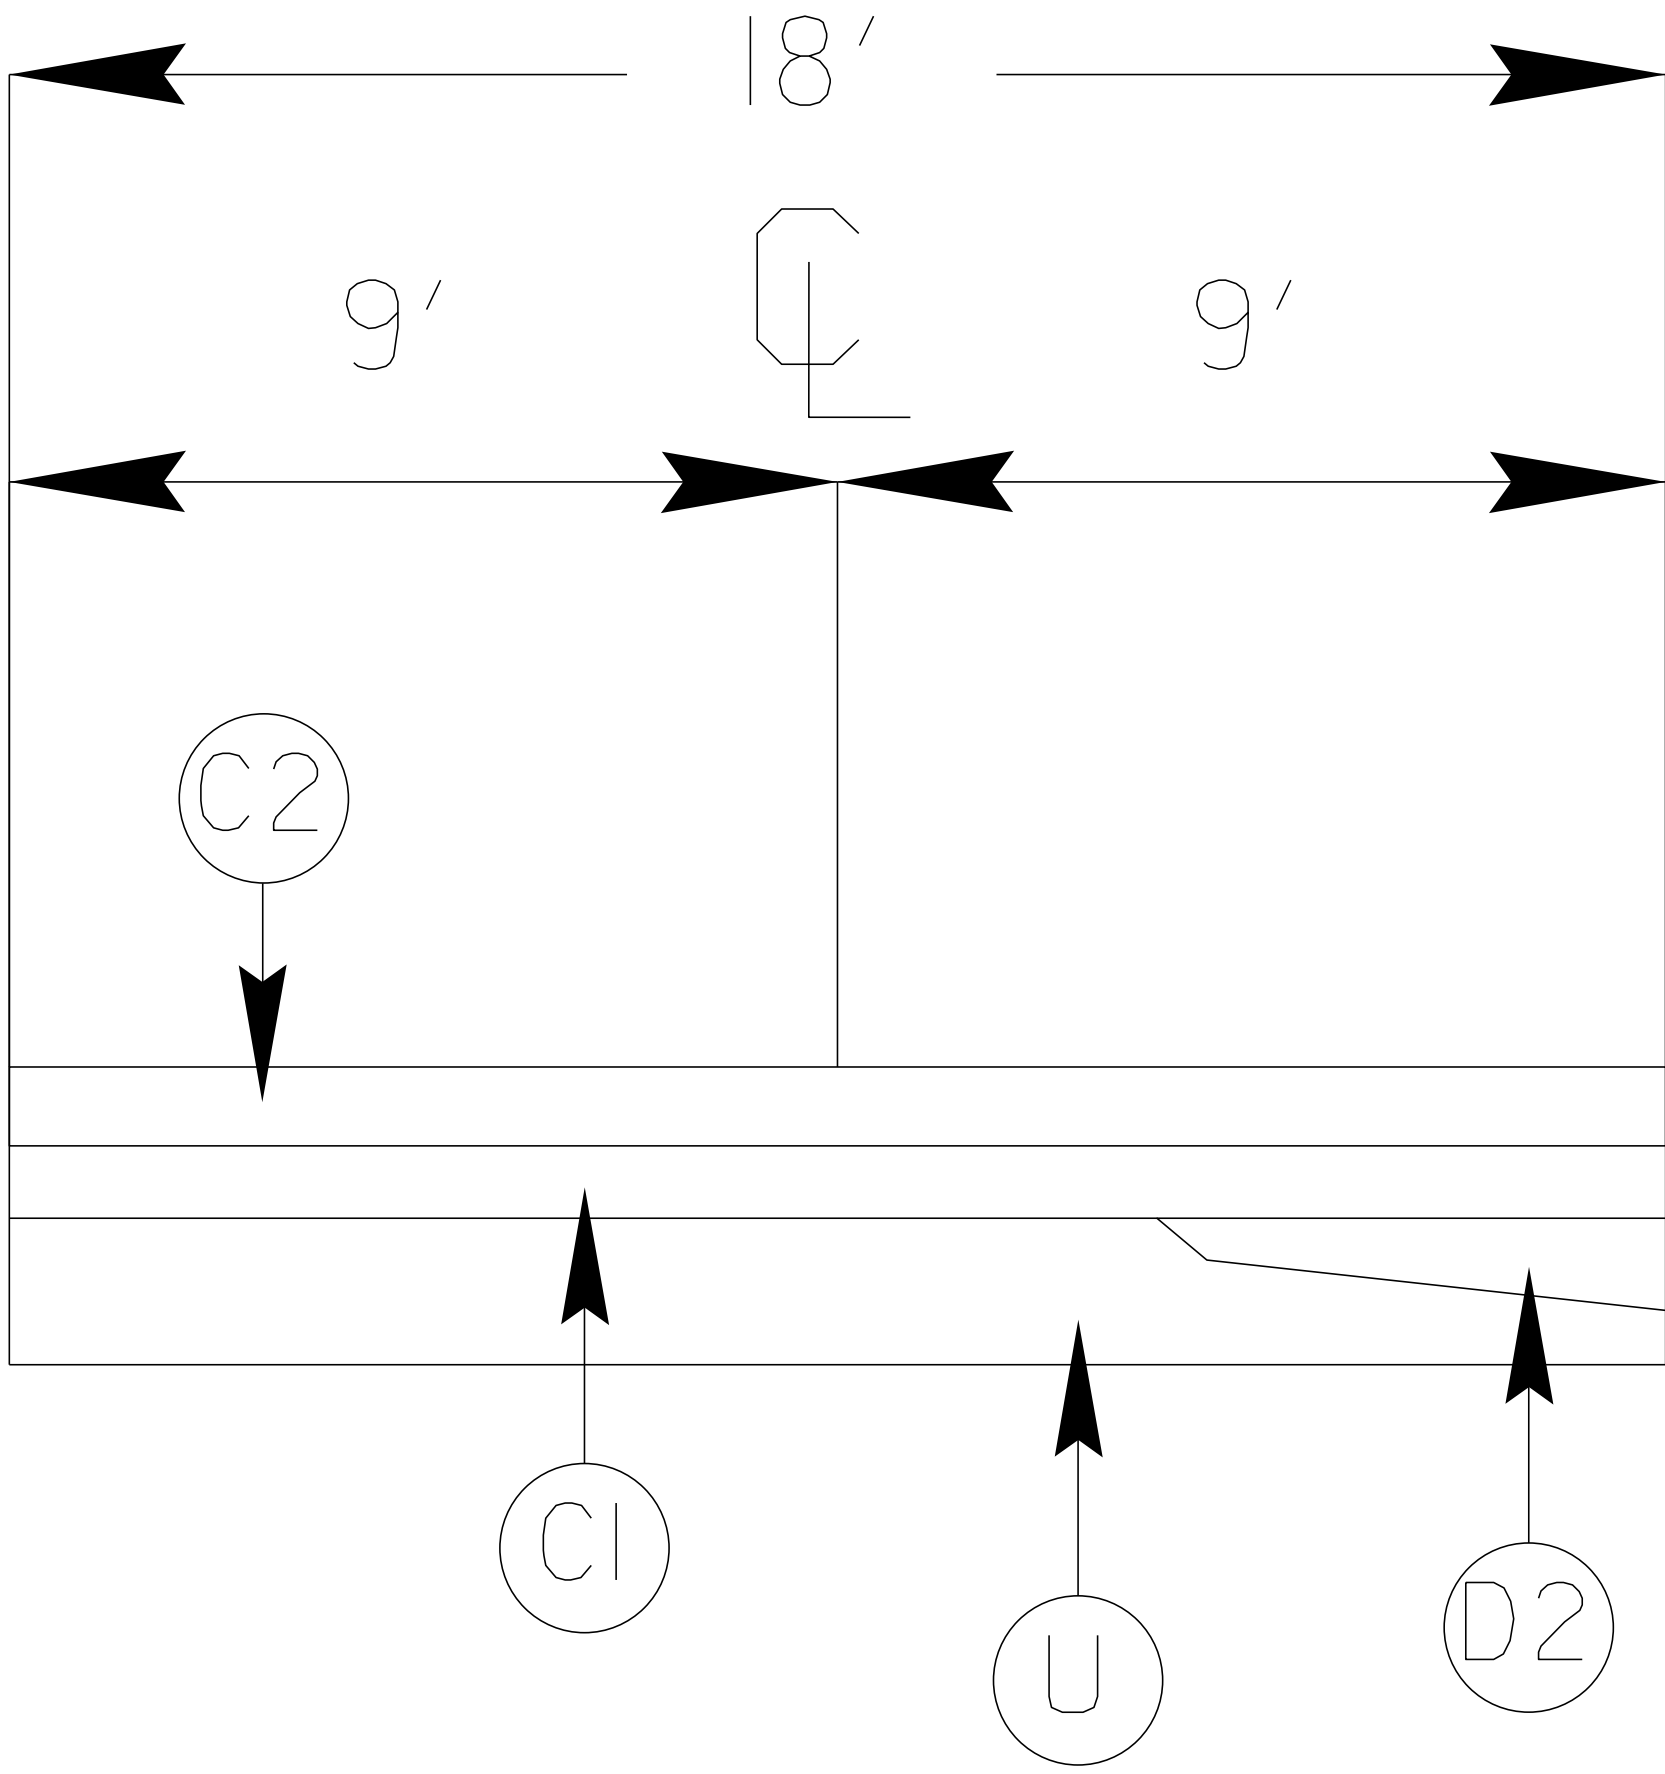


TYPICAL 2

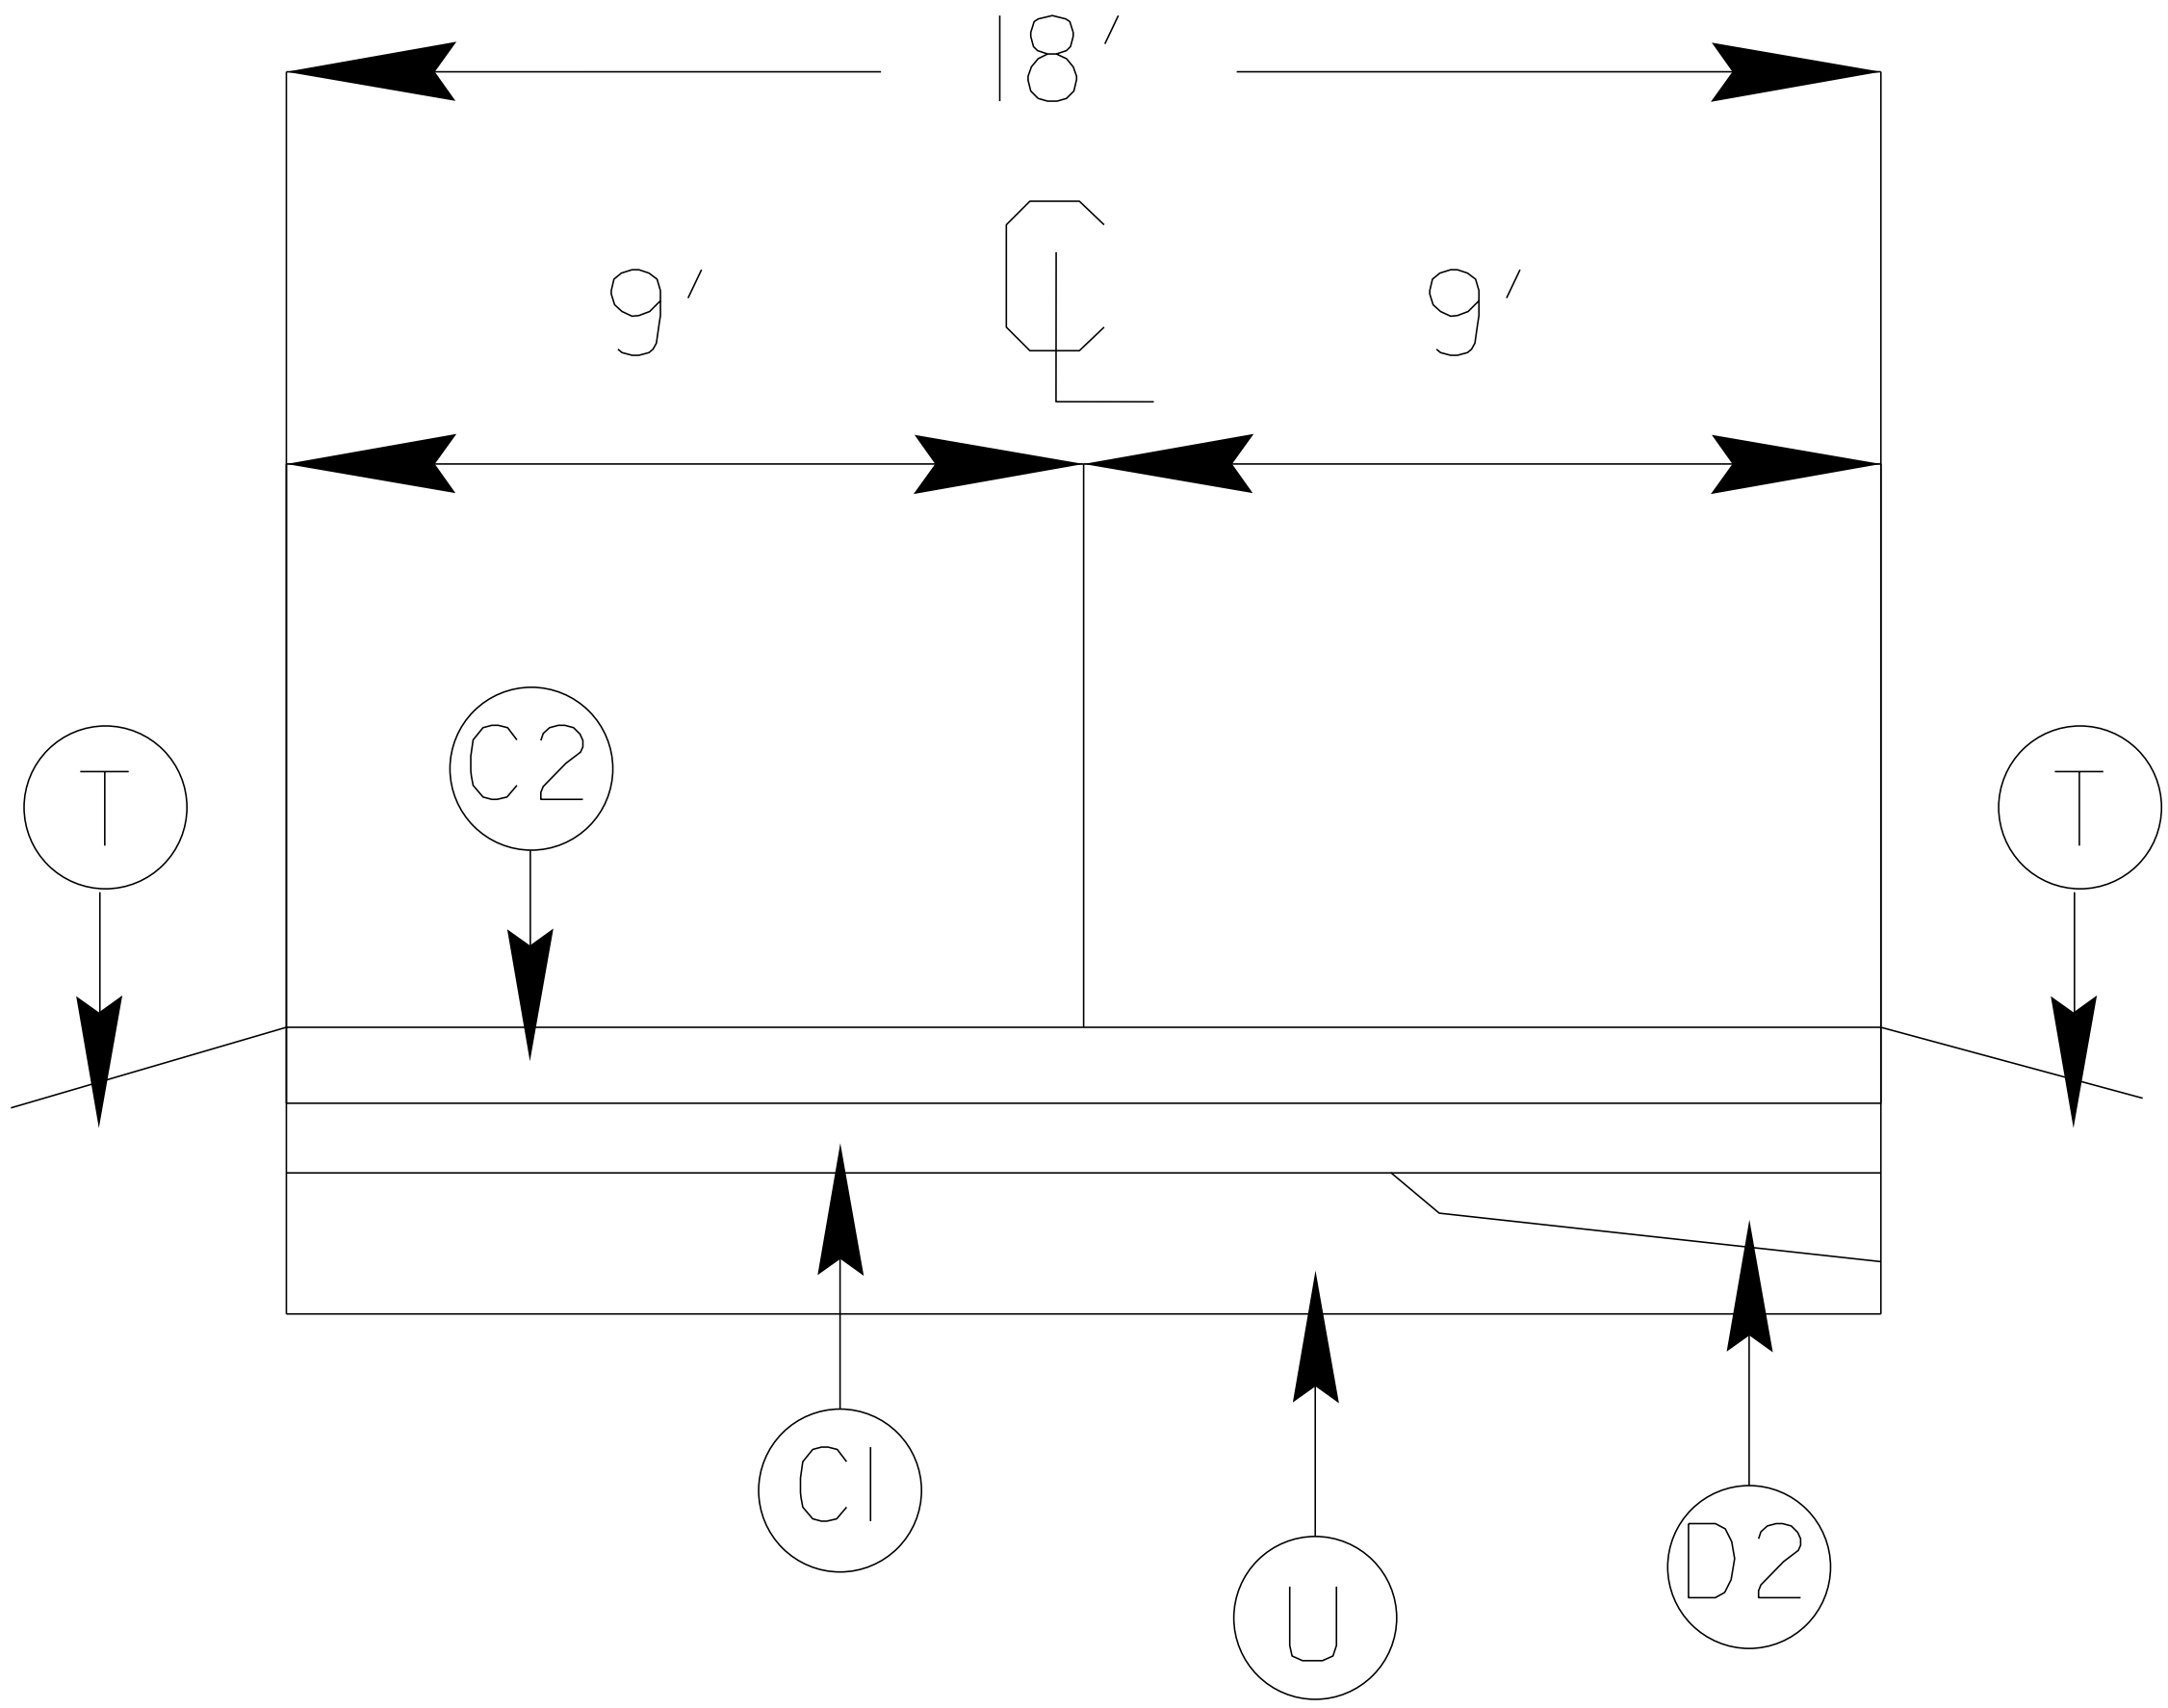


PROJECT REFERENCE NO.			SHEET NO.
2021.CPT.14.04.10441			12
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION	
2021.CPT.14.04.10501		CONSTRUCTION	
2021.CPT.14.04.20501			
2021.CPT.14.04.20441			
2021.CPT.14.04.10441			

TYPICAL 3

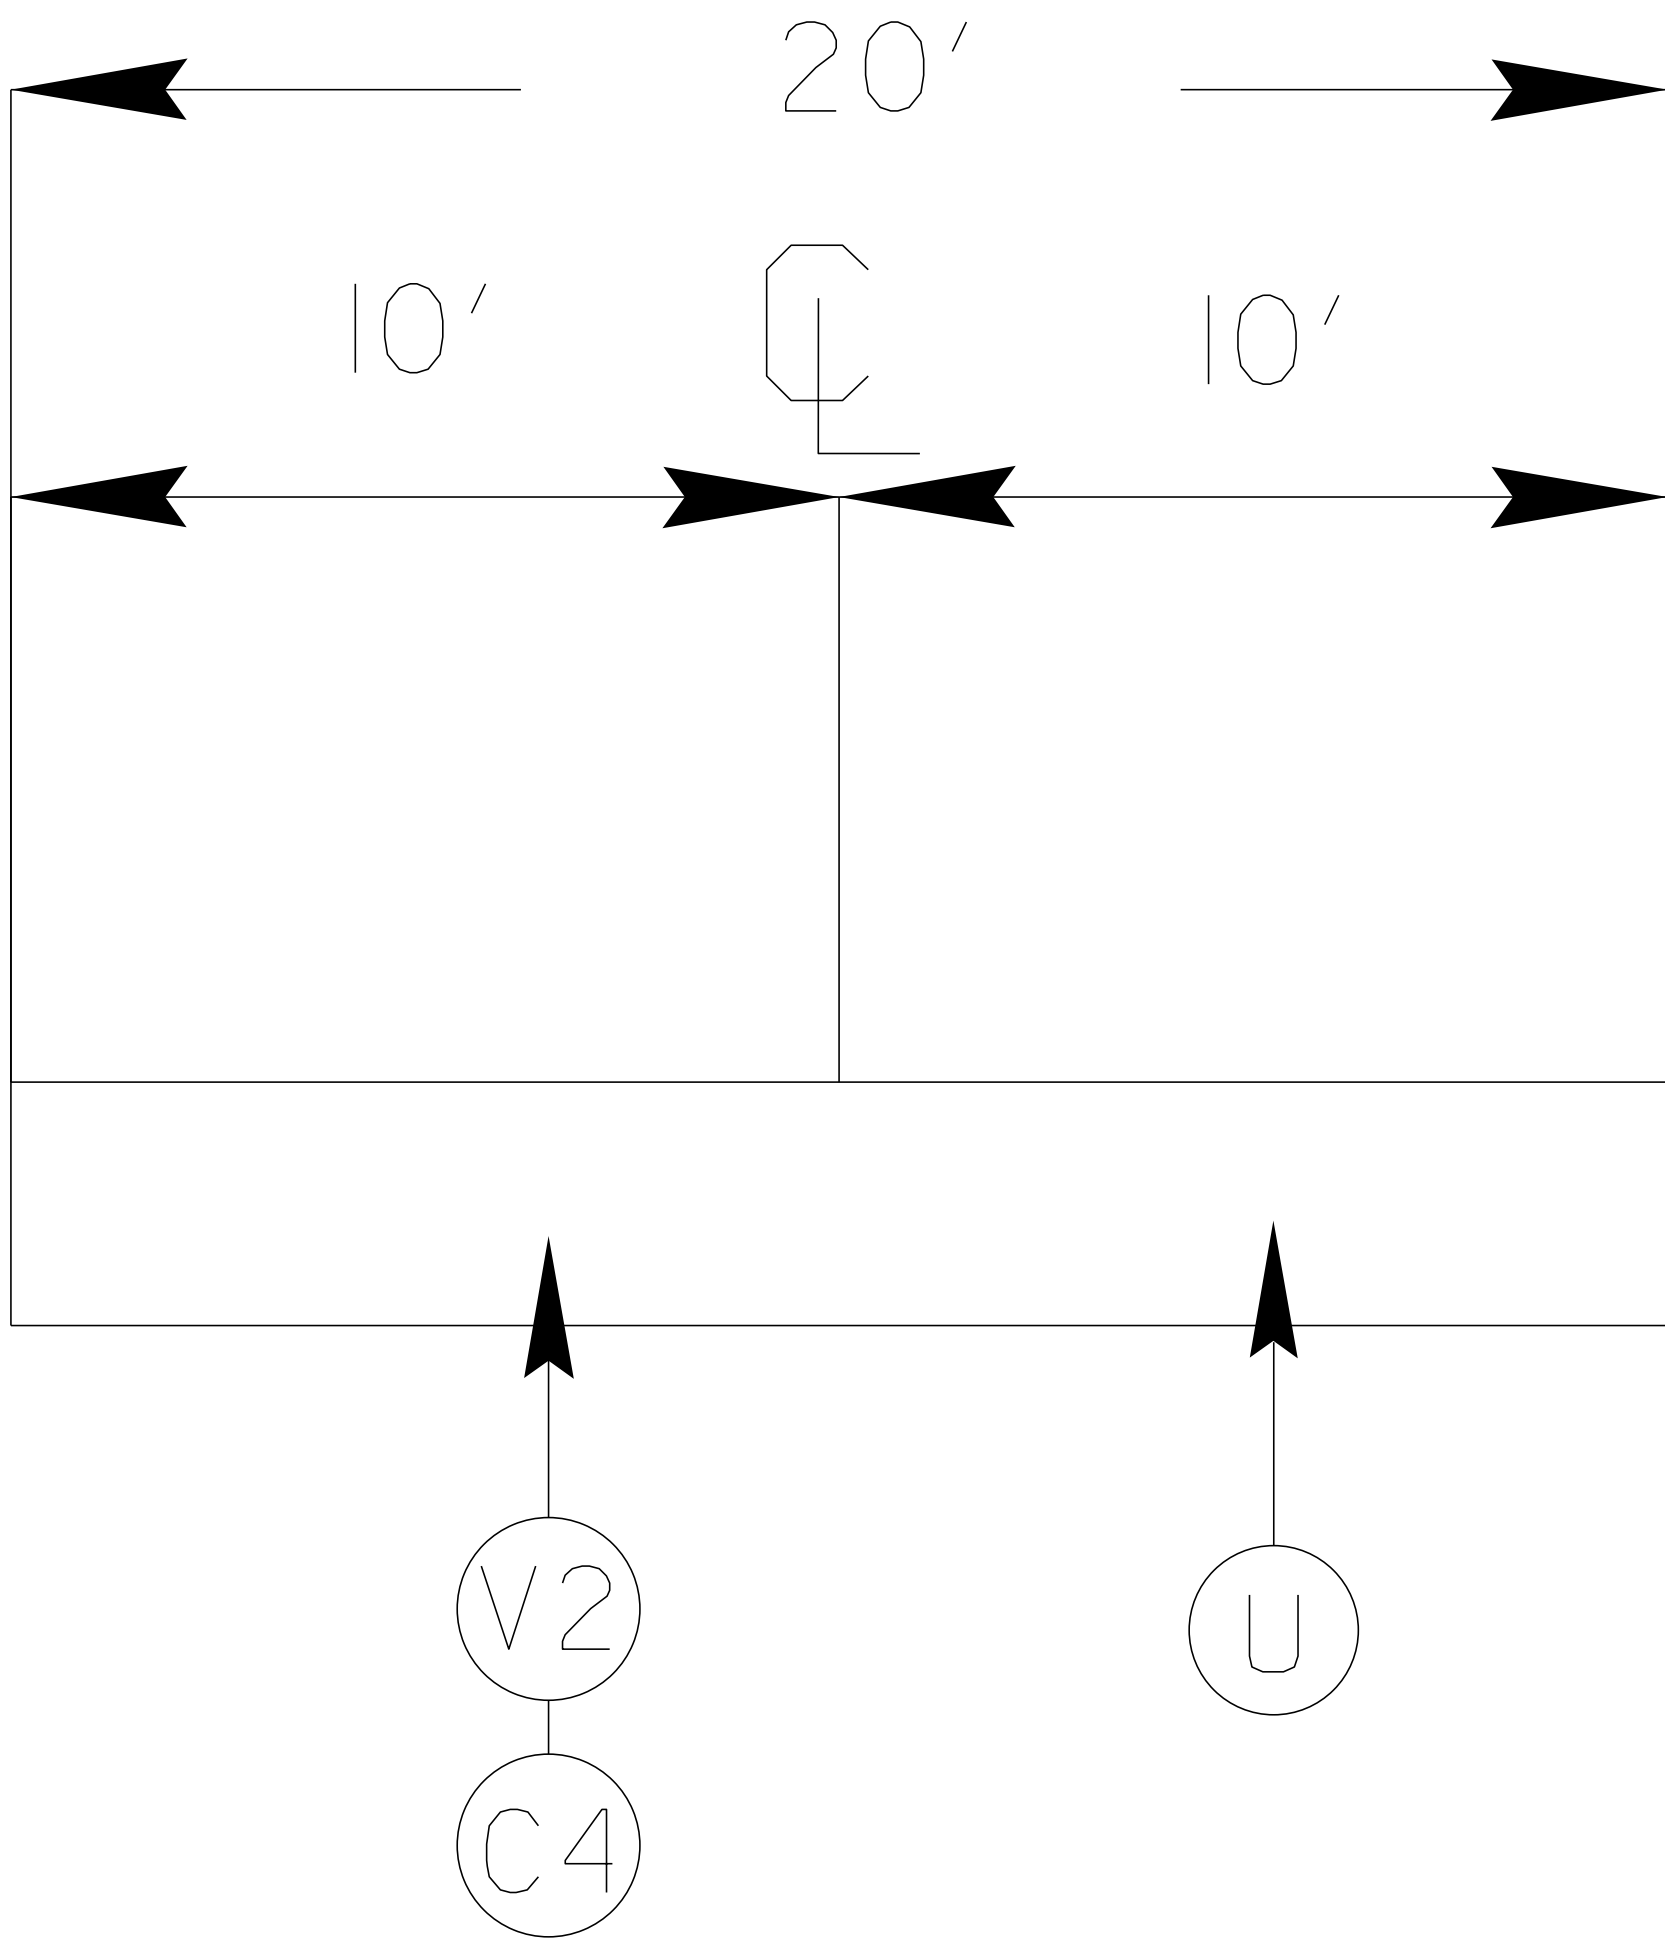


TYPICAL 4

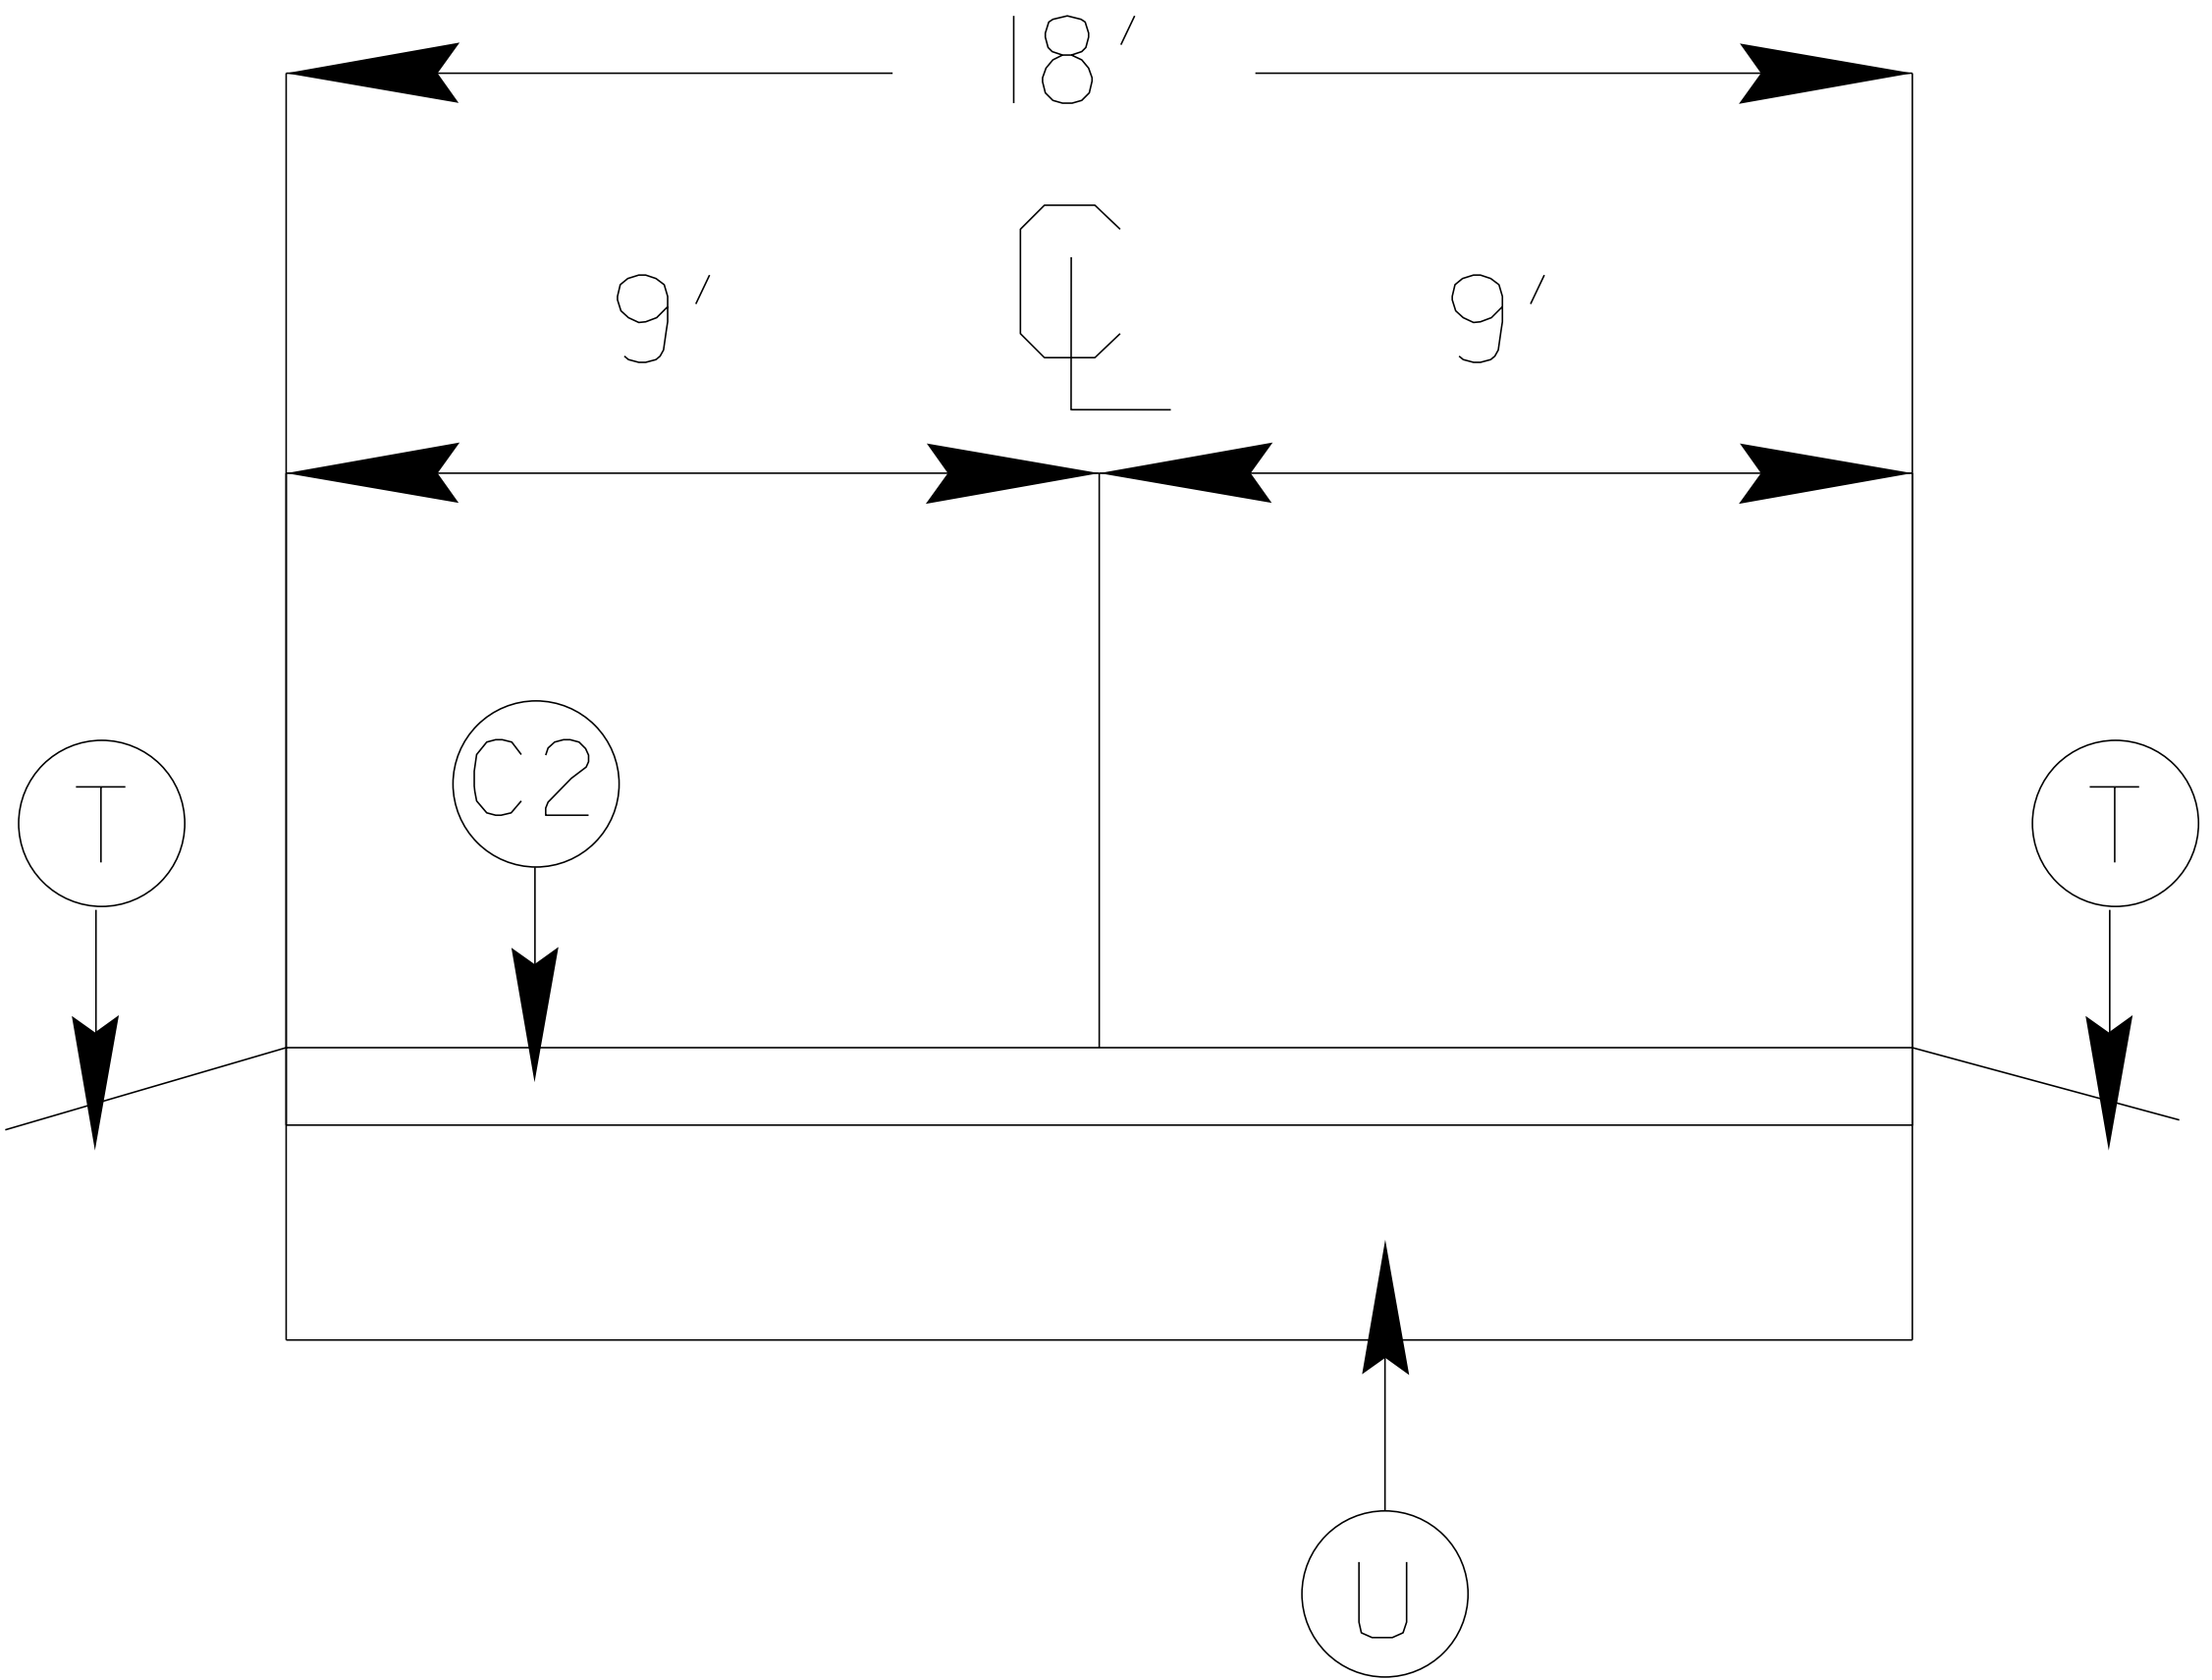


PROJECT REFERENCE NO.		SHEET NO.
2021.CPT.14.04.10441		13
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION
2021.CPT.14.04.10501		CONSTRUCTION
2021.CPT.14.04.20501		
2021.CPT.14.04.20441		
2021.CPT.14.04.10441		

TYPICAL 5

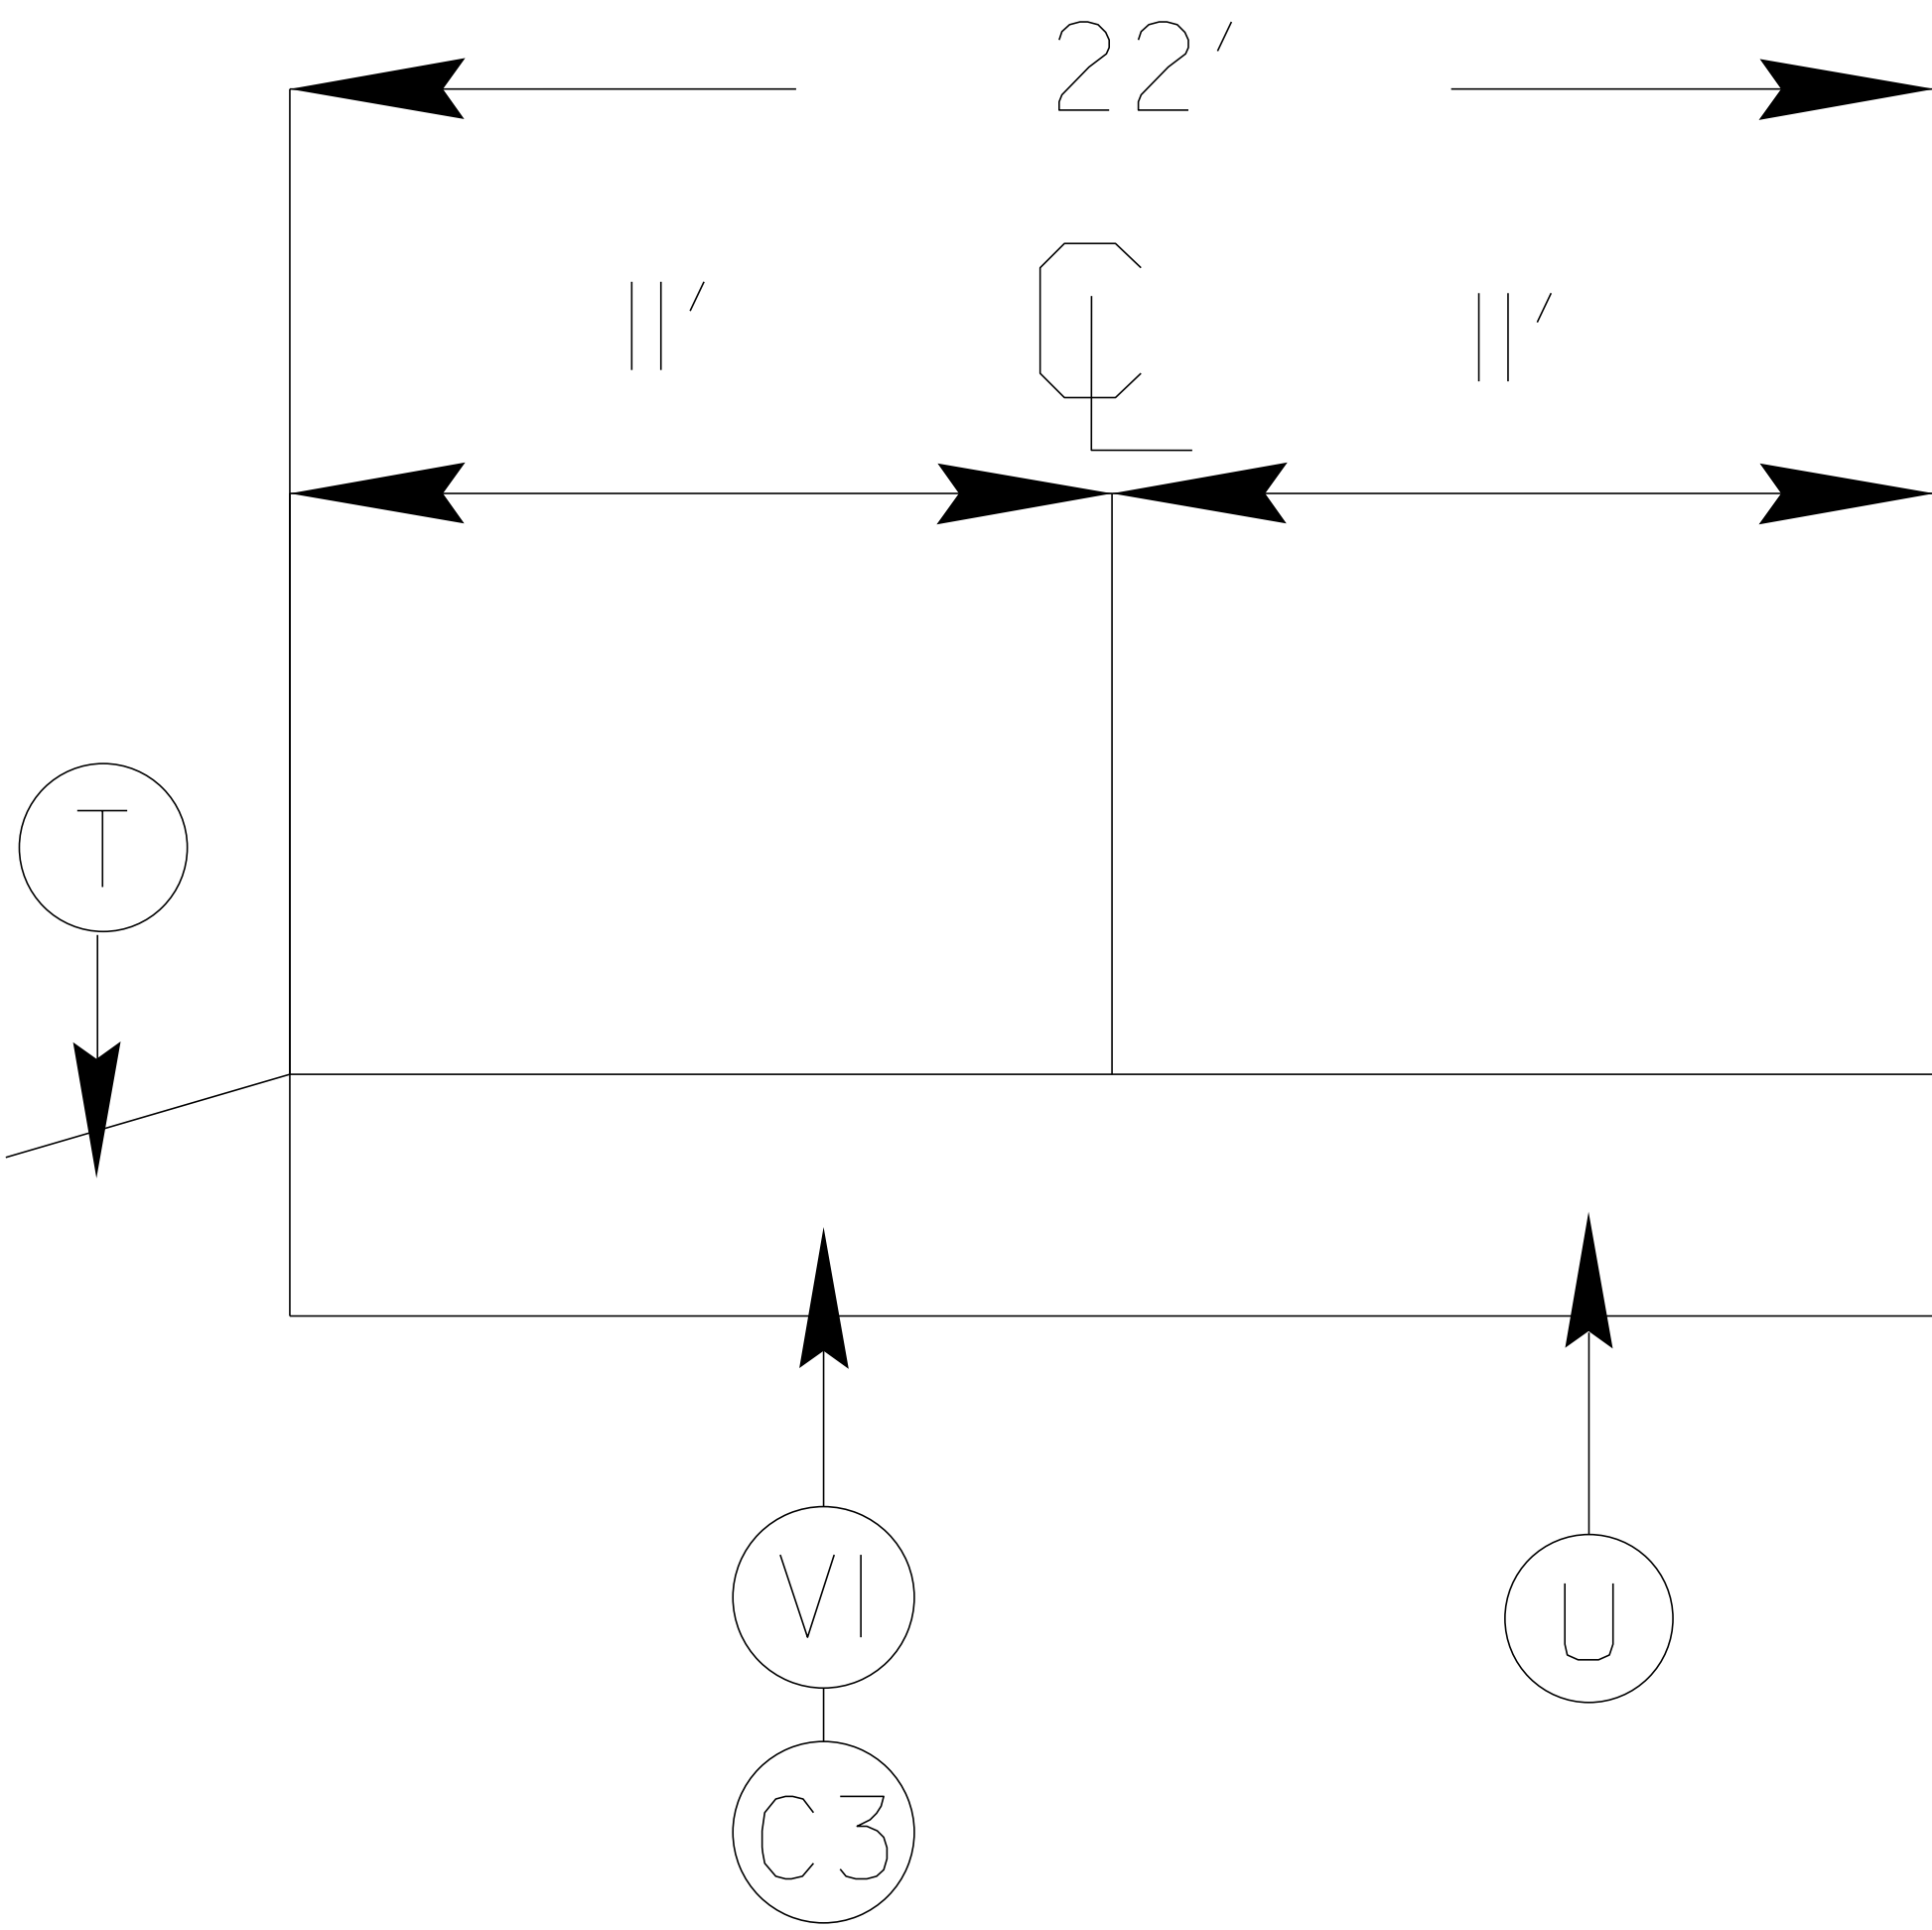


TYPICAL 6

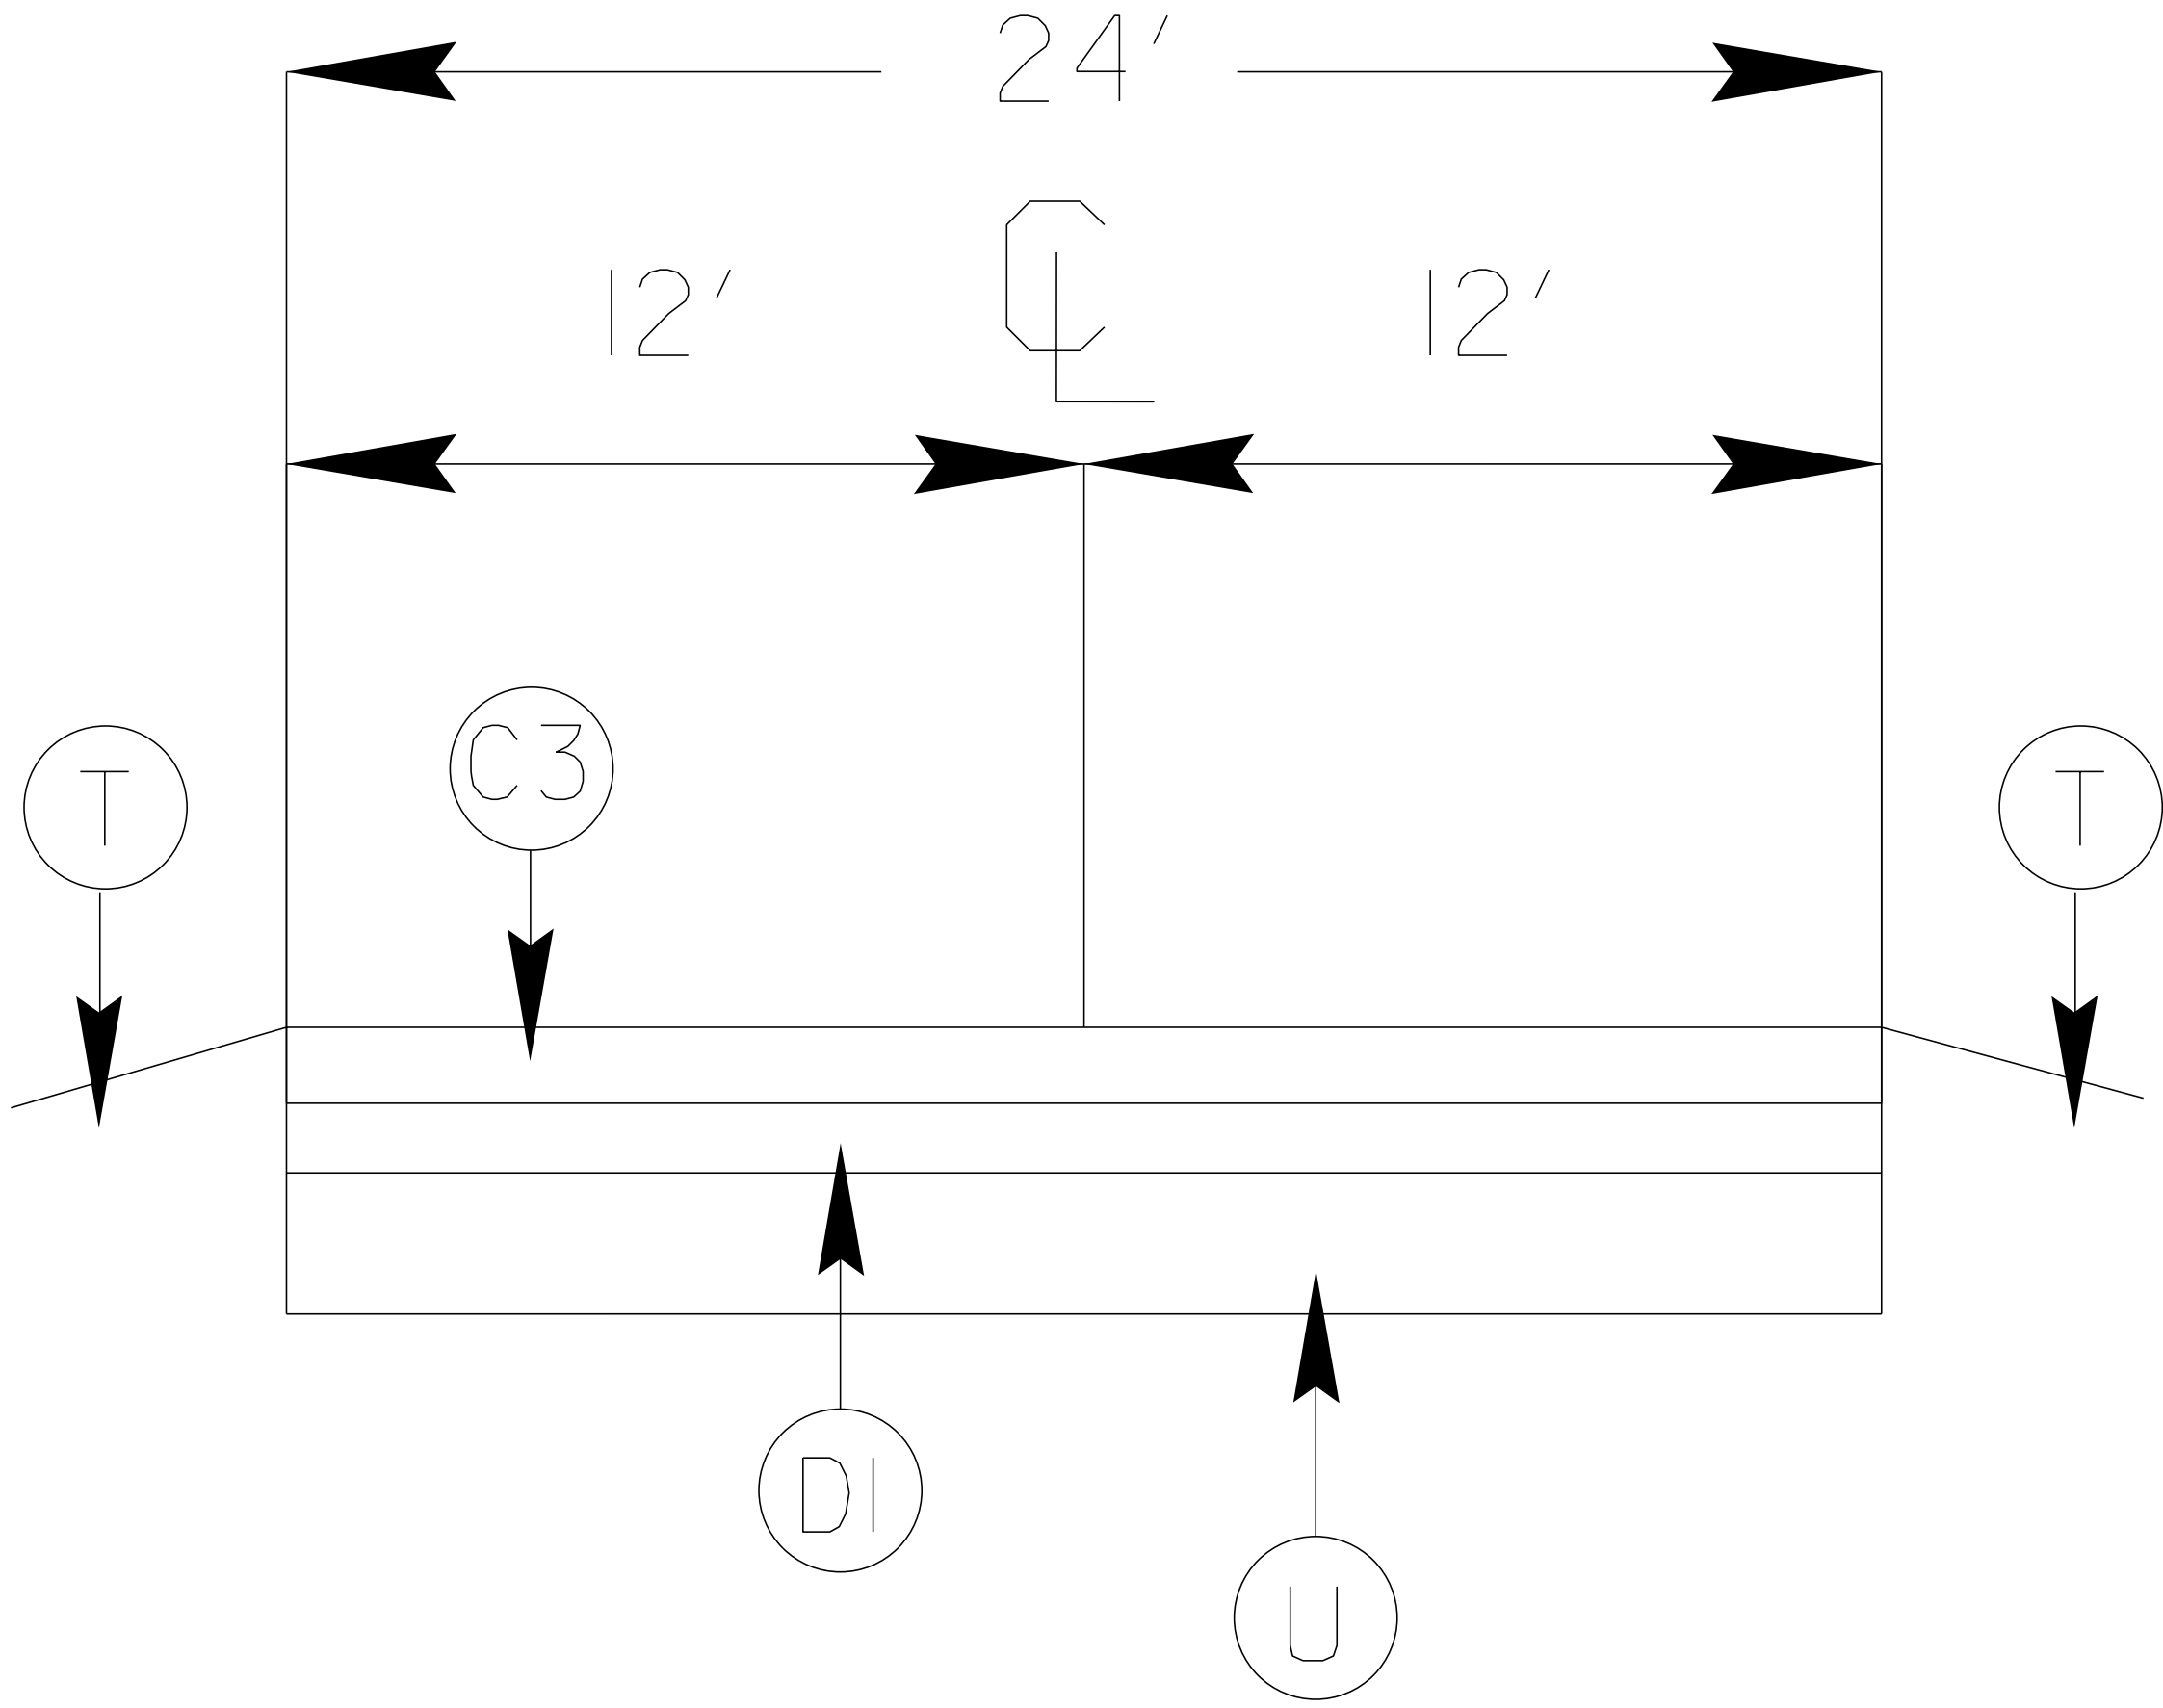


PROJECT REFERENCE NO.		SHEET NO.
2021.CPT.14.04.10441		14
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION
2021.CPT.14.04.10501		CONSTRUCTION
2021.CPT.14.04.20501		
2021.CPT.14.04.20441		
2021.CPT.14.04.10441		

TYPICAL 7

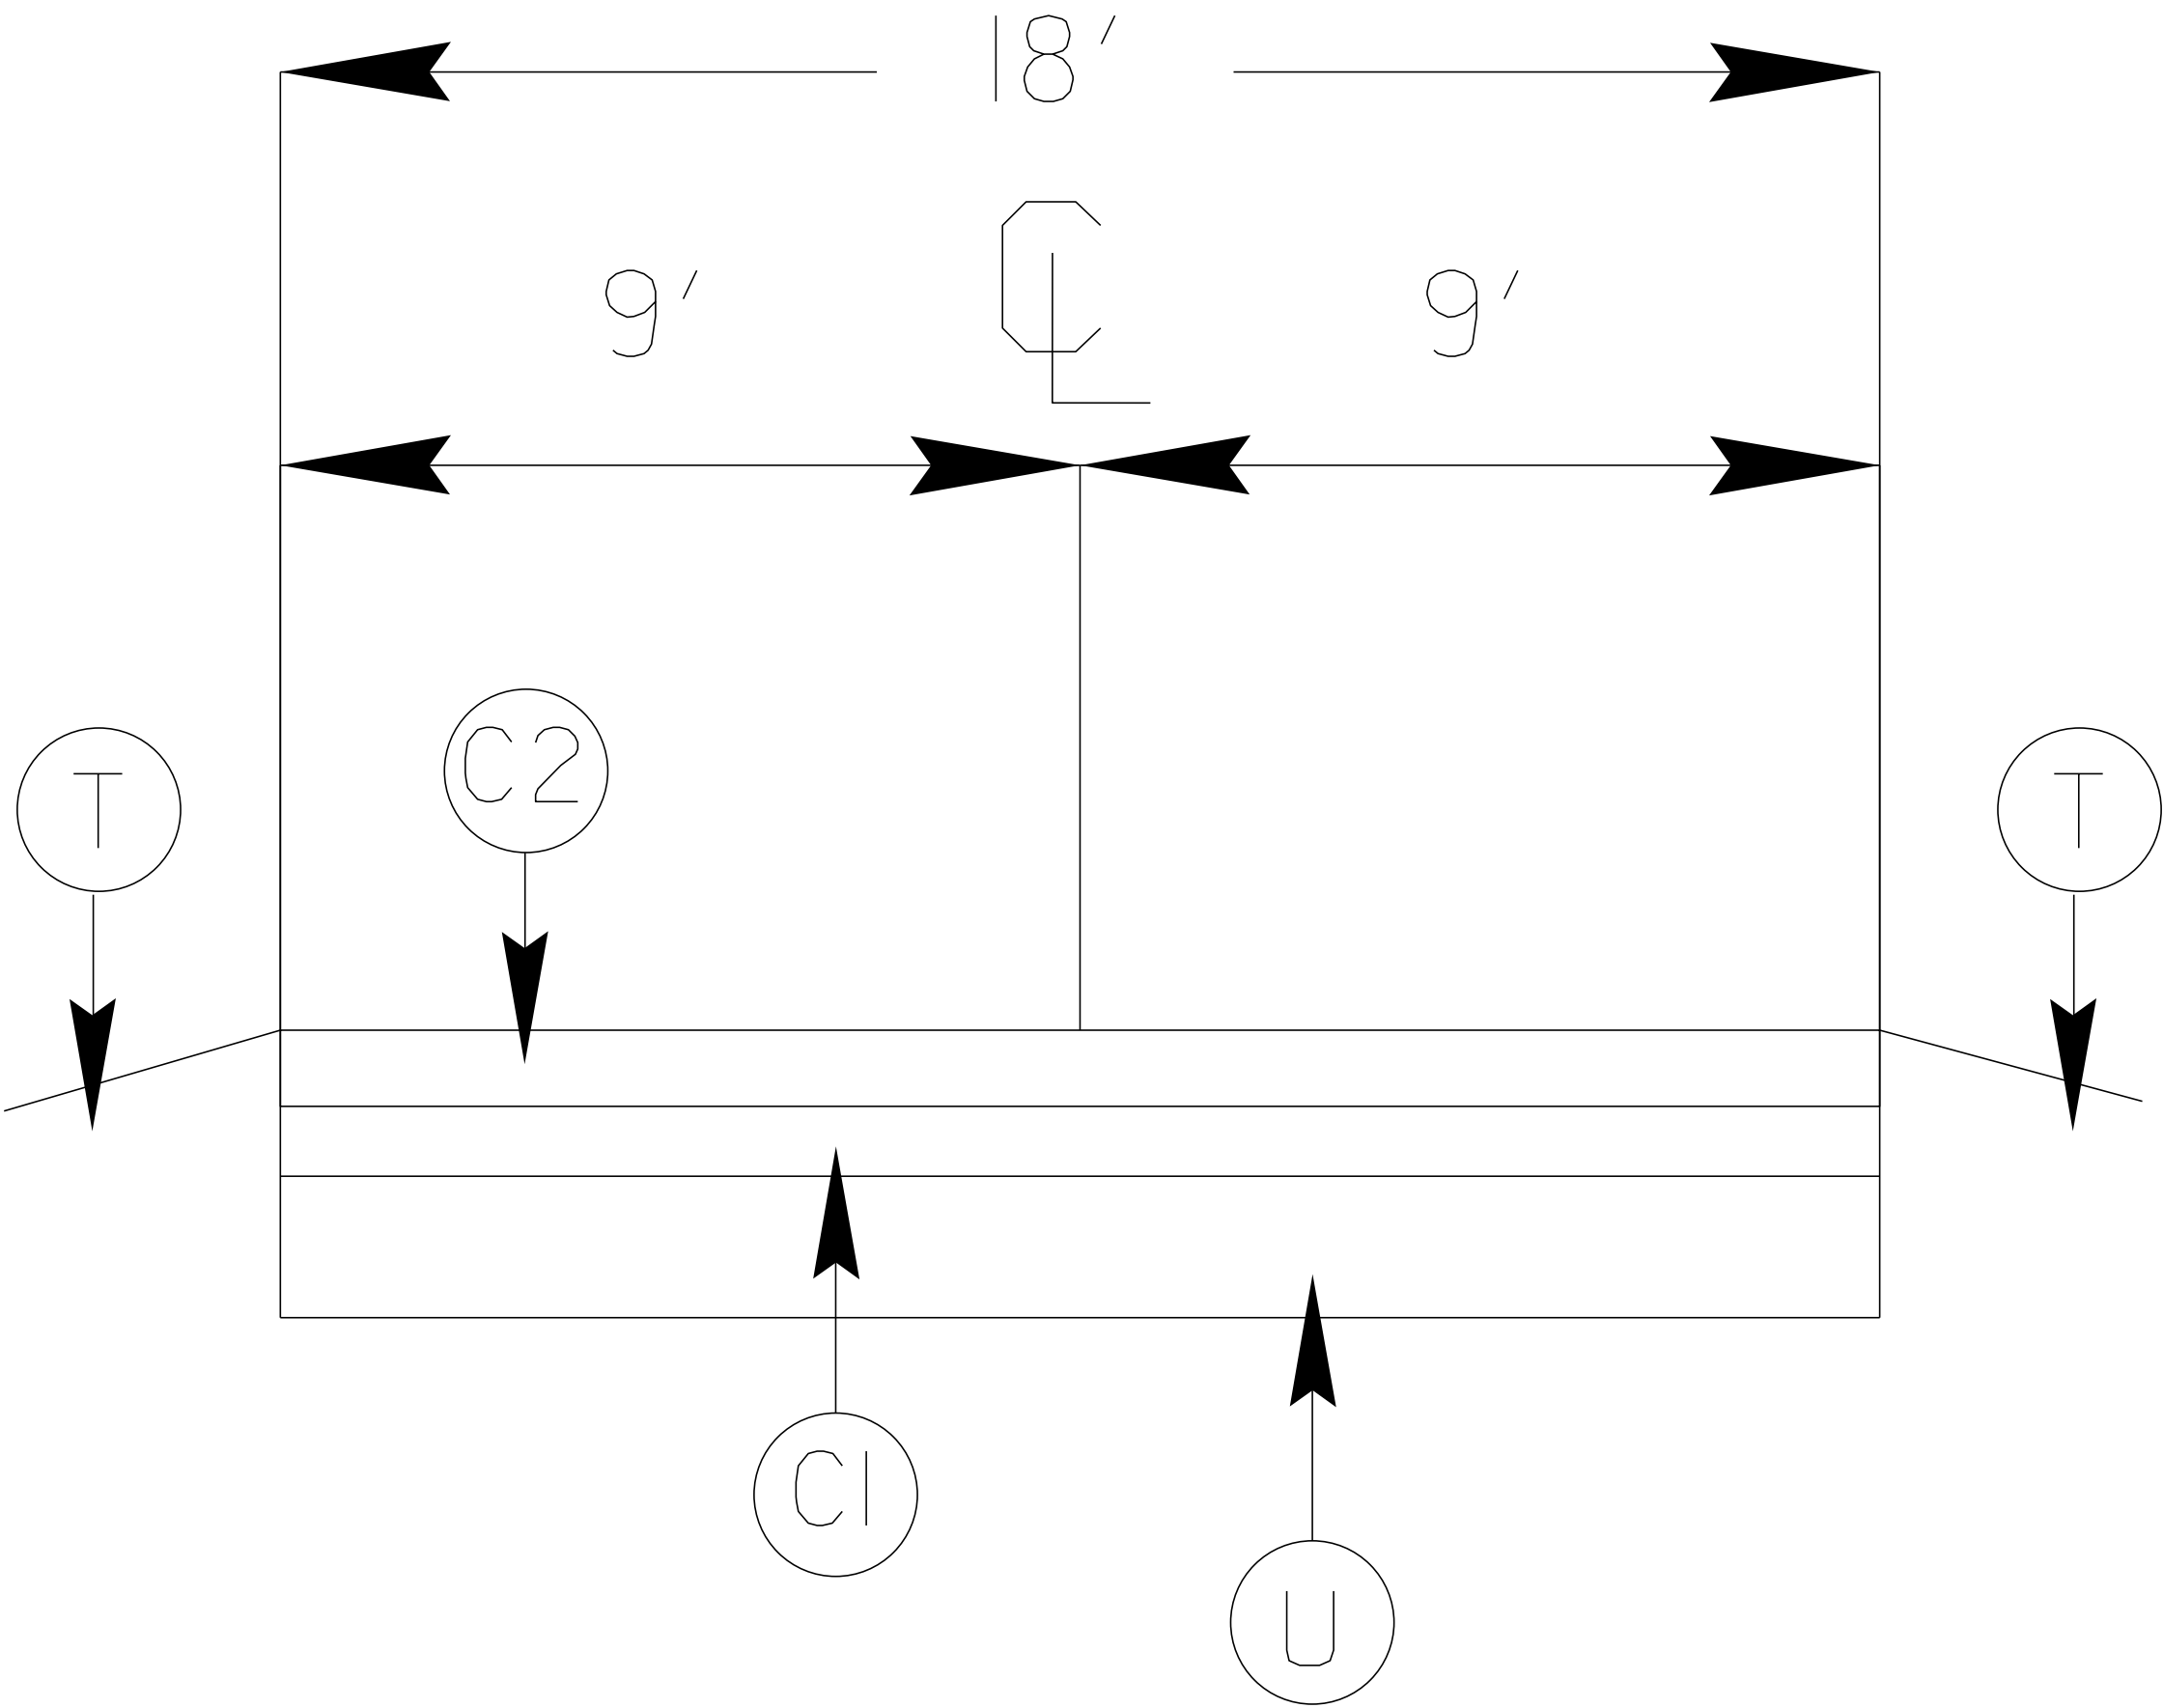

TYPICAL 8

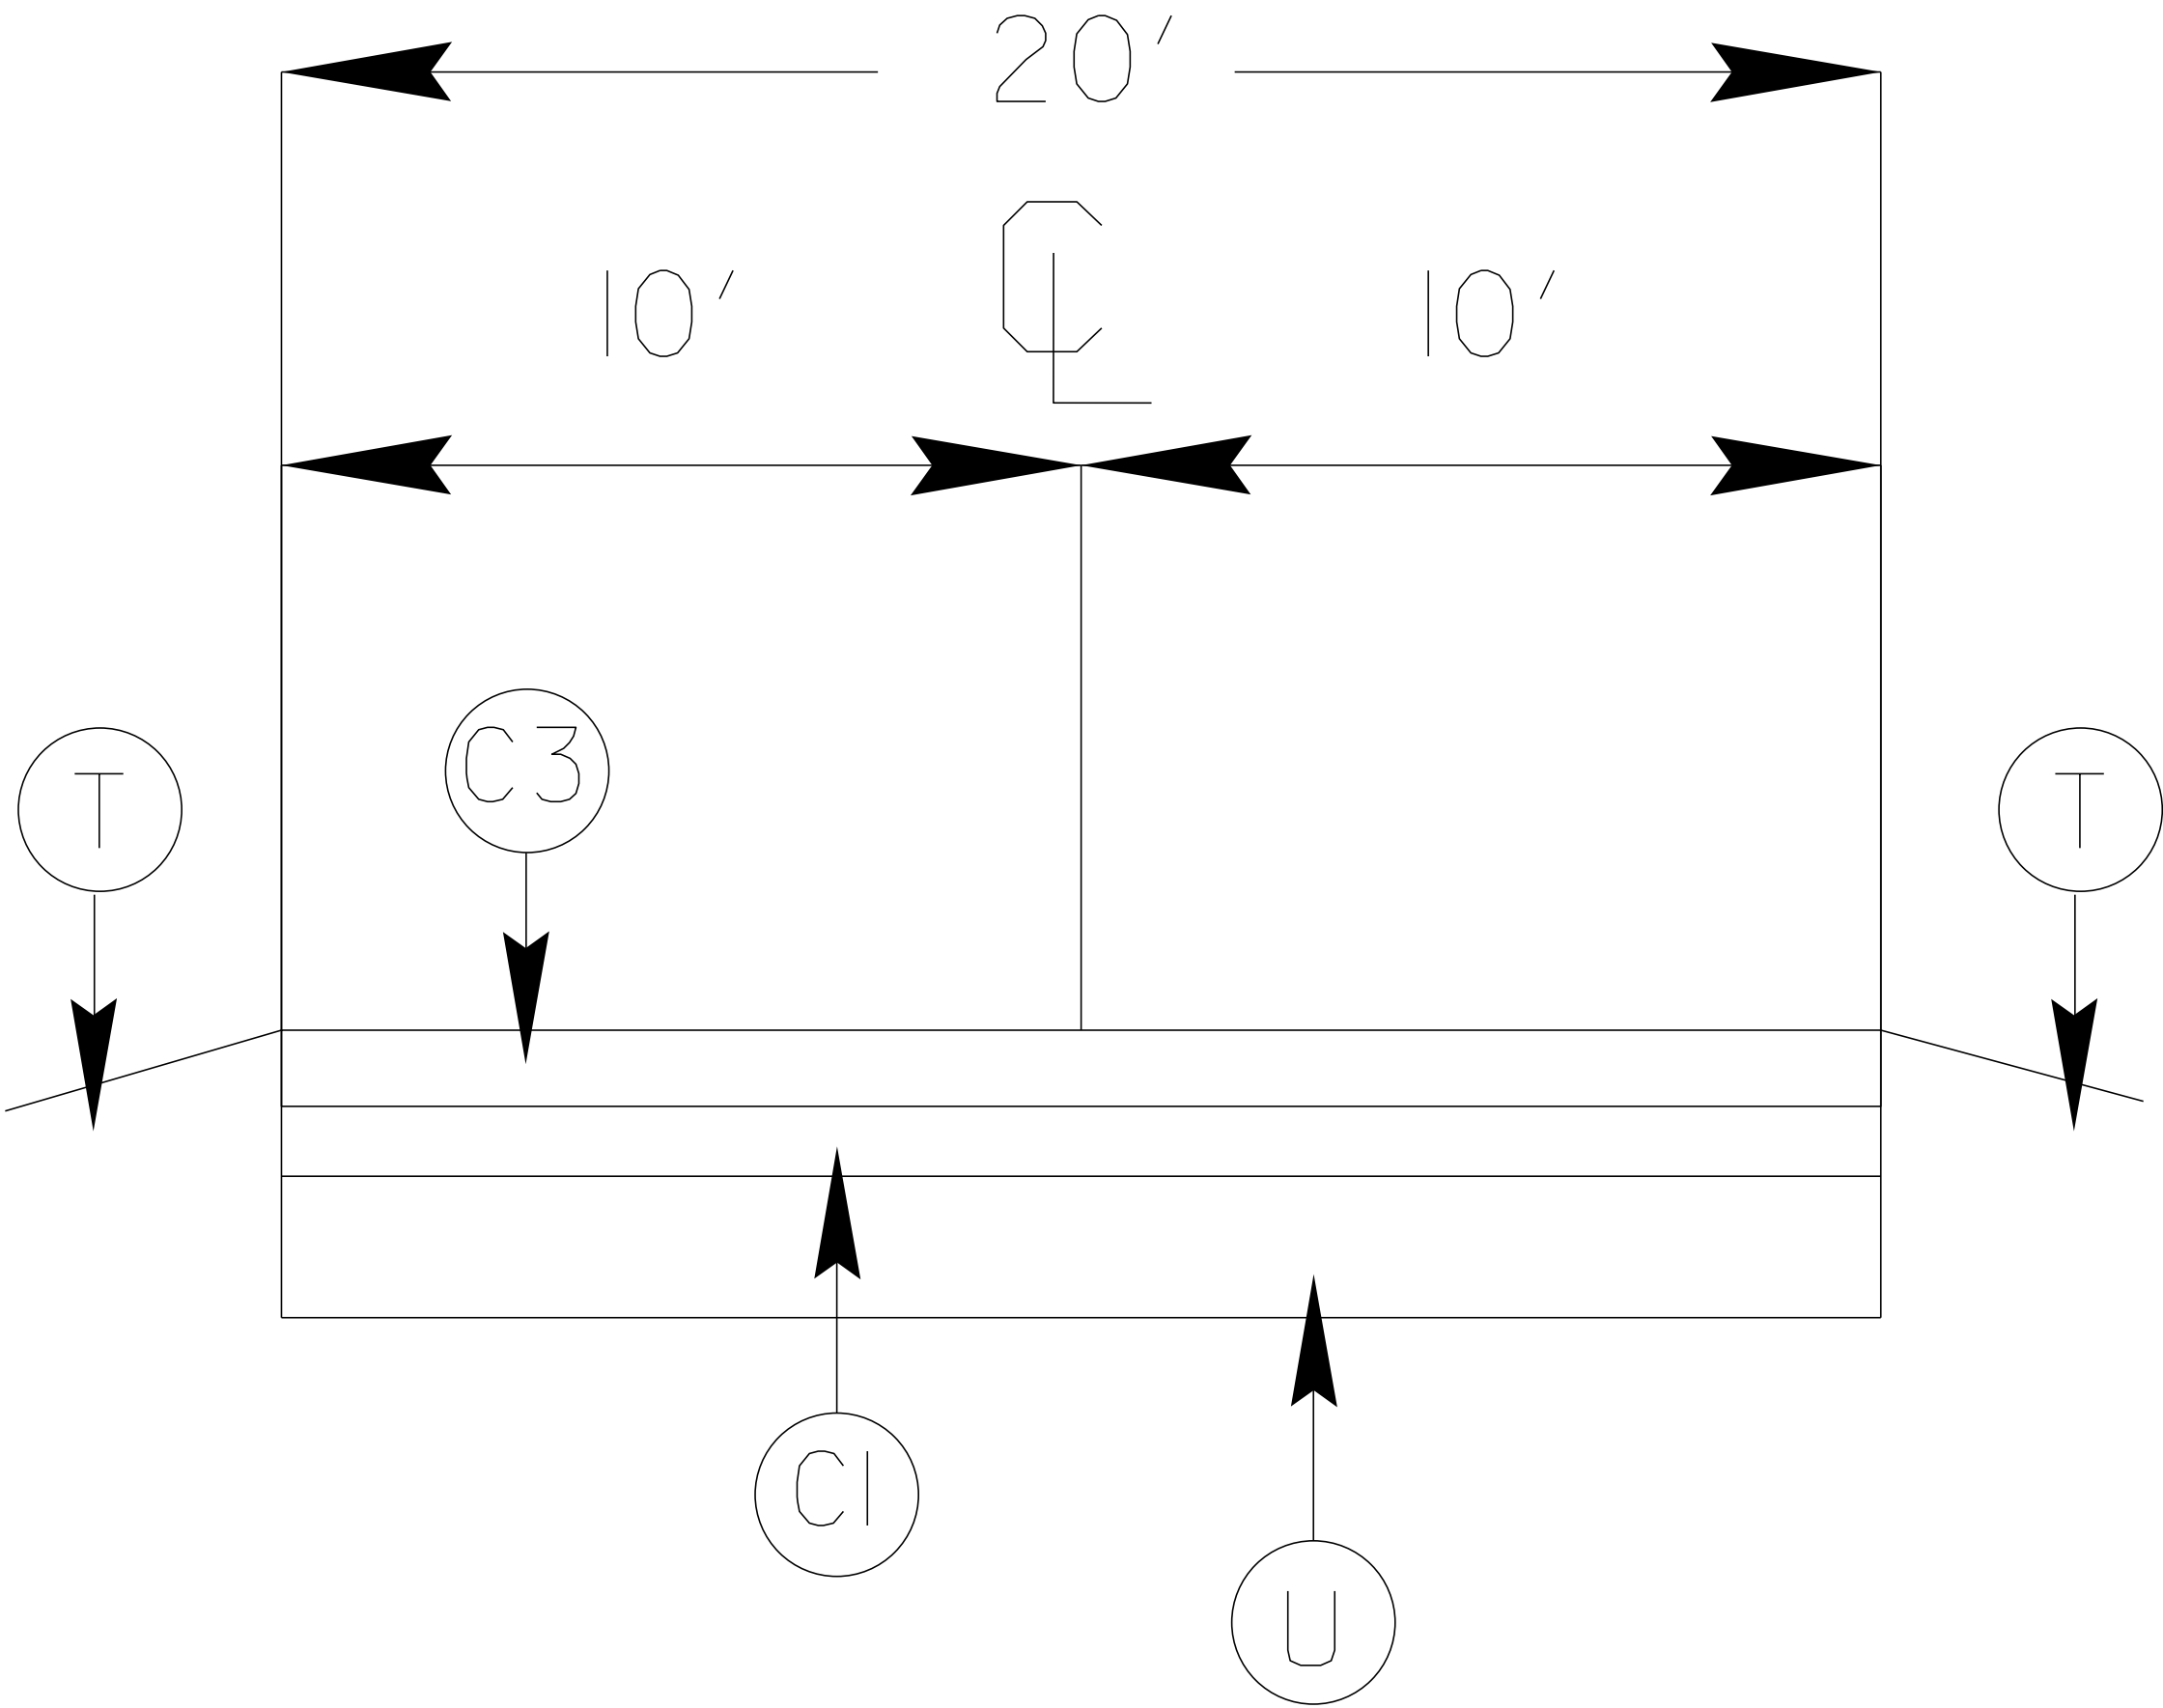

PROJECT REFERENCE NO.		SHEET NO.
2021.CPT.14.04.10441		15
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION
2021.CPT.14.04.10501		CONSTRUCTION
2021.CPT.14.04.20501		
2021.CPT.14.04.20441		
2021.CPT.14.04.10441		

SURFACING SCHEDULE

ITEM NO.	DESCRIPTION
C1	PROP. APPROX. 3/4" ASPHALT CONCRETE SURFACE COURSE, (LEVELING) TYPE S9.5B, AT AN AVERAGE RATE OF 82.5 LBS. PER SQ. YD.
C2	PROP. APPROX. 1 1/4" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD.
C3	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C4	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
D1	PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.
D2	PROP. APPROX. 2 1/2" ASPHALT CONCRETE INTERMEDIATE COURSE, (WEDGING) TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
T	SHOULDER RECONSTRUCTION WITH ABCM - SEE PROJECT SPECIAL PROVISIONS
U	EXISTING ASPHALT
V1	MILLED ASPHALT PAVEMENT 1 1/2" IN DEPTH IN DISTRESSED AREAS AS DIRECTED BY PROJECT ENGINEER.
V2	MILLED ASPHALT PAVEMENT 2" IN DEPTH IN DISTRESSED AREAS AS DIRECTED BY PROJECT ENGINEER.

PROJECT NO.	SHEET NO.	TOTAL NO.
2021CPT.14.04.10441, 2021CPT.14.04.10501 2021CPT.14.04.20441, 2021CPT.14.04.20501	16	

SUMMARY OF QUANTITIES


PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	TYP NO	LANES	LANE TYPE	FINAL SURFACE TESTING REQUIRED	WARM MIX ASPHALT REQUIRED	LENGTH	WIDTH	1245000000-E	1297000000-E	1330000000-E	1503000000-E	1519000000-E	1520000000-E	1523000000-E	1575000000-E	1704000000-E	2830000000-N	2845000000-N			
												SHOULDER RECONSTRUCTI ON	2" MILLING	1½" MILLING	INCIDENTAL MILLING	INTERMEDIA TE COURSE, I19.0C (WEDGING)	INTERMEDI ATE COURSE, I19.0C (LEVELING)	SURFACE COURSE, S9.5B	LEVELING COURSE, S9.5B	SURFACE COURSE, S9.5C	ASPHALT BINDER FOR PLANT MIX	PATCHING EXISTING PAVEMENT	ADJ. OF MANHOLES	ADJ. OF METER OR VALVE BOX	
												MI	FT	SMI	SY	SY	SY	TONS	TONS	TONS	TONS	TONS	TONS	EA	EA
2021CPT.14.04.20441	Haywood	1	SR-1863 (HENSON COVE ROAD)	FROM .01 MILES EAST OF NC 110 TO SR-1871	1	2	2WU	NO	NO	1.57	18					354		1,515	686		164	80			
TOTAL FOR MAP NO. 1										1.57						354		1,515	686		164	80			
2021CPT.14.04.20441	Haywood	2	SR-1871 (OLD HENSON COVE/MURRY ROAD	FROM .01.MILES EAST OF NC 110 TO SR-1870	1	2	2WU	NO	NO	3.75	18					846			1,639	3,684	372	120			
TOTAL FOR MAP NO. 2										3.75						846			1,639	3,684	372	120			
TOTAL FOR PROJ NO. 2021CPT.14.04.20441										5.32						1,200		1,515	2,325	3,684	536	200			
																	1,200								
2021CPT.14.04.20501	Jackson	3	SR-1465 (ROSEMONT ROAD)	FROM .01 MILES NORTH OF US 74 TO END OF MAINT.	2	2	2WU	NO	NO	1.4	18	2.80				203		1,104	612		125	335			
TOTAL FOR MAP NO. 3										1.4		2.80				203		1,104	612		125	335			
2021CPT.14.04.20501	Jackson	4	SR-1456 (MINERAL SPRINGS DRIVE)	FROM .01 MILES NORTH OF US 74 TO SR-1432	2	2	2WU	NO	NO	1.2	18	2.40						984	525		101	494			
TOTAL FOR MAP NO. 4										1.2		2.40						984	525		101	494			
2021CPT.14.04.20501	Jackson	5	SR-1169 (CENRTAL DRIVE)	FROM SR-1002 TO SR-1002	3	2	2WU	NO	NO	0.83	20		9,739							1,210	73	34	6		
TOTAL FOR MAP NO. 5										0.83			9,739							1,210	73	34	6		
2021CPT.14.04.20501	Jackson	6	SR-1729 (STEPHENS ROAD)	FROM SR-1002 TO END OF MAINT.	4	2	2WU	NO	NO	0.51	18	1.02						410			27	160			
TOTAL FOR MAP NO. 6										0.51		1.02						410			27	160			
2021CPT.14.04.20501	Jackson	7	SR-1473 (MACKTOWN ROAD)	FROM SR-1377 TO END OF PAVE	7	2	2WU	NO	NO	0.7	18	1.40						562	306		58	220			
TOTAL FOR MAP NO. 7										0.7		1.40						562	306		58	220			
2021CPT.14.04.20501	Jackson	8	SR-1532 (GATEWAY)	FROM .01 MILES WEST OF US441 TO SR-1565	7	2	2WU	NO	NO	1.43	18	2.86						1,162	625		120	311			
TOTAL FOR MAP NO. 8										1.43		2.86						1,162	625		120	311			
2021CPT.14.04.20501	Jackson	9	SR-1405 (SUNSET FARM ROAD)	FROM .10 MILES EAST OF US 441 TO .01 MILES EAST OF SR-1406	7	2	2WU	NO	NO	0.68	18	1.36						546	297		57	214			
TOTAL FOR MAP NO. 9										0.68		1.36						546	297		57	214			
TOTAL FOR PROJ NO. 2021CPT.14.04.20501										6.75		11.84	9,739			203		4,768	2,365	1,210	561	1,734	34	6	
													9,739			203									
2021CPT.14.04.10501	Jackson	10	NC 116 (WEBSTER ROAD)	FROM US 23/441 TO BRIDGE #58 AT SR-1540	8	2	2WU	NO	NO	2.3	20	4.60							1,490	2,555	253	263			
TOTAL FOR MAP NO. 10										2.3		4.60							1,490	2,555	253	263			
2021CPT.14.04.10501	Jackson	11	NC-116 (WEBSTER ROAD)	FROM BRIDGE #58 TO .24 MILES EAST OF SR-1359	5	2		NO	NO	0.35	22	0.35		4,693						389	23	25			
TOTAL FOR MAP NO. 11										0.35		0.35		4,693						389	23	25			
TOTAL FOR PROJ NO. 2021CPT.14.04.10501										2.65		4.95		4,693					1,490	2,944	276	288			
													4,693												
2021CPT.14.04.10441	Haywood	12	US 276	FROM .9 MILES NORTH OF SR-1812 TO 1.1 MILES NORTH OF SR-1812	6	2	2WU	NO	NO	0.227	24	0.45			222		330			297	34				
TOTAL FOR MAP NO. 12										0.227		0.45			222		330			297	34				
TOTAL FOR PROJ NO. 2021CPT.14.04.10441										0.227		0.45			222		330			297	34				
																	330								
GRAND TOTAL										14.947		17.24	9,739	4,693	222	1,403	330	6,283	6,180	8,135	1,407	2,222	34	6	
															14,432			1,733							

PROJECT NO.	SHEET NO.	TOTAL NO.
2021CPT.14.04.10441, 2021CPT.14.04.10501 2021CPT.14.04.20441, 2021CPT.14.04.20501	17	


THERMOPLASTIC AND PAINT QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	TYP NO	LANES	LANE TYPE	4413000000-E	4457000000-N	4810000000-E		4835000000-E	4890000000-E		4892000000-N		
								WORK ZONE ADVANCE/GENERAL WARNING SIGNING	TEMPORARY TRAFFIC CONTROL	4" WHITE PAINT	4" YELLOW PAINT	24" WHITE PAINT	GENERIC PAVE. MARK ITEM 4" X 60 MIL WHITE THERMO	GENERIC PAVE. MARK ITEM 4" X 60 MIL YELLOW THERMO.	GENERIC PAVE. MARK ITM. NON-METALIC HOUSING SNOWPLOWABLE MARKERS		
								MI	FT	SF	LS	LF	LF	LF	LF	EA	
2021CPT.14.04.20441	Haywood	1	SR-1863 (HENSON COVE ROAD)	FROM .01 MILES EAST OF NC 110 TO SR-1871	1	2	2WU	1.57	18	160	1.00	67,572	67,572				
TOTAL FOR MAP NO. 1							1.57		160	1	67,572	67,572					
2021CPT.14.04.20441	Haywood	2	SR-1871 (OLD HENSON COVE/MURRY ROAD	FROM .01.MILES EAST OF NC 110 TO SR-1870	1	2	2WU	3.75	18	383		121,800	79,950				
TOTAL FOR MAP NO. 2							3.75		383		121,800	79,950					
TOTAL FOR PROJ NO. 2021CPT.14.04.20441							5.32		543	1	189,372	147,522					
											336,894						
2021CPT.14.04.20501	Jackson	3	SR-1465 (ROSEMONT ROAD)	FROM .01 MILES NORTH OF US 74 TO END OF MAINT.	2	2	2WU	1.4	18	143		30,128	30,128				
TOTAL FOR MAP NO. 3							1.4		143		30,128	30,128					
2021CPT.14.04.20501	Jackson	4	SR-1456 (MINERAL SPRINGS DRIVE)	FROM .01 MILES NORTH OF US 74 TO SR-1432	2	2	2WU	1.2	18	143		25,824	25,824				
TOTAL FOR MAP NO. 4							1.2		143		25,824	25,824					
2021CPT.14.04.20501	Jackson	5	SR-1169 (CENRTAL DRIVE)	FROM SR-1002 TO SR-1002	3	2	2WU	0.83	20			17,862	17,862	200			
TOTAL FOR MAP NO. 5							0.83				17,862	17,862	200				
2021CPT.14.04.20501	Jackson	6	SR-1729 (STEPHENS ROAD)	FROM SR-1002 TO END OF MAINT.	4	2	2WU	0.51	18	52		10,975	10,975				
TOTAL FOR MAP NO. 6							0.51		52		10,975	10,975					
2021CPT.14.04.20501	Jackson	7	SR-1473 (MACKTOWN ROAD)	FROM SR-1377 TO END OF PAVE	7	2	2WU	0.7	18	71		15,064	15,064				
TOTAL FOR MAP NO. 7							0.7		71		15,064	15,064					
2021CPT.14.04.20501	Jackson	8	SR-1532 (GATEWAY)	FROM .01 MILES WEST OF US441 TO SR-1565	7	2	2WU	1.43	18	146		30,774	30,774				
TOTAL FOR MAP NO. 8							1.43		146		30,774	30,774					
2021CPT.14.04.20501	Jackson	9	SR-1405 (SUNSET FARM ROAD)	FROM .10 MILES EAST OF US 441 TO .01 MILES EAST OF SR-1406	7	2	2WU	0.68	18	70		14,634	14,634				
TOTAL FOR MAP NO. 9							0.68		70		14,634	14,634					
TOTAL FOR PROJ NO. 2021CPT.14.04.20501							6.75		625		145,261	145,261	200				
											290,522						
2021CPT.14.04.10501	Jackson	10	NC 116 (WEBSTER ROAD)	FROM US 23/441 TO BRIDGE #58 AT SR-1540	8	2	2WU	2.3	20	196		49,496	49,496		24,748	24,748	160
TOTAL FOR MAP NO. 10							2.3		196		49,496	49,496		24,748	24,748	160	
2021CPT.14.04.10501	Jackson	11	NC-116 (WEBSTER ROAD)	FROM BRIDGE #58 TO .24 MILES EAST OF SR-1359	5	2		0.35	22	112					3,696	3,696	26
TOTAL FOR MAP NO. 11							0.35		112						3,696	3,696	26
TOTAL FOR PROJ NO. 2021CPT.14.04.10501							2.65		308		49,496	49,496		28,444	28,444	186	
											98,992			56,888			
2021CPT.14.04.10441	Haywood	12	US 276	FROM .9 MILES NORTH OF SR-1812 TO 1.1 MILES NORTH OF SR-1812	6	2	2WU	0.227	24	128		4,885	4,889				
TOTAL FOR MAP NO. 12							0.227		128		4,885	4,889					
TOTAL FOR PROJ NO. 2021CPT.14.04.10441							0.227		128		4,885	4,889					
											9,774						
GRAND TOTAL							14.947		1,604	1	389,014	347,168	200	28,444	28,444	186	
											736,182			56,888			


- NOTES:
- 1) DETAIL DOES NOT APPLY TO OGAFD AND ULTRA-THIN BONDED WEARING COURSE.
 - 2) BACKFILL SHOULDER WITH APPROVED MATERIAL.
 - 3) THE SHOULDER WEDGE DEVICE MAY BE DISENGAGED AT PAVED DRIVEWAYS AND SIDE STREETS.

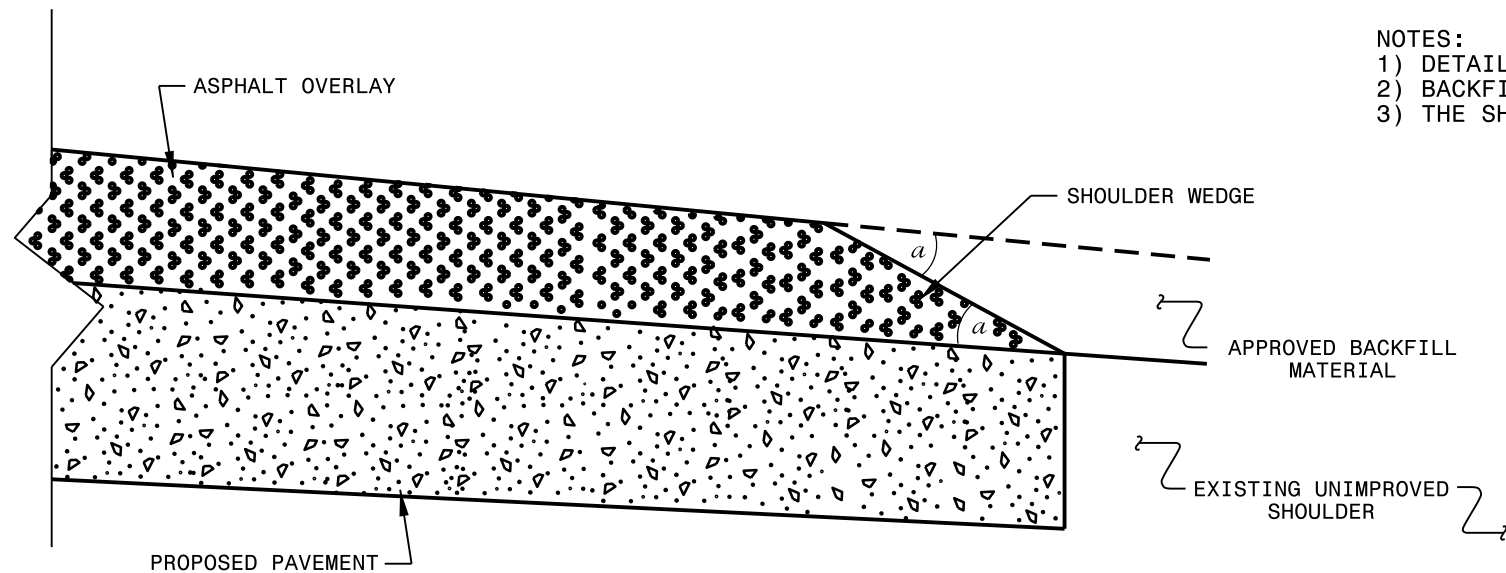

SHOULDER WEDGE DETAIL
(Resurfacing Projects w/ Widening or
with Existing Paved Shoulder having no dropoffs)

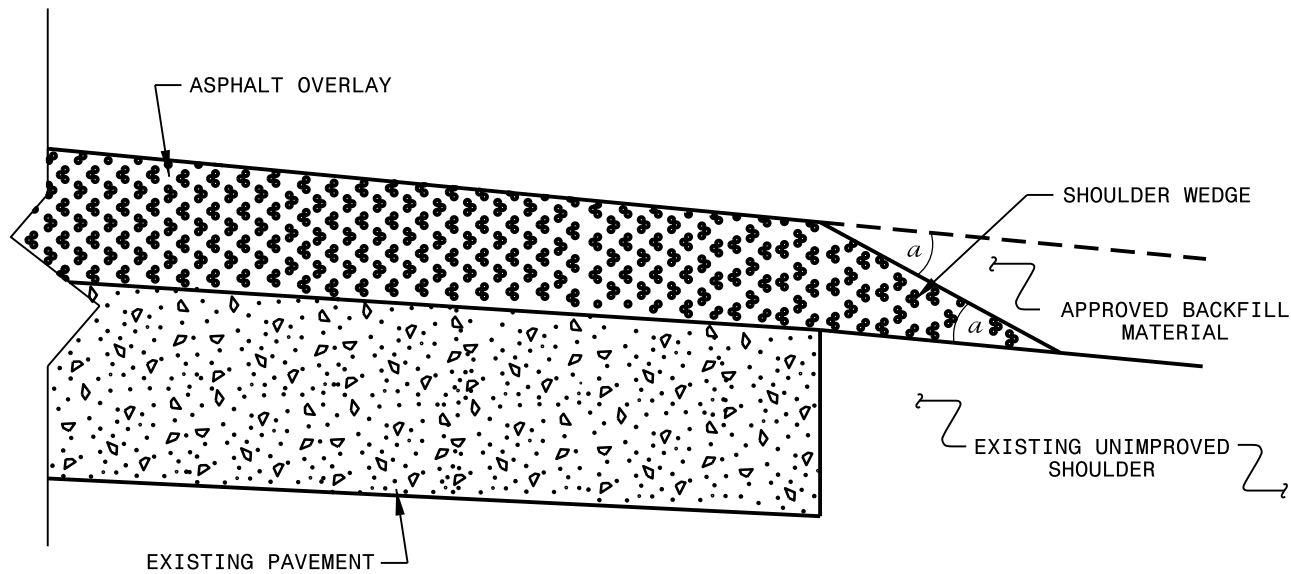

SHOULDER WEDGE DETAIL
(Resurfacing Projects w/ NO Widening)

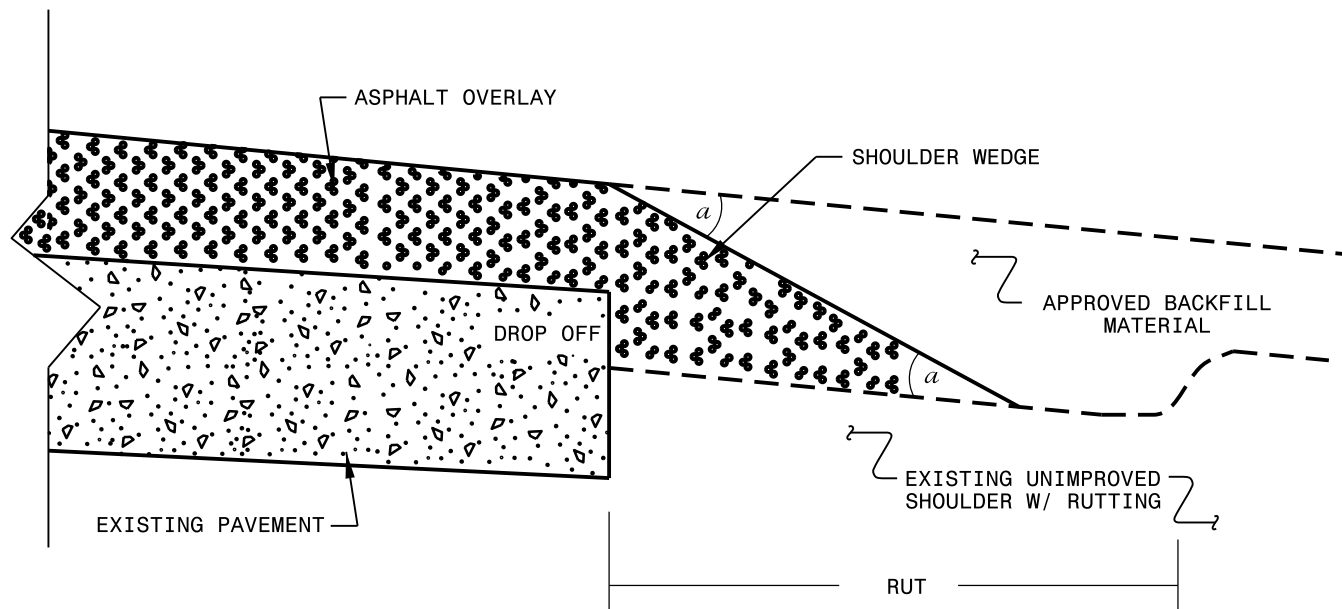


SHOULDER WEDGE DETAIL
(Resurfacing Adjacent to
Rutted Shoulder)

- SHOULDER WEDGE ANGLE = 30°

**CONTRACT STANDARDS
AND DEVELOPMENT UNIT**
Office 919-707-6950 FAX 919-250-4119

**SHOULDER WEDGE
DETAILS**

ORIGINAL BY: T.SPELL DATE: 7-19-11
MODIFIED BY: DATE: 10/16/12
CHECKED BY: DATE:
FILE SPEC.: s:\usr\details\stand\shoulderwedgedetail.dgn

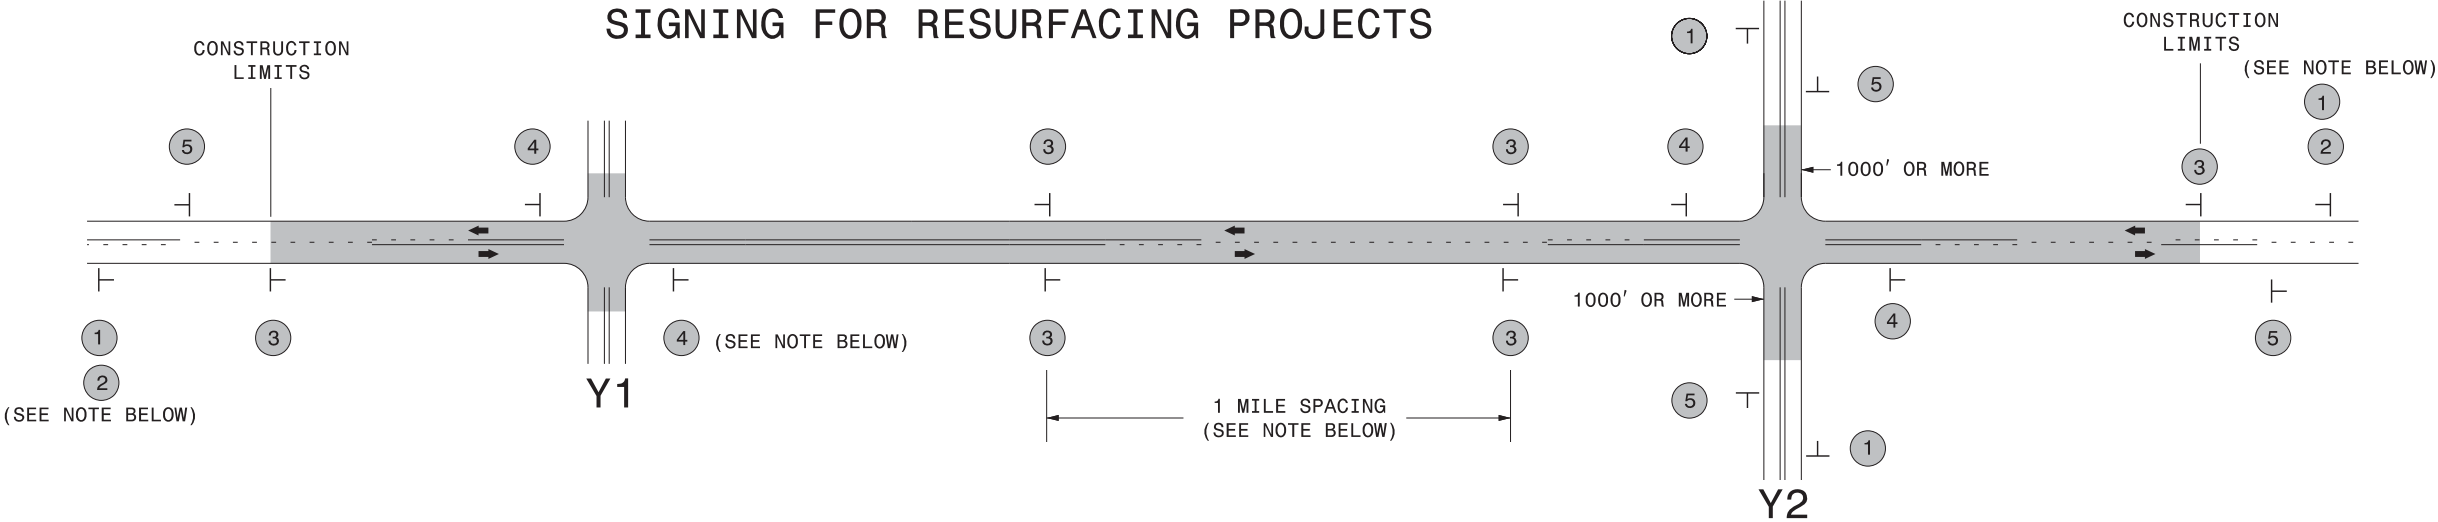

LEGEND

—|—

STATIONARY SIGN

→

DIRECTION OF TRAFFIC FLOW

MAINLINE (-L-) SIGNING

-Y- LINE SIGNING

SIGNING NOTES AND PLACEMENT PER DIRECTION	1 2 ROAD WORK AHEAD W20-1 48" X 48" NEXT XX MILES W7-36P 24" X 18" PLACE 1000' PRIOR TO BEGINNING OF CONSTRUCTION LIMITS. ONLY USED ON -Y- LINES IF RESURFACING LIMITS EXTEND 1000' ALONG -Y- LINE. #2 SIGN ONLY USED WHEN RESURFACING LIMITS ARE 2 OR MORE MILES IN LENGTH. ROUND UP TO NEXT WHOLE NUMBER.(NO FRACTIONAL OR DECIMAL NUMBERS)	NO REQUIRED STATIONARY SIGNING FOR THE FOLLOWING -Y- LINE CONDITIONS: 1) LESS THAN 1000' OF RESURFACING ALONG -Y- LINE 2) SUBDIVISION ROADS 3) DEAD END ROADS WHEN PAVING/CONSTRUCTION ACTIVITIES PROCEED ACROSS AN UNSIGNED -Y- LINE, ADVANCE WARNING PORTABLE SIGNS SHALL BE USED ALONG THE -Y- LINE AS SHOWN BELOW. REMOVE UPON COMPLETION OF WORK. ROAD WORK AHEAD W20-1 48" X 48" ROAD WORK AHEAD W20-7 A 48" X 48" PLACED 500' IN ADVANCE OF FLAGGER. PLACED 250' IN ADVANCE OF FLAGGER.
	3 LOW/SOFT SHOULDER SP 13107 48" X 48" PLACE INITIALLY AT THE CONSTRUCTION LIMITS AND SPACED 1 MILE APART THEREAFTER. IF NO -Y- LINES EXIST, PLACE 2ND SET 1/2 MILE FROM THE CONSTRUCTION LIMITS AND THEN SPACE 1 MILE THEREAFTER.	
	4 ROAD UNDER CONST SP 13106 48" X 48" THESE ARE FOR -Y- LINES THAT ARE "THROUGH" ROADWAYS. DEAD END AND SUBDIVISION ROADS ARE NOT "THROUGH" ROADWAYS. INSTALL 500' +/- FROM EACH -Y- LINE APPROACH AS SHOWN ABOVE. FOR MULTIPLE -Y- LINES THAT ARE SEPARATED BY 0.25 MILES OR LESS, TREAT AS A SINGLE UNIT AND INSTALL WITHIN 500' OF EACH APPROACH. A MAXIMUM OF 2 SIGN SETS PER MILE. DO NOT INSTALL WHEN -Y- LINES ARE WITHIN 0.5 MILES FROM "END ROAD WORK" SIGN.	
	5 END ROAD WORK G20-2 A 48" X 24" PLACE 500' FOLLOWING THE END OF CONSTRUCTION LIMITS.	