PROJECT REFERENCE NO.	SHEET NO.
14CR.10451.7	SIG 1

High Speed Detection
[≥40 mph (64 km/hr)]

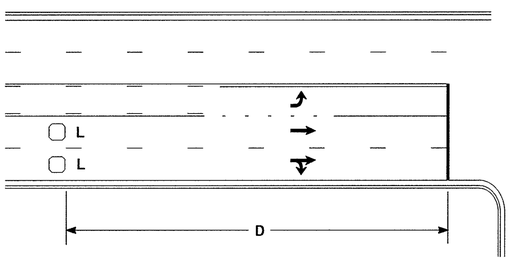

OR

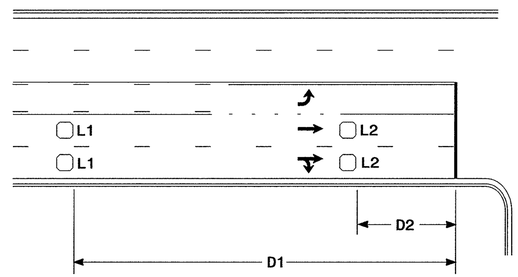

Speed Limit mph (km/hr)		D ft	(m)
40	(64)	250	(75)
45	(72)	300	(90)
50	(80)	355	(110)
55	(88)	420	(130)

L = 6ft X 6ft (1.8m X 1.8m)
Wired in series for TS1 Controllers
Wired separately for TS2, 170, and 2070L Controllers

Volume Density Operation

Speed Limit mph (km/hr)		D1 ft	(m)	D2 ft	(m)
40	(64)	250	(75)	80	(25)
45	(72)	300	(90)	90	(27)
50	(80)	355	(110)	100	(30)
55	(88)	420	(130)	110	(35)

L1 = 6ft X 6ft (1.8m X 1.8m)
Wired in series

L2 = 6ft X 6ft (1.8m X 1.8m)
Wired in series

"Stretch" Operation

Low Speed Detection
[≤35 mph (56 km/hr)]



OR



L = 6ft X 6ft (1.8m X 1.8m)
Wired in series

L = 6ft X 40ft (1.8m X 12.0m)
Quadrupole loop, wired separately

Left Turn Lane Detection

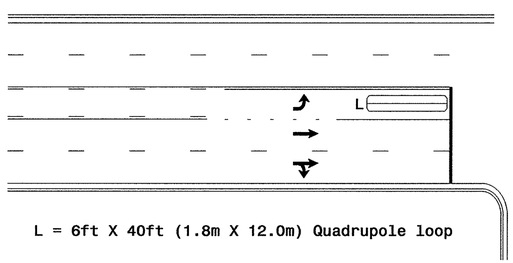

L = 6ft X 40ft (1.8m X 12.0m) Quadrupole loop

Presence Loop Detection

OR

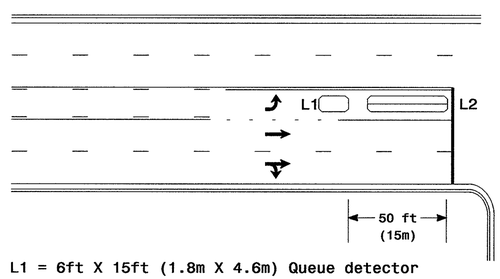

L1 = 6ft X 15ft (1.8m X 4.6m) Queue detector
L2 = 6ft X 40ft (1.8m X 12.0m) Quadrupole loop

Queue Loop Detection

Right Turn Lane Detection



Standard Turn

L1 = 6ft X 40ft (1.8m X 12.0m) Quadrupole loop
L2 = 6ft X 6ft (1.8m X 1.8m) [Minimum] Presence loop
Wired separately
L3 = 6ft X 20ft (1.8m X 6.0m) Quadrupole loop
Wired in series



Wide Radius Turn

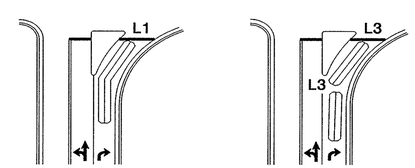

Channelized Turn

Side Street Detection



L = 6ft X 40ft (1.8m X 12.0m)
Quadrupole loop
Wired to separate detectors/channels

Presence Loop Placement at Stop Lines



Note:
Loop may be located in advance of stop line when stop line is greater than 15′ (4.5m) from edge of intersecting roadway; or, when loop detects a permissive or protected/permissive left turn.

Recommended Number of Turns

Single 6′ X 6′ (1.8m X 1.8m) loop (wired separately):

Length of Lead-in ft (m)	Number of Turns
< 250 (75)	3
250-375 (75-115)	4
375-525 (115-160)	5
> 525 (160)	6

Quadrupole loops: Use 2-4-2 turns

6′ X 15′ (1.8m X 4.6m) Loops:
Lead-in < 150′ (45 m), use 2 turns
Lead-in > 150′ (45 m), use 3 turns

Prepared in the Offices of:
Traffic Engineering and Safety Systems Branch
STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
Signals and Geometrics Section
122 N. McDowell St., Raleigh, NC 27603

Typical Loop Locations

PLAN DATE: June 2006	REVIEWED BY:
PREPARED BY: P L Alexander	REVIEWED BY:

REVISIONS	INIT.	DATE
Revise pavement markings		12/11/06

SCALE
N/A

SEAL
NORTH CAROLINA PROFESSIONAL SEAL 23488 ENGINEER PAUL L. ALEXANDER
SIGNATURE
DATE 6/6/06
SIG. INVENTORY NO.

19-DEC-2006 14:29
s:\traffic\signals\lib turn lnmnisc\loop\typical2006.dgn
palexander