PROJECT REFERENCE NO.		SHEET NO.
14CR.10451.7		
STATE PROJECT	F.A. PROJECT NO.	DESCRIPTION
14CR.10451.7		

TYPICAL 1

HENDERSON COUNTY

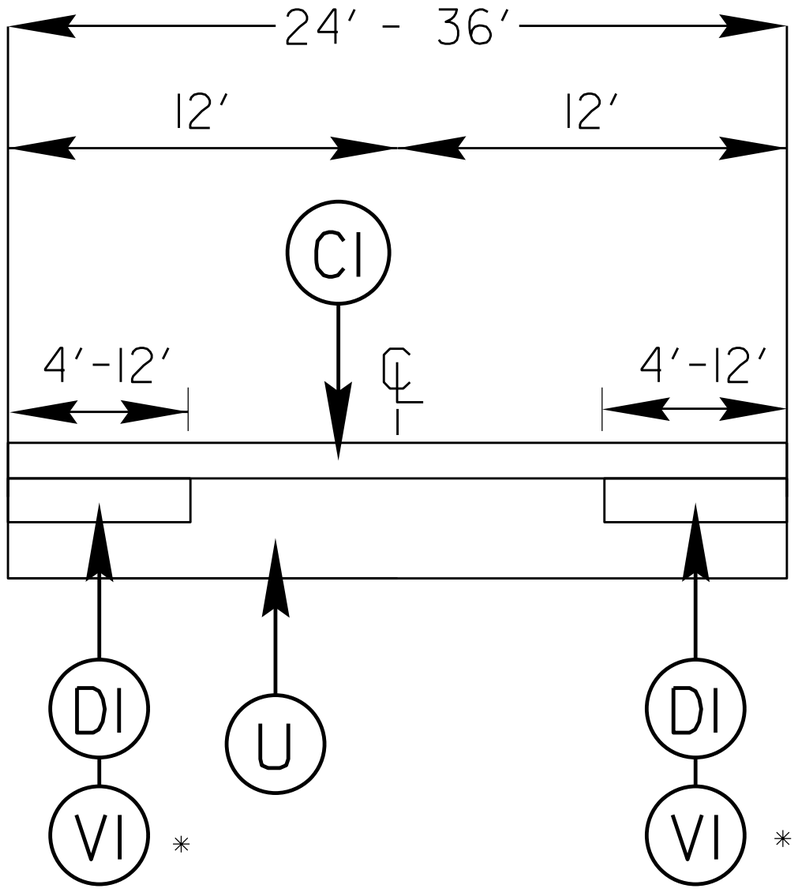

* MILLING AS DIRECTED BY ENGINEER

SURFACING SCHEDULE

ITEM NO	DESCRIPTION
C1	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
D1	PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.
V1	MILLED ASPHALT PAVEMENT 3" IN DEPTH AT LOCATIONS AS DIRECTED BY PROJECT ENGINEER
U	EXISTING ASPHALT