

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH, N.C.

PROPOSAL

DATE AND TIME OF BID OPENING: **JANUARY 28, 2015 AT 11:00 AM**

CONTRACT ID DB00211
WBS 42229.3.FS1

FEDERAL-AID NO. NHPP-0070(173)
COUNTY CRAVEN
T.I.P. NO. K-5101
MILES 0.000
ROUTE NO. US 70
LOCATION US-70 CRAVEN COUNTY

TYPE OF WORK REST AREA

NOTICE:

ALL BIDDERS SHALL COMPLY WITH ALL APPLICABLE LAWS REGULATING THE PRACTICE OF GENERAL CONTRACTING AS CONTAINED IN CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA WHICH REQUIRES THE BIDDER TO BE LICENSED BY THE N.C. LICENSING BOARD FOR CONTRACTORS WHEN BIDDING ON ANY NON-FEDERAL AID PROJECT WHERE THE BID IS \$30,000 OR MORE, EXCEPT FOR CERTAIN SPECIALTY WORK AS DETERMINED BY THE LICENSING BOARD. BIDDERS SHALL ALSO COMPLY WITH ALL OTHER APPLICABLE LAWS REGULATING THE PRACTICES OF ELECTRICAL, PLUMBING, HEATING AND AIR CONDITIONING AND REFRIGERATION CONTRACTING AS CONTAINED IN CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA. NOTWITHSTANDING THESE LIMITATIONS ON BIDDING, THE BIDDER WHO IS AWARDED ANY FEDERAL - AID FUNDED PROJECT SHALL COMPLY WITH CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA FOR LICENSING REQUIREMENTS WITHIN 60 CALENDAR DAYS OF BID OPENING.

BIDS WILL BE RECEIVED AS SHOWN BELOW:

THIS IS A REST AREA PROPOSAL

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION



DIVISION TWO ROADSIDE ENVIRONMENTAL

CONTRACT PROPOSAL

COUNTY: CRAVEN

CONTRACT NO.: DB00211

TIP NO.: K-5101

WBS ELEMENT: 42229.3.FS1

DESCRIPTION: CRAVEN COUNTY REST AREA RENOVATION

BID OPENING: Wednesday, January 28, 2015

NOTICE:

ALL BIDDERS SHALL COMPLY WITH ALL APPLICABLE LAWS REGULATING THE PRACTICE OF GENERAL CONTRACTING AS CONTAINED IN CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA WHICH REQUIRES THE BIDDER TO BE LICENSED BY THE NC LICENSING BOARD FOR CONTRACTORS WHEN BIDDING ON ANY NON-FEDERAL AID PROJECT WHERE THE BID IS \$30,000 OR MORE, EXCEPT FOR CERTAIN SPECIALTY WORK AS DETERMINED BY THE LICENSING BOARD. BIDDERS SHALL ALSO COMPLY WITH ALL OTHER APPLICABLE LAWS REGULATING THE PRACTICES OF ELECTRICAL, PLUMBING, HEATING AND AIR CONDITIONING AND REFRIGERATION CONTRACTING AS CONTAINED IN CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA.

NAME OF BIDDER

ADDRESS OF BIDDER

RETURN BIDS TO: NC DEPARTMENT OF TRANSPORTATION
Sarah Lentine
105 Pictolus Highway
PO Box 1587
Greenville, NC 27835-1587

**PROPOSAL FOR THE CONSTRUCTION OF
CONTRACT No. DB00211 IN CRAVEN COUNTY, NORTH CAROLINA
December 29, 2014
DEPARTMENT OF TRANSPORTATION,
RALEIGH, NORTH CAROLINA**

The Bidder has carefully examined the location of the proposed work to be known as Contract No. **DB00211**; has carefully examined the plans and specifications, which are acknowledged to be part of the proposal, the special provisions, the proposal, the form of contract, and the forms of contract payment bond and contract performance bond; and thoroughly understands the stipulations, requirements and provisions. The undersigned bidder agrees to bound upon his execution of the bid and subsequent award to him by the Board of Transportation in accordance with this proposal to provide the necessary contract payment bond and contract performance bond within fourteen days after the written notice of award is received by him. The undersigned Bidder further agrees to provide all necessary machinery, tools, labor, and other means of construction; and to do all the work and to furnish all materials, except as otherwise noted, necessary to perform and complete the said contract in accordance with *the 2012 Standard Specifications for Roads and Structures* by the dates(s) specified in the Project Special Provisions and in accordance with the requirements of the Engineer, and at the unit or lump sum prices, as the case may be, for the various items given on the sheets contained herein.

The Bidder shall provide and furnish all the materials, machinery, implements, appliances and tools, and perform the work and required labor to construct and complete State Highway Contract No. **DB00211** in **Craven County**, for the unit or lump sum prices, as the case may be, bid by the Bidder in his bid and according to the proposal, plans, and specifications prepared by said Department, which proposal, plans, and specifications show the details covering this project, and hereby become a part of this contract.

The published volume entitled *North Carolina Department of Transportation, Raleigh, Standard Specifications for Roads and Structures, January 2012* with all amendments and supplements thereto, is by reference incorporated into and made a part of this contract; that, except as herein modified, all the construction and work included in this contract is to be done in accordance with the specifications contained in said volume, and amendments and supplements thereto, under the direction of the Engineer.

If the proposal is accepted and the award is made, the contract is valid only when signed either by the Contract Officer or such other person as may be designated by the Secretary to sign for the Department of Transportation. The conditions and provisions herein cannot be changed except over the signature of the said Contract Officer.

The quantities shown in the itemized proposal for the project are considered to be approximate only and are given as the basis for comparison of bids. The Department of Transportation may increase or decrease the quantity of any item or portion of the work as may be deemed necessary or expedient.

An increase or decrease in the quantity of an item will not be regarded as sufficient ground for an increase or decrease in the unit prices, nor in the time allowed for the completion of the work, except as provided for the contract.

A bid bond is not required for this Contract.

INSTRUCTIONS TO BIDDERS

**PLEASE READ ALL INSTRUCTIONS CAREFULLY
BEFORE PREPARING AND SUBMITTING YOUR BID.**

All bids shall be prepared and submitted in accordance with the following requirements. Failure to comply with any requirement may cause the bid to be considered irregular and may be grounds for rejection of the bid.

TRADITIONAL PAPER BIDS:

1. Download the entire proposal from the Connect NCDOT website and return the entire proposal with your bid.
2. All entries on the itemized proposal sheet (bid form) shall be written in ink or typed.
3. The Bidder shall submit a unit price for every item on the itemized proposal sheet. The unit prices for the various contract items shall be written in figures. Unit prices shall be rounded off by the Bidder to contain no more than FOUR decimal places.
4. An amount bid shall be entered on the itemized proposal sheet for every item. The amount bid for each item shall be determined by multiplying each unit bid by the quantity for that item, and shall be written in figures in the "Amount" column of the form.
5. The total amount bid shall be written in figures in the proper place on the bid form. The total amount bid shall be determined by adding the amounts bid for each item.
6. Changes to any entry shall be made by marking through the entry in ink and making the correct entry adjacent thereto in ink. A representative of the Bidder shall initial the change in ink. Do not use correction fluid, correction tape or similar product to make corrections.
7. The bid shall be properly executed on the included **Execution of Bid – Non-collusion Affidavit, Debarment Certification and Gift Ban Certification** form. All bids shall show the following information:
 - a. Name of corporation, partnership, limited liability company, joint venture, individual or firm, submitting bid.
Corporations that have a corporate seal should include it on the bid.
 - b. Name of individual or representative submitting bid and position or title held on behalf of the bidder.
 - c. Name, signature, and position or title of witness.
 - d. Completed attestation by Notary Public**Note: Signer, Witness and Notary Public must be different individuals.**
8. The bid shall not contain any unauthorized additions, deletions, or conditional bids.
9. The Bidder shall not add any provision reserving the right to accept or reject an award, or to enter into a contract pursuant to an award.
10. **THE PROPOSAL WITH THE ITEMIZED PROPOSAL SHEET ATTACHED SHALL BE PLACED IN A SEALED ENVELOPE AND SHALL BE DELIVERED TO AND RECEIVED IN THE NCDOT DIVISION 2 OFFICE, LOCATED AT 105 PACTOLUS HIGHWAY, GREENVILLE, NC 27834, BY 11:00 AM ON, WEDNESDAY, JANUARY 28, 2015.**
11. The sealed bid must display the following statement on the front of the sealed envelope:

**ATTN: SARAH LENTINE
QUOTATION FOR DB00211 (REST AREA CRAVEN COUNTY)
TO BE OPENED AT 11:00 AM ON, WEDNESDAY, JANUARY 28, 2015.**

12. If delivered by mail, the sealed envelope shall be placed in another sealed envelope and the outer envelope shall be addressed as follows:

**N. C. DEPARTMENT OF TRANSPORTATION
ATTN: SARAH LENTINE
PO BOX 1587
GREENVILLE, NC 27835-1587**

OPTIONAL COMPUTER BID PREPARATION:

1. All instructions given above for completing and returning TRADITIONAL PAPER BIDS apply, except as modified by the provision “**Computer Bid Preparation (Optional)**”, if applicable.
2. Expedite software necessary for electronic bid preparation may be downloaded from the Connect NCDOT website at: <https://connect.ncdot.gov/letting/Pages/EBS-Information.aspx>

STANDARD PROVISIONS

GENERAL

All work and materials shall be in accordance with the provisions of the General Guidelines of this contract, the Project Special Provisions, the North Carolina Department of Transportation Standard Specifications for Roads and Structures 2012, the North Carolina Department of Transportation Roadway Standards Drawings, and the current edition of the Manual of Uniform Traffic Control Devices (MUTCD).

The Contractor shall keep himself fully informed of all Federal, State and local laws, ordinances, and regulations, and shall comply with the provisions of Section 107 of the Standard Specifications.

PURCHASE ORDER CONTRACT PREQUALIFICATION

Beginning **July 1, 2009**, any firm that wishes to perform work on Division Purchase Order Contracts as either the prime contractor or as a subcontractor on the project must be prequalified for the type of work they wish to perform. Firms that wish to bid on these projects as the prime contractor must be prequalified prior to submitting a bid. Firms that wish to perform as a subcontractor to the prime contractor must be prequalified prior to beginning work on the project.

For the purposes of prequalification, any firm that is currently prequalified as a prime or a subcontractor on central let projects for the appropriate work codes is considered eligible to work and/or bid on Purchase Order Contracts as long as other items such as bonding and license requirements for the contract are met.

Information regarding the requirements to become prequalified as a Purchase Order Contract contractor, including the application to become prequalified if you are not already prequalified, can be found at the following website:

<http://www.ncdot.org/business/howtogetstarted/>

BIDS

In accordance with GS 136-28.1(b), if the total bid amount of the contract exceeds \$2,500,000.00, the bid will not be considered for award.

AVAILABILITY OF FUNDS – TERMINATION OF CONTRACTS

(5-20-08)

Z-2

General Statute 143C-6-11. (h) Highway Appropriation is hereby incorporated verbatim in this contract as follows:

(h) Amounts Encumbered. – Transportation project appropriations may be encumbered in the amount of allotments made to the Department of Transportation by the Director for the estimated payments for transportation project contract work to be performed in the appropriation fiscal year. The allotments shall be multiyear allotments and shall be based on estimated revenues and shall be subject to the maximum contract authority contained in *General Statute 143C-6-11(c)*. Payment for transportation project work performed pursuant to contract in any fiscal year other than the current fiscal year is subject to appropriations by the General Assembly. Transportation project contracts shall contain a schedule of estimated completion progress, and any acceleration of this progress shall be subject to the approval of the Department of Transportation provided funds are available. The State reserves the right to terminate or suspend any transportation project contract, and any transportation project contract shall be so terminated or suspended if funds will not be available for payment of the work to be performed during that fiscal year pursuant to the contract. In the event of termination of any contract, the contractor shall be given a written notice of termination at least 60 days before completion of scheduled work for which funds are available. In the event of termination, the contractor shall be paid for the work already performed in accordance with the contract specifications.

Payment will be made on any contract terminated pursuant to the special provision in accordance with Article 108-13(E), of the *North Carolina Department of Transportation Standard Specifications for Roads and Structures*, dated July 1, 2012.

The successful bidder, within fourteen (14) days after notice of award, shall provide the Department with a contract payment bond and a contract performance bond each in an amount equal to 100 percent of the amount of the contract

EXTENSION OF CONTRACT TIME

Failure on the part of the Contractor to furnish bonds or certifications, or to satisfy preliminary requirements necessary to issue the purchase order will not constitute grounds for extension of the contract time. If the Contractor has fulfilled all preliminary requirements for the issuance of a purchase order, and the purchase order authorization is not available by the date of availability, the Contractor shall be granted an extension equal to the number of calendar days the purchase order authorization is delayed after the date of availability.

NOTIFICATION OF OPERATIONS

The Contractor shall notify the Engineer Five (5) working days in advance of beginning work on this project.

BANKRUPTCY

The Department of Transportation, at its option, may terminate the contract upon the filing by the contractor of any petition for protection under the provisions of the Federal Bankruptcy Act.

POSTED WEIGHT LIMITS

The Contractor's attention is directed to the fact that many Primary and Secondary Roads and bridges are posted with weight limits less than the legal limit. The Contractor will not be allowed to exceed the posted weight limits in transporting materials and/or equipment to the projects, unless otherwise approved by the Engineer. The Contractor should make a thorough examination of all projects and haul routes.

INSPECTION

All work shall be subject to inspection by the Engineer at any time. Routinely, the Engineer will make periodic inspections of the completed work. It will be the responsibility of the Contractor to keep the Engineer informed of his proposed work plan and to submit written reports of work accomplished on a frequency to be determined by the Engineer

EROSION CONTROL

The Contractor shall exercise every reasonable precaution throughout the life of the project to prevent erosion and siltation. Silt fence and erosion control measures shall be installed in accordance with the plans for this project, Division 16 of the 2012 Standard Specifications, and in locations directed by the Engineer or his representative.

UTILITY CONFLICTS

It shall be the responsibility of the Contractor to contact all affected utility owners and determine the precise locations of all utilities prior to beginning construction. Utility owners shall be contacted a minimum of 48 hours prior to the commencement of operations. Special care shall be used in working around or near existing utilities, protecting them when necessary to provide uninterrupted service. In the event that any utility service is interrupted, the Contractor shall notify the utility owner immediately and shall cooperate with the owner, or his representative, in the restoration of service in the shortest time possible. Existing fire hydrants shall be kept accessible to fire departments at all times.

The Contractor shall adhere to all applicable regulations and follow accepted safety procedures when working in the vicinity of utilities in order to ensure the safety of construction personnel and the public.

PLAN, DETAIL AND QUANTITY ADJUSTMENTS

The Department reserves the right to make, at any time during the progress of the work, such alterations in plans or the details of construction as may be found necessary or desirable by the Engineer to complete the project.

COOPERATION BETWEEN CONTRACTORS

In accordance with Section 105-7 of the 2012 Standard Specifications, the Department reserves the right at any time to contract for and perform other or additional work on or near the work covered by the contract.

When separate or additional contracts are let within the limits of any one project, each Contractor shall conduct his work so as not to interfere with or hinder the progress or completion of the work being performed by other Contractors. Contractors working within the limits of the same project shall cooperate with each other.

Each Contractor shall conduct his operations in such a manner as to avoid damaging any work being performed by others or which has been completed by others.

When a project is let under more than one contract and the plans and/or special provisions include a construction schedule, it shall be the responsibility of the Contractors to complete the various phases of the project in accordance with the time limits specified such that the total contracts will be completed by the completion date. This construction schedule will remain in effect until such time as the Contractors at their option submit to the engineer a joint construction schedule meeting the approval of the Engineer. This joint construction schedule shall be signed by authorized representatives of each firm and upon the approval of the Engineer shall be binding on each Contractor and made a part of the contract documents. Subsequent modifications to the joint construction schedule may be made during the course of the work in the same manner.

Failure of the Contractor(s) to complete the various phases of work within the time limits set forth in the construction schedule or latest approved joint construction schedule shall be just cause for removing the Contractor(s) from the Department's list of qualified bidders. A Contractor disqualified from bidding by reason of this provision will not be reinstated until such time as his progress is in accordance with the latest approved construction schedule or until the project is completed and accepted, whichever occurs first. The Department will under no circumstances be liable for any claim for additional compensation due to acts of one Contractor holding up the work of another.

The Department will under no circumstances be liable for any damages experienced by one Contractor as a result of the presence and operations of other Contractors working within the limits of the same project.

APPROVAL OF PERSONNEL

The State shall have the right to approve or reject the project engineer and other supervisory personnel, assigned to a project.

The Engineers or any subcontractor for the Engineers which are employed to provide engineering services for this project shall not engage the services of any person or persons, now in the employment of the State during the time of this Agreement, without written consent of the State.

In the event of engagement, the Engineers or their subcontractors shall restrict such person or persons from working on any of the Engineers' contracted projects in which the person or persons were formerly involved while employed by the State. This restriction period shall be for the duration of the contracted project with which the person or persons was involved. "Involvement" shall be defined as active participation in any of the following activities:

- Drafting the contract;
- Defining the scope of the contract;
- Selection of the Engineers' firm for services;
- Negotiation of the cost of the contract (including calculating man-hours or fees); and
- Administration of the contract.

An exception to these terms may be granted when recommended by the Secretary and approved by the Board of Transportation. Failure to comply with the terms stated above in this section shall be grounds for termination of this contract.

EMPLOYMENT

(11-15-11) (Rev. 1-17-12)

108, 102

SP1 G184

Revise the 2012 *Standard Specifications* as follows:

Page 1-20, Subarticle 102-15(O), delete and replace with the following:

- (O)** Failure to restrict a former Department employee as prohibited by Article 108-5.

Page 1-65, Article 108-5 Character of Workmen, Methods, and Equipment, line 32, delete all of line 32, the first sentence of the second paragraph and the first word of the second sentence of the second paragraph.

CONTRACTOR CLAIM SUBMITTAL FORM

If the Contractor elects to file a written claim or requests an extension of contract time, it shall be submitted on the *Contractor Claim Submittal Form (CCSF)* available through the Construction Unit or http://ncdot.org/doh/operations/dp_chief_eng/constructionunit/formsmanuals/

STATE HIGHWAY ADMINISTRATOR TITLE CHANGE:

(9-18-12)

SP1 G185

Revise the *2012 Standard Specifications* as follows:

Replace all references to “State Highway Administrator” with “Chief Engineer”.

SPECIAL PROVISIONS

SCOPE OF WORK

The construction of the CRAVEN COUNTY US-70 REST AREA facility consists of the replacement of the existing Rest Area building with a new building in the location of the existing building (approximately 2,403 sq. ft.) during the 8 month construction period, and related site work. The above construction work is for the North Carolina Department of Transportation located at the Highway US-70 Rest Area in Clarks, NC as indicated on the Construction Documents (see Section 01010-Summary of Work).

GENERAL INSTRUCTIONS

It is understood and agreed that by submitting a bid that the Contractor has examined these contract documents, drawings and specifications and has visited the site of the work, and has satisfied himself relative to the work to be performed. The Contractor shall notify the Architect / Engineer of any inconsistencies in the Construction Documents and ask for a clarification before proceeding with the affected work. The Contractor shall assume appropriate responsibility for performing work that he did not report as an inconsistency and correct such work.

MANDATORY PRE-BID CONFERENCE AND PROPOSAL REVIEW

All prospective bidders shall attend a Mandatory Pre-Bid Conference as shown below:

Date: January 8, 2015

Time: 1:00 P.M.

Place: NCDOT Division Two Office Conference Room

Location: 105 Pactolus Hwy, Greenville, NC 27835

County: Pitt

Telephone: (252) 439-2800

NOTE: The Mandatory Pre-Bid Conference will begin promptly at 1:00 P.M. An official clock for the pre-bid conference will be designated. Contractors who are late will not be permitted to sign in or to participate in the conference.

This conference will be conducted by Department personnel for the purpose of providing additional information about the project and to give bidders an opportunity to ask any questions they may have.

The Engineer will explain areas of responsibility, standards of performance and expected results as well as FHWA reporting requirements. This is also intended to be a time for the Contractor to raise questions.

Any changes made to the contract during the pre-bid conference will be documented and included in an addendum. The addendum must be returned with the bid package, signed and dated. Failure to do so will result in disqualification of bid. Pre-Bid Conference proceedings will be tape recorded.

NOTICE TO BIDDERS

PLANS and SPECIFICATIONS WILL NOT BE DISTRIBUTED IN PAPER FORMAT - Complete plans, specifications and contract documents will be posted in .pdf format at the following web address:

<http://www.ncdot.gov/doh/operations/division2/>

All questions during the Bid Period are to be directed Sarah Lentine, in the form of a written RFI, via e-mail: sflentine@ncdot.gov.

ALL DOCUMENTATION, DURING THE BID PERIOD, WILL BE POSTED ON THE WEBSITE ONLY. IT IS THE RESPONSIBILITY OF ALL PARTICIPATING IN THE BID TO CHECK THE WEBSITE PRIOR TO BIDDING FOR ADDENDA, LIST OF REGISTERED GENERAL CONTRACTORS, ETC.

Digital documents web address will be forwarded the plan rooms of the *Associated General Contractors*, Carolinas Branch, Raleigh (919) 781-3270 (mgilchrist@carolinasagc.org); in the North Carolina office of *McGraw-Hill Dodge Corporation* (704) 599-9461 (dodge_document_ca@mcgraw-hill.com); in the Eastern Regional Office of *Reed Construction Data* in Norcross, GA (800) 424-3996 (docprocessing@reedbusiness.com); in Minority Plan Rooms in: *Raleigh Business & Technology Ctr* (919) 836-8618 (mgreen@raleighBTC.com); and to the *Hispanic Contractors Association of the Carolinas* in the Charlotte, Raleigh, and Winston-Salem Areas (877) 227-1680 (HCAcarolinas@isqst.com).

Proposals shall be made only on the form provided herein with all blank spaces for bids properly filled in and all signatures properly executed.

AWARD OF CONTRACT

(6-28-77) Z-6

“The North Carolina Department of Transportation, in accordance with the provisions of Title VI of the Civil Rights Act of 1964 (78 Stat. 252) and the Regulations of the Department of Transportation (49 C.F.R., Part 21), issued pursuant to such act, hereby notifies all bidders that it will affirmatively insure that the contract entered into pursuant to this advertisement will be awarded to the lowest responsible bidder without discrimination on the ground of race, color, or national origin”.

CONTRACT TIME AND LIQUIDATED DAMAGES

(7-1-95) (Rev. 12-18-07)

108

SP1 G10 A

The date of availability for this contract is **March 1, 2015**.

The completion date for this contract is **December 1, 2015**.

Except where otherwise provided by the contract, observation periods required by the contract will not be a part of the work to be completed by the completion date and/or intermediate contract times stated in the contract. The acceptable completion of the observation periods that extend beyond the final completion date shall be a part of the work covered by the performance and payment bonds.

The liquidated damages for this contract are **Seven Hundred Fifty Dollars (\$750.00)** per calendar day.

INVOICES FOR PAYMENT

Monthly partial payments will be made after the end of each month based on the Contractor's Application for Payment; retainage is not required, received on the 25th of that month. Final payment will be made within thirty (30) consecutive days after acceptance of the work and the submission both of notarized contractor's affidavit and five copies of invoices which are to include the contract, account and job order numbers.

See Specification Section 01026-Payment and Completion Procedures.

The contractor's affidavit shall state: “This is to certify that all costs of materials, equipment, labor, and all else entering into the accomplishment of this contract, including payrolls, have been paid in full.”

Executed contract documents, insurance certifications and upon completion and acceptance of the work, invoices and other information requested are to be sent to the Resident Engineer:

Bill Kincannon, PE, PO Box 1587 Greenville, NC 27835

It is imperative that contract documents, invoices, etc., be sent only to the above address in order to assure proper and timely delivery and handling.

CONTRACTOR'S LICENSE REQUIREMENTS:

(7-1-95)

102-14

SP1 G88

If the successful bidder does not hold the proper license to perform any plumbing, heating, air conditioning, or electrical work in this contract, he will be required to sublet such work to a contractor properly licensed in accordance with *Article 2 of Chapter 87 of the General Statutes* (licensing of heating, plumbing, and air conditioning contractors) and *Article 4 of Chapter 87 of the General Statutes* (licensing of electrical contractors).

PERFORMANCE AND PAYMENT BONDS

The Contractor shall furnish a performance bond in the amount of one hundred percent (100%) of the contract amount executed by a surety company authorized to do business in North Carolina, conditioned upon the faithful performance of the contract in accordance with specifications and conditions of the contract. Such bond shall be solely for the protection of the North Carolina Department of Transportation and the State of North Carolina.

The Contractor shall furnish a payment bond in the amount of one hundred percent (100%) of the contract amount executed by a surety company authorized to do business in North Carolina, conditioned upon the prompt payment for all labor or materials for which the Contractor, or his subcontractors, are liable. The payment bond shall be solely for the protection of persons or firms furnishing materials or performing labor for this contract for which the Contractor is liable.

Bonds shall be executed in the form bound with these specifications. All bonds shall be countersigned by an authorized agent of the bonding company who is licensed to do business in North Carolina.

WORKERS COMPENSATION INSURANCE

Pursuant to N.C.G.S. § 97-19, all contractors of the Department of Transportation are required, prior to beginning services, to show proof of coverage issued by a workers' compensation insurance carrier, or a certificate of compliance issued by the Department of Insurance for self-insured subcontractors stating that it has complied with N.C.G.S. § 97-93 irrespective of whether subcontractors have regularly in service fewer than three employees in the same business within the State of North Carolina, and subcontractors shall be hereinafter liable under the Workers' Compensation Act for payment of compensation and other benefits to its employees for any injury or death due to an accident arising out of and in the course of performance of the work insured by the subcontractor

MATERIALS, EQUIPMENT AND EMPLOYEES

- a. The Contractor shall, unless otherwise specified, supply and pay for all labor, transportation, materials, tools, apparatus, lights, power, heat, sanitary facilities, water, scaffolding, and incidentals necessary for the completion of his work, and shall install, maintain and remove all equipment of the construction, other utensils or things, and be responsible for the safe, proper and lawful construction, maintenance and use of same, and shall construct in the best and most workmanlike manner, a complete job and everything incidental thereto, as shown on the plans, stated in the specifications, or reasonably implied therefrom, all in accordance with the contract documents.
- b. All materials shall be new and of quality specified, except where reclaimed material is authorized herein and approved for use. Workmanship shall at all times be of a grade accepted as the best practice of the particular trade involved, and as stipulated in written standards of recognized organizations or institutes of the respective trades except as exceeded or qualified by the specifications.
- c. No changes shall be made in the work except upon written approval and order of the designer.
- d. Whenever products, materials, or equipment are named in the specifications, the specifications shall be interpreted to mean an item of material or equipment similar to that named and which is suited for the same use and capable of performing the same furnish evidence as to quality of materials.
- e. Each Contractor shall obtain written approval from the Owner/Designer for the use of substitute products, materials or equipment claimed as equal to those specified before the Bid Opening, see the Supplementary General Conditions, page SGC-1.
- f. If at any time during the construction and completion of the work covered by these contract documents, the conduct of any workman of the various crafts be adjudged a nuisance to the Owner of if any workman be considered detrimental to the work, the Contractor shall order such parties removed immediately from grounds.

CONSTRUCTION SUPERVISION

- a. The Contractor shall provide a full-time and competent superintendent who has the authority to act on behalf of the Contractor.
- b. A field office or construction trailer shall be provide by the Contractor with telephone, heating, air conditioning, and secured storage space for the contractors use during the renovation project along with one copy of the drawing plans, specifications, addenda, and change orders.
- c. A set of Record Drawings shall be maintained by the Contractor during construction and turned over to the Architect at the end of the project.

CODES, PERMITS AND INSPECTIONS

- a. The Contractor shall give all notice and comply with all laws, ordinances, codes, rules and regulations bearing on the conduct of the work under this contract. If the Contractor observes that the drawings and specifications are at variance therewith, he shall promptly notify the Owner in writing. If the Contractor performs any work knowing it to be contrary to such laws, ordinances, codes, rules and regulations, and without such notice to the Owner, he shall bear all cost arising therefrom.
- b. All work under this contract shall conform to the North Carolina State Building Code and other state, local and national codes as are applicable. The cost of all required inspection and permits shall be the responsibility of the Contractor.
- c. Projects constructed by the State of North Carolina or any agency or institution of the State are not subject to county or municipal building codes and may not be subject to inspection by county or municipal authorities. The Contractor shall, however, cooperate with the county or municipal authorities by obtaining building permits. Permits shall be obtained at no cost.
Inspection and certification of compliance by the NC Department of Insurance is required on the electrical work on the project.

SAFETY REQUIREMENTS

- a. The Contractor shall be responsible for the entire site and the building or construction of the same and provide all the necessary protections as required by laws of ordinances governing such conditions and as required by the Owner or Designer. He shall be responsible for any damage to the Owner's property, or that of others on the job, by himself, his personnel or his subcontractors, and shall make good such damages. He shall be responsible for and pay for any claims against the Owner arising from such damages.
- b. The Contractor shall adhere to the rules, regulations and interpretations of the North Carolina Department of Labor relating to Occupational Safety and Health Standards for the Construction Industry (Title 29, Code of Federal Regulations, Part 1926 published in Volume 39, Number 122, Part II, June 24, 1974 Federal Register) and revisions thereto as adopted by General Statutes of North Carolina 95-126 through 155.
- c. The Contractor shall provide all necessary safety measures for the protection of all persons on the work, including the requirements of the A.G.C. Accident Prevention Manual in Construction as amended, and shall fully comply with all state laws and regulations and North Carolina State Building Code requirements to prevent accident or injury to persons on or above the location of the work. He shall clearly mark or post signs warning of hazards existing, and shall barricade excavations, elevator shafts, stairwells and similar hazards. He shall protect against damage or injury resulting from falling materials and he shall maintain all protective devices and signs throughout the progress of the work.

TAXES

- a. Federal Excise Taxes do not apply to materials entering into State work (Internal Revenue Code, Section (3442(3))).
- b. Federal Transportation Taxes do not apply to materials entering into State work (Internal Revenue Code, Section 3475(b) as amended).
- c. North Carolina Sales Taxes and Use Tax do apply to materials entering into State Work (NC Sales and Use Tax Regulation No. 42, Paragraph A), and such costs shall be included in the bid proposal and contract sum.
- b. Local Option Sales and Use Taxes do apply to materials entering into State work as applicable (Local Option Sales and Use Tax Act, Regulation No. 57), and such cost shall be included in the bid proposal and contract sum.

EQUAL OPPORTUNITY

- a. The non-discrimination clause contained in Section 202 (Federal) Executive Order 11246, as amended by Executive Order 11375, relative to Equal Employment Opportunity for all persons without regard to race, color, religion, sex or national origin, and the implementing rules and regulations prescribed by the Secretary of Labor, are incorporated herein.
- b. The Contractors agree not to discriminate against any employees or applicant for employment because of physical or mental handicap in regard to any position for which the employees or applicant is qualified. The Contractor agrees to take affirmative action to employee, advance in employment and otherwise treat qualified handicapped individuals without discrimination based upon their physical or mental handicap in all employment practices.

ROOF GUARANTEE

The following paragraph is hereby added and shall become a part of the Guarantee, of the General Conditions of the Contract; the Contractor shall guarantee the materials and workmanship of the roofing against defect due to faulty material, workmanship and negligence by Contractors for a period of twenty-four (24) months following final acceptance of the work, and submit the metal roof panel manufacturer's standard 20 year exterior finish warranty. The substitution of an equal or longer term manufacturer's warranty in lieu of this requirement will not be accepted.

UTILITIES

The General Contractor shall provide approved temporary toilet facilities, located where directed, for complete and adequate sanitary arrangements. These facilities shall be available to other Contractors on the project and shall be kept in a neat and sanitary condition. The General Contractor may use electrical and water from the existing Rest Area building.

MATERIAL SUBSTITUTIONS

Submit proposed product substitutions seven (7) calendar days prior to bid date. An addendum will be issued at least 7 days prior to the bid date, listing all approved substitutions. After the issuance of the substitution addendum no further product substitutions will be made.

PROSECUTION OF WORK

(7-1-95) (Rev. 8-21-12)

108

SP1 G15R

The Contractor will be required to prosecute the work in a continuous and uninterrupted manner from the time he begins the work until completion and final acceptance of the project. The Contractor will not be permitted to suspend his operations except for reasons beyond his control or except where the Engineer has authorized a suspension of the Contractor's operations in writing.

In the event that the Contractor's operations are suspended in violation of the above provisions, the sum of \$ 500.00 will be charged the Contractor for each and every calendar day that such suspension takes place. The said amount is hereby agreed upon as liquidated damages due to extra engineering and maintenance costs and due to increased public hazard resulting from a suspension of the work. Liquidated damages chargeable due to suspension of the work will be additional to any liquidated damages that may become chargeable due to failure to complete the work on time.

CERTIFICATION FOR FEDERAL-AID CONTRACTS:

(3-21-90)

SP1 G85

The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

- (A) No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.
- (B) If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, *Disclosure Form to Report Lobbying*, in accordance with its instructions.

This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by *Section 1352, Title 31, U.S. Code*. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

The prospective participant also agrees by submitting his or her bid or proposal that he or she shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such subrecipients shall certify and disclose accordingly.

U.S. DEPARTMENT OF TRANSPORTATION HOTLINE:

(11-22-94)

108-5

SP1 G100

To report bid rigging activities call: **1-800-424-9071**

The U.S. Department of Transportation (DOT) operates the above toll-free hotline Monday through Friday, 8:00 a.m. to 5:00 p.m. eastern time. Anyone with knowledge of possible bid rigging, bidder collusion, or other fraudulent activities should use the hotline to report such activities.

The hotline is part of the DOT's continuing effort to identify and investigate highway construction contract fraud and abuse is operated under the direction of the DOT Inspector General. All information will be treated confidentially and caller anonymity will be respected.

GIFTS FROM VENDORS AND CONTRACTORS:

(12-15-09)

107-1

SP1 G152

By Executive Order 24, issued by Governor Perdue, and *N.C. G.S. § 133-32*, it is unlawful for any vendor or contractor (i.e. architect, bidder, contractor, construction manager, design professional, engineer, landlord, offeror, seller, subcontractor, supplier, or vendor), to make gifts or to give favors to any State employee of the Governor's Cabinet Agencies (i.e. Administration, Commerce, Correction, Crime Control and Public Safety, Cultural Resources, Environment and Natural Resources, Health and Human Services, Juvenile Justice and Delinquency Prevention, Revenue, Transportation, and the Office of the Governor). This prohibition covers those vendors and contractors who:

- (1) have a contract with a governmental agency; or
- (2) have performed under such a contract within the past year; or
- (3) anticipate bidding on such a contract in the future.

For additional information regarding the specific requirements and exemptions, vendors and contractors are encouraged to review Executive Order 24 and *G.S. § 133-32*.

Executive Order 24 also encouraged and invited other State Agencies to implement the requirements and prohibitions of the Executive Order to their agencies. Vendors and contractors should contact other State Agencies to determine if those agencies have adopted Executive Order 24.

CLEANING UP

The contractor shall keep the building and surrounding area reasonably free from rubbish at all times and shall remove debris from the site from time to time or when directed to do so by the Owner. Before final inspection and acceptance of the building, each Contractor shall clean his portion of the work, including glass, hardware fixtures, masonry, tile and marble (using no acid), clean and wax all floors as specified, and completely prepare the building for use by the Owner.

GUARANTEE

The Contractor shall guarantee the materials and workmanship against defect due to faulty materials or faulty workmanship or negligence for a period of twelve (12) months following the final acceptance of the work. Where items of equipment or material carry a manufacturer's warranty for any period in excess of twelve (12) months, then the manufacturer's warranty shall apply for that particular piece of equipment or material. The contractor shall replace such defective materials, equipment, or workmanship without cost to the Owner within the stipulated guarantee period.

PRE-CONSTRUCTION MEETING

A Pre-Construction meeting will be held at a time and place designated by the architect, for the purpose of identifying responsibilities of the owner's, and the architect's personnel and explanation of administrative procedures.

The Contractor shall also use this meeting for the following minimum agenda: Construction schedule, Use of areas of the site, Delivery and storage, Safety, Security, Cleaning up, Submittals, Change orders, Applications for payment, and Record documents.

CLARIFICATIONS OF CONTRACT DOCUMENTS

The Contractor shall request clarifications by the Architect/Engineer, should he find discrepancies or conflicts in the drawings and specification, before proceeding with an item of work well in advance of the scheduled work in question. Drawing plan dimensions shall govern over scaled dimensions. The specifications shall govern over the drawing plans. The Contractor shall not take advantage of any apparent error or omission in the plans or specifications; the Architect/Engineer will make all interpretations as may be determined necessary for the fulfillment of the intent of the plans and specifications.

TERMINATION OF THE CONTRACT

If the Contractor fails to begin the Work within the time specified, or cannot maintain the progress of the work on schedule, to ensure the completion of the project by the completion date, than the Owner may give notice in writing to the Contractor and his Surety of such delay, neglect or default, and shall declare the Contract in default, 15-days after the written notice. All costs incurred by the Owner required in completing the project shall be deducted from monies due the Contractor and Surety, or if in excess be paid by the Contractor and Surety to the Owner.

CHANGE ORDERS / OVERHEAD & PROFIT

Changes in the Work shall not proceed without an approved Change Order. The Contractor shall provide a complete breakdown of all labor and material costs with the Change Order request. The breakdown shall include the Contractors allowance for overhead and profit not to exceed 20% of the net cost of the change with work provided directly by the Prime Contractor or the allowance shall not exceed 15% for subcontractor with 10% for the Prime Contractor. Actual costs for bonds, insurance, and sales taxes related to the costs of this Work may be incorporated into the breakdown.

FIELD ORDERS

A Field Order maybe issued by the Architect/Engineer to expedite critical changes in the Work with a not to exceed lump sum cost. The Contractor's breakdown/price quotation can be faxed to the Architect/Engineer for review and issuance of the Field Order. The Field Order shall be prepared by the Architect/Engineer faxed to the Contractor and Owning Agency for signature approval before the change in Work can proceed. A formal Change Order shall follow.

MATERIALS:

(2-21-12) (Rev. 5-20-14)

1000, 1002, 1005, 1024, 1050, 1056, 1074, 1078, 1080, 1081, 1086, 1084, 1087, 1092

SP10 R01

Revise the 2012 *Standard Specifications* as follows:**Page 10-1, Article 1000-1, DESCRIPTION, lines 9-10**, replace the last sentence of the first paragraph with the following:

Type IL, IP, IS or IT blended cement may be used instead of Portland cement.

Page 10-1, Article 1000-1, DESCRIPTION, line 14, add the following:

Use materials which do not produce a mottled appearance through rusting or other staining of the finished concrete surface.

Page 10-5, Table 1000-1, REQUIREMENTS FOR CONCRETE, replace with the following:

TABLE 1000-1 REQUIREMENTS FOR CONCRETE											
Class of Concrete	Min. Com p. Strength at 28 days	Maximum Water-Cement Ratio				Consistency Max. Slump		Cement Content			
		Air-Entrained Concrete		Non Air-Entrained Concrete		Vibrated	Non-Vibrated	Vibrated		Non-Vibrated	
		Rounded Aggregate	Angular Aggregate	Rounded Aggregate	Angular Aggregate			Min.	Max.	Min.	Max.
<i>Units</i>	<i>psi</i>					<i>inch</i>	<i>inch</i>	<i>lb/cy</i>	<i>lb/cy</i>	<i>lb/cy</i>	<i>lb/cy</i>
AA	4,500	0.381	0.426	-	-	3.5	-	639	715	-	-
AA Slip Form	4,500	0.381	0.426	-	-	1.5	-	639	715	-	-
Drilled Pier	4,500	-	-	0.450	0.450	-	5-7 dry 7-9 wet	-	-	640	800
A	3,000	0.488	0.532	0.550	0.594	3.5	4	564	-	602	-
B	2,500	0.488	0.567	0.559	0.630	2.5	4	508	-	545	-
B Slip Formed	2,500	0.488	0.567	-	-	1.5	-	508	-	-	-
Sand Light-weight	4,500	-	0.420	-	-	4	-	715	-	-	-
Latex Modified	3,000 7 day	0.400	0.400	-	-	6	-	658	-	-	-
Flowable Fill excavatable	150 max. at 56 days	as needed	as needed	as needed	as needed	-	Flow-able	-	-	40	100
Flowable Fill non-excavatable	125	as needed	as needed	as needed	as needed	-	Flow-able	-	-	100	as needed
Pavement	4,500 design, field 650 flexural, design only	0.559	0.559	-	-	1.5 slip form 3.0 hand place	-	526	-	-	-
Precast	See Table 1077-1	as needed	as needed	-	-	6	as needed	as needed	as needed	as needed	as needed
Prestress	per contract	See Table 1078-1	See Table 1078-1	-	-	8	-	564	as needed	-	-

Page 10-1, Article 1000-2, MATERIALS, line 16; Page 10-8, Subarticle 1000-7(A), MATERIALS, line 8; and Page 10-18, Article 1002-2, MATERIALS, line 9, add the following to the table of item references:**Item**

Type IL Blended Cement

Section

1024-1

**TABLE 1005-1
AGGREGATE GRADATION - COARSE AGGREGATE**

Std. Size #	Percentage of Total by Weight Passing													Remarks
	2"	1 1/2"	1"	3/4"	1/2"	3/8"	#4	#8	#10	#16	#40	#200		
4	100	90-100	20-55	0-15	-	0-5	-	-	-	-	-	A	Asphalt Plant Mix	
467M	100	95-100	-	35-70	-	0-30	0-5	-	-	-	-	A	Asphalt Plant Mix	
5	-	100	90-100	20-55	0-10	0-5	-	-	-	-	-	A	AST, Sediment Control Stone	
57	-	100	95-100	-	25-60	-	0-10	0-5	-	-	-	A	AST, Str. Concrete, Shoulder Drain, Sediment Control Stone	
57M	-	100	95-100	-	25-45	-	0-10	0-5	-	-	-	A	AST, Concrete Pavement	
6M	-	-	100	90-100	20-55	0-20	0-8	-	-	-	-	A	AST	
67	-	-	100	90-100	-	20-55	0-10	0-5	-	-	-	A	AST, Str. Concrete, Asphalt Plant Mix	
78M	-	-	-	100	98-100	75-100	20-45	0-15	-	-	-	A	Asphalt Plant Mix, AST, Str. Conc, Weep Hole Drains	
14M	-	-	-	-	-	100	35-70	5-20	0-8	-	-	A	Asphalt Plant Mix, AST, Weep Hole Drains, Str. Concrete	
9	-	-	-	-	-	100	85-100	10-40	0-10	-	-	A	AST	
ABC	-	100	75-97	-	55-80	-	35-55	-	25-45	14-30	4-12 ^B		Aggregate Base Course, Aggregate Stabilization	
ABC (M)	-	100	75-100	-	45-79	-	20-40	-	0-25	-	0-12 ^B		Maintenance Stabilization	
Light-C weight	-	-	-	-	100	80-100	5-40	0-20	-	0-10	-	0-2.5	AST	

- A. See Subarticle 1005-4(A).
- B. See Subarticle 1005-4(B).
- C. For Lightweight Aggregate used in Structural Concrete, see Subarticle 1014-2(E)(6).

Use Type IL blended cement that meets AASHTO M 240, except that the limestone content is limited to between 5 and 12% by weight and the constituents shall be interground. Class F fly ash can replace a portion of Type IL blended cement and shall be replaced as outlined in Subarticle 1000-4(I) for Portland cement. For mixes that contain cement with alkali content between 0.6% and 1.0% and for mixes that contain a reactive aggregate documented by the Department, use a pozzolan in the amount shown in Table 1024-1.

Page 10-65, Article 1050-1, GENERAL, line 41, replace the first sentence with the following:

All fencing material and accessories shall meet Section 106.

Page 10-73, Article 1056-1 DESCRIPTION, lines 7-8, delete the first sentence of the second paragraph and replace with the following:

Use geotextile fabrics that are on the NCDOT Approved Products List.

Page 10-73, Article 1056-2 HANDLING AND STORING, line 17, replace “mechanically stabilized earth (MSE) wall faces” with “temporary wall faces”.

Page 10-74, TABLE 1056-1 GEOTEXTILE REQUIREMENTS, replace table with the following:

TABLE 1056-1 GEOTEXTILE REQUIREMENTS						
Property	Requirement (MARV^A)					Test Method
	Type 1	Type 2	Type 3^B	Type 4	Type 5^C	
<i>Typical Application</i>	<i>Shoulder Drains</i>	<i>Under Rip Rap</i>	<i>Temporary Silt Fence</i>	<i>Soil Stabilization</i>	<i>Temporary Walls</i>	
Elongation (MD & CD)	≥ 50%	≥ 50%	≤ 25%	< 50%	< 50%	ASTM D4632
Grab Strength (MD & CD)	Table 1 ^D , Class 3	Table 1 ^D , Class 1	100 lb	Table 1 ^D , Class 3	-	ASTM D4632
Tear Strength (MD & CD)			-		-	ASTM D4533
Puncture Strength			-		-	ASTM D6241
Ultimate Tensile Strength (MD & CD)	-	-	-	-	2,400 lb/ft (unless required otherwise in the contract)	ASTM D4595
Permittivity	Table 2 ^D , 15% to 50% <i>in Situ</i> Soil Passing No. 200 ^E		Table 7 ^D	Table 5 ^D	0.20 sec ⁻¹	ASTM D4491
Apparent Opening Size					No. 30 ^E	ASTM D4751
UV Stability (Retained Strength)					70%	ASTM D4355

A. MARV does not apply to elongation

B. Minimum roll width of 36" required

C. Minimum roll width of 13 ft required

D. AASHTO M 288

E. US Sieve No. per AASHTO M 92

Page 10-115, Subarticle 1074-7(B), Gray Iron Castings, lines 10-11, replace with the first two sentences with the following:

Supply gray iron castings meeting all facets of AASHTO M 306 excluding proof load. Proof load testing will only be required for new casting designs during the design process, and conformance to M306 loading (40,000 lbs.) will be required only when noted on the design documents.

Page 10-126, Table 1078-1, REQUIREMENTS FOR CONCRETE, replace with the following:

TABLE 1078-1 REQUIREMENTS FOR CONCRETE		
Property	28 Day Design Compressive Strength 6,000 psi or less	28 Day Design Compressive Strength greater than 6,000 psi
Maximum Water/Cementitious Material Ratio	0.45	0.40
Maximum Slump without HRWR	3.5"	3.5"
Maximum Slump with HRWR	8"	8"
Air Content (upon discharge into forms)	5 + 2%	5 + 2%

Page 10-151, Article 1080-4 Inspection and Sampling, lines 18-22, replace (B), (C) and (D) with the following:

- (B) At least 3 panels prepared as specified in 5.5.10 of AASHTO M 300, Bullet Hole Immersion Test.
- (C) At least 3 panels of 4"x6"x1/4" for the Elcometer Adhesion Pull Off Test, ASTM D4541.
- (D) A certified test report from an approved independent testing laboratory for the Salt Fog Resistance Test, Cyclic Weathering Resistance Test, and Bullet Hole Immersion Test as specified in AASHTO M 300.
- (E) A certified test report from an approved independent testing laboratory that the product has been tested for slip coefficient and meets AASHTO M253, Class B.

Page 10-161, Subarticle 1081-1(A) Classifications, lines 29-33, delete first 3 sentences of the description for Type 2 and replace with the following:

Type 2 - A low-modulus, general-purpose adhesive used in epoxy mortar repairs. It may be used to patch spalled, cracked or broken concrete where vibration, shock or expansion and contraction are expected.

Page 10-162, Subarticle 1081-1(A) Classifications, lines 4-7, delete the second and third sentences of the description for Type 3A. Lines 16-22, delete Types 6A, 6B and 6C.

Page 10-162, Subarticle 1081-1(B) Requirements, lines 26-30, replace the second paragraph with the following:

For epoxy resin systems used for embedding dowel bars, threaded rods, rebar, anchor bolts and other fixtures in hardened concrete, the manufacturer shall submit test results showing that the bonding system will obtain 125% of the specified required yield strength of the fixture. Furnish certification that, for the particular bolt grade, diameter and embedment depth required, the anchor system will not fail by adhesive failure and that there is no movement of the anchor bolt. For certification and anchorage, use 3,000 psi as the minimum Portland cement concrete compressive strength used in this test. Use adhesives that meet Section 1081.

List the properties of the adhesive on the container and include density, minimum and maximum temperature application, setting time, shelf life, pot life, shear strength and compressive strength.

Page 10-163, Table 1081-1 Properties of Mixed Epoxy Resin Systems, replace table with the following:

Table 1081-1 Properties of Mixed Epoxy Resin Systems							
Property	Type 1	Type 2	Type 3	Type 3A	Type 4A	Type 4B	Type 5
Viscosity-Poises at 77°F ± 2°F	Gel	10-30	25-75	Gel	40-150	40-150	1-6
Spindle No.	-	3	4	--	4	4	2
Speed (RPM)	-	20	20	--	10	10	50
Pot Life (Minutes)	20-50	30-60	20-50	5-50	40-80	40-80	20-60
Minimum Tensile Strength at 7 days (psi)	1,500	2,000	4,000	4,000	1,500	1,500	4,000
Tensile Elongation at 7 days (%)	30 min.	30 min.	2-5	2-5	5-15	5-15	2-5
Min. Compressive Strength of 2" mortar cubes at 24 hours	3,000 (Neat)	4,000-	6,000-	6,000 (Neat)	3,000	3,000	6,000
Min. Compressive Strength of 2" mortar cubes at 7 days	5,000 (Neat)	-	-	-	-	5,000	-
Maximum Water Absorption (%)	1.5	1.0	1.0	1.5	1.0	1.0	1.0
Min. Bond Strength Slant Shear Test at 14 days (psi)	1,500	1,500	2,000	2,000	1,500	1,500	1,500

Page 10-164, Subarticle 1081-1(E) Prequalification, lines 31-33, replace the second sentence of the first paragraph with the following:

Manufacturers choosing to supply material for Department jobs must submit an application through the Value Management Unit with the following information for each type and brand name:

Page 10-164, Subarticle 1081-1(E)(3), line 37, replace this subarticle with the following:

(3) Type of the material in accordance with Articles 1081-1 and 1081-4,

Page 10-165, Subarticle 1081-1(E)(6), line 1, in the first sentence of the first paragraph replace “AASHTO M 237” with “the specifications”.

Page 10-165, Subarticle 1081-1(E) Prequalification, line 9-10, delete the second sentence of the last paragraph.

Page 10-165, Subarticle 1081-1(F) Acceptance, line 14, in the first sentence of the first paragraph replace “Type 1” with “Type 3”.

Page 10-169, Subarticle 1081-3(G) Anchor Bolt Adhesives, delete this subarticle.

Page 10-170, Article 1081-3 Hot Bitumen, line 9, add the following at the end of Section 1081:

1081-4 EPOXY RESIN ADHESIVE FOR BONDING TRAFFIC MARKINGS

(A) General

This section covers epoxy resin adhesive for bonding traffic markers to pavement surfaces.

(B) Classification

The types of epoxies and their uses are as shown below:

Type I – Rapid Setting, High Viscosity, Epoxy Adhesive. This type of adhesive provides rapid adherence to traffic markers to the surface of pavement.

Type II – Standard Setting, High Viscosity, Epoxy Adhesive. This type of adhesive is recommended for adherence of traffic markers to pavement surfaces when rapid set is not required.

Type III – Rapid Setting, Low Viscosity, Water Resistant, Epoxy Adhesive. This type of rapid setting adhesive, due to its low viscosity, is appropriate only for use with embedded traffic markers.

Type IV – Standard Set Epoxy for Blade Deflecting-Type Plowable Markers.

(C) Requirements

Epoxies shall conform to the requirements set forth in AASHTO M 237.

(D) Prequalification

Refer to Subarticle 1081-1(E).

(E) Acceptance

Refer to Subarticle 1081-1(F).

Page 10-173, Article 1084-2 STEEL SHEET PILES, lines 37-38, replace first paragraph with the following:

Steel sheet piles detailed for permanent applications shall be hot rolled and meet ASTM A572 or ASTM A690 unless otherwise required by the plans. Steel sheet piles shall be coated as required by the plans. Galvanized sheet piles shall be coated in accordance with Section 1076. Metallized sheet piles shall be metallized in accordance to the Project Special Provision “Thermal Sprayed Coatings (Metallization)” with an 8 mil, 99.9% aluminum alloy coating and a 0.5 mil seal coating. Any portion of the metallized sheet piling encased in concrete shall receive a barrier coat. The barrier coat shall be an approved waterborne coating with a low-viscosity which readily absorbs into the pores of the aluminum thermal sprayed coating. The waterborne coating shall be applied at a spreading rate that results in a theoretical 1.5 mil dry film thickness. The manufacturer shall issue a letter of certification that the resin chemistry of the waterborne coating is compatible with the 99.9% aluminum thermal sprayed alloy and suitable for tidal water applications.

Page 10-174, Subarticle 1086-1(B)(1) Epoxy, lines 18-24, replace this subarticle with the following:

The epoxy shall meet Article 1081-4.

The 2 types of epoxy adhesive which may be used are Type I, Rapid Setting, and Type II, Standard Setting. Use Type II when the pavement temperature is above 60°F or per the manufacturer’s recommendations whichever is more stringent. Use Type I when the pavement temperature is between 50°F and 60°F or per the manufacturer’s recommendations whichever is more stringent. Epoxy adhesive Type I, Cold Set, may be used to attach temporary pavement markers to the pavement surface when the pavement temperature is between 32°F and 50°F or per the manufacturer’s recommendations whichever is more stringent.

Page 10-175, Subarticle 1086-2(E) Epoxy Adhesives, line 27, replace “Section 1081” with “Article 1081-4”.

Page 10-177, Subarticle 1086-3(E) Epoxy Adhesives, line 22, replace “Section 1081” with “Article 1081-4”.

Page 10-179, Subarticle 1087-4(A) Composition, lines 39-41, replace the third paragraph with the following:

All intermixed and drop-on glass beads shall not contain more than 75 ppm arsenic or 200 ppm lead.

Page 10-180, Subarticle 1087-4(B) Physical Characteristics, line 8, replace the second paragraph with the following:

All intermixed and drop-on glass beads shall comply with NCGS § 136-30.2 and 23 USC § 109(r).

Page 10-181, Subarticle 1087-7(A) Intermixed and Drop-on Glass Beads, line 24, add the following after the first paragraph:

Use X-ray Fluorescence for the normal sampling procedure for intermixed and drop-on beads, without crushing, to check for any levels of arsenic and lead. If any arsenic or lead is detected, the sample shall be crushed and repeat the test using X-ray Fluorescence. If the X-ray Fluorescence test shows more than a LOD of 5 ppm, test the beads using United States Environmental Protection Agency Method 6010B, 6010C or 3052 for no more than 75 ppm arsenic or 200 ppm lead.

Page 10-204, Subarticle 1092-2(A) Performance and Test Requirements, replace Table 1092-3 Minimum Coefficient of Retroreflection for NC Grade A with the following:

Observation Angle, degrees	Entrance Angle, degrees	White	Yellow	Green	Red	Blue	Fluorescent Yellow Green	Fluorescent Yellow
0.2	-4.0	525	395	52	95	30	420	315
0.2	30.0	215	162	22	43	10	170	130
0.5	-4.0	310	230	31	56	18	245	185
0.5	30.0	135	100	14	27	6	110	81
1.0	-4.0	120	60	8	16	3.6	64	48
1.0	30.0	45	34	4.5	9	2	36	27

PLANT AND PEST QUARANTINES

(Imported Fire Ant, Gypsy Moth, Witchweed, And Other Noxious Weeds)

(3-18-03) (Rev. 10-15-13)

Z-04a

Within Quarantined Area

This project may be within a county regulated for plant and/or pests. If the project or any part of the Contractor's operations is located within a quarantined area, thoroughly clean all equipment prior to moving out of the quarantined area. Comply with federal/state regulations by obtaining a certificate or limited permit for any regulated article moving from the quarantined area.

Originating in a Quarantined County

Obtain a certificate or limited permit issued by the N.C. Department of Agriculture/United States Department of Agriculture. Have the certificate or limited permit accompany the article when it arrives at the project site.

Contact

Contact the N.C. Department of Agriculture/United States Department of Agriculture at 1-800-206-9333, 919-733-6932, or <http://www.ncagr.gov/plantind/> to determine those specific project sites located in the quarantined area or for any regulated article used on this project originating in a quarantined county.

Regulated Articles Include

1. Soil, sand, gravel, compost, peat, humus, muck, and decomposed manure, separately or with other articles. This includes movement of articles listed above that may be associated with cut/waste, ditch pulling, and shoulder cutting.
2. Plants with roots including grass sod.
3. Plant crowns and roots.
4. Bulbs, corms, rhizomes, and tubers of ornamental plants.
5. Hay, straw, fodder, and plant litter of any kind.
6. Clearing and grubbing debris.
7. Used agricultural cultivating and harvesting equipment.
8. Used earth-moving equipment.
9. Any other products, articles, or means of conveyance, of any character, if determined by an inspector to present a hazard of spreading imported fire ant, gypsy moth, witchweed or other noxious weeds.

ERRATA

(1-17-12) (Rev. 11-18-14)

Z-4

Revise the *2012 Standard Specifications* as follows:

Division 2

Page 2-7, line 31, Article 215-2 Construction Methods, replace “Article 107-26” with “Article 107-25”.

Page 2-17, Article 226-3, Measurement and Payment, line 2, delete “pipe culverts,”.

Page 2-20, Subarticle 230-4(B), Contractor Furnished Sources, change references as follows: Line 1, replace “(4) Buffer Zone” with “(c) Buffer Zone”; **Line 12**, replace “(5) Evaluation for Potential Wetlands and Endangered Species” with “(d) Evaluation for Potential Wetlands and Endangered Species”; and **Line 33**, replace “(6) Approval” with “(4) Approval”.

Division 3

Page 3-1, after line 15, Article 300-2 Materials, replace “1032-9(F)” with “1032-6(F)”.

Division 4

Page 4-77, line 27, Subarticle 452-3(C) Concrete Coping, replace “sheet pile” with “reinforcement”.

Division 6

Page 6-7, line 31, Article 609-3 Field Verification of Mixture and Job Mix Formula Adjustments, replace “30” with “45”.

Page 6-10, line 42, Subarticle 609-6(C)(2), replace “Subarticle 609-6(E)” with “Subarticle 609-6(D)”.

Page 6-11, Table 609-1 Control Limits, replace “Max. Spec. Limit” for the Target Source of $P_{0.075}/P_{be}$ Ratio with “1.0”.

Page 6-40, Article 650-2 Materials, replace “Subarticle 1012-1(F)” with “Subarticle 1012-1(E)”.

Division 8

Page 8-23, line 10, Article 838-2 Materials, replace “Portland Cement Concrete, Class B” with “Portland Cement Concrete, Class A”.

Division 10

Page 10-166, Article 1081-3 Hot Bitumen, replace “Table 1081-16” with “Table 1081-2”, replace “Table 1081-17” with “Table 1081-3”, and replace “Table 1081-18” with “Table 1081-4”.

Division 12

Page 12-7, Table 1205-3, add “FOR THERMOPLASTIC” to the end of the title.

Page 12-8, Subarticle 1205-5(B), line 13, replace “Table 1205-2” with “Table 1205-4”.

Page 12-8, Table 1205-4 and 1205-5, replace “THERMOPLASTIC” in the title of these tables with “POLYUREA”.

Page 12-9, Subarticle 1205-6(B), line 21, replace “Table 1205-4” with “Table 1205-6”.

Page 12-11, Subarticle 1205-8(C), line 25, replace “Table 1205-5” with “Table 1205-7”.

Division 15

Page 15-4, Subarticle 1505-3(F) Backfilling, line 26, replace “Subarticle 235-4(C)” with “Subarticle 235-3(C)”.

Page 15-6, Subarticle 1510-3(B), after line 21, replace the allowable leakage formula with the following:

$$W = LD\sqrt{P} + 148,000$$

Page 15-6, Subarticle 1510-3(B), line 32, delete “may be performed concurrently or” and replace with “shall be performed”.

Page 15-17, Subarticle 1540-3(E), line 27, delete “Type 1”.

Division 17

Page 17-26, line 42, Subarticle 1731-3(D) Termination and Splicing within Interconnect Center, delete this subarticle.

Revise the *2012 Roadway Standard Drawings* as follows:

1633.01 Sheet 1 of 1, English Standard Drawing for Matting Installation, replace “1633.01” with “1631.01”.

MINORITY AND FEMALE EMPLOYMENT REQUIREMENTS

Z-7

NOTICE OF REQUIREMENTS FOR AFFIRMATIVE ACTION TO ENSURE EQUAL EMPLOYMENT OPPORTUNITY (*EXECUTIVE NUMBER 11246*)

1. The goals and timetables for minority and female participation, expressed in percentage terms for the Contractor's aggregate workforce in each trade on all construction work in the covered area, see as shown on the attached sheet entitled "Employment Goals for Minority and Female participation".

These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally assisted) performed in the covered area. If the Contractor performs construction work in a geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the Contractor also is subject to the goals for both its federally involved and nonfederally involved construction.

The Contractor's compliance with the Executive Order and the regulations in *41 CFR Part 60-4* shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in *41 CFR 60-4.3(a)*, and its effort to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade and the Contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project or the sole purpose of meeting the Contractor's goals shall be a violation of the contract, the executive Order and the regulations in *41 CFR Part 60-4*. Compliance with the goals will be measured against the total work hours performed.

2. As used in this Notice and in the contract resulting from this solicitation, the "covered area" is the county or counties shown on the cover sheet of the proposal form and contract.

EMPLOYMENT GOALS FOR MINORITY AND FEMALE PARTICIPATION

Economic Areas

Area 023 29.7%

Bertie County
Camden County
Chowan County
Gates County
Hertford County
Pasquotank County
Perquimans County

Area 024 31.7%

Beaufort County
Carteret County
Craven County
Dare County
Edgecombe County
Green County
Halifax County
Hyde County
Jones County
Lenoir County
Martin County
Nash County
Northampton County
Pamlico County
Pitt County
Tyrrell County
Washington County
Wayne County
Wilson County

Area 025 23.5%

Columbus County
Duplin County

Area 026 33.5%

Bladen County
Hoke County
Richmond County
Robeson County
Sampson County
Scotland County

Area 027 24.7%

Chatham County
Franklin County
Granville County
Harnett County
Johnston County
Lee County
Person County
Vance County
Warren County

Area 028 15.5%

Alleghany County
Ashe County
Caswell County
Davie County
Montgomery County
Moore County
Rockingham County
Surry County
Watauga County
Wilkes County

Area 029 15.7%

Alexander County
Anson County
Burke County
Cabarrus County
Caldwell County
Catawba County
Cleveland County
Iredell County
Lincoln County
Polk County
Rowan County
Rutherford County
Stanly County

Area 0480 8.5%

Buncombe County
Madison County

Area 030 6.3%

Avery County
Cherokee County
Clay County
Graham County
Haywood County
Henderson County
Jackson County
McDowell County
Macon County
Mitchell County
Swain County
Transylvania County
Yancey County

Onslow County

Pender County

SMSA Areas

Area 5720 26.6%

Currituck County

Area 9200 20.7%

Brunswick County

New Hanover County

Area 2560 24.2%

Cumberland County

Area 6640 22.8%

Durham County

Orange County

Wake County

Area 1300 16.2%

Alamance County

Area 3120 16.4%

Davidson County

Forsyth County

Guilford County

Randolph County

Stokes County

Yadkin County

Area 1520 18.3%

Gaston County

Mecklenburg County

Union County

Goals for Female Participation in Each Trade (Statewide) 6.9%

DISADVANTAGED BUSINESS ENTERPRISE (DIVISIONS):

(10-16-07)(Rev.12-17-13)

102-15(J)

SP1 G62

Description

The purpose of this Special Provision is to carry out the U.S. Department of Transportation's policy of ensuring nondiscrimination in the award and administration of contracts financed in whole or in part with Federal funds. This provision is guided by 49 CFR Part 26.

Definitions

Additional DBE Subcontractors - Any DBE submitted at the time of bid that will not be used to meet the DBE goal. No submittal of a Letter of Intent is required.

Committed DBE Subcontractor - Any DBE submitted at the time of bid that is being used to meet the DBE goal by submission of a Letter of Intent. Or any DBE used as a replacement for a previously committed DBE firm.

Contract Goal Requirement - The approved DBE participation at time of award, but not greater than the advertised contract goal.

DBE Goal - A portion of the total contract, expressed as a percentage, that is to be performed by committed DBE subcontractor(s).

Disadvantaged Business Enterprise (DBE) - A firm certified as a Disadvantaged Business Enterprise through the North Carolina Unified Certification Program.

Goal Confirmation Letter - Written documentation from the Department to the bidder confirming the Contractor's approved, committed DBE participation along with a listing of the committed DBE firms.

Manufacturer - A firm that operates or maintains a factory or establishment that produces on the premises, the materials or supplies obtained by the Contractor.

Regular Dealer - A firm that owns, operates, or maintains a store, warehouse, or other establishment in which the materials or supplies required for the performance of the contract are bought, kept in stock, and regularly sold to the public in the usual course of business. A regular dealer engages in, as its principal business and in its own name, the purchase and sale or lease of the products in question. A regular dealer in such bulk items as steel, cement, gravel, stone, and petroleum products need not keep such products in stock, if it owns and operates distribution equipment for the products. Brokers and packagers are not regarded as manufacturers or regular dealers within the meaning of this section.

North Carolina Unified Certification Program (NCUCP) - A program that provides comprehensive services and information to applicants for DBE certification, such that an applicant is required to apply only once for a DBE certification that will be honored by all recipients of USDOT funds in the state and not limited to the Department of Transportation only. The Certification Program is in accordance with 49 CFR Part 26.

United States Department of Transportation (USDOT) - Federal agency responsible for issuing regulations (49 CFR Part 26) and official guidance for the DBE program.

Forms and Websites Referenced in this Provision

DBE Payment Tracking System - On-line system in which the Contractor enters the payments made to DBE subcontractors who have performed work on the project. <https://apps.dot.state.nc.us/Vendor/PaymentTracking/>

DBE-IS Subcontractor Payment Information - Form for reporting the payments made to all DBE firms working on the project. This form is for paper bid projects only. <http://www.ncdot.org/doh/forms/files/DBE-IS.xls>

RF-1 DBE Replacement Request Form - Form for replacing a committed DBE.

<http://connect.ncdot.gov/projects/construction/Construction%20Forms/DBE%20MBE%20WBE%20Replacement%20Request%20Form.pdf>

SAF Subcontract Approval Form - Form required for approval to sublet the contract. <http://connect.ncdot.gov/projects/construction/Construction%20Forms/Subcontract%20Approval%20Form%20Rev.%202012.zip>

JC-1 *Joint Check Notification Form* - Form and procedures for joint check notification. The form acts as a written joint check agreement among the parties providing full and prompt disclosure of the expected use of joint checks.
<http://connect.ncdot.gov/projects/construction/Construction%20Forms/Joint%20Check%20Notification%20Form.pdf>

Letter of Intent - Form signed by the Contractor and the DBE subcontractor, manufacturer or regular dealer that affirms that a portion of said contract is going to be performed by the signed DBE for the amount listed at the time of bid.
<http://connect.ncdot.gov/letting/LetCentral/Letter%20of%20Intent%20to%20Perform%20as%20a%20Subcontractor.pdf>

Listing of DBE Subcontractors Form - Form for entering DBE subcontractors on a project that will meet this DBE goal. This form is for paper bids only.
[http://connect.ncdot.gov/municipalities/Bid%20Proposals%20for%20LGA%20Content/08%20DBE%20Subcontractors%20\(Federal\).doc](http://connect.ncdot.gov/municipalities/Bid%20Proposals%20for%20LGA%20Content/08%20DBE%20Subcontractors%20(Federal).doc)

Subcontractor Quote Comparison Sheet - Spreadsheet for showing all subcontractor quotes in the work areas where DBEs quoted on the project. This sheet is submitted with good faith effort packages.
<http://connect.ncdot.gov/business/SmallBusiness/Documents/DBE%20Subcontractor%20Quote%20Comparison%20Example.xls>

DBE Goal

The following DBE goal for participation by Disadvantaged Business Enterprises is established for this contract:

Disadvantaged Business Enterprises **3.0 %**

- (A) *If the DBE goal is more than zero*, the Contractor shall exercise all necessary and reasonable steps to ensure that DBEs participate in at least the percent of the contract as set forth above as the DBE goal.
- (B) *If the DBE goal is zero*, the Contractor shall make an effort to recruit and use DBEs during the performance of the contract. Any DBE participation obtained shall be reported to the Department.

Directory of Transportation Firms (Directory)

Real-time information is available about firms doing business with the Department and firms that are certified through NCUCP in the Directory of Transportation Firms. Only firms identified in the Directory as DBE certified shall be used to meet the DBE goal. The Directory can be found at the following link. <https://partner.ncdot.gov/VendorDirectory/default.html>

The listing of an individual firm in the directory shall not be construed as an endorsement of the firm's capability to perform certain work.

Listing of DBE Subcontractors

At the time of bid, bidders shall submit all DBE participation that they anticipate to use during the life of the contract. Only those identified to meet the DBE goal will be considered committed, even though the listing shall include both committed DBE subcontractors and additional DBE subcontractors. Additional DBE subcontractor participation submitted at the time of bid will be used toward the Department's overall race-neutral goal. Only those firms with current DBE certification at the time of bid opening will be acceptable for listing in the bidder's submittal of DBE participation. The Contractor shall indicate the following required information:

- (A) *If the DBE goal is more than zero*,
 - (1) Bidders, at the time the bid proposal is submitted, shall submit a listing of DBE participation, including the names and addresses on *Listing of DBE Subcontractors* contained elsewhere in the contract documents in order for the bid to be considered responsive. Bidders shall indicate the total dollar value of the DBE participation for the contract.
 - (2) If bidders have no DBE participation, they shall indicate this on the *Listing of DBE Subcontractors* by entering the word "None" or the number "0." This form shall be completed in its entirety. **Blank forms will not be deemed to represent zero participation.** Bids submitted that do not have DBE participation indicated on the appropriate form will not be read publicly during the opening of bids. The Department will not consider these bids for award and the proposal will be rejected.

- (3) The bidder shall be responsible for ensuring that the DBE is certified at the time of bid by checking the Directory of Transportation Firms. If the firm is not certified at the time of the bid-letting, that DBE's participation will not count towards achieving the DBE goal.

- (B) *If the DBE goal is zero*, entries on the *Listing of DBE Subcontractors* are not required, however any DBE participation that is achieved during the project shall be reported in accordance with requirements contained elsewhere in the special provision.

DBE Prime Contractor

When a certified DBE firm bids on a contract that contains a DBE goal, the DBE firm is responsible for meeting the goal or making good faith efforts to meet the goal, just like any other bidder. In most cases, a DBE bidder on a contract will meet the DBE goal by virtue of the work it performs on the contract with its own forces. However, all the work that is performed by the DBE bidder and any other DBE subcontractors will count toward the DBE goal. The DBE bidder shall list itself along with any DBE subcontractors, if any, in order to receive credit toward the DBE goal.

For example, if the DBE goal is 45% and the DBE bidder will only perform 40% of the contract work, the prime will list itself at 40%, and the additional 5% shall be obtained through additional DBE participation with DBE subcontractors or documented through a good faith effort.

DBE prime contractors shall also follow Sections A or B listed under *Listing of DBE Subcontractor* just as a non-DBE bidder would.

Written Documentation – Letter of Intent

The bidder shall submit written documentation for each DBE that will be used to meet the DBE goal of the contract, indicating the bidder's commitment to use the DBE in the contract. This documentation shall be submitted on the Department's form titled *Letter of Intent*.

The documentation shall be received in the office of the Engineer no later than 12:00 noon of the sixth calendar day following opening of bids, unless the sixth day falls on Saturday, Sunday or an official state holiday. In that situation, it is due in the office of the Engineer no later than 12:00 noon on the next official state business day.

If the bidder fails to submit the Letter of Intent from each committed DBE to be used toward the DBE goal, or if the form is incomplete (i.e. both signatures are not present), the DBE participation will not count toward meeting the DBE goal. If the lack of this participation drops the commitment below the DBE goal, the Contractor shall submit evidence of good faith efforts, completed in its entirety, to the Engineer no later than 12:00 noon on the eighth calendar day following opening of bids, unless the eighth day falls on Saturday, Sunday or an official state holiday. In that situation, it is due in the office of the Engineer no later than 12:00 noon on the next official state business day.

Submission of Good Faith Effort

If the bidder fails to meet or exceed the DBE goal the apparent lowest responsive bidder shall submit to the Department documentation of adequate good faith efforts made to reach the DBE goal.

One complete set and (No. of Copies) copies of this information shall be received in the office of the Engineer no later than 12:00 noon of the sixth calendar day following opening of bids, unless the sixth day falls on Saturday, Sunday or an official state holiday. In that situation, it is due in the office of the Engineer no later than 12:00 noon on the next official state business day.

Note: Where the information submitted includes repetitious solicitation letters, it will be acceptable to submit a representative letter along with a distribution list of the firms that were solicited. Documentation of DBE quotations shall be a part of the good faith effort submittal. This documentation may include written subcontractor quotations, telephone log notations of verbal quotations, or other types of quotation documentation.

Consideration of Good Faith Effort for Projects with DBE Goals More Than Zero

Adequate good faith efforts mean that the bidder took all necessary and reasonable steps to achieve the goal which, by their scope, intensity, and appropriateness, could reasonably be expected to obtain sufficient DBE participation. Adequate good faith efforts also mean that the bidder actively and aggressively sought DBE participation. Mere *pro forma* efforts are not considered good faith efforts.

The Department will consider the quality, quantity, and intensity of the different kinds of efforts a bidder has made. Listed below are examples of the types of actions a bidder will take in making a good faith effort to meet the goal and are not intended to be exclusive or exhaustive, nor is it intended to be a mandatory checklist.

- (A) Soliciting through all reasonable and available means (e.g. attendance at pre-bid meetings, advertising, written notices, use of verifiable electronic means through the use of the NCDOT Directory of Transportation Firms) the interest of all certified DBEs who have the capability to perform the work of the contract. The bidder must solicit this interest within at least 10 days prior to bid opening to allow the DBEs to respond to the solicitation. Solicitation shall provide the opportunity to DBEs within the Division and surrounding Divisions where the project is located. The bidder must determine with certainty if the DBEs are interested by taking appropriate steps to follow up initial solicitations.
- (B) Selecting portions of the work to be performed by DBEs in order to increase the likelihood that the DBE goals will be achieved.
 - (1) Where appropriate, break out contract work items into economically feasible units to facilitate DBE participation, even when the prime contractor might otherwise prefer to perform these work items with its own forces.
 - (2) Negotiate with subcontractors to assume part of the responsibility to meet the contract DBE goal when the work to be sublet includes potential for DBE participation (2nd and 3rd tier subcontractors).
- (C) Providing interested DBEs with adequate information about the plans, specifications, and requirements of the contract in a timely manner to assist them in responding to a solicitation.
- (D)
 - (1) Negotiating in good faith with interested DBEs. It is the bidder's responsibility to make a portion of the work available to DBE subcontractors and suppliers and to select those portions of the work or material needs consistent with the available DBE subcontractors and suppliers, so as to facilitate DBE participation. Evidence of such negotiation includes the names, addresses, and telephone numbers of DBEs that were considered; a description of the information provided regarding the plans and specifications for the work selected for subcontracting; and evidence as to why additional agreements could not be reached for DBEs to perform the work.
 - (2) A bidder using good business judgment would consider a number of factors in negotiating with subcontractors, including DBE subcontractors, and would take a firm's price and capabilities as well as contract goals into consideration. However, the fact that there may be some additional costs involved in finding and using DBEs is not in itself sufficient reason for a bidder's failure to meet the contract DBE goal, as long as such costs are reasonable. Also, the ability or desire of a prime contractor to perform the work of a contract with its own organization does not relieve the bidder of the responsibility to make good faith efforts. Bidding contractors are not, however, required to accept higher quotes from DBEs if the price difference is excessive or unreasonable.
- (E) Not rejecting DBEs as being unqualified without sound reasons based on a thorough investigation of their capabilities. The bidder's standing within its industry, membership in specific groups, organizations, or associates and political or social affiliations (for example, union vs. non-union employee status) are not legitimate causes for the rejection or non-solicitation of bids in the bidder's efforts to meet the project goal.
- (F) Making efforts to assist interested DBEs in obtaining bonding, lines of credit, or insurance as required by the recipient or bidder.
- (G) Making efforts to assist interested DBEs in obtaining necessary equipment, supplies, materials, or related assistance or services.
- (H) Effectively using the services of available minority/women community organizations; minority/women contractors' groups; Federal, State, and local minority/women business assistance offices; and other organizations as allowed on a case-by-case basis to provide assistance in the recruitment and placement of DBEs. Contact within 7 days from the bid opening the Business Development Manager in the Business Opportunity and Work Force Development Unit to give notification of the bidder's inability to get DBE quotes.
- (I) Any other evidence that the bidder submits which shows that the bidder has made reasonable good faith efforts to meet the DBE goal.

In addition, the Department may take into account the following:

- (1) Whether the bidder's documentation reflects a clear and realistic plan for achieving the DBE goal.
- (2) The bidders' past performance in meeting the DBE goals.
- (3) The performance of other bidders in meeting the DBE goal. For example, when the apparent successful bidder fails to meet the DBE goal, but others meet it, you may reasonably raise the question of whether, with additional reasonable efforts the apparent successful bidder could have met the goal. If the apparent successful bidder fails to meet the DBE goal, but meets or exceeds the average DBE participation obtained by other bidders, the Department may view this, in conjunction with other factors, as evidence of the apparent successful bidder having made a good faith effort.

If the Department does not award the contract to the apparent lowest responsive bidder, the Department reserves the right to award the contract to the next lowest responsive bidder that can satisfy to the Department that the DBE goal can be met or that an adequate good faith effort has been made to meet the DBE goal.

Non-Good Faith Appeal

The Engineer will notify the contractor verbally and in writing of non-good faith. A contractor may appeal a determination of non-good faith made by the Goal Compliance Committee. If a contractor wishes to appeal the determination made by the Committee, they shall provide written notification to the Engineer. The appeal shall be made within 2 business days of notification of the determination of non-good faith.

Counting DBE Participation Toward Meeting DBE Goal

(A) Participation

The total dollar value of the participation by a committed DBE will be counted toward the contract goal requirement. The total dollar value of participation by a committed DBE will be based upon the value of work actually performed by the DBE and the actual payments to DBE firms by the Contractor.

(B) Joint Checks

Prior notification of joint check use shall be required when counting DBE participation for services or purchases that involves the use of a joint check. Notification shall be through submission of Form JC-1 (*Joint Check Notification Form*) and the use of joint checks shall be in accordance with the Department's Joint Check Procedures.

(C) Subcontracts (Non-Trucking)

A DBE may enter into subcontracts. Work that a DBE subcontracts to another DBE firm may be counted toward the contract goal requirement. Work that a DBE subcontracts to a non-DBE firm does not count toward the contract goal requirement. If a DBE contractor or subcontractor subcontracts a significantly greater portion of the work of the contract than would be expected on the basis of standard industry practices, it shall be presumed that the DBE is not performing a commercially useful function. The DBE may present evidence to rebut this presumption to the Department. The Department's decision on the rebuttal of this presumption is subject to review by the Federal Highway Administration but is not administratively appealable to USDOT.

(D) Joint Venture

When a DBE performs as a participant in a joint venture, the Contractor may count toward its contract goal requirement a portion of the total value of participation with the DBE in the joint venture, that portion of the total dollar value being a distinct clearly defined portion of work that the DBE performs with its forces.

(E) Suppliers

A contractor may count toward its DBE requirement 60 percent of its expenditures for materials and supplies required to complete the contract and obtained from a DBE regular dealer and 100 percent of such expenditures from a DBE manufacturer.

(F) Manufacturers and Regular Dealers

A contractor may count toward its DBE requirement the following expenditures to DBE firms that are not manufacturers or regular dealers:

- (1) The fees or commissions charged by a DBE firm for providing a *bona fide* service, such as professional, technical, consultant, or managerial services, or for providing bonds or insurance specifically required for the performance of a DOT-assisted contract, provided the fees or commissions are determined to be reasonable and not excessive as compared with fees and commissions customarily allowed for similar services.
- (2) With respect to materials or supplies purchased from a DBE, which is neither a manufacturer nor a regular dealer, count the entire amount of fees or commissions charged for assistance in the procurement of the materials and supplies, or fees or transportation charges for the delivery of materials or supplies required on a job site (but not the cost of the materials and supplies themselves), provided the fees are determined to be reasonable and not excessive as compared with fees customarily allowed for similar services.

Commercially Useful Function

(A) DBE Utilization

The Contractor may count toward its contract goal requirement only expenditures to DBEs that perform a commercially useful function in the work of a contract. A DBE performs a commercially useful function when it is responsible for execution of the work of the contract and is carrying out its responsibilities by actually performing, managing, and supervising the work involved. To perform a commercially useful function, the DBE shall also be responsible with respect to materials and supplies used on the contract, for negotiating price, determining quality and quantity, ordering the material and installing (where applicable) and paying for the material itself. To determine whether a DBE is performing a commercially useful function, the Department will evaluate the amount of work subcontracted, industry practices, whether the amount the firm is to be paid under the contract is commensurate with the work it is actually performing and the DBE credit claimed for its performance of the work, and any other relevant factors.

(B) DBE Utilization in Trucking

The following factors will be used to determine if a DBE trucking firm is performing a commercially useful function:

- (1) The DBE shall be responsible for the management and supervision of the entire trucking operation for which it is responsible on a particular contract, and there shall not be a contrived arrangement for the purpose of meeting DBE goals.
- (2) The DBE shall itself own and operate at least one fully licensed, insured, and operational truck used on the contract.
- (3) The DBE receives credit for the total value of the transportation services it provides on the contract using trucks it owns, insures, and operates using drivers it employs.
- (4) The DBE may subcontract the work to another DBE firm, including an owner-operator who is certified as a DBE. The DBE who subcontracts work to another DBE receives credit for the total value of the transportation services the subcontracted DBE provides on the contract.
- (5) The DBE may also subcontract the work to a non-DBE firm, including from an owner-operator. The DBE who subcontracts the work to a non-DBE is entitled to credit for the total value of transportation services provided by the non-DBE subcontractor not to exceed the value of transportation services provided by DBE-owned trucks on the contract. Additional participation by non-DBE subcontractors receives credit only for the fee or commission it receives as a result of the subcontract arrangement. The value of services performed under subcontract agreements between the DBE and the Contractor will not count towards the DBE contract requirement.
- (6) A DBE may lease truck(s) from an established equipment leasing business open to the general public. The lease must indicate that the DBE has exclusive use of and control over the truck. This requirement does not preclude the leased truck from working for others during the term of the lease with the consent of the DBE, so long as the lease gives the DBE absolute priority for use of the leased truck. This type of lease may count toward the DBE's credit as long as the driver is under the DBE's payroll.

- (7) Subcontracted/leased trucks shall display clearly on the dashboard the name of the DBE that they are subcontracted/leased to and their own company name if it is not identified on the truck itself. Magnetic door signs are not permitted.

DBE Replacement

When a Contractor has relied on a commitment to a DBE firm (or an approved substitute DBE firm) to meet all or part of a contract goal requirement, the contractor shall not terminate the DBE for convenience. This includes, but is not limited to, instances in which the Contractor seeks to perform the work of the terminated subcontractor with another DBE subcontractor, a non-DBE subcontractor, or with the Contractor's own forces or those of an affiliate. A DBE may only be terminated after receiving the Engineer's written approval based upon a finding of good cause for the termination.

All requests for replacement of a committed DBE firm shall be submitted to the Engineer for approval on Form RF-1 (*DBE Replacement Request*). If the Contractor fails to follow this procedure, the Contractor may be disqualified from further bidding for a period of up to 6 months.

The Contractor shall comply with the following for replacement of a committed DBE:

(A) Performance Related Replacement

When a committed DBE is terminated for good cause as stated above, an additional DBE that was submitted at the time of bid may be used to fulfill the DBE commitment. A good faith effort will only be required for removing a committed DBE if there were no additional DBEs submitted at the time of bid to cover the same amount of work as the DBE that was terminated.

If a replacement DBE is not found that can perform at least the same amount of work as the terminated DBE, the Contractor shall submit a good faith effort documenting the steps taken. Such documentation shall include, but not be limited to, the following:

- (1) Copies of written notification to DBEs that their interest is solicited in contracting the work defaulted by the previous DBE or in subcontracting other items of work in the contract.
- (2) Efforts to negotiate with DBEs for specific subbids including, at a minimum:
 - (a) The names, addresses, and telephone numbers of DBEs who were contacted.
 - (b) A description of the information provided to DBEs regarding the plans and specifications for portions of the work to be performed.
- (3) A list of reasons why DBE quotes were not accepted.
- (4) Efforts made to assist the DBEs contacted, if needed, in obtaining bonding or insurance required by the Contractor.

(B) Decertification Replacement

- (1) When a committed DBE is decertified by the Department after the SAF (*Subcontract Approval Form*) has been received by the Department, the Department will not require the Contractor to solicit replacement DBE participation equal to the remaining work to be performed by the decertified firm. The participation equal to the remaining work performed by the decertified firm will count toward the contract goal requirement.
- (2) When a committed DBE is decertified prior to the Department receiving the SAF (*Subcontract Approval Form*) for the named DBE firm, the Contractor shall take all necessary and reasonable steps to replace the DBE subcontractor with another DBE subcontractor to perform at least the same amount of work to meet the DBE goal requirement. If a DBE firm is not found to do the same amount of work, a good faith effort must be submitted to NCDOT (see A herein for required documentation).

Changes in the Work

When the Engineer makes changes that result in the reduction or elimination of work to be performed by a committed DBE, the Contractor will not be required to seek additional participation. When the Engineer makes changes that result in additional work to be performed by a DBE based upon the Contractor's commitment, the DBE shall participate in additional work to the same extent as the DBE participated in the original contract work.

When the Engineer makes changes that result in extra work, which has more than a minimal impact on the contract amount, the Contractor shall seek additional participation by DBEs unless otherwise approved by the Engineer.

When the Engineer makes changes that result in an alteration of plans or details of construction, and a portion or all of the work had been expected to be performed by a committed DBE, the Contractor shall seek participation by DBEs unless otherwise approved by the Engineer.

When the Contractor requests changes in the work that result in the reduction or elimination of work that the Contractor committed to be performed by a DBE, the Contractor shall seek additional participation by DBEs equal to the reduced DBE participation caused by the changes.

Reports and Documentation

A SAF (*Subcontract Approval Form*) shall be submitted for all work which is to be performed by a DBE subcontractor. The Department reserves the right to require copies of actual subcontract agreements involving DBE subcontractors.

When using transportation services to meet the contract commitment, the Contractor shall submit a proposed trucking plan in addition to the SAF. The plan shall be submitted prior to beginning construction on the project. The plan shall include the names of all trucking firms proposed for use, their certification type(s), the number of trucks owned by the firm, as well as the individual truck identification numbers, and the line item(s) being performed.

Within 30 calendar days of entering into an agreement with a DBE for materials, supplies or services, not otherwise documented by the SAF as specified above, the Contractor shall furnish the Engineer a copy of the agreement. The documentation shall also indicate the percentage (60% or 100%) of expenditures claimed for DBE credit.

Reporting Disadvantaged Business Enterprise Participation

The Contractor shall provide the Engineer with an accounting of payments made to all DBE firms, including material suppliers and contractors at all levels (prime, subcontractor, or second tier subcontractor). This accounting shall be furnished to the Engineer for any given month by the end of the following month. Failure to submit this information accordingly may result in the following action:

- (A) Withholding of money due in the next partial pay estimate; or
- (B) Removal of an approved contractor from the prequalified bidders' list or the removal of other entities from the approved subcontractors list.

While each contractor (prime, subcontractor, 2nd tier subcontractor) is responsible for accurate accounting of payments to DBEs, it shall be the prime contractor's responsibility to report all monthly and final payment information in the correct reporting manner.

Failure on the part of the Contractor to submit the required information in the time frame specified may result in the disqualification of that contractor and any affiliate companies from further bidding until the required information is submitted.

Failure on the part of any subcontractor to submit the required information in the time frame specified may result in the disqualification of that contractor and any affiliate companies from being approved for work on future projects until the required information is submitted.

Contractors reporting transportation services provided by non-DBE lessees shall evaluate the value of services provided during the month of the reporting period only.

At any time, the Engineer can request written verification of subcontractor payments.

The Contractor shall report the accounting of payments on the Department's DBE-IS (*Subcontractor Payment Information*) with each invoice. Invoices will not be processed for payment until the DBE-IS is received.

Failure to Meet Contract Requirements

Failure to meet contract requirements in accordance with Subarticle 102-15(J) of the *2012 Standard Specifications* may be cause to disqualify the Contractor.

REQUIRED CONTRACT PROVISIONS FEDERAL - AID CONSTRUCTION CONTRACTS

FHWA - 1273 Electronic Version - May 1, 2012

Z-8

- I. General
- II. Nondiscrimination
- III. Nonsegregated Facilities
- IV. Davis-Bacon and Related Act Provisions
- V. Contract Work Hours and Safety Standards Act Provisions
- VI. Subletting or Assigning the Contract
- VII. Safety: Accident Prevention
- VIII. False Statements Concerning Highway Projects
- IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
- X. Compliance with Governmentwide Suspension and Debarment Requirements
- XI. Certification Regarding Use of Contract Funds for Lobbying

ATTACHMENTS

- A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under Title 23 (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services).

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Form FHWA-1273 must be included in all Federal-aid design-build contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services). The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in bid proposal or request for proposal documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.
3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.
4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors.

II. NONDISCRIMINATION

The provisions of this section related to 23 CFR Part 230 are applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR 60, 29 CFR 1625-1627, Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding \$10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR 60, and 29 CFR 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), and Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR 230, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. **Equal Employment Opportunity:** Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, 29 CFR 1625-1627, 41 CFR 60 and 49 CFR 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:
 - a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract.
 - b. The contractor will accept as its operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."
2. **EEO Officer:** The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.
3. **Dissemination of Policy:** All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

- a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.
 - b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.
 - c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.
 - d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.
 - e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.
4. **Recruitment:** When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.
- a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.
 - b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.
 - c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.
5. **Personnel Actions:** Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:
- a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.
 - b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.
 - c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.
 - d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.
6. **Training and Promotion:**
- a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.
 - b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).
 - c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.
 - d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.
7. **Unions:** If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:
- a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.
 - b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.
 - c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.
 - d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.
8. **Reasonable Accommodation for Applicants / Employees with Disabilities:** The contractor must be familiar with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established there under. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.
9. **Selection of Subcontractors, Procurement of Materials and Leasing of Equipment:** The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.
- a. The contractor shall notify all potential subcontractors and suppliers and lessors of their EEO obligations under this contract.
 - b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.
10. **Assurance Required by 49 CFR 26.13(b):**
- a. The requirements of 49 CFR Part 26 and the State DOT's U.S. DOT-approved DBE program are incorporated by reference.
 - b. The contractor or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the contracting agency deems appropriate.

11. **Records and Reports:** The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.
- a. The records kept by the contractor shall document the following:
 - (1) The number and work hours of minority and non-minority group members and women employed in each work classification on the project;
 - (2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and
 - (3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women;
 - b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

III. NONSEGREGATED FACILITIES

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more.

The contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location, under the contractor's control, where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

IV. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding \$2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size). The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. Contracting agencies may elect to apply these requirements to other projects.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 "Contract provisions and related matters" with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages

- a. All laborers and mechanics employed or working upon the site of the work, will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.d. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph 1.b. of this section) and the Davis-Bacon poster (WH-1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.
 - b. (1) The contracting officer shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The contracting officer shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:
 - (i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and
 - (ii) The classification is utilized in the area by the construction industry; and
 - (iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.
 - (2) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.
 - (3) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. The Wage and Hour Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.
 - (4) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs 1.b.(2) or 1.b.(3) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.
- c. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.
- d. If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.
2. **Withholding.** The contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor under this contract, or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the contracting agency may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

3. Payrolls and basic records

- a. Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.
- b. (1) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the contracting agency. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g., the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH-347 is available for this purpose from the Wage and Hour Division Web site at <http://www.dol.gov/esa/whd/forms/wh347instr.htm> or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the contracting agency for transmission to the State DOT, the FHWA or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the contracting agency.
- (2) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:
- (i) That the payroll for the payroll period contains the information required to be provided under §5.5 (a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under §5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;
- (ii) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;
- (iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.
- (3) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(2) of this section.
- (4) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.
- c. The contractor or subcontractor shall make the records required under paragraph 3.a. of this section available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the FHWA may, after written notice to the contractor, the contracting agency or the State DOT, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

4. Apprentices and trainees

- a. Apprentices (programs of the USDOL). Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice.

The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

- b. Trainees (programs of the USDOL). Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration.

The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration.

Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

- c. Equal employment opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.
- d. Apprentices and Trainees (programs of the U.S. DOT). Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.
5. **Compliance with Copeland Act requirements.** The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.
6. **Subcontracts.** The contractor or subcontractor shall insert Form FHWA-1273 in any subcontracts and also require the subcontractors to include Form FHWA-1273 in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.
7. **Contract termination:** debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.
8. **Compliance with Davis-Bacon and Related Act requirements.** All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.
9. **Disputes concerning labor standards.** Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.
10. **Certification of eligibility.**
 - a. By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).
 - b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).
 - c. The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

The following clauses apply to any Federal-aid construction contract in an amount in excess of \$100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchmen and guards.

1. **Overtime requirements.** No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.
2. **Violation; liability for unpaid wages; liquidated damages.** In the event of any violation of the clause set forth in paragraph (1.) of this section, the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (1.) of this section, in the sum of \$10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (1.) of this section.
3. **Withholding for unpaid wages and liquidated damages.** The FHWA or the contacting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (2.) of this section.
4. **Subcontracts.** The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (1.) through (4.) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (1.) through (4.) of this section.

VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).
 - a. The term "perform work with its own organization" refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions:
 - (1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;
 - (2) the prime contractor remains responsible for the quality of the work of the leased employees;
 - (3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and
 - (4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.
 - b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract.
2. The contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.
4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.
5. The 30% self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements.

VII. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.
2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).
3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C.3704).

VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

By submission of this bid/proposal or the execution of this contract, or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any person who is or will be utilized in the performance of this contract is not prohibited from receiving an award due to a violation of Section 508 of the Clean Water Act or Section 306 of the Clean Air Act.
2. That the contractor agrees to include or cause to be included the requirements of paragraph (1) of this Section X in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements.

X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost \$25,000 or more – as defined in 2 CFR Parts 180 and 1200.

1. Instructions for Certification – First Tier Participants:

- a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.
- b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.
- c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default.
- d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.
- e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contractor). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

- f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.
- g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.
- h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (<https://www.epls.gov/>), which is compiled by the General Services Administration.
- i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.
- j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

* * * * *

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

- a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:
 - (1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency;
 - (2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;
 - (3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification; and
 - (4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.
- b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

2. Instructions for Certification - Lower Tier Participants:

- (Applicable to all subcontracts, purchase orders and other lower tier transactions requiring prior FHWA approval or estimated to cost \$25,000 or more - 2 CFR Parts 180 and 1200)
- a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.
 - b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.
 - c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.
 - d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contractor). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).
 - e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.
 - f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.
 - g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (<https://www.epls.gov/>), which is compiled by the General Services Administration.
 - h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.
 - i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

* * * * *

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

- 1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency.
- 2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

* * * * *

XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed \$100,000 (49 CFR 20).

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:
 - a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.
 - b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.
2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.
3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such recipients shall certify and disclose accordingly.

ON-THE-JOB TRAINING

(10-16-07) (Rev. 5-21-13)

Z-10

Description

The North Carolina Department of Transportation will administer a custom version of the Federal On-the-Job Training (OJT) Program, commonly referred to as the Alternate OJT Program. All contractors (existing and newcomers) will be automatically placed in the Alternate Program. Standard OJT requirements typically associated with individual projects will no longer be applied at the project level. Instead, these requirements will be applicable on an annual basis for each contractor administered by the OJT Program Manager.

On the Job Training shall meet the requirements of 23 CFR 230.107 (b), 23 USC – Section 140, this provision and the On-the-Job Training Program Manual.

The Alternate OJT Program will allow a contractor to train employees on Federal, State and privately funded projects located in North Carolina. However, priority shall be given to training employees on NCDOT Federal-Aid funded projects.

Minorities and Women

Developing, training and upgrading of minorities and women toward journeyman level status is a primary objective of this special training provision. Accordingly, the Contractor shall make every effort to enroll minority and women as trainees to the extent that such persons are available within a reasonable area of recruitment. This training commitment is not intended, and shall not be used, to discriminate against any applicant for training, whether a member of a minority group or not.

Assigning Training Goals

The Department, through the OJT Program Manager, will assign training goals for a calendar year based on the contractors' past three years' activity and the contractors' anticipated upcoming year's activity with the Department. At the beginning of each year, all contractors eligible will be contacted by the Department to determine the number of trainees that will be assigned for the upcoming calendar year. At that time the Contractor shall enter into an agreement with the Department to provide a self-imposed on-the-job training program for the calendar year. This agreement will include a specific number of annual training goals agreed to by both parties. The number of training assignments may range from 1 to 15 per contractor per calendar year. The Contractor shall sign an agreement to fulfill their annual goal for the year. A sample agreement is available at www.ncbowd.com/section/on-the-job-training.

Training Classifications

The Contractor shall provide on-the-job training aimed at developing full journeyman level workers in the construction craft/operator positions. Preference shall be given to providing training in the following skilled work classifications:

Equipment Operators	Office Engineers
Truck Drivers	Estimators
Carpenters	Iron / Reinforcing Steel Workers
Concrete Finishers	Mechanics
Pipe Layers	Welders

The Department has established common training classifications and their respective training requirements that may be used by the contractors. However, the classifications established are not all-inclusive. Where the training is oriented toward construction applications, training will be allowed in lower-level management positions such as office engineers and estimators. Contractors shall submit new classifications for specific job functions that their employees are performing. The Department will review and recommend for acceptance to FHWA the new classifications proposed by contractors, if applicable. New classifications shall meet the following requirements:

Proposed training classifications are reasonable and realistic based on the job skill classification needs, and

The number of training hours specified in the training classification is consistent with common practices and provides enough time for the trainee to obtain journeyman level status.

The Contractor may allow trainees to be trained by a subcontractor provided that the Contractor retains primary responsibility for meeting the training and this provision is made applicable to the subcontract. However, only the Contractor will receive credit towards the annual goal for the trainee.

Where feasible, 25 percent of apprentices or trainees in each occupation shall be in their first year of apprenticeship or training. The number of trainees shall be distributed among the work classifications on the basis of the contractor's needs and the availability of journeymen in the various classifications within a reasonable area of recruitment.

No employee shall be employed as a trainee in any classification in which they have successfully completed a training course leading to journeyman level status or in which they have been employed as a journeyman.

Records and Reports

The Contractor shall maintain enrollment, monthly and completion reports documenting company compliance under these contract documents. These documents and any other information as requested shall be submitted to the OJT Program Manager.

Upon completion and graduation of the program, the Contractor shall provide each trainee with a certification Certificate showing the type and length of training satisfactorily completed.

Trainee Interviews

All trainees enrolled in the program will receive an initial and Trainee/Post graduate interview conducted by the OJT program staff.

Trainee Wages

Contractors shall compensate trainees on a graduating pay scale based upon a percentage of the prevailing minimum journeyman wages (Davis-Bacon Act). Minimum pay shall be as follows:

60 percent	of the journeyman wage for the first half of the training period
75 percent	of the journeyman wage for the third quarter of the training period
90 percent	of the journeyman wage for the last quarter of the training period

In no instance shall a trainee be paid less than the local minimum wage. The Contractor shall adhere to the minimum hourly wage rate that will satisfy both the NC Department of Labor (NCDOL) and the Department.

Achieving or Failing to Meet Training Goals

The Contractor will be credited for each trainee employed by him on the contract work who is currently enrolled or becomes enrolled in an approved program and who receives training for at least 50 percent of the specific program requirement. Trainees will be allowed to be transferred between projects if required by the Contractor's scheduled workload to meet training goals.

If a contractor fails to attain their training assignments for the calendar year, they may be taken off the NCDOT's Bidders List.

Measurement and Payment

No compensation will be made for providing required training in accordance with these contract documents.

USDOL WAGE HOUR

General Decision Number: NC140065 01/03/2014 NC65
 Superseded General Decision Number: NC20130065
 State: North Carolina
 Construction Type: Building

Counties: Chowan, **Craven**, Dare, Gates, Jones, Martin and Washington Counties in North Carolina.

BUILDING CONSTRUCTION PROJECTS (does not include single family homes or apartments up to and including 4 stories).

Modification Number Publication Date
 0 01/03/2014

* PLUM0421-004 07/01/2013	<u>Rates</u>	<u>Fringes</u>
PIPEFITTER (Excluding HVAC System Installation).....	\$ 24.85	9.65

* SUNC2011-046 08/26/2011	<u>Rates</u>	<u>Fringes</u>
BRICKLAYER.....	\$ 19.38	8.73
CARPENTER (Drywall Hanging Only).....	\$ 18.13	1.31
CARPENTER (Form Work Only).....	\$ 14.21	0.41
CARPENTER, Excludes Drywall Hanging, and Form Work.....	\$ 14.64	2.39
CEMENT MASON/CONCRETE FINISHER...	\$ 14.02	0.00
ELECTRICIAN.....	\$ 17.10	1.47
HVAC MECHANIC (HVAC Duct Installation Only).....	\$ 15.58	1.53
IRONWORKER, STRUCTURAL.....	\$ 18.75	5.62
LABORER: Common or General.....	\$ 10.57	0.67
LABORER: Landscape & Irrigation.....	\$ 10.29	1.82
LABORER: Mason Tender-Brick/Cement/Concrete.....	\$ 10.00	0.00
OPERATOR: Backhoe/Excavator/Trackhoe.....	\$ 14.71	2.33
OPERATOR: Crane.....	\$ 19.25	2.37
OPERATOR: Grader/Blade.....	\$ 15.71	1.49
PAINTER: Brush, Roller and Spray.....	\$ 14.36	1.97
PLUMBER (HVAC System Installation).....	\$ 16.96	3.17
PLUMBER, Excludes HVAC System Installation.....	\$ 17.34	2.09
ROOFER.....	\$ 13.55	0.80
SHEET METAL WORKER, Excludes HVAC Duct and System Installation....	\$ 13.09	1.28
TRUCK DRIVER: Dump Truck.....	\$ 12.50	1.21

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of "identifiers" that indicate whether the particular rate is union or non-union.

Union Identifiers: An identifier enclosed in dotted lines beginning with characters other than "SU" denotes that the union classification and rate have found to be prevailing for that classification. Example: PLUM0198-005 07/01/2011. The first four letters, PLUM, indicate the international union and the four-digit number, 0198, that follows indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. The date, 07/01/2011, following these characters is the effective date of the most current negotiated rate/collective bargaining agreement which would be July 1, 2011 in the above example.

Union prevailing wage rates will be updated to reflect any changes in the collective bargaining agreements governing the rate.

Non-Union Identifiers: Classifications listed under an "SU" identifier were derived from survey data by computing average rates and are not union rates; however, the data used in computing these rates may include both union and non-union data. Example: SULA2004-007 5/13/2010. SU indicates the rates are not union rates, LA indicates the State of Louisiana; 2004 is the year of the survey; and 007 is an internal number used in producing the wage determination. A 1993 or later date, 5/13/2010, indicates the classifications and rates under that identifier were issued as a General Wage Determination on that date.

Survey wage rates will remain in effect and will not change until a new survey is conducted.

WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can be:

- * an existing published wage determination
- * a survey underlying a wage determination
- * a Wage and Hour Division letter setting forth a position on a wage determination matter
- * a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative

Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.


END OF GENERAL DECISION

PROJECT MANUAL

NC DEPARTMENT OF TRANSPORTATION US 70 REST AREA RENOVATIONS PROJECT 42229.3.FS1 (K-5101)

Craven County, New Bern, NC


JKF Project No. 2013-18
January 10, 2014
December 10, 2014 (REV. #2)



P.O. Box 20662
Greenville, NC 27858
252-355-1068 Phone
252-355-0216 Fax
jkf@jkf-arch.com

**NCDOT US 70 REST AREA RENOVATIONS
PROJECT 42229.1(K-5501)
TABLE OF CONTENTS TECHNICAL SPECIFICATIONS**

Division	Section Title	Pages
DIVISION 01 - GENERAL REQUIREMENTS		
011000	SUMMARY	3
012200	UNIT PRICES	2
012900	PAYMENT PROCEDURES	2
013100	PROJECT MANAGEMENT AND COORDINATION	3
013200	CONSTRUCTION PROGRESS DOCUMENTATION	4
013300	SUBMITTAL PROCEDURES	6
014000	QUALITY REQUIREMENTS	3
015000	TEMPORARY FACILITIES AND CONTROLS	5
016000	PRODUCT REQUIREMENTS	4
017300	EXECUTION	4
017419	CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL	7
017700	CLOSEOUT PROCEDURES	4
017823	OPERATION AND MAINTENANCE DATA	8
017839	PROJECT RECORD DOCUMENTS	3
DIVISION 02 - EXISTING CONDITIONS		
024116	STRUCTURE DEMOLITION	5
DIVISION 03 - CONCRETE		
033000	CAST-IN-PLACE CONCRETE	16
DIVISION 04 - MASONRY		
042000	MASONRY VENEER	12
047200	CAST STONE MASONRY	7
DIVISION 05 - METALS		
051200	STRUCTURAL STEEL FRAMING	8
055000	METAL FABRICATIONS	6
DIVISION 06 - WOOD, PLASTICS, AND COMPOSITES		
061000	ROUGH CARPENTRY	7
061600	SHEATHING	4
062023	INTERIOR FINISH CARPENTRY	4
DIVISION 07 - THERMAL AND MOISTURE PROTECTION		
072100	THERMAL INSULATION	4

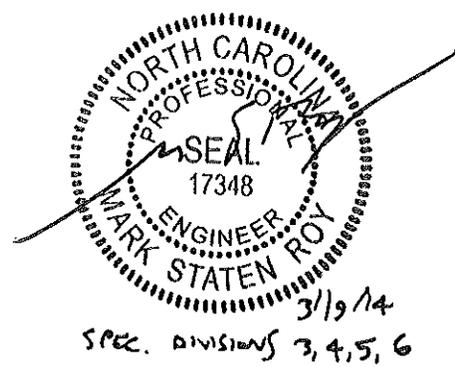

072500	WEATHER BARRIERS	2
074113	STANDING-SEAM METAL ROOF PANELS	10
074646	FIBER-CEMENT SIDING	4
079200	JOINT SEALANTS	7

DIVISION 08 - OPENINGS

081213	HOLLOW METAL FRAMES	5
083113	ACCES DOORS AND FRAMES	3
084113	ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS	10
084523	FIBERGLASS SANDWICH PANEL ASSEMBLIES	7
085113	ALUMINUM WINDOWS	7
087100	DOOR HARDWARE	12
088000	GLAZING	9

DIVISION 09 - FINISHES

092900	GYPSUM BOARD	6
093013	CERAMIC TILING	9
096513	RESILIENT BASE AND ACCESSORIES	5
099123	INTERIOR PAINTING	6
099300	STAINING AND TRANSPARENT FINISHING	5

DIVISION 10 - SPECIALTIES

101423	PANEL SIGNAGE	5
102113	PLASTIC TOILET COMPARTMENTS	4
102800	TOILET, BATH, AND LAUNDRY ACCESSORIES	5
104413	FIRE PROTECTION CABINETS	4
104416	FIRE EXTINGUISHERS	2

DIVISION 11 - EQUIPMENT

NOT APPLICABLE

DIVISION 12 - FURNISHINGS

NOT APPLICABLE

DIVISION 13 - SPECIAL CONSTRUCTION

NOT APPLICABLE


DIVISION 14 - CONVEYING EQUIPMENT

NOT APPLICABLE

END OF TABLE OF CONTENTS


DIVISION 15A - PLUMBING

15010	Basic Plumbing Requirements
15140	Hangers and Supports
15190	Plumbing Identification
15250	Plumbing Piping Insulation
15430	Plumbing Specialties
15450	Water Heaters




DIVISION 15B: MECHANICAL

15500	Basic Mechanical Requirements
15501	Hangers and Supports
15504	Piping Insulation-Refrigerant and Condensate
15507	Ductwork Insulation
15513	Refrigerant Piping
15672	Split System Heat Pump
15674	Duct Free Split System Air Conditioner
15782	Energy Recovery Ventilator
15870A	Power Ventilators
15891A	Metal Ductwork
15910	Duct Accessories
15932	Air Outlets and Inlets
15990	Testing, Adjusting and Balancing



DIVISION 16: ELECTRICAL

16010	Basic Electrical Requirements
16050	Basic Electrical Materials and Methods
16100	Raceways, Boxes and Cabinets
16120	Wires and Cables
16140	Wiring Devices
16190	Supporting Devices
16195	Electrical Identification
16452	Grounding
16470	Panel Boards
16476	Disconnects
16515	Interior Lighting



Rest Area Site Work

TABLE OF CONTENTS	
DESCRIPTION	PAGE
SITE DEMOLITION	3
TREE PRESERVATION / PROTECTION FENCE	4
4" CONCRETE SIDEWALKS	5
LANDSCAPE AND SITE GRADING TOPSOIL	6
TOPSOIL (PLANTER SEATING WALL)	7
PICNIC SHELTER TABLE / METAL ROOF	8
EXISTING PICNIC SHELTER / METAL ROOF	8
BRICK BLOCK PLANTER SEATING WALL	9
BRICK BLOCK PAVERS	9
RELOCATION OF POST TOP LIGHT	10

SITE DEMOLITION

General

Site demolition consists of the removal and disposal of all pavement, structures, site amenities and vegetative material designated to be removed as indicated on the plans and as directed by the Engineer. Vegetative material includes trees and shrubs with stumps, and plant beds as designated on the plans and as directed by the Engineer on site. Others will remove selected structures, site amenities and any trees or shrubs to be salvaged prior to the construction. Benches, recycle bins, and trash receptacles noted on plans or as directed by the engineer, are to be removed by contractor, salvaged and stockpiled (on site) for reuse by NCDOT. **Demolition for the purpose of rest area building renovations is covered elsewhere in the Special Provisions.**

All methods and operations used for removal of paving, structures, site amenities and vegetative material will meet prior approval of the Engineer. Make a saw cut providing a clean edge at locations where concrete paving is removed.

Satisfactorily complete vegetative removal operations prior to building and landscape grading operations. Vegetation removal consists of below ground removal of root masses as well as above ground growth. Perform all work so as to cause minimum soil erosion and comply with the requirements of Section 107-13. Conduct vegetation removal operations in a manner to prevent limb, bark or root injuries to trees, shrubs, or other types of vegetation that are to remain. Should damage occur to adjacent trees or shrubs to remain take all steps necessary as directed by the Engineer to repair or minimize the effects of the damage to the tree or shrub. Remove any tree or shrub that is to remain that is damaged to the extent that its value as a desirable landscape tree is compromised in the opinion of the engineer. There will be no further compensation for removal of a tree or shrub damaged by the contractor. Furthermore, the contractor will reimburse the owner for the aesthetic value of the tree or shrub, as determined by a certified arborist using the current International Society of Arboriculture plant appraisal standards.

All materials removed that are not noted for recycling or reinstallation on the project will become the property of the Contractor and will be properly disposed of by the Contractor off site.

Prevent damage to adjacent property and structures during the removal and demolition operations. The contractor is responsible for repairing any and all damaged areas to its original condition and/or to the satisfaction of the Engineer.

Compensation

Payment for the work of removing and disposing of all paving, structures, site amenities and vegetation as described above, indicated on plans and directed by the Engineer, will be paid for as a 'Lump Sum' for 'Site Demolition'.

Such price and payment will be full compensation for all work covered by this provision; including but not limited to furnishing all labor, tools and equipment and any other incidentals necessary or required to complete the work.

Payment will be made under:

Site Demolition Lump Sum

TREE PRESERVATION / PROTECTION FENCE

General Requirements and Restrictions

The aesthetics and comfort of the rest area is greatly enhanced by the maturing trees on the site. The Department has dedicated much effort to preserve all the existing trees possible during this renovation project. This will require the utmost care during the construction process since the construction is located very close to many of the trees we desire to preserve. The contractor will assist the department by educating its employees, subcontractors and any utility companies conducting work in the vicinity, of the efforts and the preservation measures required herein.

Tree Preservation/Protection Fence consist of furnishing, installing, maintaining, and removing wood slat, polyethylene, or polypropylene fence as specified or as directed by the Engineer and in accordance with the special provisions included herein.

Install tree protection fence prior to any demolition. All construction unless approved by the Engineer will occur within the construction fence. *Do not trespass* with vehicles or machinery in the areas indicated for tree preservation. Do not park, refuel, repair or maintain vehicles or equipment in the tree preservation areas. Do not stockpile materials or store equipment in the tree preservation areas.

Do not release petroleum products, fuels, paints, or lubricants anywhere within this project in the vicinity of the tree preservation areas or in areas that drain into this vicinity. Do not apply or release herbicides, fertilizers or chemicals of any kind that may be toxic to plant life and do not 'clean out' concrete trucks in the vicinity of the tree preservation areas, or into areas that drain into this vicinity. Do not burn trash, debris or vegetation in the vicinity of tree preservation areas.

Demolition, ground disturbing activities and construction that occurs within the drip line of the tree(s) or within a radius three times the drip line of the tree(s) will be done with utmost care. Accomplish all grading in such a manner as to avoid standing water or saturated soils around root systems of trees that are to remain. Install erosion control devices in a timely manner to prevent sedimentation of the tree root zone in the tree preservation areas. In areas to be 'cut' by grading or where utility trenches or building footings occur, prevent shredding, tearing or exposing roots by excavating a trench not less than 6" wide and to the maximum depth of the cut up to 24" deep. Hand saw any

roots 2" or greater in diameter that are encountered to make a clean smooth cut. If necessary, dig out enough soil to reach an undamaged portion of the root to make the smooth cut. To prevent drying out of roots, immediately cover any exposed root surfaces with 6" of approved mulch or soil until 'finish' construction operations dictate removal. Supplemental irrigation may be necessary during periods of drought or stress. Irrigate as directed and approved by the Engineer.

Branches that protrude into the construction area that interfere with construction operations will be tied back if possible or pruned if not. Follow proper pruning techniques as established in American National Standards Institute ANSI Z133.1 and perform pruning by a professional arborist. Submit description of proposed work along with arborist credentials to the Engineer for approval prior to conducting work.

Violation of any of these tree preservation measures will result in suspension of all work until the violation is resolved or repaired to the satisfaction of the Engineer. Such suspension of work will not be considered justification for additional compensation in accordance with Section 104 of the Standard Specifications or extension of the contract time.

Materials

Posts will be nominal 2" x 4" or 4" x 4", lengths as required, structural light framing, grade no. 2, southern yellow pine or steel posts will be a minimum of 1 3/8" wide measured parallel to the fence, with a weight of 1.25 lbs/ft of length. Wood posts will be treated with a preservative in accordance with Section 1082-3 of the Standard Specifications.

Fence fabric will be a barricade or safety barrier type highly visible orange polyethylene or polypropylene mesh that is approved by the Engineer. Fabric will be UV stabilized, flexible and inert to most chemicals and acid.

Signs will be fabricated of a durable, weatherproof lightweight material. Signs will have a white background with red lettering. They will be a minimum of 4.5 square feet and clearly display the following message in both English and Spanish:

TREE PROTECTION ZONE

DO NOT ENTER

Submit sample for approval prior to placing.

Installation

Erect fence to conform to the general contour of the ground. Do not remove existing plant material in order to install fence unless directed by the Engineer.

Set post and maintain in a vertical position. Post may be hand set or set with a post driver. If hand set, thoroughly tamp all backfill material, if power driven, wood posts may be

sharpened to a dull point. Remove and replace any post damaged by power driving prior to final acceptance. Cut the tops of all posts at a 30-degree angle. The posts may, at the option of the Contractor, be cut at this angle either before or after the posts are erected. Contractor is responsible for locating all utilities prior to installation of fence posts.

Stretch fence fabric taut and attach to post with appropriate means according to post type utilized. In sections where signs will be located, reinforce top of fabric by weaving a 12 gauge galvanized wire in the fabric and firmly attach to the post at each end of section. Place signs every 100 linear feet with a minimum of one sign for each segment facing in a different direction. Secure sign to fence fabric at all four corners placing near the top of the fence fabric where clearly visible.

Tree Protection Fence Maintenance

At any time during the duration of the project if the tree protection fence is not in an upright secure position with no gaps and properly signed, work on the project will be suspended wholly until the fence is properly repaired and determined to be in satisfactory condition by the Engineer. Remove tree protection fence, fill post holes, weed/mow and dispose of debris off site as a last item of work on the project.

Compensation

Tree Protection / Preservation Fence will be paid for as ‘Tree Protection Fence’ in linear feet as measured along the surface of the installed and accepted work.

Such payment will be full compensation for the work described above including furnishing, installing, and removing; fence post, fence bracing, fence fabric, staples, tie wires; all tools, equipment and any other incidentals necessary to complete the work. Mulch and/or watering required herein will be incidental to the completion of the work.

Payment will be made under.

Tree Protection Fence LF

4” CONCRETE SIDEWALKS

General: The sidewalks indicated on the plans shall be 4" concrete. The sidewalks and patio shall be as specified in Section 848 and as shown on the plans.

Where it is noted on the plans where 4” concrete sidewalk is to meet and/or match existing concrete sidewalk. Install sidewalk according plans, details and specifications. The existing sidewalk shall have a clean **saw cut** edge provided, at the match locations and/or where concrete paving is removed.

Scoring patterns shall be as shown on plans or as directed by the Engineer in field, and as specified in Section 825-10. Control joints indicated on plans shall be as specified for Grooved Contraction Joints.

Method of Measurement and Basis of Payment

The quantities of sidewalk to be paid for will be the actual number of square yards measured along the surface which have been completed and accepted. This quantity of concrete includes all noted 4” sidewalk and the concrete banding associated with installation of decorative concrete pavers. The quantity of sidewalk measured as indicated above, will be paid for at the contract unit price per square yard for "4" Concrete Sidewalk". There will be no additional compensation for control and expansion joints.

Payment will be made under:

4" Concrete Sidewalk SY

LANDSCAPE AND SITE GRADING

General

Landscape and Site grading consists of surface grading and placing topsoil material within seeding and planting beds, and cutting and backfilling around buildings, sidewalks, etc., to provide proper drainage and elevations as indicated on the grading plans, cross-sections, and as directed by the Engineer.

Material

Topsoil will be as specified herein and will be utilized for all fill/backfill operations as directed by the Engineer.

Topsoil will be a sandy loam, silt loam or clay loam that contains a reasonable amount of humus material. Topsoil will be of good texture, loose and friable and will be representative of topsoil in the general vicinity. It will be reasonably free from sod, hard lumps, subsoil, large roots, rocks and gravel, noxious weed seeds and/or toxic substances or other material, which would be harmful to plant growth. **Topsoil when delivered to the job site will be approved by the Engineer prior to placement, whether or not the source of topsoil has been previously approved.**

Fill material to bring building site to finished grade will be as specified in the building specifications under earthwork.

Installation

Place building fill and compact as described in the building specifications. Place topsoil fill and spread evenly to a depth of 18 inches or as directed by the Engineer, which after settlement, constitutes finish grade. Do not place topsoil when the ground is frozen, is

excessively wet, or is in a condition that the soil cannot be worked easily and dressed smoothly. Compact fill material under sidewalks/concrete paving to a density equal to or greater than undisturbed soil in the area.

Where fill material is needed within wooded areas, precautionary measures will be taken to prevent damage to trees and the roots of trees to be retained for landscape purposes. When placing or compacting fill material in or adjacent to wooded areas heavy machinery will not be allowed. Equipment for placing fill material will be approved by the Engineer prior to any grading work.

Compensation

‘Landscape and Site Grading’ will be paid for at the contract lump sum price for the work detailed in this section that has been successfully accomplished and accepted. Building fill will be included as part of the building lump sum payment. ‘Topsoil’ will be paid for in the actual number of cubic yards of topsoil placed and accepted. Topsoil will be measured by truck measurement. Each truck will be measured and will have a legible identification mark indicating its capacity. Load each truck to at least its measured capacity at the time it arrives at the point of delivery. The recorded capacity will be adjusted by making a 25 percent deduction to allow for shrinkage, and the adjusted capacity will be the quantity to be paid for.

Such price and payment will be full compensation for furnishing, all labor, equipment and all incidentals necessary to complete the work satisfactorily.

Payment will be made under:

Landscape and Site Grading	LS
Topsoil	CY

TOPSOIL PLANTER SEATING WALL

Topsoil shall consist of a sandy loam, silt loam or clay loam which contains a reasonable amount of humus material. Topsoil shall be of good texture, loose and shall be representative of topsoils in the general vicinity. It shall be reasonable free from sod, hard lumps, subsoil, large roots, rocks and gravel, noxious weed seeds and/or toxic substitutes or material which would be harmful to plant growth. All topsoil shall be approved by the Engineer when delivered to the job site

Method of Measurement and Basis of Payment

The quantity of topsoil to be paid for will be the actual number of cubic yards of topsoil which has been placed as specified herein and accepted. The topsoil used on this project will be measured for payment by pit measurement as provide in Subarticle 230-5(B) or by truck measurement as provided by Subarticle 230-5(C), as directed by the Engineer.

The quantity of topsoil, measured as provided for above, will be paid for at the contract unit price per cubic yard "Topsoil". Such price and Rest Area Site Work payment will be full compensation or furnishing, placing, all labor, equipment and all incidentals necessary to complete the work satisfactorily.

Payment will be made under:

Topsoil Planter Seating Wall CY

PICNIC SHELTER TABLE / METAL ROOF

Class "B" concrete shall be used in footing and floor slab. All concrete and all structural and reinforcing steel shall comply with applicable portions of section 825 "Incidental Concrete Construction-General" ; Section 1070 "Reinforcing Steel"; and Section 1072 "Structural Steel" of standard Specifications.

Include all fasteners, anchors, ties, gusset plates, etc., as required. Thru bolts shall be 1/2 inches in diameter, length as required, hot-dip galvanized steel. Install with steel galvanized washers under bolt head and nut, except for gusset plates; galvanizing shall conform with applicable requirements of Section 1076 of the Standard Specifications. Grading of all lumber, plywood and trim shall conform to the association under whose rules it is graded. Moisture content shall not exceed 18 percent for framing lumber and 12 percent for millwork and trim.

All lumber in contact with concrete or masonry, and/or soil shall be treated with water borne pentachlorophenol or chromated copper arsenate in accordance with standards of the American wood Preserver's Association. Minimum retention shall be 0.25 pcf for material 2 inches and smaller and 0.40 pcf for materials greater than 2 inches.

All lumber and millwork shall be stored in a manner that will keep it dry and well ventilated, well off the ground, and adequately covered.

All timbers, rafters and fascia shall be full size, rough-cut No 1 southern yellow pine, thru-bolted where shown on drawings and securely spiked together at all other joints. Stain all timbers, rafters, and underside of roofing decking. The Engineer will select color.

Coat section of treated wood columns in footing with asphalt paint.

Roof is to be metal matching building. Follow construction plans for building roofing to complete metal roof on picnic shelter.

Payment will be made under:

Picnic Shelter Table / Metal RoofEA

EXISTING PICNIC SHELTER / METAL ROOF

Roofing for existing picnic shelters shall be metal, matching building. Use the same construction plan for building to complete.

Payment will be made under:

Existing Picnic Shelter / Metal RoofEA

BRICK BLOCK PLANTER SEATING WALL

The working covered by this section shall consist of furnishing and constructing the Brick Block Planter Seating Walls, as shown on the plan and detail. The Engineer according to site conditions may adjust the height and length. Verify exact dimensions before proceeding.

Planter brick block materials shall match that of the building. The capping must also match building and must be approved by Engineer.

Installation: Excavate and pour reinforced concrete footing, building reinforced block wall and place brick block veneer. Use one metal tie per every two square foot of surface area to bound the brick block veneer to block wall. Allow the masonry to cure a minimum of 7 days prior to placing backfill.

An experienced stone/brick mason with a minimum of 7 years of experience shall be required to construct the seating wall. A sample wall with approximately 20 square feet of veneer surface area and a minimum of 5 linear feet of capping shall be required prior to progressing with seating wall. The sample wall shall be a separate wall. The sample wall shall be approved prior to proceeding with installation.

Basis of Payment

Payment will be full compensation for all work covered by this section including, but not limited to footing excavation, furnishing and installing reinforcing steel, concrete, block, brick block veneer, foundation drain, backfill and other incidental material; and all labor and equipment necessary to complete the work.

Payment will be made under:

Brick Block Seating WallLF

BRICK BLOCK PAVERS

The work covered by this section shall consist of furnishing and installing the Brick Block Pavers in accordance with the dimensions and finishes as shown on the plan, and detail and described herein.

Brick Block Pavers shall match building and be 12"x12" in size and 2 3/8" thick. Brick Block shall be installed as noted on plan and detail.

The work of furnishing and installing the Brick Block Pavers as shown on the plan or approved by Engineer , when completed and accepted , will be paid for at the unit price per SY for Brick Block Pavers.

Payment will be made under:

Brick Block PaversSY

RELOCATION OF DIRECT BURIAL POST TOP LIGHTS and RELOCATION OF OUTDOOR PAY PHONE on CONCRETE PAD

General

Relocate existing Post Top Light as shown on the plans and as directed by the Engineer. Relocation will include, but not be limited to, dismantling the light and pole and, storing items during construction, reinstallation of the light and direct burial pole or connecting to existing/new Lighting circuit

NOTE: Underground Electric damaged during construction must be in working order before the project will be finally accepted.

Relocation of post top light will be paid for at the contract unit price each successfully relocated, installed, and accepted

Such price and payment will be full compensation for all work covered by this special provision; including but not limited to furnishing all labor, materials, equipment and any other incidentals necessary or required to complete the work and restore service.

Payment will be made under:

Relocate Post Top Light and Pole.EA

SECTION 011000 - SUMMARY

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Project information.
 - 2. Work covered by Contract Documents.
 - 3. Phased construction.
 - 4. Work by Owner.
 - 5. Access to site.
 - 6. Work restrictions.
 - 7. Specification and drawing conventions.
 - 8. Miscellaneous provisions.

1.3 PROJECT INFORMATION

- A. Project Identification: NCDOT U.S. Hwy. 70 Craven County Rest Area Renovations.
 - 1. Project Location: U.S. Hwy. 70, New Bern, Craven County, NC.
- B. Owner/ Owner's Representative:
 - Tad Davis
 - 1557 Mail Service Center
 - Raleigh, NC 27699-1557.
- C. Architect:
 - JKF Architecture PC
 - John K. Farkas, AIA LEED-AP
 - P.O. Box 20662
 - 625 Lynndale Court, Suite F
 - Greenville, NC 27858
 - jkf@j kf-arch.com
 - 252-355-1068
- D. Architect's Consultants: The Architect has retained the following design professionals who have prepared designated portions of the Contract Documents:
 - 1. RPA Engineering, Greenville, NC; Structural Engineering
 - 2. Burke Design Group, Raleigh, NC; PME Engineering.

1.4 WORK COVERED BY CONTRACT DOCUMENTS

- A. The Work of Project is defined by the Contract Documents prepared by JKF Architecture dated 11-11-2013, and consists of, of but not limited to, the following:
 - 1. Construction of a new 1-story, approximately 2,664 GSF, exterior wood stud building with brick and cement board siding exterior. Roof is a standing seam metal roof on plywood roof deck over wood stud framing with blanket insulation. Project includes exterior aluminum storefront, and aluminum windows, aluminum entrance doors, louvers, and cast stone. Building is Type VB Construction. Project includes site work, and PME systems.
 - 2. Project also includes building demolition.
- B. Type of Contract:
 - 1. Project will be constructed under a single prime contract.

1.5 PHASED CONSTRUCTION

- A. The Work shall be conducted in a single phase.

1.6 WORK BY OWNER

- A. General: Cooperate fully with Owner so work may be carried out smoothly, without interfering with or delaying work under this Contract or work by Owner. Coordinate the Work of this Contract with work performed by Owner.

1.7 ACCESS TO SITE

- A. General: Contractor shall have full use of Project site for construction operations during construction period. Contractor's use of Project site is limited only by Owner's right to perform work or to retain other contractors on portions of Project.
- B. Use of Site: Limit use of Project site to areas within the Contract limits indicated. Do not disturb portions of Project site beyond areas in which the Work is indicated.
 - 1. Limits: Limit site disturbance, including earthwork and clearing of vegetation, to 40 feet beyond building perimeter; 10 feet beyond surface walkways, patios, surface parking, and utilities less than 12 inches in diameter; 15 feet beyond primary roadway curbs and main utility branch trenches; and 25 feet beyond constructed areas with permeable surfaces (such as pervious paving areas, stormwater detention facilities, and playing fields) that require additional staging areas in order to limit compaction in the constructed area.
 - 2. Driveways, Walkways and Entrances: Keep driveways and entrances serving premises clear and available to Owner, Owner's employees, and emergency vehicles at all times. Do not use these areas for parking or storage of materials.
 - a. Schedule deliveries to minimize use of driveways and entrances by construction operations.
 - b. Schedule deliveries to minimize space and time requirements for storage of materials and equipment on-site.

1.8 WORK RESTRICTIONS

- A. Work Restrictions, General: Comply with restrictions on construction operations.
 - 1. Comply with limitations on use of public streets and with other requirements of authorities having jurisdiction.
- B. Noise, Vibration, and Odors: Coordinate operations that may result in high levels of noise and vibration, odors, or other disruption to Owner occupancy with Owner.
- C. Nonsmoking Building: Smoking is not permitted..
- D. Controlled Substances: Use of tobacco products and other controlled substances on site is not permitted.

1.9 SPECIFICATION AND DRAWING CONVENTIONS

- A. Specification Content: The Specifications use certain conventions for the style of language and the intended meaning of certain terms, words, and phrases when used in particular situations. These conventions are as follows:
 - 1. Imperative mood and streamlined language are generally used in the Specifications. The words "shall," "shall be," or "shall comply with," depending on the context, are implied where a colon (:) is used within a sentence or phrase.
 - 2. Specification requirements are to be performed by Contractor unless specifically stated otherwise.
- B. Division 01 General Requirements: Requirements of Sections in Division 01 apply to the Work of all Sections in the Specifications.
- C. Drawing Coordination: Requirements for materials and products identified on Drawings are described in detail in the Specifications. One or more of the following are used on Drawings to identify materials and products:
 - 1. Terminology: Materials and products are identified by the typical generic terms used in the individual Specifications Sections.
 - 2. Keynoting: Materials and products are identified by reference keynotes referencing Specification Section numbers found in this Project Manual.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 011000

SECTION 012900 - PAYMENT PROCEDURES

PART 1 - G GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section specifies administrative and procedural requirements necessary to prepare and process Applications for Payment.

1.3 DEFINITIONS

- A. Schedule of Values: A statement furnished by Contractor allocating portions of the Contract Sum to various portions of the Work and used as the basis for reviewing Contractor's Applications for Payment.

1.4 SCHEDULE OF VALUES

- A. Coordination: Coordinate preparation of the Schedule of Values with preparation of Contractor's Construction Schedule.
 - 1. Correlate line items in the Schedule of Values with other required administrative forms and schedules, including the following:
 - a. Application for Payment forms with Continuation Sheets.
 - b. Submittals Schedule.
 - c. Contractor's Construction Schedule.
 - 2. Submit the Schedule of Values to Architect at earliest possible date but no later than 21 days after notice to proceed. Provide separate schedule for each Armory.
- B. Format and Content: Use the Project Manual table of contents as a guide to establish line items for the Schedule of Values. Provide at least one line item for each Specification Section.
 - 1. Submit draft of AIA Document G703 Continuation Sheets.
 - 2. Arrange the Schedule of Values in tabular form with separate columns to indicate the following for each item listed:
 - 3. Provide a breakdown of the Contract Sum in enough detail to facilitate continued evaluation of Applications for Payment and progress reports. Coordinate with the Project Manual table of contents. Provide several line items for principal subcontract amounts, where appropriate.
 - 4. Round amounts to nearest whole dollar; total shall equal the Contract Sum.
 - 5. Provide a separate line item in the Schedule of Values for each part of the Work where Applications for Payment may include materials or equipment purchased or fabricated and stored, but not yet installed.

1.5 APPLICATIONS FOR PAYMENT

- A. Each Application for Payment shall be consistent with previous applications and payments as certified by Architect and paid for by Owner.
 - 1. Initial Application for Payment, Application for Payment at time of final Application for Payment involve additional requirements.
- B. Payment Application Times: The date for each progress payment is indicated in the Agreement between Owner and Contractor. The period of construction Work covered by each Application for Payment is the period indicated in the Agreement.
- C. Payment Application Forms: Use **AIA Document G702** and **AIA Document G703 Continuation Sheets** as form for Applications for Payment.
- D. Application Preparation: Complete every entry on form. Notarize and execute by a person authorized to sign legal documents on behalf of Contractor. Architect will return incomplete applications without action.
 - 1. Entries shall match data on the Schedule of Values and Contractor's Construction Schedule. Use updated schedules if revisions were made.
 - 2. Include amounts of Approved Change Orders issued before last day of construction period covered by application.
- E. Transmittal: Submit 6 signed and notarized original copies of each Application for Payment to Architect by a method ensuring receipt within 24 hours. One copy shall include waivers of lien and similar attachments if required.
 - 1. Transmit each copy with a transmittal form listing attachments and recording appropriate information about application.
- F. Final Payment Application: Submit final Application for Payment with releases and supporting documentation not previously submitted and accepted, including, but not limited, to the following:
 - 1. Evidence of completion of Project closeout requirements.
 - 2. Insurance certificates for products and completed operations where required and proof that taxes, fees, and similar obligations were paid.
 - 3. Updated final statement, accounting for final changes to the Contract Sum.
 - 4. NC State Construction Forms "Contractor's Affidavit of Payment of Debts and Claims."
 - 5. NC State Construction Forms "Contractor's Affidavit of Release of Liens."
 - 6. NC State Construction Forms "Consent of Surety to Final Payment."
 - 7. Summary of all MBE's paid for project. Use Appendix E to Summarize.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

PART 4 - END OF SECTION 012900

SECTION 013100 - PROJECT MANAGEMENT AND COORDINATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes administrative provisions for coordinating construction operations on Project including, but not limited to, the following:
 - 1. Coordination Drawings.
 - 2. Administrative and supervisory personnel.
 - 3. Project meetings.
- B. Each contractor shall participate in coordination requirements. Certain areas of responsibility will be assigned to a specific contractor.

1.3 COORDINATION

- A. Coordination: Coordinate construction operations included in different Sections of the Specifications to ensure efficient and orderly installation of each part of the Work. Coordinate construction operations, included in different Sections that depend on each other for proper installation, connection, and operation.
- B. Conservation: Coordinate construction activities to ensure that operations are carried out with consideration given to conservation of energy, water, and materials.
 - 1. Salvage materials and equipment involved in performance of, but not actually incorporated into, the Work. Refer to other Sections for disposition of salvaged materials that are designated as Owner's property.

1.4 SUBMITTALS

- A. Coordination Drawings: Prepare Coordination Drawings if limited space availability necessitates maximum utilization of space for efficient installation of different components or if coordination is required for installation of products and materials fabricated by separate entities.
 - 1. Content: Project-specific information, drawn accurately to scale. Do not base Coordination Drawings on reproductions of the Contract Documents or standard printed data. Include the following information, as applicable:
 - a. Indicate functional and spatial relationships of components of architectural, structural, civil, mechanical, and electrical systems.
 - b. Indicate required installation sequences.
 - c. Indicate dimensions shown on the Contract Drawings and make specific note of dimensions that appear to be in conflict with submitted equipment and minimum clearance

requirements. Provide alternate sketches to Architect for resolution of such conflicts. Minor dimension changes and difficult installations will not be considered changes to the Contract.

2. Sheet Size: At least 8-1/2 by 11 inches but no larger than 30 by 42 inches.
 3. Number of Copies: Submit 4 opaque copies of each submittal. Architect will return 2 copies.
 4. Refer to individual Sections for Coordination Drawing requirements for Work in those Sections.
- B. Key Personnel Names: Within 21 days after notice to proceed, submit a list of key personnel assignments, including superintendent and other personnel in attendance at Project site. Identify individuals and their duties and responsibilities; list addresses and telephone numbers, including home and office telephone numbers. Provide names, addresses, and telephone numbers of individuals assigned as standbys in the absence of individuals assigned to Project.
1. Post copies of list in Project meeting room, in temporary field office, and by each temporary telephone. Keep list current at all times.

1.5 ADMINISTRATIVE AND SUPERVISORY PERSONNEL

- A. General: In addition to Project superintendent, provide other administrative and supervisory personnel as required for proper performance of the Work.
1. Include special personnel required for coordination of operations with other contractors.

1.6 PROJECT MEETINGS

- A. General: Architect will schedule and conduct meetings and conferences at Project site, unless otherwise indicated.
1. Attendees: Architect will inform participants and others involved, and individuals whose presence is required, of date and time of each meeting.
 2. Agenda: Architect will prepare the meeting agenda.
 3. Minutes: Architect will record significant discussions and agreements achieved and distribute the meeting minutes to everyone concerned, within 10 days of the meeting.
- B. Preconstruction Conference: Architect will schedule a preconstruction conference before starting construction.
1. Attendees: Authorized representatives of Owner, State Construction, Architect, and their consultants; Contractor and its superintendent; major subcontractors; suppliers; and other concerned parties shall attend the conference. All participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
 2. Agenda: Discuss items of significance that could affect progress, including the following:
 - a. Tentative construction schedule.
 - b. Phasing.
 - c. Critical work sequencing and long-lead items.
 - d. Designation of key personnel and their duties.
 - e. Procedures for processing field decisions and Change Orders.
 - f. Procedures for requests for interpretations (RFIs).
 - g. Procedures for testing and inspecting.
 - h. Procedures for processing Applications for Payment.

- i. Distribution of the Contract Documents.
 - j. Submittal procedures.
 - k. Preparation of Record Documents.
 - l. Use of the premises and existing building.
 - m. Work restrictions.
 - n. Owner's occupancy requirements.
 - o. Responsibility for temporary facilities and controls.
 - p. Construction waste management and recycling.
 - q. Parking availability.
 - r. Office, work, and storage areas.
 - s. Equipment deliveries and priorities.
 - t. First aid.
 - u. Security.
 - v. Progress cleaning.
 - w. Working hours.
3. Minutes: Architect will record and distribute meeting minutes.
- C. Progress Meetings: Architect will conduct progress meetings at **monthly** intervals. Coordinate dates of meetings with preparation of payment requests.
- 1. Attendees: In addition to representatives of Owner, State Construction, and Architect, each contractor, subcontractor, supplier, and other entity concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
 - 2. Agenda: Contractor shall provide a written summary of the project status in the following format at each meeting:
 - a. Review outstanding items from previous minutes.
 - b. Contractors current status complete with written summary.
 - c. Contractors work to be performed next period, written summary.
 - d. Change Order status
 - e. Shop Drawing status.
 - f. Project Schedule.
 - g. Other.
 - 3. Minutes: Architect will record and distribute to Contractor the meeting minutes.
 - a. Schedule Updating: Revise Contractor's Construction Schedule after each progress meeting where revisions to the schedule have been made or recognized. Issue revised schedule concurrently with the report of each meeting.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 013100

SECTION 013200 - CONSTRUCTION PROGRESS DOCUMENTATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for documenting the progress of construction during performance of the Work, including the following:
 - 1. Contractor's Construction Schedule.
 - 2. Submittals Schedule.
 - 3. Daily construction reports.

1.3 SUBMITTALS

- A. Submittals Schedule: Submit **three** copies of schedule. Arrange the following information in a tabular format:
 - 1. Scheduled date for first submittal.
 - 2. Specification Section number and title.
 - 3. Submittal category (action or informational).
 - 4. Name of subcontractor.
 - 5. Description of the Work covered.
 - 6. Scheduled date for Architect's final release or approval.
 - 7. Approval of cost-loaded preliminary construction schedule will not constitute approval of Schedule of Values for cost-loaded activities.
- B. Contractor's Construction Schedule: Submit **two** opaque copies of initial schedule, large enough to show entire schedule for entire construction period.
- C. Daily Construction Reports: Submit **two** weekly intervals.

1.4 QUALITY ASSURANCE

- A. Scheduling Consultant Qualifications: An experienced specialist in CPM scheduling and reporting, with capability of producing CPM reports and diagrams within 24 hours of Architect's request.
- B. Prescheduling Conference: Conduct conference at Project site to comply with requirements in Division 1 Section "Project Management and Coordination." Review methods and procedures related to the Preliminary Construction Schedule and Contractor's Construction Schedule, including, but not limited to, the following:

1.5 COORDINATION

- A. Coordinate preparation and processing of schedules and reports with performance of construction activities and with scheduling and reporting of separate contractors.
- B. Coordinate Contractor's Construction Schedule with the Schedule of Values, list of subcontracts, Submittals Schedule, progress reports, payment requests, and other required schedules and reports.

PART 2 - PRODUCTS

2.1 SUBMITTALS SCHEDULE

- A. Preparation: Submit a schedule of submittals, arranged in chronological order by dates required by construction schedule. Include time required for review, resubmittal, ordering, manufacturing, fabrication, and delivery when establishing dates.
 - 1. Coordinate Submittals Schedule with list of subcontracts, the Schedule of Values, and Contractor's Construction Schedule.

2.2 CONTRACTOR'S CONSTRUCTION SCHEDULE, GENERAL

- A. Procedures: Comply with procedures contained in AGC's "Construction Planning & Scheduling."
- B. Time Frame: Extend schedule from date established for the Notice to Proceed to date of Final Completion.
 - 1. Contract completion date shall not be changed by submission of a schedule that shows an early completion date, unless specifically authorized by Change Order.
- C. Activities: Treat each story or separate area as a separate numbered activity for each principal element of the Work. Comply with the following:
 - 1. Procurement Activities: Include procurement process activities for the following long lead items and major items, requiring a cycle of more than 60 days, as separate activities in schedule. Procurement cycle activities include, but are not limited to, submittals, approvals, purchasing, fabrication, and delivery.
 - 2. Submittal Review Time: Include review and resubmittal times indicated in Division 1 Section "Submittal Procedures" in schedule. Coordinate submittal review times in Contractor's Construction Schedule with Submittals Schedule.
- D. Milestones: Include milestones indicated in the Contract Documents in schedule, including, but not limited to, the Notice to Proceed, and Final Completion:
- E. Contract Modifications: For each proposed contract modification and concurrent with its submission, prepare a time-impact analysis using fragnets to demonstrate the effect of the proposed change on the overall project schedule.

2.3 CONTRACTOR'S CONSTRUCTION SCHEDULE (GANTT CHART)

- A. Gantt-Chart Schedule: Submit a comprehensive, fully developed, horizontal Gantt-chart-type, Contractor's Construction Schedule within 21 days of date established for the Notice to Proceed. Base schedule on the Preliminary Construction Schedule and whatever updating and feedback was received since the start of Project.
- B. Preparation: Indicate each significant construction activity separately. Identify first workday of each week with a continuous vertical line.
 - 1. For construction activities that require 3 months or longer to complete, indicate an estimated completion percentage in 1 percent increments within time bar.

2.4 REPORTS

- A. Daily Construction Reports: Prepare a daily construction report recording the following information concerning events at Project site:
 - 1. List of subcontractors at Project site.
 - 2. List of separate contractors at Project site.
 - 3. Approximate count of personnel at Project site.
 - 4. Equipment at Project site.
 - 5. Material deliveries.
 - 6. High and low temperatures and general weather conditions.
 - 7. Accidents.
 - 8. Meetings and significant decisions.
 - 9. Unusual events (refer to special reports).
 - 10. Stoppages, delays, shortages, and losses.
 - 11. Meter readings and similar recordings.
 - 12. Emergency procedures.
 - 13. Orders and requests of authorities having jurisdiction.
 - 14. Change Orders received and implemented.
 - 15. Construction Change Directives received and implemented.
 - 16. Services connected and disconnected.
 - 17. Equipment or system tests and startups.

PART 3 - EXECUTION

3.1 CONTRACTOR'S CONSTRUCTION SCHEDULE

- A. Contractor's Construction Schedule Updating: At monthly intervals, update schedule to reflect actual construction progress and activities. Issue schedule one week before each regularly scheduled progress meeting.
 - 1. Revise schedule immediately after each meeting or other activity where revisions have been recognized or made. Issue updated schedule concurrently with the report of each such meeting.
 - 2. Include a report with updated schedule that indicates every change, including, but not limited to, changes in logic, durations, actual starts and finishes, and activity durations.
 - 3. As the Work progresses, indicate Actual Completion percentage for each activity.

- B. **Distribution:** Distribute copies of approved schedule to Architect, Owner, separate contractors, testing and inspecting agencies, and other parties identified by Contractor with a need-to-know schedule responsibility.
1. Post copies in Project meeting rooms and temporary field offices.
 2. When revisions are made, distribute updated schedules to the same parties and post in the same locations. Delete parties from distribution when they have completed their assigned portion of the Work and are no longer involved in performance of construction activities.

END OF SECTION 013200

SECTION 013300 - SUBMITTAL PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for submitting Shop Drawings, Product Data, Samples, and other submittals.
- B. Related Sections include the following:
 - 1. Division 1 Section "Payment Procedures" for submitting Applications for Payment and the Schedule of Values.
 - 2. Division 1 Section "Project Management and Coordination" for submitting and distributing meeting and conference minutes and for submitting Coordination Drawings.
 - 3. Divisions 2 through 16 Sections for specific requirements for submittals in those Sections.

1.3 SUBMITTAL PROCEDURES

- A. General: Electronic copies of CAD Drawings of the Contract Drawings will not be provided by Architect or consultants for Contractor's use in preparing submittals.
- B. Coordination: Coordinate preparation and processing of submittals with performance of construction activities.
 - 1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.
 - 2. Coordinate transmittal of different types of submittals for related parts of the Work so processing will not be delayed because of need to review submittals concurrently for coordination.
 - a. Architect reserves the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.
- C. Processing Time: Allow enough time for submittal review, including time for resubmittals, as follows. Time for review shall commence on Architect's receipt of submittal. No extension of the Contract Time will be authorized because of failure to transmit submittals enough in advance of the Work to permit processing, including resubmittals.
 - 1. Initial Review: Allow 20 days for initial review of each submittal. Allow additional time if coordination with subsequent submittals is required. Architect will advise Contractor when a submittal being processed must be delayed for coordination.
 - 2. Resubmittal Review: Allow 20 days for review of each resubmittal.
- D. Identification: Place a permanent label or title block on each submittal for identification.

1. Indicate name of firm or entity that prepared each submittal on label or title block.
 2. Include the following information on label for processing and recording action taken:
 - a. Project name.
 - b. Date.
 - c. Name and address of Architect.
 - d. Name and address of Contractor.
 - e. Name and address of subcontractor.
 - f. Name and address of supplier.
 - g. Name of manufacturer.
 - h. Number and title of appropriate Specification Section.
 - i. Drawing number and detail references, as appropriate.
 - j. Location(s) where product is to be installed, as appropriate.
 - k. Other necessary identification.
- E. Deviations: **Highlight** or otherwise specifically identify deviations from the Contract Documents on submittals.
- F. Transmittal: Package each submittal individually and appropriately for transmittal and handling. Transmit each submittal using a transmittal form. Architect will **discard submittals** received from sources other than Contractor.
1. Transmittal Form: Use Contractor's Standard Form
 2. Transmittal Form: Provide locations on form for the following information:
 - a. Project name.
 - b. Date.
 - c. Names of subcontractor, manufacturer, and supplier.
 - d. Category and type of submittal.
 - e. Submittal purpose and description.
 - f. Specification Section number and title.
 - g. Drawing number and detail references, as appropriate.
 - h. Submittal and transmittal distribution record.
 - i. Remarks.
 - j. Signature of transmitter.
 3. On an attached separate sheet, prepared on Contractor's letterhead, record relevant information, requests for data, revisions other than those requested by Architect on previous submittals, and deviations from requirements in the Contract Documents, including minor variations and limitations. Include same label information as related submittal.
- G. Resubmittals: Make resubmittals in same form and number of copies as initial submittal.
1. Note date and content of previous submittal.
 2. Note date and content of revision in label or title block and clearly indicate extent of revision.
- H. Distribution: Furnish copies of final submittals to manufacturers, subcontractors, suppliers, fabricators, installers, authorities having jurisdiction, and others as necessary for performance of construction activities. Show distribution on transmittal forms.
- I. Use for Construction: Use only final submittals with mark indicating a Review or Reviewed as Noted by Architect.

PART 2 - PRODUCTS

2.1 ACTION SUBMITTALS

- A. General: Prepare and submit Action Submittals required by individual Specification Sections.
- B. Product Data: Collect information into a single submittal for each element of construction and type of product or equipment.
 - 1. If information must be specially prepared for submittal because standard printed data are not suitable for use, submit as Shop Drawings, not as Product Data.
 - 2. Mark each copy of each submittal to show which products and options are applicable.
 - 3. Include the following information, as applicable:
 - a. Manufacturer's written recommendations.
 - b. Manufacturer's product specifications.
 - c. Manufacturer's installation instructions.
 - d. Standard color charts.
 - e. Manufacturer's catalog cuts.
 - f. Wiring diagrams showing factory-installed wiring.
 - g. Printed performance curves.
 - h. Operational range diagrams.
 - i. Mill reports.
 - j. Standard product operation and maintenance manuals.
 - k. Compliance with specified referenced standards.
 - l. Testing by recognized testing agency.
 - m. Application of testing agency labels and seals.
 - n. Notation of coordination requirements.
 - 4. Submit Product Data before or concurrent with Samples.
 - 5. Number of Copies: Submit 6 copies of Product Data, unless otherwise indicated. Architect[, will return 3copies. Mark up and retain one returned copy as a Project Record Document.
- C. Shop Drawings: Prepare Project-specific information, drawn accurately to scale. Do not base Shop Drawings on reproductions of the Contract Documents or standard printed data.
 - 1. Preparation: Fully illustrate requirements in the Contract Documents. Include the following information, as applicable:
 - a. Dimensions.
 - b. Identification of products.
 - c. Fabrication and installation drawings.
 - d. Roughing-in and setting diagrams.
 - e. Wiring diagrams showing field-installed wiring, including power, signal, and control wiring.
 - f. Shopwork manufacturing instructions.
 - g. Templates and patterns.
 - h. Schedules.
 - i. Design calculations.
 - j. Compliance with specified standards.
 - k. Notation of coordination requirements.
 - l. Notation of dimensions established by field measurement.
 - m. Relationship to adjoining construction clearly indicated.
 - n. Seal and signature of professional engineer if specified.

- o. Wiring Diagrams: Differentiate between manufacturer-installed and field-installed wiring.
 - 2. Sheet Size: Except for templates, patterns, and similar full-size drawings, submit Shop Drawings on sheets at least 8-1/2 by 11 inches but no larger than 30 by 42 inches.
 - 3. Number of Copies: Submit 6 opaque copies of each submittal, unless copies are required for operation and maintenance manuals. Architect will retain 3 copies; remainder will be returned.
- D. Samples: Submit Samples for review of kind, color, pattern, and texture for a check of these characteristics with other elements and for a comparison of these characteristics between submittal and actual component as delivered and installed.
- 1. Transmit Samples that contain multiple, related components such as accessories together in one submittal package.
 - 2. Identification: Attach label on unexposed side of Samples that includes the following:
 - a. Generic description of Sample.
 - b. Product name and name of manufacturer.
 - c. Sample source.
 - d. Number and title of appropriate Specification Section.
 - 3. Disposition: Maintain sets of approved Samples at Project site, available for quality-control comparisons throughout the course of construction activity. Sample sets may be used to determine final acceptance of construction associated with each set.
 - a. Samples that may be incorporated into the Work are indicated in individual Specification Sections. Such Samples must be in an undamaged condition at time of use.
 - b. Samples not incorporated into the Work, or otherwise designated as Owner's property, are the property of Contractor.
 - 4. Samples for Initial Selection: Submit manufacturer's color charts consisting of units or sections of units showing the full range of colors, textures, and patterns available.
 - a. Number of Samples: Submit 6 full set(s) of available choices where color, pattern, texture, or similar characteristics are required to be selected from manufacturer's product line. Architect will return 3 submittals with options selected.
 - 5. Samples for Verification: Submit full-size units or Samples of size indicated, prepared from same material to be used for the Work, cured and finished in manner specified, and physically identical with material or product proposed for use, and that show full range of color and texture variations expected. Samples include, but are not limited to, the following: partial sections of manufactured or fabricated components; small cuts or containers of materials; complete units of repetitively used materials; swatches showing color, texture, and pattern; color range sets; and components used for independent testing and inspection.
- E. Contractor's Construction Schedule: Comply with requirements specified in Division 1 Section "Construction Progress Documentation" for Construction Manager's action.
- F. Submittals Schedule: Comply with requirements specified in Division 1 Section "Construction Progress Documentation."
- G. Application for Payment: Comply with requirements specified in Division 1 Section "Payment Procedures."
- H. Schedule of Values: Comply with requirements specified in Division 1 Section "Payment Procedures."

2.2 INFORMATIONAL SUBMITTALS

- A. General: Prepare and submit Informational Submittals required by other Specification Sections.
1. Number of Copies: Submit 3 copies of each submittal, unless otherwise indicated. Architect will not return copies.
 2. Certificates and Certifications: Provide a notarized statement that includes signature of entity responsible for preparing certification. Certificates and certifications shall be signed by an officer or other individual authorized to sign documents on behalf of that entity.
 3. Test and Inspection Reports: Comply with requirements specified in Division 1 Section "Quality Requirements."

2.3 DELEGATED DESIGN

- A. Performance and Design Criteria: Where professional design services or certifications by a design professional are specifically required of Contractor by the Contract Documents, provide products and systems complying with specific performance and design criteria indicated.
1. If criteria indicated are not sufficient to perform services or certification required, submit a written request for additional information to Architect.

PART 3 - EXECUTION

3.1 CONTRACTOR'S REVIEW

- A. Review each submittal and check for coordination with other Work of the Contract and for compliance with the Contract Documents. Note corrections and field dimensions. Mark with approval stamp before submitting to Architect.
- B. Approval Stamp: Stamp each submittal with a uniform, approval stamp. Include Project name and location, submittal number, Specification Section title and number, name of reviewer, date of Contractor's approval, and statement certifying that submittal has been reviewed, checked, and approved for compliance with the Contract Documents.

3.2 ARCHITECT'S ACTION

- A. General: Architect will not review submittals that do not bear Contractor's approval stamp and will return them without action.
- B. Action Submittals: Architect will review each submittal, make marks to indicate corrections or modifications required, and return it. Architect will stamp each submittal with an action stamp and will mark stamp appropriately to indicate action taken, as follows:
1. Reviewed: Information submitted is in compliance with Contract Documents.
 2. Reviewed as Noted: Information submitted is in compliance with Contract Documents except as noted.
 3. Revise and Resubmit: Submittal does not meet Contract Documents or is incomplete, and must be resubmitted.

- 4. Not Reviewed: Incomplete submittal, was not required or does not require review.
- C. Informational Submittals: Architect will review each submittal and will not return it, or will return it if it does not comply with requirements. Architect will forward each submittal to appropriate party.
- D. Partial submittals are not acceptable, will be considered nonresponsive, and will be returned without review.
- E. Submittals not required by the Contract Documents may not be reviewed and may be discarded.

END OF SECTION 013300

SECTION 014000 - QUALITY REQUIREMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for quality assurance and quality control.
- B. Testing and inspecting services are required to verify compliance with requirements specified or indicated. These services do not relieve Contractor of responsibility for compliance with the Contract Document requirements.
 - 1. Specific quality-assurance and -control requirements for individual construction activities are specified in the Sections that specify those activities. Requirements in those Sections may also cover production of standard products.
 - 2. Specified tests, inspections, and related actions do not limit Contractor's other quality-assurance and -control procedures that facilitate compliance with the Contract Document requirements.
 - 3. Requirements for Contractor to provide quality-assurance and -control services required by Architect, Owner, or authorities having jurisdiction are not limited by provisions of this Section.

1.3 CONFLICTING REQUIREMENTS

- A. General: If compliance with two or more standards is specified and the standards establish different or conflicting requirements for minimum quantities or quality levels, comply with the most stringent requirement. Refer uncertainties and requirements that are different, but apparently equal, to Architect for a decision before proceeding.
- B. Minimum Quantity or Quality Levels: The quantity or quality level shown or specified shall be the minimum provided or performed. The actual installation may comply exactly with the minimum quantity or quality specified, or it may exceed the minimum within reasonable limits. To comply with these requirements, indicated numeric values are minimum or maximum, as appropriate, for the context of requirements. Refer uncertainties to Architect for a decision before proceeding.

1.4 SUBMITTALS

- A. Qualification Data: For testing agencies specified in "Quality Assurance" Article to demonstrate their capabilities and experience. Include proof of qualifications in the form of a recent report on the inspection of the testing agency by a recognized authority.
- B. Schedule of Tests and Inspections: Prepare in tabular form and include the following:
 - 1. Specification Section number and title.
 - 2. Description of test and inspection.

3. Identification of applicable standards.
4. Identification of test and inspection methods.
5. Number of tests and inspections required.
6. Time schedule or time span for tests and inspections.
7. Entity responsible for performing tests and inspections.
8. Requirements for obtaining samples.
9. Unique characteristics of each quality-control service.

C. Reports: Prepare and submit certified written reports that include the following:

1. Date of issue.
2. Project title and number.
3. Name, address, and telephone number of testing agency.
4. Dates and locations of samples and tests or inspections.
5. Names of individuals making tests and inspections.
6. Description of the Work and test and inspection method.
7. Identification of product and Specification Section.
8. Complete test or inspection data.
9. Test and inspection results and an interpretation of test results.
10. Record of temperature and weather conditions at time of sample taking and testing and inspecting.
11. Comments or professional opinion on whether tested or inspected Work complies with the Contract Document requirements.
12. Name and signature of laboratory inspector.
13. Recommendations on retesting and reinspecting.

D. Permits, Licenses, and Certificates: For Owner's records, submit copies of permits, licenses, certifications, inspection reports, releases, jurisdictional settlements, notices, receipts for fee payments, judgments, correspondence, records, and similar documents, established for compliance with standards and regulations bearing on performance of the Work.

1.5 QUALITY CONTROL

A. Owner Responsibilities: Where quality-control services are indicated as Owner's responsibility, Owner will engage a qualified testing agency to perform these services.

1. Owner will furnish Contractor with names, addresses, and telephone numbers of testing agencies engaged and a description of types of testing and inspecting they are engaged to perform.
2. Costs for retesting and reinspecting construction that replaces or is necessitated by work that failed to comply with the Contract Documents will be charged to Contractor, and the Contract Sum will be adjusted by Change Order.

B. Retesting/Reinspecting: Regardless of whether original tests or inspections were Contractor's responsibility, provide quality-control services, including retesting and reinspecting, for construction that replaced Work that failed to comply with the Contract Documents.

C. Testing Agency Responsibilities: Cooperate with Architect and Contractor in performance of duties. Provide qualified personnel to perform required tests and inspections.

1. Notify Architect and Contractor promptly of irregularities or deficiencies observed in the Work during performance of its services.
2. Determine the location from which test samples will be taken and in which in-situ tests are conducted.
3. Conduct and interpret tests and inspections and state in each report whether tested and inspected work complies with or deviates from requirements.

4. Submit a certified written report, in duplicate, of each test, inspection, and similar quality-control service through Contractor.
 5. Do not release, revoke, alter, or increase the Contract Document requirements or approve or accept any portion of the Work.
 6. Do not perform any duties of Contractor.
- D. Coordination: Coordinate sequence of activities to accommodate required quality-assurance and -control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting.
1. Schedule times for tests, inspections, obtaining samples, and similar activities.
- E. Schedule of Tests and Inspections: Prepare a schedule of tests, inspections, and similar quality-control services required by the Contract Documents including Statement of Special Inspections.. Submit schedule within 20 days of date established for the Notice to Proceed.
1. Distribution: Distribute schedule to Owner, Architect, testing agencies, and each party involved in performance of portions of the Work where tests and inspections are required.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 REPAIR AND PROTECTION

- A. General: On completion of testing, inspecting, sample taking, and similar services, repair damaged construction and restore substrates and finishes.
1. Provide materials and comply with installation requirements specified in other Specification Sections. Restore patched areas and extend restoration into adjoining areas with durable seams that are as invisible as possible.
 2. Comply with the Contract Document requirements for Division 1 Section "Cutting and Patching."
- B. Protect construction exposed by or for quality-control service activities.
- C. Repair and protection are Contractor's responsibility, regardless of the assignment of responsibility for quality-control services.

END OF SECTION 014000

SECTION 015000 - TEMPORARY FACILITIES AND CONTROLS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes requirements for temporary utilities, support facilities, and security and protection facilities.
- B. Related Sections include the following:
 - 1. Division 1 Section "Summary" for limitations on utility interruptions and other work restrictions.

1.3 DEFINITIONS

- A. **Permanent Enclosure:** As determined by Architect, permanent or temporary roofing is complete, insulated, and weathertight; exterior walls are insulated and weathertight; and all openings are closed with permanent construction or substantial temporary closures.

1.4 USE CHARGES

- A. **General:** Cost or use charges for temporary facilities shall be included in the Contract Sum. Allow other entities to use temporary services and facilities without cost, including, but not limited to Architect, occupants of Project, testing agencies, and authorities having jurisdiction.
- B. **Electric Power Service:** Pay electric power service use charges for electricity used by all entities for construction operations.
- C. **Sewer and Water Service:** Provide a temporary water service to the site and pay for all utilization.

1.5 QUALITY ASSURANCE

- A. **Electric Service:** Comply with NECA, NEMA, and UL standards and regulations for temporary electric service. Install service to comply with NFPA 70.
- B. **Tests and Inspections:** Arrange for authorities having jurisdiction to test and inspect each temporary utility before use. Obtain required certifications and permits.

1.6 PROJECT CONDITIONS

- A. **Temporary Use of Permanent Facilities:** Installer of each permanent service shall assume responsibility for operation, maintenance, and protection of each permanent service during its use as a construction facility before Owner's acceptance, regardless of previously assigned responsibilities.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. **Portable Chain-Link Fencing:** Minimum 2-inch, 9-gage, galvanized steel, chain-link fabric fencing; minimum 6 feet high with galvanized steel pipe posts; minimum 2-3/8-inch- OD line posts and 2-7/8-inch- OD corner and pull posts, with 1-5/8-inch- OD top and bottom rails. Provide galvanized steel bases for supporting posts.
- B. **Paint:** Comply with requirements in Division 9 painting Sections.

2.2 TEMPORARY FACILITIES

- A. **Field Offices, General:** Prefabricated or mobile units with serviceable finishes, temperature controls, and foundations adequate for normal loading. Keep office clean and orderly. Furnish and equip offices as follows:
 - 1. Furniture required for Project-site documents including file cabinets, plan tables, plan racks, and bookcases.
 - 2. Conference room of sufficient size to accommodate meetings of 10 individuals. Provide electrical power service and 120-V ac duplex receptacles. Furnish room with conference table, chairs, and 4-foot- square tack board.
 - 3. Lighting fixtures capable of maintaining average illumination of 20 fc at desk height.
- B. **Storage and Fabrication Sheds:** Provide sheds sized, furnished, and equipped to accommodate materials and equipment for construction operations.
 - 1. Store combustible materials apart from building.

2.3 EQUIPMENT

- A. **Fire Extinguishers:** Portable, UL rated; with class and extinguishing agent as required by locations and classes of fire exposures.
- B. **Heating Equipment:** Unless Owner authorizes use of permanent heating system, provide vented, self-contained, liquid-propane-gas or fuel-oil heaters with individual space thermostatic control.
 - 1. Use of gasoline-burning space heaters, open-flame heaters, or salamander-type heating units is prohibited.
 - 2. Heating Units: Listed and labeled for type of fuel being consumed, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Locate facilities where they will serve Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required by progress of the Work.
- B. Provide each facility ready for use when needed to avoid delay. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities.

3.2 TEMPORARY UTILITY INSTALLATION

- A. General: Install temporary service or connect to existing service.
- B. Sewers and Drainage: Provide temporary utilities to remove effluent lawfully.
- C. Water Service: Install water service and distribution piping in sizes and pressures adequate for construction.
- D. Sanitary Facilities: Provide temporary toilets, wash facilities, and drinking water for use of construction personnel. Comply with authorities having jurisdiction for type, number, location, operation, and maintenance of fixtures and facilities.
- E. Heating and Cooling: Provide temporary heating and cooling required by construction activities for curing or drying of completed installations or for protecting installed construction from adverse effects of low temperatures or high humidity. Select equipment that will not have a harmful effect on completed installations or elements being installed.
- F. Ventilation and Humidity Control: Provide temporary ventilation required by construction activities for curing or drying of completed installations or for protecting installed construction from adverse effects of high humidity. Select equipment that will not have a harmful effect on completed installations or elements being installed. Coordinate ventilation requirements to produce ambient condition required and minimize energy consumption.
- G. Electric Power Service: Provide electric power service and distribution system of sufficient size, capacity, and power characteristics required for construction operations.
- H. Lighting: Provide temporary lighting with local switching that provides adequate illumination for construction operations, observations, inspections, and traffic conditions.
 - I. Install and operate temporary lighting that fulfills security and protection requirements without operating entire system.
- I. Telephone Service: Provide temporary telephone service in common-use facilities for use by all construction personnel. Install one telephone line(s) for each field office.
 - I. Provide additional telephone lines for the following:
 - a. Provide a dedicated telephone line for each facsimile machine and computer in each field office.

3.3 SUPPORT FACILITIES INSTALLATION

- A. General: Comply with the following:
 - 1. Provide incombustible construction for offices, shops, and sheds located within construction area or within 30 feet of building lines. Comply with NFPA 241.
 - 2. Maintain support facilities until near Substantial Completion. Remove before Substantial Completion. Personnel remaining after Substantial Completion will be permitted to use permanent facilities, under conditions acceptable to Owner.
- B. Project Identification and Temporary Signs: Provide Project identification and other signs as indicated on Drawings. Install signs where indicated to inform public and individuals seeking entrance to Project. Unauthorized signs are not permitted.

- C. **Waste Disposal Facilities:** Provide waste-collection containers in sizes adequate to handle waste from construction operations. Comply with requirements of authorities having jurisdiction.
- D. **Lifts and Hoists:** Provide facilities necessary for hoisting materials and personnel.
- E. **Temporary Erosion and Sedimentation Control:** Provide measures to prevent soil erosion and discharge of soil-bearing water runoff and airborne dust to adjacent properties and walkways, according to requirements of authorities having jurisdiction.
 - 1. Inspect, repair, and maintain erosion- and sedimentation-control measures during construction until permanent vegetation has been established.
- F. **Stormwater Control:** Comply with authorities having jurisdiction. Provide barriers in and around excavations and subgrade construction to prevent flooding by runoff of stormwater from heavy rains.
- G. **Tree and Plant Protection:** Install temporary fencing located as indicated or outside the drip line of trees to protect vegetation from damage from construction operations. Protect tree root systems from damage, flooding, and erosion.
- H. **Pest Control:** Engage pest-control service to recommend practices to minimize attraction and harboring of rodents, roaches, and other pests and to perform extermination and control procedures at regular intervals so Project will be free of pests and their residues at Substantial Completion. Obtain extended warranty for Owner. Perform control operations lawfully, using environmentally safe materials.

3.4 SECURITY AND PROTECTION FACILITIES INSTALLATION

- A. **Environmental Protection:** Provide protection, operate temporary facilities, and conduct construction in ways and by methods that comply with environmental regulations and that minimize possible air, waterway, and subsoil contamination or pollution or other undesirable effects.
- B. **Barricades, Warning Signs, and Lights:** Comply with requirements of authorities having jurisdiction for erecting structurally adequate barricades, including warning signs and lighting.
- C. **Temporary Partitions:** Provide floor-to-ceiling dustproof partitions to limit dust and dirt migration and to separate areas occupied by **Owner** from fumes and noise.
- D. **Temporary Fire Protection:** Install and maintain temporary fire-protection facilities of types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 241.

3.5 OPERATION, TERMINATION, AND REMOVAL

- A. **Supervision:** Enforce strict discipline in use of temporary facilities. To minimize waste and abuse, limit availability of temporary facilities to essential and intended uses.
- B. **Maintenance:** Maintain facilities in good operating condition until removal.
 - 1. Maintain operation of temporary enclosures, heating, cooling, humidity control, ventilation, and similar facilities on a 24-hour basis where required to achieve indicated results and to avoid possibility of damage.
- C. **Termination and Removal:** Remove each temporary facility when need for its service has ended, when it has been replaced by authorized use of a permanent facility, or no later than Pre-final inspection. Complete or, if necessary, restore permanent construction that may have been delayed because of interference with temporary facility. Repair damaged Work, clean exposed surfaces, and replace construction that cannot be satisfactorily repaired.

3.6 PROJECT SIGN- As indicated on the Drawings.

END OF SECTION 015000

SECTION 016000 - PRODUCT REQUIREMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for selection of products for use in Project; product delivery, storage, and handling; manufacturers' standard warranties on products; special warranties; product substitutions; and comparable products.

1.3 DEFINITIONS

- A. **Products:** Items purchased for incorporating into the Work, whether purchased for Project or taken from previously purchased stock. The term "product" includes the terms "material," "equipment," "system," and terms of similar intent.
- B. **Substitutions:** Changes in products, materials, equipment, and methods of construction from those required by the Contract Documents and proposed by Contractor.
- C. **Basis-of-Design Product Specification:** Where a specific manufacturer's product is named and accompanied by the words "basis of design," including make or model number or other designation, to establish the significant qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics for purposes of evaluating comparable products of other named manufacturers.

1.4 SUBMITTALS

- A. **Product List:** Submit a list, in tabular form, showing specified products. Include generic names of products required. Include manufacturer's name and proprietary product names for each product.
 - 1. Coordinate product list with Contractor's Construction Schedule and the Submittals Schedule.
 - 2. **Form:** Tabulate information for each product under the following column headings:
 - a. Specification Section number and title.
 - b. Generic name used in the Contract Documents.
 - c. Proprietary name, model number, and similar designations.
 - d. Manufacturer's name and address.
 - e. Supplier's name and address.
 - f. Installer's name and address.
 - g. Projected delivery date or time span of delivery period.
 - h. Identification of items that require early submittal approval for scheduled delivery date.

3. Initial Submittal: Within 10 days after date of award of the Work, submit 3 copies of initial product list. Include a written explanation for omissions of data and for variations from Contract requirements.
 - a. At Contractor's option, initial submittal may be limited to product selections and designations that must be established early in Contract period.
4. Completed List: Within 10 days after approval of initial list by the Architect, submit 3 copies of completed product list. Include a written explanation for omissions of data and for variations from Contract requirements.
5. Architect's Action: Architect will respond in writing to Contractor within 10 days of receipt of completed product list. Architect's response will include a list of unacceptable product selections and a brief explanation of reasons for this action. Architect's response, or lack of response, does not constitute a waiver of requirement to comply with the Contract Documents.
 - a. Form of Acceptance: Change Order.
 - b. Use product specified if Architect cannot make a decision on use of a proposed substitution within time allocated.

1.5 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, and handle products using means and methods that will prevent damage, deterioration, and loss, including theft. Comply with manufacturer's written instructions.
- B. Delivery and Handling:
 1. Schedule delivery to minimize long-term storage at Project site and to prevent overcrowding of construction spaces.
 2. Coordinate delivery with installation time to ensure minimum holding time for items that are flammable, hazardous, easily damaged, or sensitive to deterioration, theft, and other losses.
 3. Deliver products to Project site in an undamaged condition in manufacturer's original sealed container or other packaging system, complete with labels and instructions for handling, storing, unpacking, protecting, and installing.
 4. Inspect products on delivery to ensure compliance with the Contract Documents and to ensure that products are undamaged and properly protected.
- C. Storage:
 1. Store products to allow for inspection and measurement of quantity or counting of units.
 2. Store materials in a manner that will not endanger Project structure.
 3. Store products that are subject to damage by the elements, under cover in a weathertight enclosure above ground, with ventilation adequate to prevent condensation.
 4. Store cementitious products and materials on elevated platforms.
 5. Store foam plastic from exposure to sunlight, except to extent necessary for period of installation and concealment.
 6. Comply with product manufacturer's written instructions for temperature, humidity, ventilation, and weather-protection requirements for storage.
 7. Protect stored products from damage and liquids from freezing.
 8. Provide a secure location and enclosure at Project site for storage of materials and equipment by Owner's construction forces. Coordinate location with Owner.

1.6 PRODUCT WARRANTIES

- A. Warranties specified in other Sections shall be in addition to, and run concurrent with, other warranties required by the Contract Documents. Manufacturer's disclaimers and limitations on product warranties do not relieve Contractor of obligations under requirements of the Contract Documents.
1. Manufacturer's Warranty: Preprinted written warranty published by individual manufacturer for a particular product and specifically endorsed by manufacturer to Owner.
 2. Special Warranty: Written warranty required by or incorporated into the Contract Documents, either to extend time limit provided by manufacturer's warranty or to provide more rights for Owner.
- B. Special Warranties: Prepare a written document that contains appropriate terms and identification, ready for execution. Submit a draft for approval before final execution.
1. Manufacturer's Standard Form: Modified to include Project-specific information and properly executed.
 2. Specified Form: When specified forms are included with the Specifications, prepare a written document using appropriate form properly executed.
 3. Refer to Divisions 2 through 16 Sections for specific content requirements and particular requirements for submitting special warranties.
- C. Submittal Time: Comply with requirements in Division 1 Section "Closeout Procedures."

PART 2 - PRODUCTS

2.1 PRODUCT SELECTION PROCEDURES

- A. General Product Requirements: Provide products that comply with the Contract Documents, that are undamaged and, unless otherwise indicated, that are new at time of installation.
1. Provide products complete with accessories, trim, finish, fasteners, and other items needed for a complete installation and indicated use and effect.
 2. Standard Products: If available, and unless custom products or nonstandard options are specified, provide standard products of types that have been produced and used successfully in similar situations on other projects.
 3. Owner reserves the right to limit selection to products with warranties not in conflict with requirements of the Contract Documents.
 4. Where products are accompanied by the term "as selected," Architect will make selection.
 5. Where products are accompanied by the term "match sample," sample to be matched is Architect's.
 6. Descriptive, performance, and reference standard requirements in the Specifications establish "salient characteristics" of products.
- B. Product Selection Procedures:
1. Products: Where Specifications include a list of names of both products and manufacturers, provide one of the products listed that complies with requirements.
 2. Basis-of-Design Product: Where Specifications name a product and include a list of manufacturers, provide the specified product or a comparable product by one of the other named manufacturers. Drawings and Specifications indicate sizes, profiles, dimensions, and other characteristics that are based on the product named. Comply with provisions in Part 2 "Comparable Products" Article for consideration of an unnamed product by the other named manufacturers.

- a. If no product available within specified category matches and complies with other specified requirements, comply with provisions in Part 2 "Product Substitutions" Article for proposal of product.
3. Visual Selection Specification: Where Specifications include the phrase "as selected from manufacturer's colors, patterns, textures" or a similar phrase, select a product that complies with other specified requirements.
 - a. Standard Range: Where Specifications include the phrase "standard range of colors, patterns, textures" or similar phrase, Architect will select color, pattern, density, or texture from manufacturer's product line that does not include premium items.
 - b. Full Range: Where Specifications include the phrase "full range of colors, patterns, textures" or similar phrase, Architect will select color, pattern, density, or texture from manufacturer's product line that includes both standard and premium items.

2.2 PRODUCT SUBSTITUTIONS

- A. Conditions: Architect will consider Contractor's request for substitution within the first 30 days after Notice to Proceed only and only when the following conditions are satisfied. If the following conditions are not satisfied, Architect will return requests without action, except to record noncompliance with these requirements:
 1. Requested substitution offers Owner a substantial advantage in cost, time, energy conservation, or other considerations, after deducting additional responsibilities Owner must assume. Owner's additional responsibilities may include compensation to Architect for redesign and evaluation services, increased cost of other construction by Owner, and similar considerations.
 2. Requested substitution does not require extensive revisions to the Contract Documents.
 3. Requested substitution is consistent with the Contract Documents and will produce indicated results.
 4. Substitution request is fully documented and properly submitted.
 5. Requested substitution will not adversely affect Contractor's Construction Schedule.
 6. Requested substitution has received necessary approvals of authorities having jurisdiction.
 7. Requested substitution is compatible with other portions of the Work.
 8. Requested substitution has been coordinated with other portions of the Work.
 9. Requested substitution provides specified warranty.
 10. If requested substitution involves more than one contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors involved.

PART 3 - EXECUTION (Not Used)

END OF SECTION 016000

SECTION 017300 - EXECUTION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes general procedural requirements governing execution of the Work including, but not limited to, the following:
 - 1. Construction layout.
 - 2. General installation of products.
 - 3. Progress cleaning.
 - 4. Starting and adjusting.
 - 5. Protection of installed construction.
 - 6. Correction of the Work.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Existing Conditions: The existence and location of site improvements, utilities, and other construction indicated as existing are not guaranteed. Before beginning work, investigate and verify the existence and location of mechanical and electrical systems and other construction affecting the Work.
 - I. Before construction, verify the location and points of connection of utility services.
- B. Existing Utilities: The existence and location of underground and other utilities and construction indicated as existing are not guaranteed. Before beginning sitework, investigate and verify the existence and location of underground utilities and other construction affecting the Work.
- C. Acceptance of Conditions: Examine substrates, areas, and conditions, with Installer or Applicator present where indicated, for compliance with requirements for installation tolerances and other conditions affecting performance. Record observations.

3.2 PREPARATION

- A. Field Measurements: Take field measurements as required to fit the Work properly. Recheck measurements before installing each product. Where portions of the Work are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication. Coordinate fabrication schedule with construction progress to avoid delaying the Work.

- B. Space Requirements: Verify space requirements and dimensions of items shown diagrammatically on Drawings.
- C. Review of Contract Documents and Field Conditions: Immediately on discovery of the need for clarification of the Contract Documents, submit a request for information to Architect. Include a detailed description of problem encountered, together with recommendations for changing the Contract Documents.

3.3 INSTALLATION

- A. General: Locate the Work and components of the Work accurately, in correct alignment and elevation, as indicated.
 - 1. Make vertical work plumb and make horizontal work level.
 - 2. Where space is limited, install components to maximize space available for maintenance and ease of removal for replacement.
 - 3. Conceal pipes, ducts, and wiring in finished areas, unless otherwise indicated.
- B. Comply with manufacturer's written instructions and recommendations for installing products in applications indicated.
- C. Install products at the time and under conditions that will ensure the best possible results. Maintain conditions required for product performance until Completion.
- D. Conduct construction operations so no part of the Work is subjected to damaging operations or loading in excess of that expected during normal conditions of occupancy.
- E. Tools and Equipment: Do not use tools or equipment that produce harmful noise levels.
- F. Templates: Obtain and distribute to the parties involved templates for work specified to be factory prepared and field installed. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing products to comply with indicated requirements.
- G. Anchors and Fasteners: Provide anchors and fasteners as required to anchor each component securely in place, accurately located and aligned with other portions of the Work.
 - 1. Mounting Heights: Where mounting heights are not indicated, mount components at heights directed by Architect.
 - 2. Allow for building movement, including thermal expansion and contraction.
 - 3. Coordinate installation of anchorages. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.
- H. Joints: Make joints of uniform width. Where joint locations in exposed work are not indicated, arrange joints for the best visual effect. Fit exposed connections together to form hairline joints.
- I. Hazardous Materials: Use products, cleaners, and installation materials that are not considered hazardous.

3.4 PROGRESS CLEANING

- A. General: Clean Project site and work areas daily, including common areas. Coordinate progress cleaning for joint-use areas where more than one installer has worked. Enforce requirements strictly. Dispose of materials lawfully.
- B. Site: Maintain Project site free of waste materials and debris.
- C. Work Areas: Clean areas where work is in progress to the level of cleanliness necessary for proper execution of the Work.
- D. Installed Work: Keep installed work clean. Clean installed surfaces according to written instructions of manufacturer or fabricator of product installed, using only cleaning materials specifically recommended. If specific cleaning materials are not recommended, use cleaning materials that are not hazardous to health or property and that will not damage exposed surfaces.
- E. Concealed Spaces: Remove debris from concealed spaces before enclosing the space.
- F. Exposed Surfaces in Finished Areas: Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration at time of Completion.
- G. Waste Disposal: Burying or burning waste materials on-site will not be permitted. Washing waste materials down sewers or into waterways will not be permitted.
- H. During handling and installation, clean and protect construction in progress and adjoining materials already in place. Apply protective covering where required to ensure protection from damage or deterioration at Completion.
- I. Clean and provide maintenance on completed construction as frequently as necessary through the remainder of the construction period. Adjust and lubricate operable components to ensure operability without damaging effects.
- J. Limiting Exposures: Supervise construction operations to assure that no part of the construction, completed or in progress, is subject to harmful, dangerous, damaging, or otherwise deleterious exposure during the construction period.

3.5 STARTING AND ADJUSTING

- A. Start equipment and operating components to confirm proper operation. Remove malfunctioning units, replace with new units, and retest.
- B. Adjust operating components for proper operation without binding. Adjust equipment for proper operation.
- C. Test each piece of equipment to verify proper operation. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

3.6 PROTECTION OF INSTALLED CONSTRUCTION

- A. Provide final protection and maintain conditions that ensure installed Work is without damage or deterioration at time of Completion.
- B. Comply with manufacturer's written instructions for temperature and relative humidity.

3.7 CORRECTION OF THE WORK

- A. Repair or remove and replace defective construction. Restore damaged substrates and finishes. Comply with requirements in Division 1 Section "Cutting and Patching."
 - I. Repairing includes replacing defective parts, refinishing damaged surfaces, touching up with matching materials, and properly adjusting operating equipment.
- B. Restore permanent facilities used during construction to their specified condition.
- C. Remove and replace damaged surfaces that are exposed to view if surfaces cannot be repaired without visible evidence of repair.
- D. Repair components that do not operate properly. Remove and replace operating components that cannot be repaired.
- E. Remove and replace chipped, scratched, and broken glass or reflective surfaces.

END OF SECTION 017300

SECTION 017419 - CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division I Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for the following:
 - 1. Recycling nonhazardous demolition and construction waste.
 - 2. Disposing of nonhazardous demolition and construction waste.

1.3 DEFINITIONS

- A. Construction Waste: Building and site improvement materials and other solid waste resulting from construction, remodeling, renovation, or repair operations. Construction waste includes packaging.
- B. Demolition Waste: Building and site improvement materials resulting from demolition or selective demolition operations.
- C. Disposal: Removal off-site of demolition and construction waste and subsequent sale, recycling, reuse, or deposit in landfill or incinerator acceptable to authorities having jurisdiction.
- D. Recycle: Recovery of demolition or construction waste for subsequent processing in preparation for reuse.
- E. Salvage: Recovery of demolition or construction waste and subsequent sale or reuse in another facility.
- F. Salvage and Reuse: Recovery of demolition or construction waste and subsequent incorporation into the Work.

1.4 PERFORMANCE

- A. General: Develop waste management plan that results in end-of-Project rates for salvage/recycling of 50 percent by weight of total waste generated by the Work.
 - I. Demolition Waste:
 - a. Concrete.
 - b. Brick.
 - c. Concrete masonry units.
 - d. Wood studs.
 - e. Structural and miscellaneous steel.
 - f. Rough hardware.
 - g. Insulation.
 - h. Doors and frames.
 - i. Door hardware.

- j. Glazing.
- k. Metal studs.
- l. Gypsum board.
- m. Acoustical tile and panels.
- n. Carpet.
- o. Carpet pad.
- p. Plumbing fixtures.
- q. Piping.
- r. Supports and hangers.
- s. Valves.
- t. Mechanical equipment.
- u. Refrigerants.
- v. Electrical conduit.
- w. Copper wiring.
- x. Lighting fixtures.
- y. Lamps.
- z. Ballasts.
- aa. Electrical devices.
- bb. Switchgear and panelboards.
- cc. Transformers.

2. Construction Waste:

- a. Site-clearing waste.
- b. Masonry and CMU.
- c. Lumber.
- d. Metals.
- e. Insulation.
- f. Carpet and pad.
- g. Gypsum board.
- h. Piping.
- i. Electrical conduit.
- j. Packaging: Regardless of salvage/recycle goal indicated above, salvage or recycle 100 percent of the following uncontaminated packaging materials:
 - 1) Paper.
 - 2) Cardboard.
 - 3) Boxes.
 - 4) Plastic sheet and film.
 - 5) Polystyrene packaging.
 - 6) Wood crates.
 - 7) Plastic pails.

1.5 SUBMITTALS

- A. Waste Management Plan: Submit 3 copies of plan within 7 days of date established for the Notice to Proceed.
- B. Waste Reduction Progress Reports: Concurrent with each Application for Payment, submit three copies of report. Include the following information:
 - 1. Material category.
 - 2. Generation point of waste.
 - 3. Total quantity of waste in tons.
 - 4. Quantity of waste salvaged, both estimated and actual in tons.

5. Quantity of waste recycled, both estimated and actual in tons.
 6. Total quantity of waste recovered (salvaged plus recycled) in tons.
 7. Total quantity of waste recovered (salvaged plus recycled) as a percentage of total waste.
- C. **Waste Reduction Calculations:** Before request for Substantial Completion, submit three copies of calculated end-of-Project rates for salvage, recycling, and disposal as a percentage of total waste generated by the Work.
- D. **Records of Donations:** Indicate receipt and acceptance of salvageable waste donated to individuals and organizations. Indicate whether organization is tax exempt.
- E. **Records of Sales:** Indicate receipt and acceptance of salvageable waste sold to individuals and organizations. Indicate whether organization is tax exempt.
- F. **Recycling and Processing Facility Records:** Indicate receipt and acceptance of recyclable waste by recycling and processing facilities licensed to accept them. Include manifests, weight tickets, receipts, and invoices.
- G. **Landfill and Incinerator Disposal Records:** Indicate receipt and acceptance of waste by landfills and incinerator facilities licensed to accept them. Include manifests, weight tickets, receipts, and invoices.
- H. **Statement of Refrigerant Recovery:** Signed by refrigerant recovery technician responsible for recovering refrigerant, stating that all refrigerant that was present was recovered and that recovery was performed according to EPA regulations. Include name and address of technician and date refrigerant was recovered.

1.6 QUALITY ASSURANCE

- A. **Refrigerant Recovery Technician Qualifications:** Certified by EPA-approved certification program.
- B. **Regulatory Requirements:** Comply with hauling and disposal regulations of authorities having jurisdiction.

1.7 WASTE MANAGEMENT PLAN

- A. **General:** Develop plan consisting of waste identification, waste reduction work plan, and cost/revenue analysis. Indicate quantities by weight or volume, but use same units of measure throughout waste management plan.
- B. **Waste Identification:** Indicate anticipated types and quantities of waste generated by the Work. Include estimated quantities and assumptions for estimates.
- C. **Waste Reduction Work Plan:** List each type of waste and whether it will be salvaged, recycled, or disposed of in landfill or incinerator. Include points of waste generation, total quantity of each type of waste, quantity for each means of recovery, and handling and transportation procedures.
 1. **Salvaged Materials for Reuse:** For materials that will be salvaged and reused in this Project, describe methods for preparing salvaged materials before incorporation into the Work.
 2. **Salvaged Materials for Sale:** For materials that will be sold to individuals and organizations, include list of their names, addresses, and telephone numbers.
 3. **Salvaged Materials for Donation:** For materials that will be donated to individuals and organizations, include list of their names, addresses, and telephone numbers.

4. **Recycled Materials:** Include list of local receivers and processors and type of recycled materials each will accept. Include names, addresses, and telephone numbers.
5. **Disposed Materials:** Indicate how and where materials will be disposed of. Include name, address, and telephone number of each landfill and incinerator facility.
6. **Handling and Transportation Procedures:** Include method that will be used for separating recyclable waste including sizes of containers, container labeling, and designated location on Project site where materials separation will be located.

D. **Forms:** Prepare waste management plan on forms included at end of Part 3.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 PLAN IMPLEMENTATION

- A. **General:** Implement waste management plan as approved by **Architect**. Provide handling, containers, storage, signage, transportation, and other items as required to implement waste management plan during the entire duration of the Contract.
 1. Comply with Division 1 Section "Temporary Facilities and Controls" for operation, termination, and removal requirements.
- B. **Waste Management Coordinator:** Engage a waste management coordinator to be responsible for implementing, monitoring, and reporting status of waste management work plan. Coordinator shall be present at Project site full time for duration of Project.
- C. **Site Access and Temporary Controls:** Conduct waste management operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
 1. Designate and label specific areas on Project site necessary for separating materials that are to be salvaged, recycled, reused, donated, and sold.
 2. Comply with Division 1 Section "Temporary Facilities and Controls" for controlling dust and dirt, environmental protection, and noise control.

3.2 RECYCLING DEMOLITION AND CONSTRUCTION WASTE, GENERAL

- A. **General:** Recycle paper and beverage containers used by on-site workers.
- B. **Recycling Incentives:** Revenues, savings, rebates, tax credits, and other incentives received for recycling waste materials shall **accrue to Contractor**.
- C. **Procedures:** Separate recyclable waste from other waste materials, trash, and debris. Separate recyclable waste by type at Project site to the maximum extent practical.
 1. Provide appropriately marked containers or bins for controlling recyclable waste until they are removed from Project site. Include list of acceptable and unacceptable materials at each container and bin.
 - a. Inspect containers and bins for contamination and remove contaminated materials if found.

2. Stockpile processed materials on-site without intermixing with other materials. Place, grade, and shape stockpiles to drain surface water. Cover to prevent windblown dust.
3. Stockpile materials away from construction area. Do not store within drip line of remaining trees.
4. Store components off the ground and protect from the weather.
5. Remove recyclable waste off Owner's property and transport to recycling receiver or processor.

3.3 RECYCLING DEMOLITION WASTE

- A. Concrete: Remove reinforcement and other metals from concrete and sort with other metals.
 1. Pulverize concrete to maximum 4-inch size.
- B. Masonry: Remove metal reinforcement, anchors, and ties from masonry and sort with other metals.
 1. Pulverize masonry to maximum 1-1/2-inch size.
 2. Clean and stack undamaged, whole masonry units on wood pallets.
- C. Wood Materials: Sort and stack members according to size, type, and length. Separate lumber, engineered wood products, panel products, and treated wood materials.
- D. Metals: Separate metals by type.
 1. Structural Steel: Stack members according to size, type of member, and length.
 2. Remove and dispose of bolts, nuts, washers, and other rough hardware.
- E. Gypsum Board: Stack large clean pieces on wood pallets and store in a dry location. Remove edge trim and sort with other metals. Remove and dispose of fasteners.
- F. Acoustical Ceiling Panels and Tile: Stack large clean pieces on wood pallets and store in a dry location.
 1. Separate suspension system, trim, and other metals from panels and tile and sort with other metals.
- G. Carpet: Roll large pieces tightly after removing debris, trash, adhesive, and tack strips.
 1. Store clean, dry carpet and pad in a closed container or trailer provided by Carpet Reclamation Agency or carpet recycler.
- H. Equipment: Drain tanks, piping, and fixtures. Seal openings with caps or plugs. Protect equipment from exposure to weather.
- I. Plumbing Fixtures: Separate by type and size.
- J. Piping: Reduce piping to straight lengths and store by type and size. Separate supports, hangers, valves, sprinklers, and other components by type and size.
- K. Lighting Fixtures: Separate lamps by type and protect from breakage.
- L. Electrical Devices: Separate switches, receptacles, switchgear, transformers, meters, panelboards, circuit breakers, and other devices by type.
- M. Conduit: Reduce conduit to straight lengths and store by type and size.

3.4 RECYCLING CONSTRUCTION WASTE

- A. Asphaltic Concrete Paving: Break up and transport paving to asphalt-recycling facility.
- B. Concrete: Remove reinforcement and other metals from concrete and sort with other metals.
 - 1. Pulverize concrete to maximum 1-1/2-inch size.
- C. Masonry: Remove metal reinforcement, anchors, and ties from masonry and sort with other metals.
 - 1. Pulverize masonry to maximum 3/4-inch size.
 - 2. Clean and stack undamaged, whole masonry units on wood pallets.
- D. Wood Materials: Sort and stack members according to size, type, and length. Separate lumber, engineered wood products, panel products, and treated wood materials.
- E. Metals: Separate metals by type.
 - 1. Structural Steel: Stack members according to size, type of member, and length.
 - 2. Remove and dispose of bolts, nuts, washers, and other rough hardware.
- F. Gypsum Board: Stack large clean pieces on wood pallets and store in a dry location. Remove edge trim and sort with other metals. Remove and dispose of fasteners.
- G. Acoustical Ceiling Panels and Tile: Stack large clean pieces on wood pallets and store in a dry location.
 - 1. Separate suspension system, trim, and other metals from panels and tile and sort with other metals.
- H. Carpet and Pad: Roll large pieces tightly after removing debris, trash, adhesive, and tack strips.
 - 1. Store clean, dry carpet and pad in a closed container or trailer provided by Carpet Reclamation Agency or carpet recycler.
- I. Equipment: Drain tanks, piping, and fixtures. Seal openings with caps or plugs. Protect equipment from exposure to weather.
- J. Plumbing Fixtures: Separate by type and size.
- K. Piping: Reduce piping to straight lengths and store by type and size. Separate supports, hangers, valves, sprinklers, and other components by type and size.
- L. Lighting Fixtures: Separate lamps by type and protect from breakage.
- M. Electrical Devices: Separate switches, receptacles, switchgear, transformers, meters, panelboards, circuit breakers, and other devices by type.
- N. Conduit: Reduce conduit to straight lengths and store by type and size.

3.5 DISPOSAL OF WASTE

- A. General: Except for items or materials to be salvaged, recycled, or otherwise reused, remove waste materials from Project site and legally dispose of them in a landfill or incinerator acceptable to authorities having jurisdiction.

1. Except as otherwise specified, do not allow waste materials that are to be disposed of accumulate on-site.
 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
- B. Burning: Do not burn waste materials.
- C. Disposal: Transport waste materials off Owner's property and legally dispose of them.

PART 4 - END OF SECTION 017419

SECTION 017700 - CLOSEOUT PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for contract closeout, including, but not limited to, the following:
 - 1. Inspection procedures.
 - 2. Warranties.
 - 3. Final cleaning.

1.3 PRE-FINAL INSPECTION

- A. Preliminary Procedures: Before requesting inspection for determining date of Pre-final Inspection, complete the following. List items below that are incomplete in request.
 - 1. Prepare a list of items to be completed and corrected (punch list), the value of items on the list, and reasons why the Work is not complete.
 - 2. Advise Owner of pending insurance changeover requirements.
 - 3. Submit specific warranties, workmanship bonds, maintenance service agreements, final certifications, and similar documents.
 - 4. Obtain and submit releases permitting Owner unrestricted use of the Work and access to services and utilities. Include occupancy permits, operating certificates, and similar releases.
 - 5. Prepare and submit Project Record Documents, operation and maintenance manuals, Final Completion construction photographs, damage or settlement surveys, property surveys, and similar final record information.
 - 6. Deliver tools, spare parts, extra materials, and similar items to location designated by Owner. Label with manufacturer's name and model number where applicable.
 - 7. Make final changeover of permanent locks and deliver keys to Owner. Advise Owner's personnel of changeover in security provisions.
 - 8. Complete startup testing of systems.
 - 9. Submit test/adjust/balance records.
 - 10. Terminate and remove temporary facilities from Project site, along with mockups, construction tools, and similar elements.
 - 11. Advise Owner of changeover in heat and other utilities.
 - 12. Submit changeover information related to Owner's occupancy, use, operation, and maintenance.
 - 13. Complete final cleaning requirements, including touchup painting.
 - 14. Touch up and otherwise repair and restore marred exposed finishes to eliminate visual defects.
- B. Inspection: Submit a written request for Pre-final inspection. On receipt of request, Architect will either proceed with inspection or notify Contractor of unfulfilled requirements.

1. Reinspection: Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.
2. Results of completed inspection will form the basis of requirements for Final Completion.
3. Architect will perform one reinspection.

1.4 FINAL COMPLETION

- A. Preliminary Procedures: Before requesting final inspection for determining date of Final Completion, complete the following:
 1. Submit a final Application for Payment according to Division 1 Section "Payment Procedures."
 2. Complete previous punchlist
- B. Inspection: Submit a written request for final inspection for acceptance. On receipt of request, Architect will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare a final Certificate for Payment after inspection or will notify Contractor of construction that must be completed or corrected before certificate will be issued.
 1. Reinspection: Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.
 2. Architect will perform one reinspection.

1.5 WARRANTIES

- A. Submittal Time: Submit written warranties on request of Architect for designated portions of the Work where commencement of warranties other than date of Final Acceptance is indicated.
- B. Partial Occupancy: Submit properly executed warranties within 15 days of completion of designated portions of the Work that are completed and occupied or used by Owner during construction period by separate agreement with Contractor.
- C. Organize warranty documents into an orderly sequence based on the table of contents of the Project Manual.
 1. Bind warranties and bonds in heavy-duty, 3-ring, vinyl-covered, loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive 8-1/2-by-11-inch paper.
 2. Provide heavy paper dividers with plastic-covered tabs for each separate warranty. Mark tab to identify the product or installation. Provide a typed description of the product or installation, including the name of the product and the name, address, and telephone number of Installer.
 3. Identify each binder on the front and spine with the typed or printed title "WARRANTIES," Project name, and name of Contractor.
 4. Provide 6 copies in binders of all documents.
- D. Provide additional copies of each warranty to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART 3 - EXECUTION

3.1 FINAL CLEANING

- A. General: Provide final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and Federal and local environmental and antipollution regulations.
- B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to condition expected in an average commercial building cleaning and maintenance program. Comply with manufacturer's written instructions.
 - 1. Complete the following cleaning operations before requesting inspection for certification of Substantial Completion for entire Project or for a portion of Project:
 - a. Clean Project site, yard, and grounds, in areas disturbed by construction activities, including landscape development areas, of rubbish, waste material, litter, and other foreign substances.
 - b. Sweep paved areas broom clean. Remove petrochemical spills, stains, and other foreign deposits.
 - c. Rake grounds that are neither planted nor paved to a smooth, even-textured surface.
 - d. Remove tools, construction equipment, machinery, and surplus material from Project site.
 - e. Remove snow and ice to provide safe access to building.
 - f. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to their original condition.
 - g. Remove debris and surface dust from limited access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.
 - h. Sweep concrete floors broom clean in unoccupied spaces.
 - i. Vacuum carpet and similar soft surfaces, removing debris and excess nap; shampoo if visible soil or stains remain.
 - j. Clean transparent materials, including mirrors and glass in doors and windows. Remove glazing compounds and other noticeable, vision-obscuring materials. Replace chipped or broken glass and other damaged transparent materials. Polish mirrors and glass, taking care not to scratch surfaces.
 - k. Remove labels that are not permanent.
 - l. Touch up and otherwise repair and restore marred, exposed finishes and surfaces. Replace finishes and surfaces that cannot be satisfactorily repaired or restored or that already show evidence of repair or restoration.
 - 1) Do not paint over "UL" and similar labels, including mechanical and electrical nameplates.
 - m. Wipe surfaces of mechanical and electrical equipment and similar equipment. Remove excess lubrication, paint and mortar droppings, and other foreign substances.

- n. Replace parts subject to unusual operating conditions.
 - o. Clean plumbing fixtures to a sanitary condition, free of stains, including stains resulting from water exposure.
 - p. Replace disposable air filters and clean permanent air filters. Clean exposed surfaces of diffusers, registers, and grills.
 - q. Clean ducts, blowers, and coils if units were operated without filters during construction.
 - r. Clean light fixtures, lamps, globes, and reflectors to function with full efficiency. Replace burned-out bulbs, and those noticeably dimmed by hours of use, and defective and noisy starters in fluorescent and mercury vapor fixtures to comply with requirements for new fixtures.
 - s. Leave Project clean and ready for occupancy.
- C. Pest Control: Engage an experienced, licensed exterminator to make a final inspection and rid Project of rodents, insects, and other pests. Prepare a report.

END OF SECTION 017700

SECTION 017823 - OPERATION AND MAINTENANCE DATA

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for preparing operation and maintenance manuals, including the following:
 - 1. Operation and maintenance documentation directory.
 - 2. Emergency manuals.
 - 3. Operation manuals for systems, subsystems, and equipment.
 - 4. Product maintenance manuals.
 - 5. Systems and equipment maintenance manuals.

1.3 DEFINITIONS

- A. System: An organized collection of parts, equipment, or subsystems united by regular interaction.
- B. Subsystem: A portion of a system with characteristics similar to a system.

1.4 CLOSEOUT SUBMITTALS

- A. Manual Content: Operations and maintenance manual content is specified in individual Specification Sections to be reviewed at the time of Section submittals. Submit reviewed manual content formatted and organized as required by this Section.
 - 1. Architect will comment on whether content of operations and maintenance submittals are acceptable.
 - 2. Where applicable, clarify and update reviewed manual content to correspond to revisions and field conditions.
- B. Format: Submit operations and maintenance manuals in the following format:
 - 1. PDF electronic file. Assemble each manual into a composite electronically indexed file. Submit on digital media acceptable to Architect.
 - a. Name each indexed document file in composite electronic index with applicable item name. Include a complete electronically linked operation and maintenance directory.
 - b. Enable inserted reviewer comments on draft submittals.
 - 2. Three paper copies. Include a complete operation and maintenance directory. Enclose title pages and directories in clear plastic sleeves. Architect will return two copies.

- C. **Initial Manual Submittal:** Submit draft copy of each manual at least 30 days before commencing demonstration and training. Architect will comment on whether general scope and content of manual are acceptable.
- D. **Final Manual Submittal:** Submit each manual in final form prior to requesting inspection for Substantial Completion and at least 15 days before commencing demonstration and training. Architect will return copy with comments.
 - 1. Correct or revise each manual to comply with Architect's comments. Submit copies of each corrected manual within 15 days of receipt of Architect's comments and prior to commencing demonstration and training.

PART 2 - PRODUCTS

2.1 OPERATION AND MAINTENANCE DOCUMENTATION DIRECTORY

- A. **Directory:** Prepare a single, comprehensive directory of emergency, operation, and maintenance data and materials, listing items and their location to facilitate ready access to desired information. Include a section in the directory for each of the following:
 - 1. List of documents.
 - 2. List of systems.
 - 3. List of equipment.
 - 4. Table of contents.
- B. **List of Systems and Subsystems:** List systems alphabetically. Include references to operation and maintenance manuals that contain information about each system.
- C. **List of Equipment:** List equipment for each system, organized alphabetically by system. For pieces of equipment not part of system, list alphabetically in separate list.
- D. **Tables of Contents:** Include a table of contents for each emergency, operation, and maintenance manual.
- E. **Identification:** In the documentation directory and in each operation and maintenance manual, identify each system, subsystem, and piece of equipment with same designation used in the Contract Documents. If no designation exists, assign a designation according to ASHRAE Guideline 4, "Preparation of Operating and Maintenance Documentation for Building Systems."

2.2 REQUIREMENTS FOR EMERGENCY, OPERATION, AND MAINTENANCE MANUALS

- A. **Organization:** Unless otherwise indicated, organize each manual into a separate section for each system and subsystem, and a separate section for each piece of equipment not part of a system. Each manual shall contain the following materials, in the order listed:
 - 1. Title page.
 - 2. Table of contents.
 - 3. Manual contents.
- B. **Title Page:** Include the following information:
 - 1. Subject matter included in manual.
 - 2. Name and address of Project.

3. Name and address of Owner.
 4. Date of submittal.
 5. Name and contact information for Contractor.
 6. Name and contact information for Construction Manager.
 7. Name and contact information for Architect.
 8. Name and contact information for Commissioning Authority.
 9. Names and contact information for major consultants to the Architect that designed the systems contained in the manuals.
 10. Cross-reference to related systems in other operation and maintenance manuals.
- C. Table of Contents: List each product included in manual, identified by product name, indexed to the content of the volume, and cross-referenced to Specification Section number in Project Manual.
1. If operation or maintenance documentation requires more than one volume to accommodate data, include comprehensive table of contents for all volumes in each volume of the set.
- D. Manual Contents: Organize into sets of manageable size. Arrange contents alphabetically by system, subsystem, and equipment. If possible, assemble instructions for subsystems, equipment, and components of one system into a single binder.
- E. Manuals, Electronic Files: Submit manuals in the form of a multiple file composite electronic PDF file for each manual type required.
1. Electronic Files: Use electronic files prepared by manufacturer where available. Where scanning of paper documents is required, configure scanned file for minimum readable file size.
 2. File Names and Bookmarks: Enable bookmarking of individual documents based on file names. Name document files to correspond to system, subsystem, and equipment names used in manual directory and table of contents. Group documents for each system and subsystem into individual composite bookmarked files, then create composite manual, so that resulting bookmarks reflect the system, subsystem, and equipment names in a readily navigated file tree. Configure electronic manual to display bookmark panel on opening file.
- F. Manuals, Paper Copy: Submit manuals in the form of hard copy, bound and labeled volumes.
1. Binders: Heavy-duty, three-ring, vinyl-covered, loose-leaf binders, in thickness necessary to accommodate contents, sized to hold 8-1/2-by-11-inch paper; with clear plastic sleeve on spine to hold label describing contents and with pockets inside covers to hold folded oversize sheets.
 - a. If two or more binders are necessary to accommodate data of a system, organize data in each binder into groupings by subsystem and related components. Cross-reference other binders if necessary to provide essential information for proper operation or maintenance of equipment or system.
 - b. Identify each binder on front and spine, with printed title "OPERATION AND MAINTENANCE MANUAL," Project title or name, and subject matter of contents, and indicate Specification Section number on bottom of spine. Indicate volume number for multiple-volume sets.
 2. Dividers: Heavy-paper dividers with plastic-covered tabs for each section of the manual. Mark each tab to indicate contents. Include typed list of products and major components of equipment included in the section on each divider, cross-referenced to Specification Section number and title of Project Manual.
 3. Protective Plastic Sleeves: Transparent plastic sleeves designed to enclose diagnostic software storage media for computerized electronic equipment.
 4. Supplementary Text: Prepared on 8-1/2-by-11-inch white bond paper.
 5. Drawings: Attach reinforced, punched binder tabs on drawings and bind with text.

- a. If oversize drawings are necessary, fold drawings to same size as text pages and use as foldouts.
- b. If drawings are too large to be used as foldouts, fold and place drawings in labeled envelopes and bind envelopes in rear of manual. At appropriate locations in manual, insert typewritten pages indicating drawing titles, descriptions of contents, and drawing locations.

2.3 EMERGENCY MANUALS

- A. Content: Organize manual into a separate section for each of the following:
 1. Type of emergency.
 2. Emergency instructions.
 3. Emergency procedures.
- B. Type of Emergency: Where applicable for each type of emergency indicated below, include instructions and procedures for each system, subsystem, piece of equipment, and component:
 1. Fire.
 2. Flood.
 3. Gas leak.
 4. Water leak.
 5. Power failure.
 6. Water outage.
 7. System, subsystem, or equipment failure.
 8. Chemical release or spill.
- C. Emergency Instructions: Describe and explain warnings, trouble indications, error messages, and similar codes and signals. Include responsibilities of Owner's operating personnel for notification of Installer, supplier, and manufacturer to maintain warranties.
- D. Emergency Procedures: Include the following, as applicable:
 1. Instructions on stopping.
 2. Shutdown instructions for each type of emergency.
 3. Operating instructions for conditions outside normal operating limits.
 4. Required sequences for electric or electronic systems.
 5. Special operating instructions and procedures.

2.4 OPERATION MANUALS

- A. Content: In addition to requirements in this Section, include operation data required in individual Specification Sections and the following information:
 1. System, subsystem, and equipment descriptions. Use designations for systems and equipment indicated on Contract Documents.
 2. Performance and design criteria if Contractor has delegated design responsibility.
 3. Operating standards.
 4. Operating procedures.
 5. Operating logs.
 6. Wiring diagrams.
 7. Control diagrams.
 8. Piped system diagrams.
 9. Precautions against improper use.

10. License requirements including inspection and renewal dates.

B. Descriptions: Include the following:

1. Product name and model number. Use designations for products indicated on Contract Documents.
2. Manufacturer's name.
3. Equipment identification with serial number of each component.
4. Equipment function.
5. Operating characteristics.
6. Limiting conditions.
7. Performance curves.
8. Engineering data and tests.
9. Complete nomenclature and number of replacement parts.

C. Operating Procedures: Include the following, as applicable:

1. Startup procedures.
2. Equipment or system break-in procedures.
3. Routine and normal operating instructions.
4. Regulation and control procedures.
5. Instructions on stopping.
6. Normal shutdown instructions.
7. Seasonal and weekend operating instructions.
8. Required sequences for electric or electronic systems.
9. Special operating instructions and procedures.

D. Systems and Equipment Controls: Describe the sequence of operation, and diagram controls as installed.

E. Piped Systems: Diagram piping as installed, and identify color-coding where required for identification.

2.5 PRODUCT MAINTENANCE MANUALS

A. Content: Organize manual into a separate section for each product, material, and finish. Include source information, product information, maintenance procedures, repair materials and sources, and warranties and bonds, as described below.

B. Source Information: List each product included in manual, identified by product name and arranged to match manual's table of contents. For each product, list name, address, and telephone number of Installer or supplier and maintenance service agent, and cross-reference Specification Section number and title in Project Manual and drawing or schedule designation or identifier where applicable.

C. Product Information: Include the following, as applicable:

1. Product name and model number.
2. Manufacturer's name.
3. Color, pattern, and texture.
4. Material and chemical composition.
5. Reordering information for specially manufactured products.

D. Maintenance Procedures: Include manufacturer's written recommendations and the following:

1. Inspection procedures.
2. Types of cleaning agents to be used and methods of cleaning.

3. List of cleaning agents and methods of cleaning detrimental to product.
 4. Schedule for routine cleaning and maintenance.
 5. Repair instructions.
- E. **Repair Materials and Sources:** Include lists of materials and local sources of materials and related services.
- F. **Warranties and Bonds:** Include copies of warranties and bonds and lists of circumstances and conditions that would affect validity of warranties or bonds.
1. Include procedures to follow and required notifications for warranty claims.

2.6 SYSTEMS AND EQUIPMENT MAINTENANCE MANUALS

- A. **Content:** For each system, subsystem, and piece of equipment not part of a system, include source information, manufacturers' maintenance documentation, maintenance procedures, maintenance and service schedules, spare parts list and source information, maintenance service contracts, and warranty and bond information, as described below.
- B. **Source Information:** List each system, subsystem, and piece of equipment included in manual, identified by product name and arranged to match manual's table of contents. For each product, list name, address, and telephone number of Installer or supplier and maintenance service agent, and cross-reference Specification Section number and title in Project Manual and drawing or schedule designation or identifier where applicable.
- C. **Manufacturers' Maintenance Documentation:** Manufacturers' maintenance documentation including the following information for each component part or piece of equipment:
1. Standard maintenance instructions and bulletins.
 2. Drawings, diagrams, and instructions required for maintenance, including disassembly and component removal, replacement, and assembly.
 3. Identification and nomenclature of parts and components.
 4. List of items recommended to be stocked as spare parts.
- D. **Maintenance Procedures:** Include the following information and items that detail essential maintenance procedures:
1. Test and inspection instructions.
 2. Troubleshooting guide.
 3. Precautions against improper maintenance.
 4. Disassembly; component removal, repair, and replacement; and reassembly instructions.
 5. Aligning, adjusting, and checking instructions.
 6. Demonstration and training video recording, if available.
- E. **Maintenance and Service Schedules:** Include service and lubrication requirements, list of required lubricants for equipment, and separate schedules for preventive and routine maintenance and service with standard time allotment.
1. **Scheduled Maintenance and Service:** Tabulate actions for daily, weekly, monthly, quarterly, semiannual, and annual frequencies.
 2. **Maintenance and Service Record:** Include manufacturers' forms for recording maintenance.

- F. Spare Parts List and Source Information: Include lists of replacement and repair parts, with parts identified and cross-referenced to manufacturers' maintenance documentation and local sources of maintenance materials and related services.
- G. Maintenance Service Contracts: Include copies of maintenance agreements with name and telephone number of service agent.
- H. Warranties and Bonds: Include copies of warranties and bonds and lists of circumstances and conditions that would affect validity of warranties or bonds.
 - 1. Include procedures to follow and required notifications for warranty claims.

PART 3 - EXECUTION

3.1 MANUAL PREPARATION

- A. Operation and Maintenance Documentation Directory: Prepare a separate manual that provides an organized reference to emergency, operation, and maintenance manuals.
- B. Emergency Manual: Assemble a complete set of emergency information indicating procedures for use by emergency personnel and by Owner's operating personnel for types of emergencies indicated.
- C. Product Maintenance Manual: Assemble a complete set of maintenance data indicating care and maintenance of each product, material, and finish incorporated into the Work.
- D. Operation and Maintenance Manuals: Assemble a complete set of operation and maintenance data indicating operation and maintenance of each system, subsystem, and piece of equipment not part of a system.
 - 1. Engage a factory-authorized service representative to assemble and prepare information for each system, subsystem, and piece of equipment not part of a system.
 - 2. Prepare a separate manual for each system and subsystem, in the form of an instructional manual for use by Owner's operating personnel.
- E. Manufacturers' Data: Where manuals contain manufacturers' standard printed data, include only sheets pertinent to product or component installed. Mark each sheet to identify each product or component incorporated into the Work. If data include more than one item in a tabular format, identify each item using appropriate references from the Contract Documents. Identify data applicable to the Work and delete references to information not applicable.
 - 1. Prepare supplementary text if manufacturers' standard printed data are not available and where the information is necessary for proper operation and maintenance of equipment or systems.
- F. Drawings: Prepare drawings supplementing manufacturers' printed data to illustrate the relationship of component parts of equipment and systems and to illustrate control sequence and flow diagrams. Coordinate these drawings with information contained in record Drawings to ensure correct illustration of completed installation.
 - 1. Do not use original project record documents as part of operation and maintenance manuals.
 - 2. Comply with requirements of newly prepared record Drawings in Division 01 Section "Project Record Documents."

- G. Comply with Division 01 Section "Closeout Procedures" for schedule for submitting operation and maintenance documentation.

END OF SECTION 017823

SECTION 017839 - PROJECT RECORD DOCUMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for Project Record Documents, including the following:
 - 1. Record Drawings.
 - 2. Record Specifications.
 - 3. Record Product Data.

1.3 SUBMITTALS

- A. Record Drawings: Comply with the following:
 - 1. Number of Copies: Submit one set of marked-up Record Prints.
- B. Record Specifications: Submit one copy of Project's Specifications, including addenda and contract modifications.
- C. Record Product Data: Submit one copy of each Product Data submittal.
 - 1. Where Record Product Data is required as part of operation and maintenance manuals, submit marked-up Product Data as an insert in manual instead of submittal as Record Product Data.

PART 2 - PRODUCTS

2.1 RECORD DRAWINGS

- A. Record Prints: Maintain one set of blue- or black-line white prints of the Contract Drawings and Shop Drawings.
 - 1. Preparation: Mark Record Prints to show the actual installation where installation varies from that shown originally. Require individual or entity who obtained record data, whether individual or entity is Installer, subcontractor, or similar entity, to prepare the marked-up Record Prints.
 - a. Give particular attention to information on concealed elements that would be difficult to identify or measure and record later.
 - b. Accurately record information in an understandable drawing technique.
 - c. Record data as soon as possible after obtaining it. Record and check the markup before enclosing concealed installations.

2. Content: Types of items requiring marking include, but are not limited to, the following:

- a. Dimensional changes to Drawings.
- b. Revisions to details shown on Drawings.
- c. Depths of foundations below first floor.
- d. Locations and depths of underground utilities.
- e. Revisions to routing of piping and conduits.
- f. Revisions to electrical circuitry.
- g. Actual equipment locations.
- h. Duct size and routing.
- i. Locations of concealed internal utilities.
- j. Changes made by Change Order or Construction Change Directive.
- k. Changes made following Architect's written orders.
- l. Details not on the original Contract Drawings.
- m. Field records for variable and concealed conditions.
- n. Record information on the Work that is shown only schematically.

3. Mark the Contract Drawings or Shop Drawings, whichever is most capable of showing actual physical conditions, completely and accurately. If Shop Drawings are marked, show cross-reference on the Contract Drawings.
4. Mark record sets with erasable, red-colored pencil. Use other colors to distinguish between changes for different categories of the Work at same location.
5. Mark important additional information that was either shown schematically or omitted from original Drawings.
6. Note Construction Change Directive numbers, alternate numbers, Change Order numbers, and similar identification, where applicable.

B. Format: Identify and date each Record Drawing; include the designation "PROJECT RECORD DRAWING" in a prominent location.

2.2 RECORD SPECIFICATIONS

A. Preparation: Mark Specifications to indicate the actual product installation where installation varies from that indicated in Specifications, addenda, and contract modifications.

1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
2. Mark copy with the proprietary name and model number of products, materials, and equipment furnished, including substitutions and product options selected.
3. Record the name of manufacturer, supplier, Installer, and other information necessary to provide a record of selections made.
4. For each principal product, indicate whether Record Product Data has been submitted in operation and maintenance manuals instead of submitted as Record Product Data.
5. Note related Change Orders and Record Drawings where applicable.

2.3 RECORD PRODUCT DATA

A. Preparation: Mark Product Data to indicate the actual product installation where installation varies substantially from that indicated in Product Data submittal.

1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.

2. Include significant changes in the product delivered to Project site and changes in manufacturer's written instructions for installation.
3. Note related Change Orders and Record Drawings where applicable.

2.4 MISCELLANEOUS RECORD SUBMITTALS

- A. Assemble miscellaneous records required by other Specification Sections for miscellaneous record keeping and submittal in connection with actual performance of the Work. Bind or file miscellaneous records and identify each, ready for continued use and reference.

PART 3 - EXECUTION

3.1 RECORDING AND MAINTENANCE

- A. Recording: Maintain one copy of each submittal during the construction period for Project Record Document purposes. Post changes and modifications to Project Record Documents as they occur; do not wait until the end of Project.
- B. Maintenance of Record Documents and Samples: Store Record Documents and Samples in the field office apart from the Contract Documents used for construction. Do not use Project Record Documents for construction purposes. Maintain Record Documents in good order and in a clean, dry, legible condition, protected from deterioration and loss. Provide access to Project Record Documents for Architect's reference during normal working hours.

END OF SECTION 017839

SECTION 024116 - STRUCTURE DEMOLITION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Demolition and removal of buildings and site improvements.
 - 2. Removing below-grade construction.
 - 3. Disconnecting, capping or sealing, and removing site utilities.

1.3 DEFINITIONS

- A. Remove: Detach items from existing construction and legally dispose of them off-site unless indicated to be removed and salvaged.

1.4 MATERIALS OWNERSHIP

- A. Unless otherwise indicated, demolition waste becomes property of Contractor.

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified refrigerant recovery technician.
- B. Proposed Protection Measures: Submit informational report, including Drawings, that indicates the measures proposed for protecting individuals and property, for environmental protection , for dust control and , for noise control. Indicate proposed locations and construction of barriers.
- C. Schedule of Building Demolition Activities: Indicate the following:
 - 1. Detailed sequence of demolition work, with starting and ending dates for each activity.
 - 2. Shutoff and capping of utility services.
- D. Predemolition Photographs or Video: Show existing conditions of adjoining construction and site improvements, including finish surfaces, that might be misconstrued as damage caused by demolition operations.
- E. Landfill Records: Indicate receipt and acceptance of hazardous wastes by a landfill facility licensed to accept hazardous wastes.

- F. Statement of Refrigerant Recovery: Signed by refrigerant recovery technician responsible for recovering refrigerant, stating that all refrigerant that was present was recovered and that recovery was performed according to EPA regulations. Include name and address of technician and date refrigerant was recovered.

1.6 QUALITY ASSURANCE

- A. Refrigerant Recovery Technician Qualifications: Certified by EPA-approved certification program.
- B. Regulatory Requirements: Comply with governing EPA notification regulations before beginning demolition. Comply with hauling and disposal regulations of authorities having jurisdiction.
- C. Standards: Comply with ANSI/ASSE A10.6 and NFPA 241.

1.7 PROJECT CONDITIONS

- A. Buildings to be demolished will be vacated and their use discontinued before start of the Work.
- B. Owner assumes no responsibility for buildings and structures to be demolished.
 - 1. Conditions existing at time of inspection for bidding purpose will be maintained by Owner as far as practical.
- C. Hazardous Materials: It is not expected that hazardous materials will be encountered in the Work.
 - 1. Hazardous materials will be removed by Owner before start of the Work.
 - 2. If materials suspected of containing hazardous materials are encountered, do not disturb; immediately notify Architect and Owner. Hazardous materials will be removed by Owner under a separate contract.
- D. On-site storage or sale of removed items or materials is not permitted.

1.8 COORDINATION

- A. Arrange demolition schedule so as not to interfere with Owner's on-site operations.

PART 2 - PRODUCTS

2.1 SOIL MATERIALS

- A. Satisfactory Soils: Comply with requirements in Section 312000 "Earth Moving."

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify that utilities have been disconnected and capped before starting demolition operations.

- B. Review Project Record Documents of existing construction provided by Owner. Owner does not guarantee that existing conditions are same as those indicated in Project Record Documents.
- C. Verify that hazardous materials have been remediated before proceeding with building demolition operations.

3.2 PREPARATION

- A. Refrigerant: Remove refrigerant from mechanical equipment according to 40 CFR 82 and regulations of authorities having jurisdiction before starting demolition.
- B. Existing Utilities: Locate, identify, disconnect, and seal or cap off indicated utilities serving buildings and structures to be demolished.
 1. Arrange to shut off indicated utilities with utility companies.
 2. If removal, relocation, or abandonment of utility services will affect adjacent occupied buildings, then provide temporary utilities that bypass buildings and structures to be demolished and that maintain continuity of service to other buildings and structures.
 3. Cut off pipe or conduit a minimum of 24 inches below grade. Cap, valve, or plug and seal remaining portion of pipe or conduit after bypassing according to requirements of authorities having jurisdiction.
- C. Existing Utilities: See plumbing and electrical Sections for shutting off, disconnecting, removing, and sealing or capping utilities. Do not start demolition work until utility disconnecting and sealing have been completed and verified in writing.
- D. Temporary Shoring: Provide and maintain interior and exterior shoring, bracing, or structural support to preserve stability and prevent unexpected movement or collapse of construction being demolished.
 1. Strengthen or add new supports when required during progress of demolition.

3.3 PROTECTION

- A. Existing Facilities: Protect adjacent walkways, loading docks, building entries, and other building facilities during demolition operations. Maintain exits from existing buildings.
- B. Existing Utilities: Maintain utility services to remain and protect from damage during demolition operations.
- C. Temporary Protection: Erect temporary protection, such as walks, fences, railings, canopies, and covered passageways, where required by authorities having jurisdiction and as indicated. Comply with requirements in Section 015000 "Temporary Facilities and Controls."
 1. Protect adjacent buildings and facilities from damage due to demolition activities.
 2. Protect existing site improvements, appurtenances, and landscaping to remain.
 3. Erect a plainly visible fence around drip line of individual trees or around perimeter drip line of groups of trees to remain.
 4. Provide temporary barricades and other protection required to prevent injury to people and damage to adjacent buildings and facilities to remain.
 5. Provide protection to ensure safe passage of people around building demolition area and to and from occupied portions of adjacent buildings and structures.

- D. Remove temporary barriers and protections where hazards no longer exist. Where open excavations or other hazardous conditions remain, leave temporary barriers and protections in place.

3.4 DEMOLITION, GENERAL

- A. General: Demolish indicated buildings and site improvements completely. Use methods required to complete the Work within limitations of governing regulations and as follows:
 - 1. Do not use cutting torches until work area is cleared of flammable materials. Maintain portable fire-suppression devices during flame-cutting operations.
 - 2. Maintain fire watch during and for at least 4 hours after flame cutting operations.
 - 3. Maintain adequate ventilation when using cutting torches.
 - 4. Locate building demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.
- B. Site Access and Temporary Controls: Conduct building demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
- C. Explosives: Use of explosives is not permitted.

3.5 DEMOLITION BY MECHANICAL MEANS

- A. Proceed with demolition of structural framing members systematically, from higher to lower level. Complete building demolition operations above each floor or tier before disturbing supporting members on the next lower level.
- B. Below-Grade Construction: Demolish foundation walls and other below-grade construction that are within footprint of new construction and extending 5 feet outside footprint indicated for new construction. Abandon below-grade construction outside this area.
 - 1. Remove below-grade construction, including basements, foundation walls, and footings, completely.
- C. Existing Utilities: Demolish existing utilities and below-grade utility structures that are within 5 feet outside footprint indicated for new construction. Abandon utilities outside this area.
 - 1. Fill abandoned utility structures with satisfactory soil materials according to backfill requirements in Section 312000 "Earth Moving."
 - 2. Piping: Disconnect piping at unions, flanges, valves, or fittings.
 - 3. Wiring Ducts: Disassemble into unit lengths and remove plug-in and disconnecting devices.
- D. Existing Utilities: Demolish and remove existing utilities and below-grade utility structures.
 - 1. Piping: Disconnect piping at unions, flanges, valves, or fittings.
 - 2. Wiring Ducts: Disassemble into unit lengths and remove plug-in and disconnecting devices.

3.6 SITE RESTORATION

- A. Below-Grade Areas: Completely fill below-grade areas and voids resulting from building demolition operations with satisfactory soil materials according to backfill requirements in Section 312000 "Earth Moving."

- B. Site Grading: Uniformly rough grade area of demolished construction to a smooth surface, free from irregular surface changes. Provide a smooth transition between adjacent existing grades and new grades.

3.7 REPAIRS

- A. Promptly repair damage to adjacent buildings caused by demolition operations.

3.8 DISPOSAL OF DEMOLISHED MATERIALS

- A. Remove demolition waste materials from Project site and legally dispose of them in an EPA-approved landfill acceptable to authorities having jurisdiction. See Section 017419 "Construction Waste Management and Disposal" for recycling and disposal of demolition waste.
 - 1. Do not allow demolished materials to accumulate on-site.
 - 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
- B. Do not burn demolished materials.

3.9 CLEANING

- A. Clean adjacent structures and improvements of dust, dirt, and debris caused by building demolition operations. Return adjacent areas to condition existing before building demolition operations began.
 - 1. Clean roadways of debris caused by debris transport.

END OF SECTION 024116

SECTION 033000 - CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes cast-in-place concrete, including formwork, reinforcement, concrete materials, mixture design, placement procedures, and finishes, for the following:
 - 1. Footings.
 - 2. Slabs-on-grade.

1.3 DEFINITIONS

- A. Cementitious Materials: Portland cement alone or in combination with one or more of the following: blended hydraulic cement, fly ash and other pozzolans, ground granulated blast-furnace slag, and silica fume; subject to compliance with requirements.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Design Mixtures: For each concrete mixture. Submit alternate design mixtures when characteristics of materials, Project conditions, weather, test results, or other circumstances warrant adjustments.
 - 1. Indicate amounts of mixing water to be withheld for later addition at Project site.
- C. Steel Reinforcement Shop Drawings: Placing drawings that detail fabrication, bending, and placement. Include bar sizes, lengths, material, grade, bar schedules, stirrup spacing, bent bar diagrams, bar arrangement, splices and laps, mechanical connections, tie spacing, hoop spacing, and supports for concrete reinforcement.

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer.
- B. Welding certificates.
- C. Material Certificates: For each of the following, signed by manufacturers:
 - 1. Cementitious materials.
 - 2. Admixtures.
 - 3. Form materials and form-release agents.

4. Steel reinforcement and accessories.
 5. Curing compounds.
 6. Floor and slab treatments.
 7. Bonding agents.
 8. Adhesives.
 9. Vapor retarders.
 10. Semirigid joint filler.
 11. Repair materials.
- D. Material Test Reports: For the following, from a qualified testing agency, indicating compliance with requirements:
1. Aggregates. Include service record data indicating absence of deleterious expansion of concrete due to alkali aggregate reactivity.
- E. Floor surface flatness and levelness measurements indicating compliance with specified tolerances.
- F. Field quality-control reports.
- G. Minutes of preinstallation conference.

1.6 QUALITY ASSURANCE

- A. Manufacturer Qualifications: A firm experienced in manufacturing ready-mixed concrete products and that complies with ASTM C 94/C 94M requirements for production facilities and equipment.
1. Manufacturer certified according to NRMCA's "Certification of Ready Mixed Concrete Production Facilities."
- B. Testing Agency Qualifications: An independent agency, acceptable to authorities having jurisdiction, qualified according to ASTM C 1077 and ASTM E 329 for testing indicated.
1. Personnel conducting field tests shall be qualified as ACI Concrete Field Testing Technician, Grade 1, according to ACI CP-1 or an equivalent certification program.
 2. Personnel performing laboratory tests shall be ACI-certified Concrete Strength Testing Technician and Concrete Laboratory Testing Technician - Grade I. Testing Agency laboratory supervisor shall be an ACI-certified Concrete Laboratory Testing Technician - Grade II.
- C. Source Limitations: Obtain each type or class of cementitious material of the same brand from the same manufacturer's plant, obtain aggregate from single source, and obtain admixtures from single source from single manufacturer.
- D. Welding Qualifications: Qualify procedures and personnel according to AWS D1.4/D 1.4M, "Structural Welding Code - Reinforcing Steel."
- E. ACI Publications: Comply with the following unless modified by requirements in the Contract Documents:
1. ACI 301, "Specifications for Structural Concrete," Sections 1 through 5.
 2. ACI 117, "Specifications for Tolerances for Concrete Construction and Materials."
- F. Concrete Testing Service: Owner shall engage a qualified independent testing agency to perform material evaluation tests and to design concrete mixtures.

- G. Preinstallation Conference: Conduct conference at Project site.
 - 1. Before submitting design mixtures, review concrete design mixture and examine procedures for ensuring quality of concrete materials. Require representatives of each entity directly concerned with cast-in-place concrete to attend, including the following:
 - a. Contractor's superintendent.
 - b. Independent testing agency responsible for concrete design mixtures.
 - c. Ready-mix concrete manufacturer.
 - d. Concrete subcontractor.
 - 2. Review special inspection and testing and inspecting agency procedures for field quality control, concrete finishes and finishing, cold- and hot-weather concreting procedures, curing procedures, construction contraction and isolation joints, and joint-filler strips, vapor-retarder installation, anchor rod and anchorage device installation tolerances, steel reinforcement installation, floor and slab flatness and levelness measurement, concrete repair procedures, and concrete protection.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Steel Reinforcement: Deliver, store, and handle steel reinforcement to prevent bending and damage.

PART 2 - PRODUCTS

2.1 FORM-FACING MATERIALS

- A. Smooth-Formed Finished Concrete: Form-facing panels that will provide continuous, true, and smooth concrete surfaces. Furnish in largest practicable sizes to minimize number of joints.
 - 1. Plywood, metal, or other approved panel materials.
- B. Rough-Formed Finished Concrete: Plywood, lumber, metal, or another approved material. Provide lumber dressed on at least two edges and one side for tight fit.
- C. Chamfer Strips: Wood, metal, PVC, or rubber strips, 3/4 by 3/4 inch, minimum.
- D. Form-Release Agent: Commercially formulated form-release agent that will not bond with, stain, or adversely affect concrete surfaces and will not impair subsequent treatments of concrete surfaces.
 - 1. Formulate form-release agent with rust inhibitor for steel form-facing materials.
- E. Form Ties: Factory-fabricated, removable or snap-off metal or glass-fiber-reinforced plastic form ties designed to resist lateral pressure of fresh concrete on forms and to prevent spalling of concrete on removal.
 - 1. Furnish units that will leave no corrodible metal closer than 1 inch to the plane of exposed concrete surface.
 - 2. Furnish ties that, when removed, will leave holes no larger than 1 inch in diameter in concrete surface.

2.2 STEEL REINFORCEMENT

- A. Reinforcing Bars: ASTM A 615/A 615M, Grade 60, deformed.
- B. Plain-Steel Wire: ASTM A 82/A 82M, as drawn.
- C. Plain-Steel Welded Wire Reinforcement: ASTM A 185/A 185M, plain, fabricated from as-drawn steel wire into flat sheets.

2.3 REINFORCEMENT ACCESSORIES

- A. Joint Dowel Bars: ASTM A 615/A 615M, Grade 60, plain-steel bars, cut true to length with ends square and free of burrs.
- B. Bar Supports: Bolsters, chairs, spacers, and other devices for spacing, supporting, and fastening reinforcing bars and welded wire reinforcement in place. Manufacture bar supports from steel wire, plastic, or precast concrete according to CRSI's "Manual of Standard Practice," of greater compressive strength than concrete and as follows:
 - 1. For concrete surfaces exposed to view where legs of wire bar supports contact forms, use CRSI Class 1 plastic-protected steel wire or CRSI Class 2 stainless-steel bar supports.
 - 2. For slabs-on-grade, use plastic coated or stainless steel supports with sand plates or horizontal runners where base material will not support chair legs. Alternately, use concrete blocks having a compressive strength equal to or greater than the concrete being placed. Hooking of welded wire fabric is not permitted.

2.4 CONCRETE MATERIALS

- A. Cementitious Material: Use the following cementitious materials, of the same type, brand, and source, throughout Project:
 - 1. Portland Cement: ASTM C 150, Type I or Type II.
 - a. Fly Ash: ASTM C 618, Class F.
 - b. Ground Granulated Blast-Furnace Slag: ASTM C 989, Grade 100 or 120.
- B. Normal-Weight Aggregates: ASTM C 33, Class 3S coarse aggregate or better, graded. Provide aggregates from a single source with documented service record data of at least 10 years' satisfactory service in similar applications and service conditions using similar aggregates and cementitious materials.
 - 1. Maximum Coarse-Aggregate Size: 1 inch nominal.
 - 2. Fine Aggregate: Free of materials with deleterious reactivity to alkali in cement.
- C. Water: ASTM C 94/C 94M and potable.

2.5 ADMIXTURES

- A. Air-Entraining Admixture: ASTM C 260.

- B. Chemical Admixtures: Provide admixtures certified by manufacturer to be compatible with other admixtures and that will not contribute water-soluble chloride ions exceeding those permitted in hardened concrete. Do not use calcium chloride or admixtures containing calcium chloride.
 - 1. Water-Reducing Admixture: ASTM C 494/C 494M, Type A.
 - 2. Retarding Admixture: ASTM C 494/C 494M, Type B.
 - 3. Water-Reducing and Retarding Admixture: ASTM C 494/C 494M, Type D.
 - 4. High-Range, Water-Reducing Admixture: ASTM C 494/C 494M, Type F.
 - 5. High-Range, Water-Reducing and Retarding Admixture: ASTM C 494/C 494M, Type G.
 - 6. Plasticizing and Retarding Admixture: ASTM C 1017/C 1017M, Type II.

2.6 VAPOR RETARDERS

- A. Sheet Vapor Retarder: ASTM E 1745, Class C or polyethylene sheet, ASTM D 4397, not less than 10 mils thick.. Include manufacturer's recommended adhesive or pressure-sensitive joint tape.

2.7 LIQUID FLOOR TREATMENTS

- A. VOC Content: Liquid floor treatments shall have a VOC content of 200 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
- B. Penetrating Liquid Floor Treatment: Clear, chemically reactive, waterborne solution of inorganic silicate or silicate materials and proprietary components; odorless; that penetrates, hardens, and densifies concrete surfaces.

2.8 CURING MATERIALS

- A. Evaporation Retarder: Waterborne, monomolecular film forming, manufactured for application to fresh concrete.
- B. Absorptive Cover: AASHTO M 182, Class 2, burlap cloth made from jute or kenaf, weighing approximately 9 oz./sq. yd. when dry.
- C. Moisture-Retaining Cover: ASTM C 171, polyethylene film or white burlap-polyethylene sheet.
- D. Water: Potable.
- E. Clear, Waterborne, Membrane-Forming Curing Compound: ASTM C 309, Type I, Class B, dissipating.

2.9 RELATED MATERIALS

- A. Expansion- and Isolation-Joint-Filler Strips: ASTM D 1751, asphalt-saturated cellulosic fiber or ASTM D 1752, cork or self-expanding cork.
- B. Bonding Agent: ASTM C 1059/C 1059M, Type II, non-redispersible, acrylic emulsion or styrene butadiene.
- C. Epoxy Bonding Adhesive: ASTM C 881, two-component epoxy resin, capable of humid curing and bonding to damp surfaces, of class suitable for application temperature and of grade to suit requirements, and as follows:

1. Types I and II, non-load bearing, for bonding hardened or freshly mixed concrete to hardened concrete.

2.10 CONCRETE MIXTURES, GENERAL

- A. Prepare design mixtures for each type and strength of concrete, proportioned on the basis of laboratory trial mixture or field test data, or both, according to ACI 301.
 1. Use a qualified independent testing agency for preparing and reporting proposed mixture designs based on laboratory trial mixtures.
- B. Cementitious Materials: Limit percentage, by weight, of cementitious materials other than portland cement in concrete as follows:
 1. Fly Ash: 25 percent.
 2. Combined Fly Ash and Pozzolan: 25 percent.
 3. Ground Granulated Blast-Furnace Slag: 50 percent.
 4. Combined Fly Ash or Pozzolan and Ground Granulated Blast-Furnace Slag: 50 percent portland cement minimum, with fly ash or pozzolan not exceeding 25 percent.
- C. Limit water-soluble, chloride-ion content in hardened concrete to 0.15 percent by weight of cement.
- D. Admixtures: Use admixtures according to manufacturer's written instructions.
 1. Use high-range water-reducing admixture in concrete, as required, for placement and workability.
 2. Use water-reducing and retarding admixture when required by high temperatures, low humidity, or other adverse placement conditions.
 3. Use water-reducing admixture in pumped concrete, and concrete with a water-cementitious materials ratio below 0.50.
 4. Use corrosion-inhibiting admixture in concrete mixtures where indicated.

2.11 CONCRETE MIXTURES FOR BUILDING ELEMENTS

- A. Footings: Proportion normal-weight concrete mixture as follows:
 1. Minimum Compressive Strength: 3000 psi at 28 days.
 2. Maximum Water-Cementitious Materials Ratio: 0.50.
 3. Slump Limit: 4 inches; 8 inches for concrete with verified slump of 2 to 4 inches before adding high-range water-reducing admixture or plasticizing admixture, plus or minus 1 inch.
- B. Exterior Slabs and Slabs-on-Grade: Proportion normal-weight concrete mixture as follows:
 1. Minimum Compressive Strength: 4000 psi at 28 days.
 1. Maximum Water-Cementitious Materials Ratio: 0.45.
 2. Slump Limit: 4 inches, plus or minus 1 inch.
 3. Air Content for Exterior Slabs: 6 percent, plus or minus 1.5 percent at point of delivery for 1-inch nominal maximum aggregate size.
 4. Air Content for Interior Slabs: Do not allow air content of trowel-finished floors to exceed 3 percent.

2.12 FABRICATING REINFORCEMENT

- A. Fabricate steel reinforcement according to CRSI's "Manual of Standard Practice."

2.13 CONCRETE MIXING

- A. Ready-Mixed Concrete: Measure, batch, mix, and deliver concrete according to ASTM C 94/C 94M and furnish batch ticket information.
 - 1. When air temperature is between 85 and 90 deg F, reduce mixing and delivery time from 1-1/2 hours to 75 minutes; when air temperature is above 90 deg F, reduce mixing and delivery time to 60 minutes.

PART 3 - EXECUTION

3.1 FORMWORK

- A. Design, erect, shore, brace, and maintain formwork, according to ACI 301, to support vertical, lateral, static, and dynamic loads, and construction loads that might be applied, until structure can support such loads.
- B. Construct formwork so concrete members and structures are of size, shape, alignment, elevation, and position indicated, within tolerance limits of ACI 117.
- C. Limit concrete surface irregularities, designated by ACI 347 as abrupt or gradual, as follows:
 - 1. Class A, 1/8 inch for smooth-formed finished surfaces.
 - 2. Class C, 1/2 inch for rough-formed finished surfaces.
- D. Construct forms tight enough to prevent loss of concrete mortar.
- E. Fabricate forms for easy removal without hammering or prying against concrete surfaces. Provide crush or wrecking plates where stripping may damage cast concrete surfaces. Provide top forms for inclined surfaces steeper than 1.5 horizontal to 1 vertical.
 - 1. Install keyways, reglets, recesses, and the like, for easy removal.
 - 2. Do not use rust-stained steel form-facing material.
- F. Set edge forms, bulkheads, and intermediate screed strips for slabs to achieve required elevations and slopes in finished concrete surfaces. Provide and secure units to support screed strips; use strike-off templates or compacting-type screeds.
- G. Provide temporary openings for cleanouts and inspection ports where interior area of formwork is inaccessible. Close openings with panels tightly fitted to forms and securely braced to prevent loss of concrete mortar. Locate temporary openings in forms at inconspicuous locations.
- H. Chamfer exterior corners and edges of permanently exposed concrete.
- I. Form openings, chases, offsets, sinkages, keyways, reglets, blocking, screeds, and bulkheads required in the Work. Determine sizes and locations from trades providing such items.

- J. Clean forms and adjacent surfaces to receive concrete. Remove chips, wood, sawdust, dirt, and other debris just before placing concrete.
- K. Retighten forms and bracing before placing concrete, as required, to prevent mortar leaks and maintain proper alignment.
- L. Coat contact surfaces of forms with form-release agent, according to manufacturer's written instructions, before placing reinforcement.

3.2 EMBEDDED ITEMS

- A. Place and secure anchorage devices and other embedded items required for adjoining work that is attached to or supported by cast-in-place concrete. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded. Wet setting anchor rods and bolts is not permitted.
 - 1. Install anchor rods, accurately located, to elevations required and complying with tolerances in Section 7.5 of AISC's "Code of Standard Practice for Steel Buildings and Bridges."

3.3 REMOVING AND REUSING FORMS

- A. General: Formwork for sides of beams, walls, columns, and similar parts of the Work that does not support weight of concrete may be removed after cumulatively curing at not less than 50 deg F for 24 hours after placing concrete. Concrete has to be hard enough to not be damaged by form-removal operations and curing and protection operations need to be maintained.
 - 1. Leave formwork for beam soffits, joists, slabs, and other structural elements that supports weight of concrete in place until concrete has achieved at least 70 percent of its 28-day design compressive strength.
 - 2. Remove forms only if shores have been arranged to permit removal of forms without loosening or disturbing shores.
- B. Clean and repair surfaces of forms to be reused in the Work. Split, frayed, delaminated, or otherwise damaged form-facing material will not be acceptable for exposed surfaces. Apply new form-release agent.
- C. When forms are reused, clean surfaces, remove fins and laitance, and tighten to close joints. Align and secure joints to avoid offsets. Do not use patched forms for exposed concrete surfaces unless approved by Architect.

3.4 VAPOR RETARDERS

- A. Sheet Vapor Retarders: Place, protect, and repair sheet vapor retarder according to ASTM E 1643 and manufacturer's written instructions.
 - 1. Lap joints 6 inches and seal with manufacturer's recommended tape.

3.5 STEEL REINFORCEMENT

- A. General: Comply with CRSI's "Manual of Standard Practice" for placing reinforcement.

1. Do not cut or puncture vapor retarder. Repair damage and reseal vapor retarder before placing concrete.
- B. Clean reinforcement of loose rust and mill scale, earth, ice, and other foreign materials that would reduce bond to concrete.
- C. Accurately position, support, and secure reinforcement against displacement. Locate and support reinforcement with bar supports to maintain minimum concrete cover. Do not tack weld crossing reinforcing bars.
 1. Weld reinforcing bars according to AWS D1.4/D 1.4M, where indicated.
- D. Set wire ties with ends directed into concrete, not toward exposed concrete surfaces.
- E. Install welded wire reinforcement in longest practicable lengths on bar supports spaced to minimize sagging. Lap edges and ends of adjoining sheets at least one mesh spacing. Offset laps of adjoining sheet widths to prevent continuous laps in either direction. Lace overlaps with wire.

3.6 JOINTS

- A. General: Construct joints true to line with faces perpendicular to surface plane of concrete.
- B. Construction Joints: Install so strength and appearance of concrete are not impaired, at locations indicated or as approved by Architect.
 1. Place joints perpendicular to main reinforcement. Continue reinforcement across construction joints unless otherwise indicated. Do not continue reinforcement through sides of strip placements of floors and slabs.
 2. Form keyed joints as indicated. Embed keys at least 1-1/2 inches into concrete.
 3. Use epoxy-bonding adhesive at locations where fresh concrete is placed against hardened or partially hardened concrete surfaces.
- C. Contraction Joints in Slabs-on-Grade: Form weakened-plane contraction joints, sectioning concrete into areas as indicated. Construct contraction joints for a depth equal to at least one-fourth of concrete thickness as follows:
 1. Sawed Joints: Form contraction joints with power saws equipped with shatterproof abrasive or diamond-rimmed blades. Cut 1/8-inch- wide joints into concrete when cutting action will not tear, abrade, or otherwise damage surface and before concrete develops random contraction cracks. Saw joints shall be made no later than 12 hours after the initial concrete pour.
- D. Isolation Joints in Slabs-on-Grade: After removing formwork, install joint-filler strips at slab junctions with vertical surfaces, such as column pedestals, foundation walls, grade beams, and other locations, as indicated.
 1. Extend joint-filler strips full width and depth of joint, terminating flush with finished concrete surface unless otherwise indicated.
 2. Terminate full-width joint-filler strips not less than 1/2 inch or more than 1 inch below finished concrete surface where joint sealants, specified in Section 079200 "Joint Sealants," are indicated.
 3. Install joint-filler strips in lengths as long as practicable. Where more than one length is required, lace or clip sections together.
- E. Doweled Joints: Install dowel bars and support assemblies at joints where indicated. Lubricate or asphalt coat one-half of dowel length to prevent concrete bonding to one side of joint.

3.7 CONCRETE PLACEMENT

- A. Before placing concrete, verify that installation of formwork, reinforcement, and embedded items is complete and that required inspections have been performed.
- B. Do not add water to concrete during delivery, at Project site, or during placement unless approved by Architect.
- C. Deposit concrete continuously in one layer or in horizontal layers of such thickness that no new concrete will be placed on concrete that has hardened enough to cause seams or planes of weakness. If a section cannot be placed continuously, provide construction joints as indicated. Deposit concrete to avoid segregation.
 - 1. Deposit concrete in horizontal layers of depth to not exceed formwork design pressures and in a manner to avoid inclined construction joints.
 - 2. Consolidate placed concrete with mechanical vibrating equipment according to ACI 301.
 - 3. Do not use vibrators to transport concrete inside forms. Insert and withdraw vibrators vertically at uniformly spaced locations to rapidly penetrate placed layer and at least 6 inches into preceding layer. Do not insert vibrators into lower layers of concrete that have begun to lose plasticity. At each insertion, limit duration of vibration to time necessary to consolidate concrete and complete embedment of reinforcement and other embedded items without causing mixture constituents to segregate.
- D. Deposit and consolidate concrete for floors and slabs in a continuous operation, within limits of construction joints, until placement of a panel or section is complete.
 - 1. Consolidate concrete during placement operations so concrete is thoroughly worked around reinforcement and other embedded items and into corners.
 - 2. Maintain reinforcement in position on chairs during concrete placement.
 - 3. Screed slab surfaces with a straightedge and strike off to correct elevations.
 - 4. Slope surfaces uniformly to drains where required.
 - 5. Begin initial floating using bull floats or darbies to form a uniform and open-textured surface plane, before excess bleedwater appears on the surface. Do not further disturb slab surfaces before starting finishing operations.
- E. Cold-Weather Placement: Comply with ACI 306.1 and as follows. Protect concrete work from physical damage or reduced strength that could be caused by frost, freezing actions, or low temperatures.
 - 1. When average high and low temperature is expected to fall below 40 deg F for three successive days, maintain delivered concrete mixture temperature within the temperature range required by ACI 301.
 - 2. Do not use frozen materials or materials containing ice or snow. Do not place concrete on frozen subgrade or on subgrade containing frozen materials.
 - 3. Do not use calcium chloride, salt, or other materials containing antifreeze agents or chemical accelerators unless otherwise specified and approved in mixture designs.
- F. Hot-Weather Placement: Comply with ACI 301 and as follows:
 - 1. Maintain concrete temperature below 90 deg F at time of placement. Chilled mixing water or chopped ice may be used to control temperature, provided water equivalent of ice is calculated to total amount of mixing water. Using liquid nitrogen to cool concrete is Contractor's option.
 - 2. Fog-spray forms, steel reinforcement, and subgrade just before placing concrete. Keep subgrade uniformly moist without standing water, soft spots, or dry areas.

3.8 FINISHING FORMED SURFACES

- A. Rough-Formed Finish: As-cast concrete texture imparted by form-facing material with tie holes and defects repaired and patched. Remove fins and other projections that exceed specified limits on formed-surface irregularities.
 - 1. Apply to concrete surfaces not exposed to public view.
- B. Smooth-Formed Finish: As-cast concrete texture imparted by form-facing material, arranged in an orderly and symmetrical manner with a minimum of seams. Repair and patch tie holes and defects. Remove fins and other projections that exceed specified limits on formed-surface irregularities.
 - 1. Apply to concrete surfaces exposed to public view.
- C. Related Unformed Surfaces: At tops of walls, horizontal offsets, and similar unformed surfaces adjacent to formed surfaces, strike off smooth and finish with a texture matching adjacent formed surfaces. Continue final surface treatment of formed surfaces uniformly across adjacent unformed surfaces unless otherwise indicated.

3.9 FINISHING FLOORS AND SLABS

- A. General: Comply with ACI 302.1R recommendations for screeding, restraighening, and finishing operations for concrete surfaces. Do not wet concrete surfaces.
- B. Scratch Finish: While still plastic, texture concrete surface that has been screeded and bull-floated or darbied. Use stiff brushes, brooms, or rakes to produce a profile amplitude of 1/4 inch in one direction.
 - 1. Apply scratch finish to surfaces to receive mortar setting beds for bonded cementitious floor finishes.
- C. Float Finish: Consolidate surface with power-driven floats or by hand floating if area is small or inaccessible to power driven floats. Restraighten, cut down high spots, and fill low spots. Repeat float passes and restraighening until surface is left with a uniform, smooth, granular texture.
 - 1. Apply float finish to surfaces to receive trowel finish.
- D. Trowel Finish: After applying float finish, apply first troweling and consolidate concrete by hand or power-driven trowel. Continue troweling passes and restraighten until surface is free of trowel marks and uniform in texture and appearance. Grind smooth any surface defects that would telegraph through applied coatings or floor coverings.
 - 1. Apply a trowel finish to surfaces exposed to view or to be covered with resilient flooring, carpet, ceramic or quarry tile set over a cleavage membrane, paint, or another thin-film-finish coating system.
 - 2. Finish surfaces to the following tolerances, according to ASTM E 1155, for a randomly trafficked floor surface:
 - a. Specified overall values of flatness, F(F) 30; and of levelness, F(L) 20; with minimum local values of flatness, F(F) 24; and of levelness, F(L) 15; for suspended slabs.
- E. Trowel and Fine-Broom Finish: Apply a first trowel finish to surfaces where ceramic or quarry tile is to be installed by either thickset or thin-set method. While concrete is still plastic, slightly scarify surface with a fine broom.

1. Comply with flatness and levelness tolerances for trowel-finished floor surfaces.
- F. Broom Finish: Apply a broom finish to exterior concrete platforms, steps, ramps, and elsewhere as indicated.
1. Immediately after float finishing, slightly roughen trafficked surface by brooming with fiber-bristle broom perpendicular to main traffic route. Coordinate required final finish with Architect before application.

3.10 MISCELLANEOUS CONCRETE ITEMS

- A. Filling In: Fill in holes and openings left in concrete structures after work of other trades is in place unless otherwise indicated. Mix, place, and cure concrete, as specified, to blend with in-place construction. Provide other miscellaneous concrete filling indicated or required to complete the Work.
- B. Curbs: Provide monolithic finish to interior curbs by stripping forms while concrete is still green and by steel-troweling surfaces to a hard, dense finish with corners, intersections, and terminations slightly rounded.
- C. Equipment Bases and Foundations: Provide machine and equipment bases and foundations as shown on Drawings. Set anchor bolts for machines and equipment at correct elevations, complying with diagrams or templates from manufacturer furnishing machines and equipment

3.11 CONCRETE PROTECTING AND CURING

- A. General: Protect freshly placed concrete from premature drying and excessive cold or hot temperatures. Comply with ACI 306.1 for cold-weather protection and ACI 301 for hot-weather protection during curing.
- B. Evaporation Retarder: Apply evaporation retarder to unformed concrete surfaces if hot, dry, or windy conditions cause moisture loss approaching 0.2 lb/sq. ft. x h before and during finishing operations. Apply according to manufacturer's written instructions after placing, screeding, and bull floating or darbying concrete, but before float finishing.
- C. Formed Surfaces: Cure formed concrete surfaces, including underside of beams, supported slabs, and other similar surfaces. If forms remain during curing period, moist cure after loosening forms. If removing forms before end of curing period, continue curing for the remainder of the curing period.
- D. Unformed Surfaces: Begin curing immediately after finishing concrete. Cure unformed surfaces, including floors and slabs, concrete floor toppings, and other surfaces.
- E. Cure concrete according to ACI 308.1, by one or a combination of the following methods:
 1. Moisture Curing: Keep surfaces continuously moist for not less than seven days with the following materials:
 - a. Water.
 - b. Continuous water-fog spray.
 - c. Absorptive cover, water saturated, and kept continuously wet. Cover concrete surfaces and edges with 12-inch lap over adjacent absorptive covers.
 2. Moisture-Retaining-Cover Curing: Cover concrete surfaces with moisture-retaining cover for curing concrete, placed in widest practicable width, with sides and ends lapped at least 12 inches,

and sealed by waterproof tape or adhesive. Cure for not less than seven days. Immediately repair any holes or tears during curing period using cover material and waterproof tape.

- a. Moisture cure or use moisture-retaining covers to cure concrete surfaces to receive floor coverings.
 - b. Moisture cure or use moisture-retaining covers to cure concrete surfaces to receive penetrating liquid floor treatments.
 - c. Cure concrete surfaces to receive floor coverings with either a moisture-retaining cover or a curing compound that the manufacturer certifies will not interfere with bonding of floor covering used on Project.
3. Curing Compound: Apply uniformly in continuous operation by power spray or roller according to manufacturer's written instructions. Recoat areas subjected to heavy rainfall within three hours after initial application. Maintain continuity of coating and repair damage during curing period.
- a. Removal: After curing period has elapsed, remove curing compound without damaging concrete surfaces by method recommended by curing compound manufacturer unless manufacturer certifies curing compound will not interfere with bonding of floor covering used on Project.
4. Curing and Sealing Compound: Apply uniformly to floors and slabs indicated in a continuous operation by power spray or roller according to manufacturer's written instructions. Recoat areas subjected to heavy rainfall within three hours after initial application. Repeat process 24 hours later and apply a second coat. Maintain continuity of coating and repair damage during curing period.

3.12 LIQUID FLOOR TREATMENTS

- A. Penetrating Liquid Floor Treatment: Unless otherwise indicated, apply to interior concrete slabs not receiving a floor covering. Prepare, apply, and finish penetrating liquid floor treatment according to manufacturer's written instructions.
1. Remove curing compounds, sealers, oil, dirt, laitance, and other contaminants and complete surface repairs.
 2. Do not apply to concrete that is less than 14 days' old.
 3. Apply liquid until surface is saturated, scrubbing into surface until a gel forms; rewet; and repeat brooming or scrubbing. Rinse with water; remove excess material until surface is dry. Apply a second coat in a similar manner if surface is rough or porous.
- B. Sealing Coat: Uniformly apply a continuous sealing coat of curing and sealing compound to hardened concrete by power spray or roller according to manufacturer's written instructions.

3.13 JOINT FILLING

- A. Prepare, clean, and install joint filler according to manufacturer's written instructions.
1. Defer joint filling until concrete has aged at least one month. Do not fill joints until construction traffic has permanently ceased.
- B. Remove dirt, debris, saw cuttings, curing compounds, and sealers from joints; leave contact faces of joint clean and dry.

- C. Install semirigid joint filler full depth in saw-cut joints and at least 2 inches deep in formed joints. Overfill joint and trim joint filler flush with top of joint after hardening.

3.14 CONCRETE SURFACE REPAIRS

- A. Defective Concrete: Repair and patch defective areas when approved by Architect. Remove and replace concrete that cannot be repaired and patched to Architect's approval.
- B. Patching Mortar: Mix dry-pack patching mortar, consisting of one part portland cement to two and one-half parts fine aggregate passing a No. 16 sieve, using only enough water for handling and placing.
- C. Repairing Formed Surfaces: Surface defects include color and texture irregularities, cracks, spalls, air bubbles, honeycombs, rock pockets, fins and other projections on the surface, and stains and other discolorations that cannot be removed by cleaning.
 - 1. Immediately after form removal, cut out honeycombs, rock pockets, and voids more than 1/2 inch in any dimension to solid concrete. Limit cut depth to 3/4 inch. Make edges of cuts perpendicular to concrete surface. Clean, dampen with water, and brush-coat holes and voids with bonding agent. Fill and compact with patching mortar before bonding agent has dried. Fill form-tie voids with patching mortar or cone plugs secured in place with bonding agent.
 - 2. Repair defects on surfaces exposed to view by blending white portland cement and standard portland cement so that, when dry, patching mortar will match surrounding color. Patch a test area at inconspicuous locations to verify mixture and color match before proceeding with patching. Compact mortar in place and strike off slightly higher than surrounding surface.
 - 3. Repair defects on concealed formed surfaces that affect concrete's durability and structural performance as determined by Architect.
- D. Repairing Unformed Surfaces: Test unformed surfaces, such as floors and slabs, for finish and verify surface tolerances specified for each surface. Correct low and high areas. Test surfaces sloped to drain for trueness of slope and smoothness; use a sloped template.
 - 1. Repair finished surfaces containing defects. Surface defects include spalls, popouts, honeycombs, rock pockets, crazing and cracks in excess of 0.01 inch wide or that penetrate to reinforcement or completely through unreinforced sections regardless of width, and other objectionable conditions.
 - 2. After concrete has cured at least 14 days, correct high areas by grinding.
 - 3. Correct localized low areas during or immediately after completing surface finishing operations by cutting out low areas and replacing with patching mortar. Finish repaired areas to blend into adjacent concrete.
 - 4. Correct other low areas scheduled to receive floor coverings with a repair underlayment. Prepare, mix, and apply repair underlayment and primer according to manufacturer's written instructions to produce a smooth, uniform, plane, and level surface. Feather edges to match adjacent floor elevations.
 - 5. Correct other low areas scheduled to remain exposed with a repair topping. Cut out low areas to ensure a minimum repair topping depth of 1/4 inch to match adjacent floor elevations. Prepare, mix, and apply repair topping and primer according to manufacturer's written instructions to produce a smooth, uniform, plane, and level surface.
 - 6. Repair defective areas, except random cracks and single holes 1 inch or less in diameter, by cutting out and replacing with fresh concrete. Remove defective areas with clean, square cuts and expose steel reinforcement with at least a 3/4-inch clearance all around. Dampen concrete surfaces in contact with patching concrete and apply bonding agent. Mix patching concrete of same materials and mixture as original concrete except without coarse aggregate. Place, compact, and finish to blend with adjacent finished concrete. Cure in same manner as adjacent concrete.
 - 7. Repair random cracks and single holes 1 inch or less in diameter with patching mortar. Groove top of cracks and cut out holes to sound concrete and clean off dust, dirt, and loose particles. Dampen cleaned concrete surfaces and apply bonding agent. Place patching mortar before bonding agent

has dried. Compact patching mortar and finish to match adjacent concrete. Keep patched area continuously moist for at least 72 hours.

- E. Perform structural repairs of concrete, subject to Architect's approval, using epoxy adhesive and patching mortar.
- F. Repair materials and installation not specified above may be used, subject to Architect's approval.

3.15 FIELD QUALITY CONTROL

- A. Testing and Inspecting: Owner will engage a special inspector and qualified testing and inspecting agency to perform field tests and inspections and prepare test reports.
- B. Testing and Inspecting: Engage a qualified testing and inspecting agency to perform tests and inspections and to submit reports.
- C. Inspections:
 - 1. Steel reinforcement placement.
 - 2. Steel reinforcement welding.
 - 3. Headed bolts and studs.
 - 4. Verification of use of required design mixture.
 - 5. Concrete placement, including conveying and depositing.
 - 6. Curing procedures and maintenance of curing temperature.
 - 7. Verification of concrete strength before removal of shores and forms from beams and slabs.
- D. Concrete Tests: Testing of composite samples of fresh concrete obtained according to ASTM C 172 shall be performed according to the following requirements:
 - 1. Testing Frequency: Obtain at least one composite sample for each 100 cu. yd. or fraction thereof of each concrete mixture placed each day.
 - a. When frequency of testing will provide fewer than five compressive-strength tests for each concrete mixture, testing shall be conducted from at least five randomly selected batches or from each batch if fewer than five are used.
 - 2. Slump: ASTM C 143/C 143M; one test at point of placement for each composite sample, but not less than one test for each day's pour of each concrete mixture. Perform additional tests when concrete consistency appears to change.
 - 3. Air Content: ASTM C 231, pressure method, for normal-weight concrete; one test for each composite sample, but not less than one test for each day's pour of each concrete mixture.
 - 4. Concrete Temperature: ASTM C 1064/C 1064M; one test hourly when air temperature is 40 deg F and below and when 80 deg F and above, and one test for each composite sample.
 - 5. Unit Weight: ASTM C 567, fresh unit weight of structural lightweight concrete; one test for each composite sample, but not less than one test for each day's pour of each concrete mixture.
 - 6. Compression Test Specimens: ASTM C 31/C 31M.
 - a. Cast and laboratory cure two sets of two standard cylinder specimens for each composite sample.
 - 7. Compressive-Strength Tests: ASTM C 39/C 39M; test one set of two laboratory-cured specimens at 7 days and one set of two specimens at 28 days.

- a. Test one set of two field-cured specimens at 7 days and one set of two specimens at 28 days.
 - b. A compressive-strength test shall be the average compressive strength from a set of two specimens obtained from same composite sample and tested at age indicated.
8. When strength of field-cured cylinders is less than 85 percent of companion laboratory-cured cylinders, Contractor shall evaluate operations and provide corrective procedures for protecting and curing in-place concrete.
 9. Strength of each concrete mixture will be satisfactory if every average of any three consecutive compressive-strength tests equals or exceeds specified compressive strength and no compressive-strength test value falls below specified compressive strength by more than 500 psi.
 10. Test results shall be reported in writing to Architect, concrete manufacturer, and Contractor within 48 hours of testing. Reports of compressive-strength tests shall contain Project identification name and number, date of concrete placement, name of concrete testing and inspecting agency, location of concrete batch in Work, design compressive strength at 28 days, concrete mixture proportions and materials, compressive breaking strength, and type of break for both 7- and 28-day tests.
 11. Nondestructive Testing: Impact hammer, sonoscope, or other nondestructive device may be permitted by Architect but will not be used as sole basis for approval or rejection of concrete.
 12. Additional Tests: Testing and inspecting agency shall make additional tests of concrete when test results indicate that slump, air entrainment, compressive strengths, or other requirements have not been met, as directed by Architect. Testing and inspecting agency may conduct tests to determine adequacy of concrete by cored cylinders complying with ASTM C 42/C 42M or by other methods as directed by Architect.
 13. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.
 14. Correct deficiencies in the Work that test reports and inspections indicate do not comply with the Contract Documents.
- E. Measure floor and slab flatness and levelness according to ASTM E 1155 within 48 hours of finishing.

3.16 PROTECTION OF LIQUID FLOOR TREATMENTS

- A. Protect liquid floor treatment from damage and wear during the remainder of construction period. Use protective methods and materials, including temporary covering, recommended in writing by liquid floor treatments installer.

END OF SECTION 033000

SECTION 042000 - MASONRY VENEER

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Clay face brick.
 - 2. Mortar.
 - 3. Ties and anchors.
 - 4. Embedded flashing.
 - 5. Miscellaneous masonry accessories.

1.3 DEFINITIONS

1.4 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.5 SPECIAL REQUIREMENTS

- A. The Work of this Section shall be bid and provided as a single lump sum subcontract to the General Contractor (Square foot/ unit pricing of masonry labor and General Contractor furnished materials is not permitted). The Masonry Subcontractor shall be a firm, who specializes in masonry construction and shall furnish all materials, equipment, and labor required to complete the required masonry construction for this project.
- B. Additionally, the work of this section shall be bid and performed by a firm certified as a "North Carolina Masonry Contractors Association Certified Masonry Contractor" as described in the most current version of the NCMCA's "Guide to Masonry Contractor Certification." (North Carolina Masonry Contractors Association, PO Box 3463, Hickory, NC 28603-3463, (828) 324-1564, information@ncmca.com) . The masonry subcontractor shall at all times when work is in progress, provide an individual from its own staff designated by the North Carolina Masonry Contractors Association Masonry Contractor Certification Program as a "CMP-Certified Masonry Professional" or "CME-Certified Masonry Executive" (as described in the most current version of the NCMCA's "Guide to Masonry Contractor Certification") on-site to supervise work in progress.
- C. Lump Sum Masonry Contractors through the General Contractor, shall upon request of the Architect/ Owner provide evidence of at least 5 years experience with 5 projects of equivalent size and scope of experience performing work as a Lump Sum Masonry Contracting Firm.

- D. Masonry subcontractor shall not act as a broker, but shall perform the Work of this section with its own forces. Upon request of the Architect, General Contractor shall provide a copy of the Contract between General Contractor and Masonry Subcontractor (contract amounts may be omitted) indicating their contract is a lump sum contract.
- E. Definition: Lump Sum Masonry Subcontractor shall be a firm specializing in lump sum masonry contracting work and shall have been in masonry construction business for at least 5 years. Sub-subcontracting of masonry work is not permitted. The masonry subcontractor shall have a superintendent and crew chiefs (from its own staff) on site supervising all the masonry work.
 - 1. A listing of masonry contractors capable of providing a lump sum bid is available from the North Carolina Masonry Contractor's Association at 828-324-1564 (828-324-2179, fax) or on the Internet at www.ncmca.com.
- F. Daily preliminary cleaning of masonry is required for this project. The masonry subcontractor shall provide a person(s) to perform this task daily.
- G. If final cleaning of the masonry is to be subcontracted, the masonry subcontractor shall be responsible to supervise the cleaning operations, coordinate the type and application of cleaning materials in accordance with specific manufacturer's written recommendations. Masonry subcontractor shall certify to the Owner through the Architect that the proper cleaners were used, at the proper application rates, and complied with manufacturer's recommendations.

1.6 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: For the following:
 - 1. Masonry Units: Show sizes, profiles, coursing, and locations of special shapes.
- C. Samples for Initial Selection:
 - 1. Clay face brick, in the form of straps of five or more bricks.
 - 2. Weep holes/vents.
- D. Samples for Verification: For each type and color of the following:
 - 1. Clay face brick, in the form of straps of five or more bricks.
 - 2. Pigmented and colored-aggregate mortar. Make Samples using same sand and mortar ingredients to be used on Project.
 - 3. Weep holes and vents.
 - 4. Accessories embedded in masonry.

1.7 QUALITY ASSURANCE

- A. Mockups: Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, and to set quality standards for materials and execution.
 - 1. Build mockups for typical exterior wall in sizes approximately 60 inches long by 60 inches high by full thickness, including face and backup wythes and accessories.
 - a. Include a sealant-filled joint at least 16 inches long in mockup.

- b. Include lower corner of window opening, framed with stone trim, at upper corner of exterior wall mockup. Make opening approximately 12 inches wide by 16 inches high.
 - c. Include through-wall flashing installed for a 24-inch length in corner of exterior wall mockup approximately 16 inches down from top of mockup, with a 12-inch length of flashing left exposed to view (omit masonry above half of flashing).
 - d. Include wood studs, sheathing, water-resistive barrier sheathing joint-and-penetration treatment, veneer anchors, flashing, cavity drainage material, and weep holes in exterior masonry-veneer wall mockup.
- 2. Where masonry is to match existing, erect mockups adjacent and parallel to existing surface.
 - 3. Clean one-half of exposed faces of mockups with masonry cleaner as indicated.
 - 4. Protect accepted mockups from the elements with weather-resistant membrane.
 - 5. Approval of mockups is for color, texture, and blending of masonry units; relationship of mortar and sealant colors to masonry unit colors; tooling of joints; and aesthetic qualities of workmanship.
 - a. Approval of mockups is also for other material and construction qualities specifically approved by Architect in writing.
 - b. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
 - 6. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Store masonry units on elevated platforms in a dry location. If units are not stored in an enclosed location, cover tops and sides of stacks with waterproof sheeting, securely tied. If units become wet, do not install until they are dry.
- B. Store cementitious materials on elevated platforms, under cover, and in a dry location. Do not use cementitious materials that have become damp.
- C. Store aggregates where grading and other required characteristics can be maintained and contamination avoided.
- D. Deliver preblended, dry mortar mix in moisture-resistant containers. Store preblended, dry mortar mix in delivery containers on elevated platforms in a dry location or in covered weatherproof dispensing silos.
- E. Store masonry accessories, including metal items, to prevent corrosion and accumulation of dirt and oil.

1.9 FIELD CONDITIONS

- A. Protection of Masonry: During construction, cover tops of veneer, projections, and sills with waterproof sheeting at end of each day's work. Cover partially completed masonry when construction is not in progress.
 - I. Extend cover a minimum of 24 inches down face of veneer, and hold cover securely in place.
- B. Stain Prevention: Prevent grout, mortar, and soil from staining the face of masonry. Immediately remove grout, mortar, and soil that come in contact with masonry.

1. Protect base of walls from rain-splashed mud and from mortar splatter by spreading coverings on ground and over wall surface.
 2. Protect sills, ledges, and projections from mortar droppings.
 3. Protect surfaces of window and door frames, as well as similar products with painted and integral finishes, from mortar droppings.
 4. Turn scaffold boards near the wall on edge at the end of each day to prevent rain from splashing mortar and dirt onto completed masonry.
- C. Cold-Weather Requirements: Do not use frozen materials or materials mixed or coated with ice or frost. Do not build on frozen substrates. Remove and replace unit masonry damaged by frost or by freezing conditions. Comply with cold-weather construction requirements contained in TMS 602/ACI 530.1/ASCE 6.
1. Cold-Weather Cleaning: Use liquid cleaning methods only when air temperature is 40 deg F and higher and will remain so until masonry has dried, but not less than seven days after completing cleaning.
- D. Hot-Weather Requirements: Comply with hot-weather construction requirements contained in TMS 602/ACI 530.1/ASCE 6.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations for Masonry Units: Obtain exposed masonry units of a uniform texture and color, or a uniform blend within the ranges accepted for these characteristics, from single source from single manufacturer for each product required.
- B. Source Limitations for Mortar Materials: Obtain mortar ingredients of a uniform quality, including color for exposed masonry, from single manufacturer for each cementitious component and from single source or producer for each aggregate.

2.2 UNIT MASONRY, GENERAL

- A. Masonry Standard: Comply with TMS 602/ACI 530.1/ASCE 6, except as modified by requirements in the Contract Documents.

2.3 BRICK

- A. General: Provide shapes indicated and as follows, with exposed surfaces matching finish and color of exposed faces of adjacent units:
 1. For ends of sills and caps and for similar applications that would otherwise expose unfinished brick surfaces, provide units without cores or frogs and with exposed surfaces finished.
 2. Provide special shapes for applications where stretcher units cannot accommodate special conditions, including those at corners, movement joints, bond beams, sashes, and lintels.
 3. Provide special shapes for applications requiring brick of size, form, color, and texture on exposed surfaces that cannot be produced by sawing.
 4. Provide special shapes for applications where shapes produced by sawing would result in sawed surfaces being exposed to view.

B. Clay Face Brick: Facing brick complying with ASTM C 216.

1. Products: Subject to compliance with requirements, provide the following:
 - a. Taylor Clay Products.
 - b. Belden Brick
 - c. Statesville Brick Company
2. Grade: SW.
3. Type: FBX.
4. Initial Rate of Absorption: Less than 30 g/30 sq. in. per minute when tested according to ASTM C 67.
5. Efflorescence: Provide brick that has been tested according to ASTM C 67 and is rated "not effloresced."
6. Surface Coating: Brick with colors or textures produced by application of coatings shall withstand 50 cycles of freezing and thawing according to ASTM C 67 with no observable difference in the applied finish when viewed from 10 feet.
7. Size (Actual Dimensions): 3-5/8 inches wide by 2-1/4 inches high by 7-5/8 inches long.
8. Color and Texture: As selected by Architect from full range of red, smooth face bricks.

2.4 MORTAR MATERIALS

- A. Portland Cement: ASTM C 150/C 150M, Type I or II, except Type III may be used for cold-weather construction. Provide natural color or white cement as required to produce mortar color indicated.
 1. Alkali content shall not be more than 0.1 percent when tested according to ASTM C 114.
- B. Hydrated Lime: ASTM C 207, Type S.
- C. Portland Cement-Lime Mix: Packaged blend of portland cement and hydrated lime containing no other ingredients.
- D. Masonry Cement: ASTM C 91/C 91M.
- E. Mortar Cement: ASTM C 1329/C 1329M.
- F. Cold-Weather Admixture: Nonchloride, noncorrosive, accelerating admixture complying with ASTM C 494/C 494M, Type C, and recommended by manufacturer for use in masonry mortar of composition indicated.
- G. Water: Potable.

2.5 TIES AND ANCHORS

- A. General: Ties and anchors shall extend at least 1-1/2 inches into veneer but with at least a 5/8-inch cover on outside face.
- B. Materials: Provide ties and anchors specified in this article that are made from materials that comply with the following unless otherwise indicated:

1. Hot-Dip Galvanized, Carbon-Steel Wire: ASTM A 82/A 82M, with ASTM A 153/A 153M, Class B-2 coating.
- C. Adjustable Anchors for Connecting to Structural Steel Framing: Provide anchors that allow vertical or horizontal adjustment but resist tension and compression forces perpendicular to plane of wall.
1. Tie Section: Triangular-shaped wire tie made from 0.25-inch- diameter, hot-dip galvanized steel wire.
- D. Adjustable Masonry-Veneer Anchors:
1. General: Provide anchors that allow vertical adjustment but resist a 100-lbf load in both tension and compression perpendicular to plane of wall without deforming or developing play in excess of 1/16 inch.
 2. Fabricate sheet metal anchor sections and other sheet metal parts from 0.105-inch- thick steel sheet, galvanized after fabrication.
 3. Fabricate wire ties from 0.25-inch- diameter, hot-dip galvanized-steel wire unless otherwise indicated.
 4. Fabricate wire connector sections from 0.25-inch- diameter, hot-dip galvanized, carbon-steel wire.
 5. Contractor's Option: Unless otherwise indicated, provide any of the adjustable masonry-veneer anchors specified.
 6. Screw-Attached, Masonry-Veneer Anchors: Wire tie and a sheet metal anchor section, 1-1/4 inches wide by 6 inches long, with screw holes top and bottom and with raised rib-stiffened strap, 5/8 inch wide by 3-5/8 inches long, stamped into center to provide a slot between strap and base for inserting wire tie.

2.6 EMBEDDED FLASHING MATERIALS

- A. Flexible Flashing: Use the following unless otherwise indicated:
1. Rubberized-Asphalt Flashing: Composite flashing product consisting of a pliable, adhesive rubberized-asphalt compound, bonded to a high-density, cross-laminated polyethylene film to produce an overall thickness of not less than 0.040 inch.
 - a. Products: Subject to compliance with requirements, provide one of the following:
 - 1) Advanced Building Products Inc.; Peel-N-Seal.
 - 2) Carlisle Coatings & Waterproofing; CCW-705-TWF Thru-Wall Flashing.
 - 3) Grace Construction Products, W. R. Grace & Co. - Conn.; Perm-A-Barrier Wall Flashing.
 - 4) Heckmann Building Products Inc.; No. 82 Rubberized-Asphalt Thru-Wall Flashing.
 - 5) Hohmann & Barnard, Inc.; Sando-Seal.
 - 6) W. R. Meadows, Inc.; Air-Shield Thru-Wall Flashing.
 - 7) Polyguard Products, Inc.; [Polyguard 300] [Polyguard 400].
 - b. Accessories: Provide preformed corners, end dams, other special shapes, and seaming materials produced by flashing manufacturer.
- B. Adhesives, Primers, and Seam Tapes for Flashings: Flashing manufacturer's standard products or products recommended by flashing manufacturer for bonding flashing sheets to each other and to substrates.

2.7 MISCELLANEOUS MASONRY ACCESSORIES

- A. Compressible Filler: Premolded filler strips complying with ASTM D 1056, Grade 2A1; compressible up to 35 percent; of width and thickness indicated; formulated from urethane.
- B. Weep/Vent Products: Use the following unless otherwise indicated:
 - 1. Vinyl Weep Hole/Vent: Units made from flexible PVC, designed to fit into a head joint and consisting of a louvered vertical leg, flexible wings to seal against ends of masonry units, and a top flap to keep mortar out of the head joint; in color selected by Architect.
 - a. Products: **Subject to compliance with requirements, provide one of the following:**
 - 1) Hohmann & Barnard, Inc.; #343 Weep Hole.
 - 2) Williams Products, Inc.; Williams-Goodco Brick Vent.
 - 3) Wire-Bond; Louvered Weep Holes.
- C. Cavity Drainage Material: Free-draining mesh, made from polymer strands that will not degrade within the wall cavity.
 - 1. Products: **Subject to compliance with requirements, provide one of the following:**
 - a. Advanced Building Products Inc.; Mortar Break.
 - b. Archovations, Inc.; CavClear Masonry Mat.
 - c. Heckmann Building Products Inc.; Weep-Thru Mortar Deflector.
 - d. Hohmann & Barnard, Inc.; Mortar Trap.
 - e. Mortar Net USA, Ltd.; Mortar Net.
 - f. Wire-Bond; Cavity Net II
 - 2. Configuration: **Provide one of the following:**
 - a. Strips, full depth of cavity and 10 inches high, with dovetail-shaped notches 7 inches deep that prevent clogging with mortar droppings.

2.8 MASONRY CLEANERS

- A. Proprietary Acidic Cleaner: Manufacturer's standard-strength cleaner designed for removing mortar/grout stains, efflorescence, and other new construction stains from new masonry without discoloring or damaging masonry surfaces. Use product expressly approved for intended use by cleaner manufacturer and manufacturer of masonry units being cleaned.

2.9 MORTAR MIXES

- A. General: Do not use admixtures, including pigments, air-entraining agents, accelerators, retarders, water-repellent agents, antifreeze compounds, or other admixtures unless otherwise indicated.
 - 1. Do not use calcium chloride in mortar or grout.
 - 2. Use portland cement-lime mortar unless otherwise indicated.
 - 3. Add cold-weather admixture (if used) at same rate for all mortar that will be exposed to view, regardless of weather conditions, to ensure that mortar color is consistent.

- B. Preblended, Dry Mortar Mix: Furnish dry mortar ingredients in form of a preblended mix. Measure quantities by weight to ensure accurate proportions, and thoroughly blend ingredients before delivering to Project site.
- C. Mortar for Unit Masonry: Comply with ASTM C 270, [Property] Specification. Use Type N unless another type is indicated.
 - 1. For masonry below grade or in contact with earth, use Type S.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
 - 1. For the record, prepare written report, endorsed by Installer, listing conditions detrimental to performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

- A. Leave openings for equipment to be installed before completing masonry. After installing equipment, complete masonry to match the construction immediately adjacent to opening.
- B. Use full-size units without cutting if possible. If cutting is required to provide a continuous pattern or to fit adjoining construction, cut units with motor-driven saws; provide clean, sharp, unchipped edges. Allow units to dry before laying unless wetting of units is specified. Install cut units with cut surfaces and, where possible, cut edges concealed.
- C. Select and arrange units for exposed unit masonry to produce a uniform blend of colors and textures. Mix units from several pallets or cubes as they are placed.
- D. Wetting of Brick: Wet brick before laying if initial rate of absorption exceeds 30 g/30 sq. in. per minute when tested according to ASTM C 67. Allow units to absorb water so they are damp but not wet at time of laying.

3.3 TOLERANCES

- A. Dimensions and Locations of Elements:
 - 1. For dimensions in cross section or elevation, do not vary by more than plus 1/2 inch or minus 1/4 inch.
 - 2. For location of elements in plan, do not vary from that indicated by more than plus or minus 1/2 inch.
 - 3. For location of elements in elevation, do not vary from that indicated by more than plus or minus 1/4 inch in a story height or 1/2 inch total.
- B. Lines and Levels:

1. For bed joints and top surfaces of bearing walls, do not vary from level by more than 1/4 inch in 10 feet, or 1/2 inch maximum.
2. For conspicuous horizontal lines, such as lintels, sills, parapets, and reveals, do not vary from level by more than 1/8 inch in 10 feet, 1/4 inch in 20 feet, or 1/2 inch maximum.
3. For vertical lines and surfaces, do not vary from plumb by more than 1/4 inch in 10 feet, 3/8 inch in 20 feet, or 1/2 inch maximum.
4. For conspicuous vertical lines, such as external corners, door jambs, reveals, and expansion and control joints, do not vary from plumb by more than 1/8 inch in 10 feet, 1/4 inch in 20 feet, or 1/2 inch maximum.
5. For lines and surfaces, do not vary from straight by more than 1/4 inch in 10 feet, 3/8 inch in 20 feet, or 1/2 inch maximum.
6. For vertical alignment of exposed head joints, do not vary from plumb by more than 1/4 inch in 10 feet, or 1/2 inch maximum.
7. For faces of adjacent exposed masonry units, do not vary from flush alignment by more than 1/16 inch except due to warpage of masonry units within tolerances specified for warpage of units.

C. Joints:

1. For bed joints, do not vary from thickness indicated by more than plus or minus 1/8 inch, with a maximum thickness limited to 1/2 inch.
2. For exposed bed joints, do not vary from bed-joint thickness of adjacent courses by more than 1/8 inch.
3. For head and collar joints, do not vary from thickness indicated by more than plus 3/8 inch or minus 1/4 inch.
4. For exposed head joints, do not vary from thickness indicated by more than plus or minus 1/8 inch. Do not vary from adjacent bed-joint and head-joint thicknesses by more than 1/8 inch.
5. For exposed bed joints and head joints of stacked bond, do not vary from a straight line by more than 1/16 inch from one masonry unit to the next.

3.4 LAYING MASONRY WALLS

- A. Lay out walls in advance for accurate spacing of surface bond patterns with uniform joint thicknesses and for accurate location of openings, movement-type joints, returns, and offsets. Avoid using less-than-half-size units, particularly at corners, jambs, and, where possible, at other locations.
- B. Bond Pattern for Exposed Masonry: Unless otherwise indicated, lay exposed masonry in; do not use units with less-than-nominal 4-inch horizontal face dimensions at corners or jambs.
- C. Stopping and Resuming Work: Stop work by stepping back units in each course from those in course below; do not tooth. When resuming work, clean masonry surfaces that are to receive mortar, remove loose masonry units and mortar, and wet brick if required before laying fresh masonry.
- D. Built-in Work: As construction progresses, build in items specified in this and other Sections. Fill in solidly with masonry around built-in items.
- E. Fill space between steel frames and masonry solidly with mortar unless otherwise indicated.

3.5 MORTAR BEDDING AND JOINTING

- A. Lay masonry units with completely filled bed and head joints; butter ends with sufficient mortar to fill head joints and shove into place. Do not deeply furrow bed joints or slush head joints.

1. At anchors and ties, fully bed units and fill cells with mortar as needed to fully embed anchors and ties in mortar.
- B. Set cast-stone trim units in full bed of mortar with full vertical joints.
1. Clean soiled surfaces with fiber brush and soap powder and rinse thoroughly with clear water.
 2. Allow cleaned surfaces to dry before setting.
 3. Wet joint surfaces thoroughly before applying mortar.
 4. Rake out mortar joints for pointing with sealant.
- C. Tool exposed joints slightly concave when thumbprint hard, using a jointer larger than joint thickness unless otherwise indicated.
1. For glazed masonry units, use a nonmetallic jointer $\frac{3}{4}$ inch or more in width.

3.6 ANCHORED MASONRY VENEERS

- A. Anchor masonry veneers to wall framing with masonry-veneer anchors to comply with the following requirements:
1. Fasten screw-attached anchors through sheathing to wall framing with metal fasteners of type indicated. Use two fasteners unless anchor design only uses one fastener.
 2. Embed tie sections in masonry joints.
 3. Locate anchor sections to allow maximum vertical differential movement of ties up and down.
 4. Space anchors as indicated, but not more than 16 inches o.c. vertically and 18 inches o.c. horizontally, with not less than one anchor for each 2 sq. ft. of wall area. Install additional anchors within 12 inches of openings and at intervals, not exceeding 8 inches, around perimeter.
- B. Provide not less than 2 inches of airspace between back of masonry veneer and face of insulation.
1. Keep airspace clean of mortar droppings and other materials during construction. Bevel beds away from airspace, to minimize mortar protrusions into airspace. Do not attempt to trowel or remove mortar fins protruding into airspace.

3.7 ANCHORING MASONRY TO STRUCTURAL STEEL AND CONCRETE

- A. Anchor masonry to structural steel and concrete, where masonry abuts or faces structural steel or concrete to comply with the following:
1. Provide an open space not less than $\frac{1}{2}$ inch wide between masonry and structural steel or concrete unless otherwise indicated. Keep open space free of mortar and other rigid materials.
 2. Anchor masonry with anchors embedded in masonry joints and attached to structure.
 3. Space anchors as indicated, but not more than 24 inches o.c. vertically and 36 inches o.c. horizontally.

3.8 EXPANSION JOINTS

- A. General: Install expansion-joint materials in unit masonry as masonry progresses. Do not allow materials to span expansion joints without provision to allow for in-plane wall or partition movement.
- B. Form expansion joints as follows:

1. Build flanges of metal expansion strips into masonry. Lap each joint 4 inches in direction of water flow. Seal joints below grade and at junctures with horizontal expansion joints if any.
 2. Build flanges of factory-fabricated, expansion-joint units into masonry.
 3. Build in compressible joint fillers where indicated.
 4. Form open joint full depth of brick wythe and of width indicated, but not less than 3/8 inch for installation of sealant and backer rod specified in Section 079200 "Joint Sealants."
- C. Provide horizontal, pressure-relieving joints by either leaving an airspace or inserting a compressible filler of width required for installing sealant and backer rod specified in Section 079200 "Joint Sealants," but not less than 3/8 inch.
1. Locate horizontal, pressure-relieving joints beneath shelf angles supporting masonry.

3.9 FLASHING, WEEP HOLES, AND VENTS

- A. General: Install embedded flashing and weep holes in masonry at shelf angles, lintels, ledges, other obstructions to downward flow of water in wall, and where indicated.
- B. Install flashing as follows unless otherwise indicated:
1. Prepare masonry surfaces so they are smooth and free from projections that could puncture flashing. Where flashing is within mortar joint, place through-wall flashing on sloping bed of mortar and cover with mortar. Before covering with mortar, seal penetrations in flashing with adhesive, sealant, or tape.
 2. Extend flashing through veneer, across airspace behind veneer, and up face of sheathing at least 8 inches; with upper edge tucked under water-resistive barrier, lapping at least 4 inches.
 3. At lintels and shelf angles, extend flashing a minimum of 6 inches into masonry at each end. At heads and sills, extend flashing 6 inches at ends and turn up not less than 2 inches to form end dams.
 4. Interlock end joints of ribbed sheet metal flashing by overlapping ribs not less than 1-1/2 inches or as recommended by flashing manufacturer, and seal lap with elastomeric sealant complying with requirements in Section 079200 "Joint Sealants" for application indicated.
 5. Cut flexible flashing off flush with face of wall after masonry wall construction is completed.
- C. Install reglets and nailers for flashing and other related construction where they are shown to be built into masonry.
- D. Place cavity drainage material in airspace behind veneers to comply with configuration requirements for cavity drainage material in "Miscellaneous Masonry Accessories" Article.
- E. Install vents in head joints in exterior wythes at spacing indicated. Use specified weep/vent products to form vents.
1. Close cavities off vertically and horizontally with blocking in manner indicated. Install through-wall flashing and weep holes above horizontal blocking.

3.10 FIELD QUALITY CONTROL

- A. Testing and Inspecting: Owner will engage special inspectors to perform tests and inspections and prepare reports. Allow inspectors access to scaffolding and work areas as needed to perform tests and inspections. Retesting of materials that fail to comply with specified requirements shall be done at Contractor's expense.

- B. Inspections: Special inspections according to Level B in TMS 402/ACI 530/ASCE 5.
 - 1. Begin masonry construction only after inspectors have verified proportions of site-prepared mortar.
- C. Testing Prior to Construction: One set of tests.
- D. Clay Masonry Unit Test: For each type of unit provided, according to ASTM C 67 for compressive strength.
- E. Mortar Aggregate Ratio Test (Proportion Specification): For each mix provided, according to ASTM C 780.
- F. Mortar Test (Property Specification): For each mix provided, according to ASTM C 780. Test mortar for mortar air content and compressive strength.

3.11 REPAIRING, POINTING, AND CLEANING

- A. Remove and replace masonry units that are loose, chipped, broken, stained, or otherwise damaged or that do not match adjoining units. Install new units to match adjoining units; install in fresh mortar, pointed to eliminate evidence of replacement.
- B. Pointing: During the tooling of joints, enlarge voids and holes, except weep holes, and completely fill with mortar. Point up joints, including corners, openings, and adjacent construction, to provide a neat, uniform appearance. Prepare joints for sealant application, where indicated.
- C. In-Progress Cleaning: Clean unit masonry as work progresses by dry brushing to remove mortar fins and smears before tooling joints.
- D. Final Cleaning: After mortar is thoroughly set and cured, clean exposed masonry as follows:
 - 1. Remove large mortar particles by hand with wooden paddles and nonmetallic scrape hoes or chisels.
 - 2. Test cleaning methods on sample wall panel; leave one-half of panel uncleaned for comparison purposes. Obtain Architect's approval of sample cleaning before proceeding with cleaning of masonry.
 - 3. Protect adjacent stone and nonmasonry surfaces from contact with cleaner by covering them with liquid strippable masking agent or polyethylene film and waterproof masking tape.
 - 4. Wet wall surfaces with water before applying cleaners; remove cleaners promptly by rinsing surfaces thoroughly with clear water.
 - 5. Clean brick by bucket-and-brush hand-cleaning method described in BIA Technical Notes 20.
 - 6. Clean masonry with a proprietary acidic cleaner applied according to manufacturer's written instructions.
 - 7. Clean stone trim to comply with stone supplier's written instructions.
 - 8. Clean limestone units to comply with recommendations in ILI's "Indiana Limestone Handbook."

3.12 MASONRY WASTE DISPOSAL

- A. Salvageable Materials: Unless otherwise indicated, excess masonry materials are Contractor's property. At completion of unit masonry work, remove from Project site.

END OF SECTION 042613

SECTION 047200 - CAST STONE MASONRY

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Cast-stone trim.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. For cast-stone units, include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
- B. Shop Drawings: Show fabrication and installation details for cast-stone units. Include dimensions, details of reinforcement and anchorages if any, and indication of finished faces.
 - 1. Include building elevations showing layout of units and locations of joints and anchors.
- C. Samples for Initial Selection: For colored mortar.
- D. Samples for Verification:
 - 1. For each color and texture of cast stone required, 10 inches square in size.
 - 2. For each trim shape required, 10 inches in length.
 - 3. For colored mortar, make Samples using same sand and mortar ingredients to be used on Project.
- E. Full-Size Samples: For each shape of cast-stone unit required.
 - 1. Make available for Architect's review at Project site.
 - 2. Approved Samples may be installed in the Work.

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For manufacturer.
- B. Material Test Reports: For each mix required to produce cast stone, based on testing according to ASTM C 1364, including test for resistance to freezing and thawing.
 - 1. Provide test reports based on testing within previous two years.

1.5 QUALITY ASSURANCE

- A. **Manufacturer Qualifications:** A qualified manufacturer of cast-stone units similar to those indicated for this Project, that has sufficient production capacity to manufacture required units, and is a plant certified by the Cast Stone Institute or the Precast/Prestressed Concrete Institute for Group A, Category AT.
- B. **Testing Agency Qualifications:** Qualified according to ASTM E 329 for testing indicated.
- C. **Mockups:** Furnish cast stone for installation in mockups specified in Section 043313.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. **Coordinate delivery of cast stone with unit masonry work to avoid delaying the Work and to minimize the need for on-site storage.**
- B. **Pack, handle, and ship cast-stone units in suitable packs or pallets.**
 - 1. **Lift with wide-belt slings; do not use wire rope or ropes that might cause staining. Move cast-stone units if required, using dollies with wood supports.**
 - 2. **Store cast-stone units on wood skids or pallets with nonstaining, waterproof covers, securely tied. Arrange to distribute weight evenly and to prevent damage to units. Ventilate under covers to prevent condensation.**
- C. **Store cementitious materials on elevated platforms, under cover, and in a dry location. Do not use cementitious materials that have become damp.**
- D. **Store mortar aggregates where grading and other required characteristics can be maintained and contamination can be avoided.**

1.7 PROJECT CONDITIONS

- A. **Cold-Weather Requirements:** Do not use frozen materials or materials mixed or coated with ice or frost. Do not build on frozen substrates. Comply with cold-weather construction requirements in TMS 602/ACI 530.1/ASCE 6.
 - 1. **Cold-Weather Cleaning:** Use liquid cleaning methods only when air temperature is 40 deg F and above and will remain so until cast stone has dried, but no fewer than seven days after completing cleaning.
- B. **Hot-Weather Requirements:** Comply with hot-weather construction requirements in TMS 602/ACI 530.1/ASCE 6.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. **Source Limitations for Cast Stone:** Obtain cast-stone units from single source from single manufacturer.
- B. **Source Limitations for Mortar Materials:** Obtain mortar ingredients of a uniform quality, including color, from one manufacturer for each cementitious component and from one source or producer for each aggregate.

2.2 CAST-STONE MATERIALS

- A. General: Comply with ASTM C 1364.
- B. Portland Cement: ASTM C 150/C 150M, Type I or Type III, containing not more than 0.60 percent total alkali when tested according to ASTM C 114. Provide natural color or white cement as required to produce cast-stone color indicated.
- C. Coarse Aggregates: Granite, quartz, or limestone complying with ASTM C 33/C 33M; gradation and colors as needed to produce required cast-stone textures and colors.
- D. Fine Aggregates: Natural sand or crushed stone complying with ASTM C 33/C 33M, gradation and colors as needed to produce required cast-stone textures and colors.
- E. Color Pigment: ASTM C 979/C 979M, synthetic mineral-oxide pigments or colored water-reducing admixtures; color stable, nonfading, and resistant to lime and other alkalis.
- F. Admixtures: Use only admixtures specified or approved in writing by Architect.
 - 1. Do not use admixtures that contain more than 0.1 percent water-soluble chloride ions by mass of cementitious materials. Do not use admixtures containing calcium chloride.
 - 2. Use only admixtures that are certified by manufacturer to be compatible with cement and other admixtures used.
 - 3. Air-Entraining Admixture: ASTM C 260/C 260M.
 - 4. Water-Reducing Admixture: ASTM C 494/C 494M, Type A.
 - 5. Water-Reducing, Retarding Admixture: ASTM C 494/C 494M, Type D.
 - 6. Water-Reducing, Accelerating Admixture: ASTM C 494/C 494M, Type E.
- G. Reinforcement: Deformed steel bars complying with ASTM A 615/A 615M, Grade 60. Use galvanized or epoxy-coated reinforcement when covered with less than 1-1/2 inches of cast-stone material.
 - 1. Epoxy Coating: ASTM A 775/A 775M.
 - 2. Galvanized Coating: ASTM A 767/A 767M.
- H. Embedded Anchors and Other Inserts: Fabricated from stainless steel complying with ASTM A 240/A 240M, ASTM A 276, or ASTM A 666, Type 304.

2.3 CAST-STONE UNITS

- A. Cast-Stone Units: Comply with ASTM C 1364.
 - 1. Units shall be manufactured using the vibrant dry tamp or wet-cast method.
 - 2. Units shall be resistant to freezing and thawing as determined by laboratory testing according to ASTM C 666/C 666M, Procedure A, as modified by ASTM C 1364.
- B. Fabricate units with sharp arris and accurately reproduced details, with indicated texture on all exposed surfaces unless otherwise indicated.
 - 1. Slope exposed horizontal surfaces 1:12 to drain unless otherwise indicated.
 - 2. Provide raised fillets at backs of sills and at ends indicated to be built into jambs.
 - 3. Provide drips on projecting elements unless otherwise indicated.
- C. Fabrication Tolerances:

1. Variation in Cross Section: Do not vary from indicated dimensions by more than 1/8 inch.
2. Variation in Length: Do not vary from indicated dimensions by more than 1/360 of the length of unit or 1/8 inch, whichever is greater, but in no case by more than 1/4 inch.
3. Warp, Bow, and Twist: Not to exceed 1/360 of the length of unit or 1/8 inch, whichever is greater.
4. Location of Grooves, False Joints, Holes, Anchorages, and Similar Features: Do not vary from indicated position by more than 1/8 inch on formed surfaces of units and 3/8 inch on unformed surfaces.

D. Cure Units as Follows:

1. Cure units in enclosed, moist curing room at 95 to 100 percent relative humidity and temperature of 100 deg F for 12 hours or 70 deg F for 16 hours.
2. Keep units damp and continue curing to comply with one of the following:
 - a. No fewer than five days at mean daily temperature of 70 deg F or above.
 - b. No fewer than six days at mean daily temperature of 60 deg F or above.
 - c. No fewer than seven days at mean daily temperature of 50 deg F or above.
 - d. No fewer than eight days at mean daily temperature of 45 deg F or above.

E. Acid etch units after curing to remove cement film from surfaces to be exposed to view.

F. Colors and Textures: As selected by Architect from manufacturer's full range.

2.4 MORTAR MATERIALS

- A. Portland Cement: ASTM C 150/C 150M, Type I or II, except Type III may be used for cold-weather construction. Provide natural color or white cement as required to produce mortar color indicated.
- B. Hydrated Lime: ASTM C 207, Type S.
- C. Portland Cement-Lime Mix: Packaged blend of portland cement and hydrated lime containing no other ingredients.
- D. Masonry Cement: ASTM C 91/C 91M.
- E. Colored Cement Product: Packaged blend made from portland cement and hydrated lime and mortar pigments, all complying with specified requirements, and containing no other ingredients.
 1. Formulate blend as required to produce color indicated or, if not indicated, as selected from manufacturer's standard colors.
 2. Pigments shall not exceed 10 percent of portland cement by weight.
 3. Pigments shall not exceed 5 percent of [masonry cement] [or] [mortar cement] by weight.
- F. Water: Potable.

2.5 ACCESSORIES

- A. Anchors: Type and size indicated, fabricated from Type 304 stainless steel complying with ASTM A 240/A 240M, ASTM A 276, or ASTM A 666.
- B. Dowels: 1/2-inch- diameter round bars, fabricated from Type 304 stainless steel complying with ASTM A 240/A 240M, ASTM A 276, or ASTM A 666.

- C. Proprietary Acidic Cleaner: Manufacturer's standard-strength cleaner designed for removing mortar/grout stains, efflorescence, and other new construction stains from new masonry without discoloring or damaging masonry surfaces. Use product expressly approved for intended use by cast-stone manufacturer and expressly approved by cleaner manufacturer for use on cast stone and adjacent masonry materials.

2.6 MORTAR MIXES

- A. Do not use admixtures including pigments, air-entraining agents, accelerators, retarders, water-repellent agents, antifreeze compounds, or other admixtures unless otherwise indicated.
 - 1. Do not use calcium chloride in mortar or grout.
 - 2. Use portland cement-lime mortar unless otherwise indicated.
- B. Comply with ASTM C 270, Proportion Specification.
 - 1. For setting mortar, use Type S.
 - 2. For pointing mortar, use Type N.
- C. Colored-Aggregate Mortar: Produce required mortar color by using colored aggregates and natural color or white cement as necessary to produce required mortar color.
 - 1. Mix to match Architect's sample.
 - 2. Application: Use colored-aggregate mortar for exposed mortar joints.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 SETTING CAST STONE IN MORTAR

- A. Install cast-stone units to comply with requirements in Section 044313.
- B. Set cast stone as indicated on Drawings. Set units accurately in locations indicated, with edges and faces aligned according to established relationships and indicated tolerances.
 - 1. Install anchors, supports, fasteners, and other attachments indicated or necessary to secure units in place.
 - 2. Coordinate installation of cast stone with installation of flashing specified in other Sections.
- C. Wet joint surfaces thoroughly before applying mortar or setting in mortar.
- D. Set units in full bed of mortar with full head joints unless otherwise indicated.
 - 1. Set units with joints 1/4 to 3/8 inch wide unless otherwise indicated.
 - 2. Build anchors and ties into mortar joints as units are set.
 - 3. Fill dowel holes and anchor slots with mortar.

4. Fill collar joints solid as units are set.
 5. Build concealed flashing into mortar joints as units are set.
 6. Keep head joints in copings and between other units with exposed horizontal surfaces open to receive sealant.
 7. Keep joints at shelf angles open to receive sealant.
- E. Rake out joints for pointing with mortar to depths of not less than 3/4 inch. Rake joints to uniform depths with square bottoms and clean sides. Scrub faces of units to remove excess mortar as joints are raked.
 - F. Point mortar joints by placing and compacting mortar in layers not greater than 3/8 inch. Compact each layer thoroughly and allow it to become thumbprint hard before applying next layer.
 - G. Tool exposed joints slightly concave when thumbprint hard. Use a smooth plastic jointer larger than joint thickness.
 - H. Rake out joints for pointing with sealant to depths of not less than 3/4 inch. Scrub faces of units to remove excess mortar as joints are raked.
 - I. Point joints with sealant to comply with applicable requirements in Section 079200 "Joint Sealants."
 1. Prime cast-stone surfaces to receive sealant and install compressible backer rod in joints before applying sealant unless otherwise indicated.
 - J. Provide sealant joints at head joints of copings and other horizontal surfaces; at expansion, control, and pressure-relieving joints; and at locations indicated.
 1. Keep joints free of mortar and other rigid materials.
 2. Build in compressible foam-plastic joint fillers where indicated.
 3. Form joint of width indicated, but not less than 3/8 inch.
 4. Prime cast-stone surfaces to receive sealant and install compressible backer rod in joints before applying sealant unless otherwise indicated.
 5. Prepare and apply sealant of type and at locations indicated to comply with applicable requirements in Section 079200 "Joint Sealants."

3.3 INSTALLATION TOLERANCES

- A. Variation from Plumb: Do not exceed 1/8 inch in 10 feet, 1/4 inch in 20 feet, or 1/2 inch maximum.
- B. Variation from Level: Do not exceed 1/8 inch in 10 feet, 1/4 inch in 20 feet, or 1/2 inch maximum.
- C. Variation in Joint Width: Do not vary joint thickness more than 1/8 inch in 36 inches or one-fourth of nominal joint width, whichever is less.
- D. Variation in Plane between Adjacent Surfaces (Lipping): Do not vary from flush alignment with adjacent units or adjacent surfaces indicated to be flush with units by more than 1/16 inch, except where variation is due to warpage of units within tolerances specified.

3.4 ADJUSTING AND CLEANING

- A. Remove and replace stained and otherwise damaged units and units not matching approved Samples. Cast stone may be repaired if methods and results are approved by Architect.

- B. Replace units in a manner that results in cast stone matching approved Samples, complying with other requirements, and showing no evidence of replacement.
- C. In-Progress Cleaning: Clean cast stone as work progresses.
 - 1. Remove mortar fins and smears before tooling joints.
 - 2. Remove excess sealant immediately, including spills, smears, and spatter.
- D. Final Cleaning: After mortar is thoroughly set and cured, clean exposed cast stone as follows:
 - 1. Remove large mortar particles by hand with wooden paddles and nonmetallic scrape hoes or chisels.
 - 2. Test cleaning methods on sample; leave one sample uncleaned for comparison purposes. Obtain Architect's approval of sample cleaning before proceeding with cleaning of cast stone.
 - 3. Protect adjacent surfaces from contact with cleaner by covering them with liquid strippable masking agent or polyethylene film and waterproof masking tape.
 - 4. Wet surfaces with water before applying cleaners; remove cleaners promptly by rinsing thoroughly with clear water.
 - 5. Clean cast stone by bucket-and-brush hand-cleaning method described in BIA Technical Notes 20.
 - 6. Clean cast stone with proprietary acidic cleaner applied according to manufacturer's written instructions.

END OF SECTION 047200

SECTION 051200 - STRUCTURAL STEEL FRAMING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Structural steel.
- 2. Grout.

- B. Related Requirements:

- 1. Section 055000 "Metal Fabrications" for miscellaneous steel fabrications and other steel items not defined as structural steel.

1.3 DEFINITIONS

- A. Structural Steel: Elements of the structural frame indicated on Drawings and as described in AISC 303, "Code of Standard Practice for Steel Buildings and Bridges."

1.4 COORDINATION

- A. Coordinate selection of shop primers with topcoats to be applied over them. Comply with paint and coating manufacturers' written recommendations to ensure that shop primers and topcoats are compatible with one another.
- B. Coordinate installation of anchorage items to be embedded in or attached to other construction without delaying the Work. Provide setting diagrams, sheet metal templates, instructions, and directions for installation.

1.5 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.6 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: Show fabrication of structural-steel components.
 - 1. Include details of cuts, connections, splices, camber, holes, and other pertinent data.

2. Include embedment Drawings.
3. Indicate welds by standard AWS symbols, distinguishing between shop and field welds, and show size, length, and type of each weld. Show backing bars that are to be removed and supplemental fillet welds where backing bars are to remain.
4. Indicate type, size, and length of bolts, distinguishing between shop and field bolts. Identify pretensioned and slip-critical, high-strength bolted connections.

1.7 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For fabricator.
- B. Welding certificates.
- C. Paint Compatibility Certificates: From manufacturers of topcoats applied over shop primers, certifying that shop primers are compatible with topcoats.
- D. Mill test reports for structural steel, including chemical and physical properties.
- E. Product Test Reports: For the following:
 1. Bolts, nuts, and washers including mechanical properties and chemical analysis.
 2. Shop primers.
 3. Nonshrink grout.
- F. Source quality-control reports.
- G. Field quality-control and special inspection reports.

1.8 QUALITY ASSURANCE

- A. Fabricator Qualifications: A qualified fabricator that participates in the AISC Quality Certification Program and is designated an AISC-Certified Plant, Category STD.
- B. Welding Qualifications: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."
- C. Comply with applicable provisions of the following specifications and documents:
 1. AISC 303.
 2. AISC 360.
 3. RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts."

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Store materials to permit easy access for inspection and identification. Keep steel members off ground and spaced by using pallets, dunnage, or other supports and spacers. Protect steel members and packaged materials from corrosion and deterioration.
 1. Do not store materials on structure in a manner that might cause distortion, damage, or overload to members or supporting structures. Repair or replace damaged materials or structures as directed.
- B. Store fasteners in a protected place in sealed containers with manufacturer's labels intact.

1. Fasteners may be repackaged provided Owner's testing and inspecting agency observes repackaging and seals containers.
2. Clean and relubricate bolts and nuts that become dry or rusty before use.
3. Comply with manufacturers' written recommendations for cleaning and lubricating ASTM F 1852 fasteners and for retesting fasteners after lubrication.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Connections: Provide details of simple shear connections required by the Contract Documents to be selected or completed by structural-steel fabricator to withstand loads indicated and comply with other information and restrictions indicated.
 1. Select and complete connections using AISC 360.
- B. Construction: Combined system of moment frame and shear walls.

2.2 STRUCTURAL-STEEL MATERIALS

- A. W-Shapes: ASTM A 992/A 992M.
- B. Channels and Angles-Shapes: ASTM A 36/A 36M.
- C. Plate and Bar: ASTM A 36/A 36M.
- D. Cold-Formed Hollow Structural Sections: ASTM A 500/A 500M, Grade B, structural tubing.
- E. Steel Pipe: ASTM A 53/A 53M, Type E or Type S, Grade B.
 1. Weight Class: Standard.
 2. Finish: Black except where indicated to be galvanized.
- F. Welding Electrodes: Comply with AWS requirements.

2.3 BOLTS, CONNECTORS, AND ANCHORS

- A. High-Strength Bolts, Nuts, and Washers: ASTM A 325, Type 1, heavy-hex steel structural bolts; ASTM A 563, Grade C, heavy-hex carbon-steel nuts; and ASTM F 436, Type 1, hardened carbon-steel washers; all with plain finish.
- B. Headed Anchor Rods: ASTM F 1554, Grade 36, straight.
 1. Nuts: ASTM A 563 hex carbon steel.
 2. Plate Washers: ASTM A 36/A 36M carbon steel.
 3. Washers: ASTM F 436, Type 1, hardened carbon steel.
 4. Finish: Plain.
- C. Threaded Rods: ASTM A 36/A 36M.
 1. Nuts: ASTM A 563 [heavy-]hex carbon steel.

2. Washers: ASTM F 436, Type 1, hardened.
3. Finish: Plain.

2.4 PRIMER

- A. Primer for interior steel not exposed to public view: Fabricator's standard lead- and chromate-free, nonasphaltic, rust-inhibiting primer complying with MPI#79 and compatible with topcoat.
- B. Primer for exterior steel, steel in exterior walls not galvanized and steel exposed to public view: SSPC-Paint 22, epoxy polyamide primer complying with MPI#79 and compatible with topcoat.
- C. Galvanizing Repair Paint: ASTM A 780/A 780M.

2.5 GROUT

- A. Nonmetallic, Shrinkage-Resistant Grout: ASTM C 1107/C 1107M, factory-packaged, nonmetallic aggregate grout, noncorrosive and nonstaining, mixed with water to consistency suitable for application and a 30-minute working time.

2.6 FABRICATION

- A. Structural Steel: Fabricate and assemble in shop to greatest extent possible. Fabricate according to AISC 303, "Code of Standard Practice for Steel Buildings and Bridges," and to AISC 360.
 1. Identify high-strength structural steel according to ASTM A 6/A 6M and maintain markings until structural steel has been erected.
 2. Mark and match-mark materials for field assembly.
 3. Complete structural-steel assemblies, including welding of units, before starting shop-priming operations.
- B. Exposed Structural Steel: Comply with fabrication requirements, including tolerance limits, of AISC's "Code of Standard Practice for Steel Buildings and Bridges" for exposed structural steel.
 1. Fabricate with exposed surfaces smooth, square, and free of surface blemishes including pitting, rust, scale, seam marks, roller marks, rolled trade names, and roughness.
 2. Remove blemishes by filling or grinding or by welding and grinding, before cleaning, treating, and shop priming.
- C. Thermal Cutting: Perform thermal cutting by machine to greatest extent possible.
 1. Plane thermally cut edges to be welded to comply with requirements in AWS D1.1/D1.1M.
- D. Bolt Holes: Cut, drill, or punch standard bolt holes perpendicular to metal surfaces.
- E. Finishing: Accurately finish ends of columns and other members transmitting bearing loads.
- F. Cleaning: Clean and prepare steel surfaces that are to remain unpainted according to SSPC-SP 3, "Power Tool Cleaning."
- G. Holes: Provide holes required for securing other work to structural steel and for other work to pass through steel members.

1. Cut, drill, or punch holes perpendicular to steel surfaces. Do not thermally cut bolt holes or enlarge holes by burning.
2. Baseplate Holes: Cut, drill, mechanically thermal cut, or punch holes perpendicular to steel surfaces.
3. Weld threaded nuts to framing and other specialty items indicated to receive other work.

2.7 SHOP CONNECTIONS

- A. High-Strength Bolts: Shop install high-strength bolts according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts" for type of bolt and type of joint specified.
 1. Joint Type: Snug-tight.
- B. Weld Connections: Comply with AWS D1.1/D1.1M for tolerances, appearances, welding procedure specifications, weld quality, and methods used in correcting welding work.
 1. Assemble and weld built-up sections by methods that maintain true alignment of axes without exceeding tolerances in AISC 303 for mill material.

2.8 SHOP PRIMING

- A. Shop prime steel surfaces except the following:
 1. Surfaces embedded in concrete or mortar. Extend priming of partially embedded members to a depth of 2 inches.
 2. Surfaces to be field welded.
 3. Surfaces of high-strength bolted, slip-critical connections.
 4. Surfaces to receive sprayed fire-resistive materials (applied fireproofing).
 5. Galvanized surfaces.
 6. Surfaces enclosed in interior construction.
- B. Surface Preparation: Clean surfaces to be painted. Remove loose rust and mill scale and spatter, slag, or flux deposits. Prepare surfaces according to the following specifications and standards:
 1. SSPC-SP 3, "Power Tool Cleaning." For interior steel not exposed to public view.
 1. SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning." For exterior steel, steel in exterior walls, and steel exposed to public view.
- C. Priming: Immediately after surface preparation, apply primer according to manufacturer's written instructions and at rate recommended by SSPC to provide a minimum dry film thickness of 1.5 mils. For exterior steel, steel in exterior walls, and steel exposed to public view, immediately after surface preparation, apply epoxy polyamide primer according to manufacturer's written instructions and at rate recommended by SSPC to provide a dry film thickness of not less than 3.0 mils. Use priming methods that result in full coverage of joints, corners, edges, and exposed surfaces.
 1. Stripe paint corners, crevices, bolts, welds, and sharp edges.
 2. Apply two coats of shop paint to surfaces that are inaccessible after assembly or erection. Change color of second coat to distinguish it from first.

2.9 GALVANIZING

- A. Hot-Dip Galvanized Finish: Apply zinc coating by the hot-dip process to structural steel according to ASTM A 123/A 123M.
 - 1. Fill vent and drain holes that are exposed in the finished Work unless they function as weep holes, by plugging with zinc solder and filing off smooth.
 - 2. Galvanize lintels and shelf angles attached to structural-steel frame and located in exterior walls.

2.10 SOURCE QUALITY CONTROL

- A. Testing Agency: Owner will engage a qualified testing agency to perform shop tests and inspections.
 - 1. Provide testing agency with access to places where structural-steel work is being fabricated or produced to perform tests and inspections.
- B. Bolted Connections: Inspect and test shop-bolted connections according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts."
- C. Welded Connections: In addition to visually inspection, shop-welded full-penetration connections will be tested according to AWS D1.1/D1.1M and the following inspection procedures, at testing agency's option:
 - 1. Liquid Penetrant Inspection: ASTM E 165.
 - 2. Magnetic Particle Inspection: ASTM E 709; performed on root pass and on finished weld. Cracks or zones of incomplete fusion or penetration are not accepted.
 - 3. Ultrasonic Inspection: ASTM E 164.
 - 4. Radiographic Inspection: ASTM E 94.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify, with certified steel erector present, elevations of concrete-bearing surfaces and locations of anchor rods, bearing plates, and other embedments for compliance with requirements.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Provide temporary shores, guys, braces, and other supports during erection to keep structural steel secure, plumb, and in alignment against temporary construction loads and loads equal in intensity to design loads. Remove temporary supports when permanent structural steel, connections, and bracing are in place unless otherwise indicated.

3.3 ERECTION

- A. Set structural steel accurately in locations and to elevations indicated and according to AISC 303 and AISC 360.

- B. **Baseplates and Bearing Plates:** Clean concrete- bearing surfaces of bond-reducing materials, and roughen surfaces prior to setting plates. Clean bottom surface of plates.
 - 1. Set plates for structural members on wedges, shims, or setting nuts as required.
 - 2. Weld plate washers to top of baseplate.
 - 3. Snug-tighten anchor rods after supported members have been positioned and plumbed. Do not remove wedges or shims but, if protruding, cut off flush with edge of plate before packing with grout.
 - 4. Promptly pack grout solidly between bearing surfaces and plates so no voids remain. Neatly finish exposed surfaces; protect grout and allow to cure. Comply with manufacturer's written installation instructions for shrinkage-resistant grouts.
- C. Maintain erection tolerances of structural steel within AISC 303, "Code of Standard Practice for Steel Buildings and Bridges."
- D. Align and adjust various members that form part of complete frame or structure before permanently fastening. Before assembly, clean bearing surfaces and other surfaces that are in permanent contact with members. Perform necessary adjustments to compensate for discrepancies in elevations and alignment.
 - 1. Level and plumb individual members of structure.
 - 2. Make allowances for difference between temperature at time of erection and mean temperature when structure is completed and in service.
- E. Splice members only where indicated.
- F. Do not use thermal cutting during erection.
- G. Do not enlarge unfair holes in members by burning or using drift pins. Ream holes that must be enlarged to admit bolts.

3.4 FIELD CONNECTIONS

- A. **High-Strength Bolts:** Install high-strength bolts according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts" for type of bolt and type of joint specified.
 - 1. Joint Type: Snug-tight.
- B. **Weld Connections:** Comply with AWS D1.1/D1.1M for tolerances, appearances, welding procedure specifications, weld quality, and methods used in correcting welding work.
 - 1. Comply with AISC 303 and AISC 360 for bearing, alignment, adequacy of temporary connections, and removal of paint on surfaces adjacent to field welds.
 - 2. Remove backing bars or runoff tabs, back gouge, and grind steel smooth.

3.5 FIELD QUALITY CONTROL

- A. **Special Inspections:** Owner will engage a qualified special inspector to perform the following special inspections:
 - 1. Verify structural-steel materials and inspect steel frame joint details.
 - 2. Verify weld materials and inspect welds.
 - 3. Verify connection materials and inspect high-strength bolted connections.

- B. Testing Agency: Owner will engage a qualified testing agency to perform tests and inspections.
- C. Bolted Connections: Inspect and test bolted connections according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts."
- D. Welded Connections: Visually inspect field welds according to AWS D1.1/D1.1M.
 - 1. In addition to visual inspection, test and inspect full-penetration field welds according to AWS D1.1/D1.1M and the following inspection procedures, at testing agency's option:
 - a. Liquid Penetrant Inspection: ASTM E 165.
 - b. Magnetic Particle Inspection: ASTM E 709; performed on root pass and on finished weld. Cracks or zones of incomplete fusion or penetration are not accepted.
 - c. Ultrasonic Inspection: ASTM E 164.
 - d. Radiographic Inspection: ASTM E 94.

3.6 REPAIRS AND PROTECTION

- A. Galvanized Surfaces: Clean areas where galvanizing is damaged or missing and repair galvanizing to comply with ASTM A 780/A 780M.
- B. Touchup Painting: Immediately after erection, clean exposed areas where primer is damaged or missing and paint with the same material as used for shop painting to comply with SSPC-PA 1 for touching up shop-painted surfaces.
 - 1. Clean and prepare surfaces by SSPC-SP 2 hand-tool cleaning or SSPC-SP 3 power-tool cleaning.
 - 2. Apply a compatible primer of same type as shop primer used on adjacent surfaces

END OF SECTION 051200

SECTION 055000 - METAL FABRICATIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Steel framing and supports for mechanical and electrical equipment.
 - 2. Steel framing and supports for applications where framing and supports are not specified in other Sections.

1.3 COORDINATION

- A. Coordinate selection of shop primers with topcoats to be applied over them. Comply with paint and coating manufacturers' written recommendations to ensure that shop primers and topcoats are compatible with one another.
- B. Coordinate installation of metal fabrications that are anchored to or that receive other work. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.

1.4 ACTION SUBMITTALS

- A. Shop Drawings: Show fabrication and installation details. Include plans, elevations, sections, and details of metal fabrications and their connections. Show anchorage and accessory items. Provide Shop Drawings for the following:
 - 1. Steel framing and supports for mechanical and electrical equipment.
 - 2. Steel framing and supports for applications where framing and supports are not specified in other Sections.

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For professional engineer.
- B. Mill Certificates: Signed by stainless-steel manufacturers, certifying that products furnished comply with requirements.
- C. Welding certificates.

- D. Paint Compatibility Certificates: From manufacturers of topcoats applied over shop primers, certifying that shop primers are compatible with topcoats.

1.6 FIELD CONDITIONS

- A. Field Measurements: Verify actual locations of walls and other construction contiguous with metal fabrications by field measurements before fabrication.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes acting on exterior metal fabrications by preventing buckling, opening of joints, overstressing of components, failure of connections, and other detrimental effects.

1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

2.2 METALS

- A. Metal Surfaces, General: Provide materials with smooth, flat surfaces unless otherwise indicated. For metal fabrications exposed to view in the completed Work, provide materials without seam marks, roller marks, rolled trade names, or blemishes.
- B. Steel Plates, Shapes, and Bars: ASTM A 36/A 36M.
- C. Steel Tubing: ASTM A 500/A 500M, cold-formed steel tubing.
- D. Steel Pipe: ASTM A 53/A 53M, Standard Weight (Schedule 40) unless otherwise indicated.

2.3 FASTENERS

- A. General: Unless otherwise indicated, provide Type 304 stainless-steel fasteners for exterior use and zinc-plated fasteners with coating complying with ASTM B 633 or ASTM F 1941, Class Fe/Zn 5, at exterior walls. Select fasteners for type, grade, and class required.
 1. Provide stainless-steel fasteners for fastening aluminum.
 2. Provide stainless-steel fasteners for fastening stainless steel.
 3. Provide stainless-steel fasteners for fastening nickel silver.

2.4 MISCELLANEOUS MATERIALS

- A. Universal Shop Primer: Fast-curing, lead- and chromate-free, universal modified-alkyd primer complying with MPI#79 and compatible with topcoat.
 1. Use primer containing pigments that make it easily distinguishable from zinc-rich primer.

- B. Water-Based Primer: Emulsion type, anticorrosive primer for mildly corrosive environments that is resistant to flash rusting when applied to cleaned steel, complying with MPI#107 and compatible with topcoat.
- C. Epoxy Zinc-Rich Primer: Complying with MPI#20 and compatible with topcoat.
- D. Shop Primer for Galvanized Steel: Primer formulated for exterior use over zinc-coated metal and compatible with finish paint systems indicated.
- E. Galvanizing Repair Paint: High-zinc-dust-content paint complying with SSPC-Paint 20 and compatible with paints specified to be used over it.
- F. Bituminous Paint: Cold-applied asphalt emulsion complying with ASTM D 1187/D 1187M.
- G. Nonshrink, Nonmetallic Grout: Factory-packaged, nonstaining, noncorrosive, nongaseous grout complying with ASTM C 1107/C 1107M. Provide grout specifically recommended by manufacturer for interior and exterior applications.
- H. Concrete: Comply with requirements in Section 033000 "Cast-in-Place Concrete" for normal-weight, air-entrained, concrete with a minimum 28-day compressive strength of 3000 psi.

2.5 FABRICATION, GENERAL

- A. Shop Assembly: Preassemble items in the shop to greatest extent possible. Disassemble units only as necessary for shipping and handling limitations. Use connections that maintain structural value of joined pieces. Clearly mark units for reassembly and coordinated installation.
- B. Cut, drill, and punch metals cleanly and accurately. Remove burrs and ease edges to a radius of approximately 1/32 inch unless otherwise indicated. Remove sharp or rough areas on exposed surfaces.
- C. Form bent-metal corners to smallest radius possible without causing grain separation or otherwise impairing work.
- D. Form exposed work with accurate angles and surfaces and straight edges.
- E. Weld corners and seams continuously to comply with the following:
 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 2. Obtain fusion without undercut or overlap.
 3. Remove welding flux immediately.
 4. At exposed connections, finish exposed welds and surfaces smooth and blended so no roughness shows after finishing and contour of welded surface matches that of adjacent surface.
- F. Form exposed connections with hairline joints, flush and smooth, using concealed fasteners or welds where possible. Where exposed fasteners are required, use Phillips flat-head (countersunk) fasteners unless otherwise indicated. Locate joints where least conspicuous.
- G. Fabricate seams and other connections that are exposed to weather in a manner to exclude water. Provide weep holes where water may accumulate.
- H. Cut, reinforce, drill, and tap metal fabrications as indicated to receive finish hardware, screws, and similar items.

- I. Provide for anchorage of type indicated; coordinate with supporting structure. Space anchoring devices to secure metal fabrications rigidly in place and to support indicated loads.
- J. Where units are indicated to be cast into concrete or built into masonry, equip with integrally welded steel strap anchors, 1/8 by 1-1/2 inches, with a minimum 6-inch embedment and 2-inch hook, not less than 8 inches from ends and corners of units and 24 inches o.c., unless otherwise indicated.

2.6 MISCELLANEOUS FRAMING AND SUPPORTS

- A. General: Provide steel framing and supports not specified in other Sections as needed to complete the Work.
- B. Fabricate units from steel shapes, plates, and bars of welded construction unless otherwise indicated. Fabricate to sizes, shapes, and profiles indicated and as necessary to receive adjacent construction.
 1. Fabricate units from slotted channel framing where indicated.
 2. Furnish inserts for units installed after concrete is placed.
- C. Galvanize miscellaneous framing and supports where indicated.

2.7 FINISHES, GENERAL

- A. Finish metal fabrications after assembly.
- B. Finish exposed surfaces to remove tool and die marks and stretch lines, and to blend into surrounding surface.

2.8 STEEL AND IRON FINISHES

- A. Galvanizing: Hot-dip galvanize items as indicated to comply with ASTM A 153/A 153M for steel and iron hardware and with ASTM A 123/A 123M for other steel and iron products.
 1. Do not quench or apply post galvanizing treatments that might interfere with paint adhesion.
- B. Preparation for Shop Priming Galvanized Items: After galvanizing, thoroughly clean railings of grease, dirt, oil, flux, and other foreign matter, and treat with metallic phosphate process.
- C. Shop prime iron and steel items not indicated to be galvanized unless they are to be embedded in concrete, sprayed-on fireproofing, or masonry, or unless otherwise indicated.
 1. Shop prime with universal shop primer unless indicated.
- D. Preparation for Shop Priming: Prepare surfaces to comply with SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
 1. Exterior Items: SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
 2. Items Indicated to Receive Zinc-Rich Primer: SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
 3. Items Indicated to Receive Primers Specified in Section 099600 "High-Performance Coatings": SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
 4. Other Items: SSPC-SP 3, "Power Tool Cleaning."

- E. Shop Priming: Apply shop primer to comply with SSPC-PA 1, "Paint Application Specification No. 1: Shop, Field, and Maintenance Painting of Steel," for shop painting.
 - 1. Stripe paint corners, crevices, bolts, welds, and sharp edges.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Cutting, Fitting, and Placement: Perform cutting, drilling, and fitting required for installing metal fabrications. Set metal fabrications accurately in location, alignment, and elevation; with edges and surfaces level, plumb, true, and free of rack; and measured from established lines and levels.
- B. Fit exposed connections accurately together to form hairline joints. Weld connections that are not to be left as exposed joints but cannot be shop welded because of shipping size limitations. Do not weld, cut, or abrade surfaces of exterior units that have been hot-dip galvanized after fabrication and are for bolted or screwed field connections.
- C. Field Welding: Comply with the following requirements:
 - 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 - 2. Obtain fusion without undercut or overlap.
 - 3. Remove welding flux immediately.
 - 4. At exposed connections, finish exposed welds and surfaces smooth and blended so no roughness shows after finishing and contour of welded surface matches that of adjacent surface.
- D. Fastening to In-Place Construction: Provide anchorage devices and fasteners where metal fabrications are required to be fastened to in-place construction. Provide threaded fasteners for use with concrete and masonry inserts, toggle bolts, through bolts, lag screws, wood screws, and other connectors.
- E. Provide temporary bracing or anchors in formwork for items that are to be built into concrete, masonry, or similar construction.

3.2 INSTALLING MISCELLANEOUS FRAMING AND SUPPORTS

- A. General: Install framing and supports to comply with requirements of items being supported, including manufacturers' written instructions and requirements indicated on Shop Drawings.

3.3 ADJUSTING AND CLEANING

- A. Touchup Painting: Immediately after erection, clean field welds, bolted connections, and abraded areas. Paint uncoated and abraded areas with the same material as used for shop painting to comply with SSPC-PA 1 for touching up shop-painted surfaces.
 - 1. Apply by brush or spray to provide a minimum 2.0-mil dry film thickness.
- B. Galvanized Surfaces: Clean field welds, bolted connections, and abraded areas and repair galvanizing to comply with ASTM A 780/A 780M.

END OF SECTION 055000

SECTION 061000 - ROUGH CARPENTRY

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Framing with dimension lumber.
 - 2. Framing with engineered wood products.
 - 3. Wood blocking and nailers.
 - 4. Wood furring.
 - 5. Wood sleepers.

1.3 DEFINITIONS

- A. Exposed Framing: Framing not concealed by other construction.
- B. Dimension Lumber: Lumber of 2 inches nominal or greater but less than 5 inches nominal in least dimension.
- C. Lumber grading agencies, and the abbreviations used to reference them, include the following:
 - 1. SPIB: The Southern Pine Inspection Bureau.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of process and factory-fabricated product. Indicate component materials and dimensions and include construction and application details.
 - 1. Include data for wood-preservative treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Indicate type of preservative used and net amount of preservative retained.
 - 2. For products receiving a waterborne treatment, include statement that moisture content of treated materials was reduced to levels specified before shipment to Project site.
 - 3. Include copies of warranties from chemical treatment manufacturers for each type of treatment.
- B. Fastener Patterns: Full-size templates for fasteners in exposed framing.

1.5 INFORMATIONAL SUBMITTALS

- A. Material Certificates: For dimension lumber specified to comply with minimum allowable unit stresses. Indicate species and grade selected for each use and design values approved by the ALSC Board of Review.

1.6 QUALITY ASSURANCE

- A. Testing Agency Qualifications: For testing agency providing classification marking for fire-retardant treated material, an inspection agency acceptable to authorities having jurisdiction that periodically performs inspections to verify that the material bearing the classification marking is representative of the material tested.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Stack lumber flat with spacers beneath and between each bundle to provide air circulation. Protect lumber from weather by covering with waterproof sheeting, securely anchored. Provide for air circulation around stacks and under coverings.

PART 2 - PRODUCTS

2.1 WOOD PRODUCTS, GENERAL

- A. Lumber: DOC PS 20 and applicable rules of grading agencies indicated. If no grading agency is indicated, provide lumber that complies with the applicable rules of any rules-writing agency certified by the ALSC Board of Review. Provide lumber graded by an agency certified by the ALSC Board of Review to inspect and grade lumber under the rules indicated.
 - 1. Factory mark each piece of lumber with grade stamp of grading agency.
 - 2. For exposed lumber indicated to receive a stained or natural finish, mark grade stamp on end or back of each piece or omit grade stamp and provide certificates of grade compliance issued by grading agency.
 - 3. Where nominal sizes are indicated, provide actual sizes required by DOC PS 20 for moisture content specified. Where actual sizes are indicated, they are minimum dressed sizes for dry lumber.
 - 4. Provide dressed lumber, S4S, unless otherwise indicated.
- B. Maximum Moisture Content of Lumber: **19 percent** unless otherwise indicated.
- C. Engineered Wood Products: Provide engineered wood products acceptable to authorities having jurisdiction and for which current model code research or evaluation reports exist that show compliance with building code in effect for Project.
 - 1. Allowable Design Stresses: Provide engineered wood products with allowable design stresses, as published by manufacturer, that meet or exceed those indicated. Manufacturer's published values shall be determined from empirical data or by rational engineering analysis and demonstrated by comprehensive testing performed by a qualified independent testing agency.

2.2 WOOD-PRESERVATIVE-TREATED LUMBER

- A. Preservative Treatment by Pressure Process: AWWA U1; Use Category UC3b for exterior construction not in contact with the ground.
 - 1. Preservative Chemicals: Acceptable to authorities having jurisdiction and containing no arsenic or chromium.
 - 2. For exposed items indicated to receive a stained or natural finish, use chemical formulations that do not require incising, contain colorants, bleed through, or otherwise adversely affect finishes.
- B. Kiln-dry lumber after treatment to a maximum moisture content of 19 percent. Do not use material that is warped or that does not comply with requirements for untreated material.
- C. Mark lumber with treatment quality mark of an inspection agency approved by the ALSC Board of Review.
 - 1. For exposed lumber indicated to receive a stained or natural finish, mark end or back of each piece or omit marking and provide certificates of treatment compliance issued by inspection agency.
- D. Application: Treat items indicated on Drawings, and the following:
 - 1. Wood cants, nailers, curbs, equipment support bases, blocking, stripping, and similar members in connection with roofing, flashing, vapor barriers, and waterproofing.
 - 2. Wood sills, sleepers, blocking, and similar concealed members in contact with masonry or concrete.
 - 3. Wood framing and furring attached directly to the interior of below-grade exterior masonry or concrete walls.
 - 4. Wood framing members that are less than 18 inches above the ground in crawlspaces or unexcavated areas.
 - 5. Wood floor plates that are installed over concrete slabs-on-grade.

2.3 DIMENSION LUMBER FRAMING

- A. Load-Bearing Partitions: Construction or No. 2 grade.
 - 1. Application: Exterior walls where indicated.
 - 2. Species:
 - a. Southern pine; SPIB.
 - b. Mixed southern pine; SPIB.
- B. Ceiling Joists: Construction or No. 2 grade.
 - 1. Species:
 - a. Southern pine; SPIB.
 - b. Mixed southern pine; SPIB.
 - c. Spruce-pine-fir (south); NeLMA, WCLIB, or WWPA.
- C. Joists, Rafters, and Other Framing Not Listed Above: Construction or No. 2 grade.
 - 1. Species:
 - a. Southern pine; SPIB.
 - b. Mixed southern pine; SPIB.

2.4 ENGINEERED WOOD PRODUCTS

- A. Engineered Wood Products, General: Products shall contain no urea formaldehyde. Source Limitations: Obtain each type of engineered wood product from single source from a single manufacturer.
- B. Parallel-Strand Lumber: Structural composite lumber made from wood strand elements with grain primarily parallel to member lengths, evaluated and monitored according to ASTM D 5456 and manufactured with an exterior-type adhesive complying with ASTM D 2559. Members shall be Architectural Appearance Grade, sealed with a penetrating sealer for exterior above grade use, and bundle wrapped as standard with the manufacturer and approved. Members shall be complete with hardware for joining laminated members and for their connection to other construction.
 - 1. Extreme Fiber Stress in Bending, Edgewise: 2900 psi for 12-inch nominal- depth members.
 - 2. Modulus of Elasticity, Edgewise: 2,200,000 psi.

2.5 MISCELLANEOUS LUMBER

- A. General: Provide miscellaneous lumber indicated and lumber for support or attachment of other construction, including the following:
 - 1. Blocking.
 - 2. Nailers.
 - 3. Rooftop equipment bases and support curbs.
 - 4. Cants.
 - 5. Furring.
 - 6. Grounds.
- B. For items of dimension lumber size, provide No. 2 grade lumber and the following species:
 - 1. Mixed southern pine; SPIB.

2.6 FASTENERS

- A. General: Provide fasteners of size and type indicated that comply with requirements specified in this article for material and manufacture.
 - 1. Where rough carpentry is exposed to weather, in ground contact, pressure-preservative treated, or in area of high relative humidity, provide fasteners with hot-dip zinc coating complying with ASTM A 153/A 153M. Exposed to view connections shall be made with Type 304 stainless steel.
- B. Nails, Brads, and Staples: ASTM F 1667.
- C. Power-Driven Fasteners: NES NER-272.
- D. Wood Screws: ASME B18.6.1.
- E. Lag Bolts: ASME B18.2.1.
- F. Bolts: Steel bolts complying with ASTM A 307, Grade A; with ASTM A 563 hex nuts and, where indicated, flat washers.
- G. Expansion Anchors: Anchor bolt and sleeve assembly of material indicated below with capability to sustain, without failure, a load equal to six times the load imposed when installed in unit masonry

assemblies and equal to four times the load imposed when installed in concrete as determined by testing per ASTM E 488 conducted by a qualified independent testing and inspecting agency.

1. Material: Carbon-steel components, zinc plated to comply with ASTM B 633, Class Fe/Zn 5.

2.7 METAL FRAMING ANCHORS

- A. Allowable Design Loads: Provide products with allowable design loads, as published by manufacturer, that meet or exceed those indicated. Manufacturer's published values shall be determined from empirical data or by rational engineering analysis and demonstrated by comprehensive testing performed by a qualified independent testing agency.
- B. Galvanized-Steel Sheet: Hot-dip, zinc-coated steel sheet complying with ASTM A 653/A 653M, G60 coating designation.
 1. Use for interior locations unless otherwise indicated.
- C. Hot-Dip, Heavy-Galvanized Steel Sheet: ASTM A 653/A 653M; structural steel (SS), high-strength low-alloy steel Type A (HSLAS Type A), or high-strength low-alloy steel Type B (HSLAS Type B); G185 coating designation; and not less than 0.036 inch thick.
 1. Use for wood-preserved-treated lumber and where indicated.
- D. Hold-Downs: Brackets for bolting to wall studs and securing to foundation walls with anchor bolts or to other hold-downs with threaded rods and designed with first of two bolts placed seven bolt diameters from reinforced base. Capacity of hold-down anchors shall be as indicated.

2.8 MISCELLANEOUS MATERIALS

- A. Sill-Sealer Gaskets: Closed-cell neoprene foam, 1/4 inch thick, selected from manufacturer's standard widths to suit width of sill members indicated.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Set rough carpentry to required levels and lines, with members plumb, true to line, cut, and fitted. Fit rough carpentry to other construction; scribe and cope as needed for accurate fit. Locate nailers, blocking, and similar supports to comply with requirements for attaching other construction.
- B. Framing Standard: Comply with AF&PA's WCD I, "Details for Conventional Wood Frame Construction," unless otherwise indicated.
- C. Framing with Engineered Wood Products: Install engineered wood products to comply with manufacturer's written instructions.
- D. Metal Framing Anchors: Install metal framing anchors to comply with manufacturer's written instructions. Install fasteners through each fastener hole.
- E. Install sill sealer gasket to form continuous seal between sill plates and foundation walls.

- F. Do not splice structural members between supports unless otherwise indicated.
- G. Provide blocking and framing as indicated and as required to support facing materials, fixtures, specialty items, and trim.
 - 1. Provide metal clips for fastening gypsum board or lath at corners and intersections where framing or blocking does not provide a surface for fastening edges of panels. Space clips not more than 16 inches o.c.
- H. Sort and select lumber so that natural characteristics will not interfere with installation or with fastening other materials to lumber. Do not use materials with defects that interfere with function of member or pieces that are too small to use with minimum number of joints or optimum joint arrangement.
- I. Comply with AWPA M4 for applying field treatment to cut surfaces of preservative-treated lumber.
 - 1. Use inorganic boron for items that are continuously protected from liquid water.
 - 2. Use copper naphthenate for items not continuously protected from liquid water.
- J. Securely attach rough carpentry work to substrate by anchoring and fastening as indicated, complying with the following:
 - 1. Table 2304.9.1, "Fastening Schedule," in ICC's International Building Code.
- K. Use steel common nails unless otherwise indicated. Select fasteners of size that will not fully penetrate members where opposite side will be exposed to view or will receive finish materials. Make tight connections between members. Install fasteners without splitting wood. Drive nails snug but do not countersink nail heads unless otherwise indicated.
- L. For exposed work, arrange fasteners in straight rows parallel with edges of members, with fasteners evenly spaced, and with adjacent rows staggered.

3.2 WOOD BLOCKING, AND NAILER INSTALLATION

- A. Install where indicated and where required for attaching other work. Form to shapes indicated and cut as required for true line and level of attached work. Coordinate locations with other work involved.
- B. Attach items to substrates to support applied loading. Recess bolts and nuts flush with surfaces unless otherwise indicated.
- C. Where wood-preservative-treated lumber is installed adjacent to metal decking, install continuous flexible flashing separator between wood and metal decking.
- D. Provide permanent grounds of dressed, pressure-preservative-treated, key-beveled lumber not less than 1-1/2 inches wide and of thickness required to bring face of ground to exact thickness of finish material. Remove temporary grounds when no longer required.

3.3 PROTECTION

- A. Protect wood that has been treated with inorganic boron (SBX) from weather. If, despite protection, inorganic boron-treated wood becomes wet, apply EPA-registered borate treatment. Apply borate solution by spraying to comply with EPA-registered label.
- B. Protect rough carpentry from weather. If, despite protection, rough carpentry becomes wet, apply EPA-registered borate treatment. Apply borate solution by spraying to comply with EPA-registered label.

END OF SECTION 061000

SECTION 061600 - SHEATHING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Wall sheathing.
 - 2. Roof sheathing.
 - 3. Sheathing joint and penetration treatment.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of process and factory-fabricated product. Indicate component materials and dimensions and include construction and application details.
 - 1. Include data for wood-preservative treatment from chemical treatment manufacturer and certification by treating plant that treated plywood complies with requirements. Indicate type of preservative used and net amount of preservative retained.
 - 2. For products receiving a waterborne treatment, include statement that moisture content of treated materials was reduced to levels specified before shipment to Project site.
 - 3. Include copies of warranties from chemical treatment manufacturers for each type of treatment.

1.4 DELIVERY, STORAGE, AND HANDLING

- A. Stack panels flat with spacers beneath and between each bundle to provide air circulation. Protect sheathing from weather by covering with waterproof sheeting, securely anchored. Provide for air circulation around stacks and under coverings.

PART 2 - PRODUCTS

2.1 WOOD PANEL PRODUCTS

- A. Plywood: DOC PS 1.
- B. Thickness: As needed to comply with requirements specified, but not less than thickness indicated.
- C. Factory mark panels to indicate compliance with applicable standard.

2.2 PRESERVATIVE-TREATED PLYWOOD

- A. Preservative Treatment by Pressure Process: AWWA U1; Use Category UC2 for interior construction not in contact with the ground;
 - 1. Preservative Chemicals: Acceptable to authorities having jurisdiction and containing no arsenic or chromium.
- B. Mark plywood with appropriate classification marking of an inspection agency acceptable to authorities having jurisdiction.
- C. Application: Treat all plywood used with roofing, flashing, vapor barriers, and waterproofing.

2.3 WALL SHEATHING

- A. Plywood Wall Sheathing: Exterior, Structural I sheathing.
 - 1. Span Rating: Not less than 16/0.
 - 2. Nominal Thickness: Not less than 7/16 inch.

2.4 ROOF SHEATHING

- A. Plywood Roof Sheathing: Exterior, Structural I sheathing.
 - 1. Span Rating: Not less than 24/0.
 - 2. Nominal Thickness: Not less than 3/4 inch.

2.5 FASTENERS

- A. General: Provide fasteners of size and type indicated that comply with requirements specified in this article for material and manufacture.
 - 1. For roof sheathing, provide fasteners with hot-dip zinc coating complying with ASTM A 153/A 153M.
- B. Nails, Brads, and Staples: ASTM F 1667.
- C. Power-Driven Fasteners: NES NER-272.
- D. Wood Screws: ASME B18.6.1.
- E. Screws for Fastening Wood Structural Panels to Cold-Formed Metal Framing: ASTM C 954, except with wafer heads and reamer wings, length as recommended by screw manufacturer for material being fastened.
 - 1. For wall and roof sheathing panels, provide screws with organic-polymer or other corrosion-protective coating having a salt-spray resistance of more than 800 hours according to ASTM B 117.
- F. Screws for Fastening Gypsum Sheathing to Cold-Formed Metal Framing: Steel drill screws, in length recommended by sheathing manufacturer for thickness of sheathing to be attached, with organic-polymer

or other corrosion-protective coating having a salt-spray resistance of more than 800 hours according to ASTM B 117.

1. For steel framing less than 0.0329 inch thick, use screws that comply with ASTM C 1002.
 2. For steel framing from 0.033 to 0.112 inch thick, use screws that comply with ASTM C 954.
- G. Screws for Fastening Oriented-Strand-Board-Surfaced, Polyisocyanurate-Foam Sheathing to Metal Roof Deck: Steel drill screws, in type and length recommended by sheathing manufacturer for thickness of sheathing to be attached, with organic-polymer or other corrosion-protective coating having a salt-spray resistance of more than 800 hours according to ASTM B 117. Provide washers or plates if recommended by sheathing manufacturer.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Do not use materials with defects that impair quality of sheathing or pieces that are too small to use with minimum number of joints or optimum joint arrangement. Arrange joints so that pieces do not span between fewer than three support members.
- B. Cut panels at penetrations, edges, and other obstructions of work; fit tightly against abutting construction unless otherwise indicated.
- C. Securely attach to substrate by fastening as indicated, complying with the following:
1. NES NER-272 for power-driven fasteners.
 2. Table 2304.9.1, "Fastening Schedule," in ICC's "International Building Code."
- D. Use common wire nails unless otherwise indicated. Select fasteners of size that will not fully penetrate members where opposite side will be exposed to view or will receive finish materials. Make tight connections. Install fasteners without splitting wood.
- E. Coordinate wall and roof sheathing installation with flashing and joint-sealant installation so these materials are installed in sequence and manner that prevent exterior moisture from passing through completed assembly.
- F. Do not bridge building expansion joints; cut and space edges of panels to match spacing of structural support elements.
- G. Coordinate sheathing installation with installation of materials installed over sheathing so sheathing is not exposed to precipitation or left exposed at end of the workday when rain is forecast.

3.2 WOOD STRUCTURAL PANEL INSTALLATION

- A. General: Comply with applicable recommendations in APA Form No. E30, "Engineered Wood Construction Guide," for types of structural-use panels and applications indicated.
- B. Fastening Methods: Fasten panels as indicated below:
1. Wall and Roof Sheathing:
 - a. Nail to wood framing.

- b. Space panels 1/8 inch (3 mm) apart at edges and ends.

END OF SECTION 061600

SECTION 062023 - INTERIOR FINISH CARPENTRY

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Interior trim.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of process and factory-fabricated product. Indicate component materials, dimensions, profiles, textures, and colors and include construction and application details.
- B. Samples for Initial Selection: For each type of product involving selection of colors, profiles, or textures.
- C. Samples for Verification:
 - 1. For each species and cut of lumber and panel products with non-factory-applied finish, with 1/2 of exposed surface finished, 50 sq. in. for lumber and 8 by 10 inches for panels.

1.4 DELIVERY, STORAGE, AND HANDLING

- A. Stack lumber, plywood, and other panels flat with spacers between each bundle to provide air circulation. Protect materials from weather by covering with waterproof sheeting, securely anchored. Provide for air circulation around stacks and under coverings.
- B. Deliver interior finish carpentry materials only when environmental conditions meet requirements specified for installation areas. If interior finish carpentry materials must be stored in other than installation areas, store only where environmental conditions meet requirements specified for installation areas.

1.5 FIELD CONDITIONS

- A. Environmental Limitations: Do not deliver or install interior finish carpentry materials until building is enclosed and weatherproof, wet work in space is completed and nominally dry, and HVAC system is operating and maintaining temperature and relative humidity at occupancy levels during the remainder of the construction period.
- B. Do not install finish carpentry materials that are wet, moisture damaged, or mold damaged.

1. Indications that materials are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
2. Indications that materials are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

PART 2 - PRODUCTS

2.1 MATERIALS, GENERAL

- A. Lumber: DOC PS 20 and the following grading rules:
 1. SPIB: The Southern Pine Inspection Bureau, "Standard Grading Rules for Southern Pine Lumber."
- B. Factory mark each piece of lumber with grade stamp of inspection agency indicating grade, species, moisture content at time of surfacing, and mill.
 1. For exposed lumber, mark grade stamp on end or back of each piece, or omit grade stamp and provide certificates of grade compliance issued by inspection agency.
- C. Softwood Plywood: DOC PS 1.
- D. Hardboard: AHA A135.4.

2.2 INTERIOR TRIM

- A. Hardwood Lumber Trim for Transparent Finish (Stain or Clear Finish):
 1. Species and Grade: White Birch; Clear; NHLA.
 2. Maximum Moisture Content: 10 percent.
 3. Finger Jointing: Not allowed.
 4. Gluing for Width: Not allowed.
 5. Face Surface: Surfaced (smooth).
 6. Matching: Selected for compatible grain and color.

2.3 SHELVING AND CLOTHES RODS

- A. Exposed Utility Shelving: Made from the following material, 3/4 inch (19 mm) thick.
 1. Wood boards as specified above for hardwood lumber trim for transparent finish.
- B. Clothes Rods: 1-1/2-inch- (38-mm-) diameter, clear, kiln-dried hardwood.
- C. Rod Flanges: Stainless steel.

2.4 MISCELLANEOUS MATERIALS

- A. Fasteners for Interior Finish Carpentry: Nails, screws, and other anchoring devices of type, size, material, and finish required for application indicated to provide secure attachment, concealed where possible.

- B. Glue: Aliphatic-resin, polyurethane, or resorcinol wood glue recommended by manufacturer for general carpentry use.
 - 1. Wood glue shall have a VOC content of 30 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
- C. Multipurpose Construction Adhesive: Formulation complying with ASTM D 3498 that is recommended for indicated use by adhesive manufacturer.
 - 1. Adhesive shall have a VOC content of 70 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

2.5 FABRICATION

- A. Back out or kerf backs of the following members except those with ends exposed in finished work:
 - 1. Interior standing and running trim except shoe and crown molds.
- B. Ease edges of lumber less than 1 inch in nominal thickness to 1/16-inch radius and edges of lumber 1 inch or more in nominal thickness to 1/8-inch radius.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance.
- B. Examine finish carpentry materials before installation. Reject materials that are wet, moisture damaged, and mold damaged.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Clean substrates of projections and substances detrimental to application.
- B. Before installing interior finish carpentry, condition materials to average prevailing humidity in installation areas for a minimum of 24 hours.

3.3 INSTALLATION, GENERAL

- A. Do not use materials that are unsound, warped, improperly treated or finished, inadequately seasoned, too small to fabricate with proper jointing arrangements, or with defective surfaces, sizes, or patterns.
- B. Install interior finish carpentry level, plumb, true, and aligned with adjacent materials. Use concealed shims where necessary for alignment.
 - 1. Scribe and cut interior finish carpentry to fit adjoining work. Refinish and seal cuts as recommended by manufacturer.

2. Where face fastening is unavoidable, countersink fasteners, fill surface flush, and sand unless otherwise indicated.
3. Install to tolerance of 1/8 inch in 96 inches for level and plumb. Install adjoining interior finish carpentry with 1/32-inch maximum offset for flush installation and 1/16-inch maximum offset for reveal installation.
4. Coordinate interior finish carpentry with materials and systems in or adjacent to it. Provide cutouts for mechanical and electrical items that penetrate interior finish carpentry.

3.4 STANDING AND RUNNING TRIM INSTALLATION

- A. Install with minimum number of joints practical, using full-length pieces from maximum lengths of lumber available. Do not use pieces less than 24 inches long, except where necessary. Stagger joints in adjacent and related standing and running trim. Cope at returns, miter at outside corners, and cope at inside corners to produce tight-fitting joints with full-surface contact throughout length of joint. Use scarf joints for end-to-end joints. Plane backs of casings to provide uniform thickness across joints where necessary for alignment.
 1. Match color and grain pattern of trim for transparent finish (stain or clear finish) across joints.
 2. Install trim after gypsum-board joint finishing operations are completed.
 3. Install without splitting; drill pilot holes before fastening where necessary to prevent splitting. Fasten to prevent movement or warping. Countersink fastener heads on exposed carpentry work and fill holes.

3.5 ADJUSTING

- A. Replace interior finish carpentry that is damaged or does not comply with requirements. Interior finish carpentry may be repaired or refinished if work complies with requirements and shows no evidence of repair or refinishing. Adjust joinery for uniform appearance.

3.6 CLEANING

- A. Clean interior finish carpentry on exposed and semiexposed surfaces. Restore damaged or soiled areas and touch up factory-applied finishes, if any.

3.7 PROTECTION

- A. Protect installed products from damage from weather and other causes during construction.
- B. Remove and replace finish carpentry materials that are wet, moisture damaged, and mold damaged.
 1. Indications that materials are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
 2. Indications that materials are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

END OF SECTION 062023

SECTION 072100 - THERMAL INSULATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Foam-plastic board insulation.
 - 2. Glass-fiber blanket insulation.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.

1.4 INFORMATIONAL SUBMITTALS

- A. Product Test Reports: Based on evaluation of comprehensive tests performed by a qualified testing agency, for each product.

1.5 QUALITY ASSURANCE

- A. Surface-Burning Characteristics: As determined by testing identical products according to ASTM E 84 by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Protect insulation materials from physical damage and from deterioration due to moisture, soiling, and other sources. Store inside and in a dry location. Comply with manufacturer's written instructions for handling, storing, and protecting during installation.
- B. Protect foam-plastic board insulation as follows:
 - 1. Do not expose to sunlight except to necessary extent for period of installation and concealment.
 - 2. Protect against ignition at all times. Do not deliver foam-plastic board materials to Project site before installation time.
 - 3. Quickly complete installation and concealment of foam-plastic board insulation in each area of construction.

PART 2 - PRODUCTS

2.1 FOAM-PLASTIC BOARD INSULATION

- A. Extruded-Polystyrene Board Insulation: ASTM C 578, of type and minimum compressive strength indicated below, with maximum flame-spread and smoke-developed indexes of 75 and 450, respectively, per ASTM E 84.
 - 1. Type IV, 25 psi.
- B. Adhesive for Bonding Insulation: Product with demonstrated capability to bond insulation securely to substrates without damaging insulation and substrates.

2.2 GLASS-FIBER BLANKET INSULATION

- A. Unfaced, Glass-Fiber Blanket Insulation: ASTM C 665, Type I; with maximum flame-spread and smoke-developed indexes of 25 and 50, respectively, per ASTM E 84; passing ASTM E 136 for combustion characteristics.
 - 1. Fire Propagation Characteristics: Passes NFPA 285 testing as part of an approved assembly.
- B. Sustainability Requirements: Provide glass-fiber blanket insulation as follows:
 - 1. Free of Formaldehyde: Insulation manufactured with 100 percent acrylic binders and no formaldehyde.
 - 2. Low Emitting: Insulation tested according to ASTM D 5116 and shown to emit less than 0.05-ppm formaldehyde.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Clean substrates of substances that are harmful to insulation or that interfere with insulation attachment.

3.2 INSTALLATION, GENERAL

- A. Comply with insulation manufacturer's written instructions applicable to products and applications indicated.
- B. Install insulation that is undamaged, dry, and unsoiled and that has not been left exposed to ice, rain, or snow at any time.
- C. Extend insulation to envelop entire area to be insulated. Cut and fit tightly around obstructions and fill voids with insulation. Remove projections that interfere with placement.
- D. Provide sizes to fit applications indicated and selected from manufacturer's standard thicknesses, widths, and lengths. Apply single layer of insulation units to produce thickness indicated unless multiple layers are otherwise shown or required to make up total thickness.

3.3 INSTALLATION OF BELOW-GRADE INSULATION

- A. On vertical surfaces, set insulation units using manufacturer's recommended adhesive according to manufacturer's written instructions.
- B. On horizontal surfaces, loosely lay insulation units according to manufacturer's written instructions. Stagger end joints and tightly abut insulation units.

3.4 INSTALLATION OF CAVITY-WALL INSULATION

- A. Foam-Plastic Board Insulation: Install pads of adhesive spaced approximately 24 inches o.c. both ways on inside face, and as recommended by manufacturer. Fit courses of insulation between wall ties and other obstructions, with edges butted tightly in both directions. Press units firmly against inside substrates.

3.5 INSTALLATION OF INSULATION FOR FRAMED CONSTRUCTION

- A. Apply insulation units to substrates by method indicated, complying with manufacturer's written instructions. If no specific method is indicated, bond units to substrate with adhesive or use mechanical anchorage to provide permanent placement and support of units.
- B. Glass-Fiber or Mineral-Wool Blanket Insulation: Install in cavities formed by framing members according to the following requirements:
 - 1. Use insulation widths and lengths that fill the cavities formed by framing members. If more than one length is required to fill the cavities, provide lengths that will produce a snug fit between ends.
 - 2. Place insulation in cavities formed by framing members to produce a friction fit between edges of insulation and adjoining framing members.
 - 3. Maintain 3-inch clearance of insulation around recessed lighting fixtures not rated for or protected from contact with insulation.
 - 4. Install eave ventilation troughs between roof framing members in insulated attic spaces at vented eaves.
 - 5. For metal-framed wall cavities where cavity heights exceed 96 inches, support unfaced blankets mechanically and support faced blankets by taping flanges of insulation to flanges of metal studs.
- C. Spray-Applied Insulation: Apply spray-applied insulation according to manufacturer's written instructions. Do not apply insulation until installation of pipes, ducts, conduits, wiring, and electrical outlets in walls is completed and windows, electrical boxes, and other items not indicated to receive insulation are masked. After insulation is applied, make flush with face of studs by using method recommended by insulation manufacturer.
- D. Miscellaneous Voids: Install insulation in miscellaneous voids and cavity spaces where required to prevent gaps in insulation using the following materials:
 - 1. Spray Polyurethane Insulation: Apply according to manufacturer's written instructions.

3.6 PROTECTION

- A. Protect installed insulation from damage due to harmful weather exposures, physical abuse, and other causes. Provide temporary coverings or enclosures where insulation is subject to abuse and cannot be concealed and protected by permanent construction immediately after installation.

END OF SECTION 072100

SECTION 072500 - WEATHER BARRIERS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Building wrap.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 WATER-RESISTIVE BARRIER

- A. Building Wrap: ASTM E 1677, Type I air barrier; with flame-spread and smoke-developed indexes of less than 25 and 450, respectively, when tested according to ASTM E 84; UV stabilized; and acceptable to authorities having jurisdiction.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Dow Chemical Company (The).
 - b. DuPont Building Innovations: E. I. du Pont de Nemours and Company.
 - c. Ludlow Coated Products.
 - 2. Water-Vapor Permeance: Not less than 75 perms (4300 ng/Pa x s x sq. m) per ASTM E 96/E 96M, Desiccant Method (Procedure A).
 - 3. Air Permeance: Not more than 0.004 cfm/sq. ft. at 0.3-inch wg (0.02 L/s x sq. m at 75 Pa) when tested according to ASTM E 2178.
 - 4. Allowable UV Exposure Time: Not less than three months.
 - 5. Fire Propagation Characteristics: Passes NFPA 285 testing as part of an approved assembly.
- B. Building-Wrap Tape: Pressure-sensitive plastic tape recommended by building-wrap manufacturer for sealing joints and penetrations in building wrap.

2.2 MISCELLANEOUS MATERIALS

- A. Nails and Staples: ASTM F 1667.

PART 3 - EXECUTION

3.1 WATER-RESISTIVE BARRIER INSTALLATION

- A. Cover exposed exterior surface of sheathing with water-resistive barrier securely fastened to framing immediately after sheathing is installed.
- B. Cover sheathing with water-resistive barrier as follows:
 - 1. Cut back barrier 1/2 inch on each side of the break in supporting members at expansion- or control-joint locations.
 - 2. Apply barrier to cover vertical flashing with a minimum 4-inch overlap unless otherwise indicated.
- A. Building Wrap: Comply with manufacturer's written instructions.
 - 1. Seal seams, edges, fasteners, and penetrations with tape.
 - 2. Extend into jambs of openings and seal corners with tape.

END OF SECTION 072500

SECTION 074113 - STANDING-SEAM METAL ROOF PANELS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes standing-seam metal roof panels.

1.3 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.
 - 1. Meet with Owner, Architect, Owner's insurer if applicable, metal panel Installer, metal panel manufacturer's representative, structural-support Installer, and installers whose work interfaces with or affects metal panels, including installers of roof accessories and roof-mounted equipment.
 - 2. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
 - 3. Review methods and procedures related to metal panel installation, including manufacturer's written instructions.
 - 4. Examine support conditions for compliance with requirements, including alignment between and attachment to structural members.
 - 5. Review structural loading limitations of deck during and after roofing.
 - 6. Review flashings, special details, drainage, penetrations, equipment curbs, and condition of other construction that affect metal panels.
 - 7. Review governing regulations and requirements for insurance, certificates, and tests and inspections if applicable.
 - 8. Review temporary protection requirements for metal panel systems during and after installation.
 - 9. Review procedures for repair of metal panels damaged after installation.
 - 10. Document proceedings, including corrective measures and actions required, and furnish copy of record to each participant.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for each type of panel and accessory.
- B. Shop Drawings:
 - 1. Include fabrication and installation layouts of metal panels; details of edge conditions, joints, panel profiles, corners, anchorages, attachment system, trim, flashings, closures, and accessories; and special details.

2. Accessories: Include details of the flashing, trim, and anchorage systems, at a scale of not less than 1-1/2 inches per 12 inches.
- C. Samples for Initial Selection: For each type of metal panel indicated with factory-applied color finishes.
 1. Include similar Samples of trim and accessories involving color selection.
- D. Samples for Verification: For each type of exposed finish required, prepared on Samples of size indicated below.
 1. Metal Panels: 12 inches long by actual panel width. Include clips, fasteners, closures, and other metal panel accessories.

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer.
- B. Product Test Reports: For each product, for tests performed by a qualified testing agency.
- C. Field quality-control reports.
- D. Sample Warranties: For special warranties.

1.6 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For metal panels to include in maintenance manuals.

1.7 QUALITY ASSURANCE

- A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.
- B. UL-Certified, Portable Roll-Forming Equipment: UL-certified, portable roll-forming equipment capable of producing metal panels warranted by manufacturer to be the same as factory-formed products. Maintain UL certification of portable roll-forming equipment for duration of work.

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Deliver components, metal panels, and other manufactured items so as not to be damaged or deformed. Package metal panels for protection during transportation and handling.
- B. Unload, store, and erect metal panels in a manner to prevent bending, warping, twisting, and surface damage.
- C. Stack metal panels horizontally on platforms or pallets, covered with suitable weathertight and ventilated covering. Store metal panels to ensure dryness, with positive slope for drainage of water. Do not store metal panels in contact with other materials that might cause staining, denting, or other surface damage.
- D. Retain strippable protective covering on metal panels during installation.

1.9 FIELD CONDITIONS

- A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit assembly of metal panels to be performed according to manufacturers' written instructions and warranty requirements.

1.10 COORDINATION

- A. Coordinate sizes and locations of roof curbs, equipment supports, and roof penetrations with actual equipment provided.
- B. Coordinate metal panel installation with rain drainage work, flashing, trim, construction of soffits, and other adjoining work to provide a leakproof, secure, and noncorrosive installation.

1.11 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of metal panel systems that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Structural failures including rupturing, cracking, or puncturing.
 - b. Deterioration of metals and other materials beyond normal weathering.
 - 2. Warranty Period: Two years from date of Substantial Completion.
- B. Special Warranty on Panel Finishes: Manufacturer's standard form in which manufacturer agrees to repair finish or replace metal panels that show evidence of deterioration of factory-applied finishes within specified warranty period.
 - 1. Exposed Panel Finish: Deterioration includes, but is not limited to, the following:
 - a. Color fading more than 5 Hunter units when tested according to ASTM D 2244.
 - b. Chalking in excess of a No. 8 rating when tested according to ASTM D 4214.
 - c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.
 - 2. Finish Warranty Period: 20 years from date of Substantial Completion.
- C. Special Weathertightness Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace standing-seam metal roof panel assemblies that fail to remain weathertight, including leaks, within specified warranty period.
 - 1. Warranty Period: 20 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Structural Performance: Provide metal panel systems capable of withstanding the effects of the following loads, based on testing according to ASTM E 1592:

1. Wind Loads: As indicated on Drawings.
 2. Other Design Loads: As indicated on Drawings.
 3. Deflection Limits: For wind loads, no greater than 1/180 of the span.
- B. Air Infiltration: Air leakage of not more than 0.06 cfm/sq. ft. when tested according to ASTM E 1680 or ASTM E 283 at the following test-pressure difference:
1. Test-Pressure Difference: 1.57 lbf/sq. ft..
- C. Water Penetration under Static Pressure: No water penetration when tested according to ASTM E 1646 or ASTM E 331 at the following test-pressure difference:
1. Test-Pressure Difference: 2.86 lbf/sq. ft..
- D. Hydrostatic-Head Resistance: No water penetration when tested according to ASTM E 2140.
- E. Wind-Uplift Resistance: Provide metal roof panel assemblies that comply with UL 580 for wind-uplift-resistance class indicated.
1. Uplift Rating: UL 90.
- F. FM Global Listing: Provide metal roof panels and component materials that comply with requirements in FM Global 4471 as part of a panel roofing system and that are listed in FM Global's "Approval Guide" for Class 1 or noncombustible construction, as applicable. Identify materials with FM Global markings.
1. Fire/Windstorm Classification: Class 1A- 120.
 2. Hail Resistance: MH.
- G. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes by preventing buckling, opening of joints, overstressing of components, failure of joint sealants, failure of connections, and other detrimental effects. Base calculations on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.
1. Temperature Change (Range): 120 deg F, ambient; 180 deg F, material surfaces.

2.2 STANDING-SEAM METAL ROOF PANELS

- A. General: Provide factory-formed metal roof panels designed to be installed by lapping and interconnecting raised side edges of adjacent panels with joint type indicated and mechanically attaching panels to supports using concealed clips in side laps. Include clips, cleats, pressure plates, and accessories required for weathertight installation.
- B. Vertical-Rib, Seamed-Joint, Standing-Seam Metal Roof Panels: Formed with vertical ribs at panel edges and intermediate stiffening ribs symmetrically spaced between ribs; designed for sequential installation by mechanically attaching panels to supports using concealed clips located under one side of panels, engaging opposite edge of adjacent panels, and mechanically seaming panels together.
1. **Products:** Subject to compliance with requirements, provide one of the following:
 - a. [AEP Span; A BlueScope Steel Company.](#)
 - b. [Architectural Metal Systems.](#)
 - c. [Berridge Manufacturing Company.](#)
 - d. [IMETCO.](#)

2. Metallic-Coated Steel Sheet: Zinc-coated (galvanized) steel sheet complying with ASTM A 653/A 653M, G90 (Z275) coating designation, or aluminum-zinc alloy-coated steel sheet complying with ASTM A 792/A 792M, Class AZ50 (Class AZM150) coating designation; structural quality. Prepainted by the coil-coating process to comply with ASTM A 755/A 755M.
 - a. Nominal Thickness: 0.040 inch.
 - b. Exterior Finish: Three-coat fluoropolymer.
 - c. Color: As selected by Architect from manufacturer's full range.
3. Clips: Two-piece floating to accommodate thermal movement.
 - a. Material: **0.064-inch-** nominal thickness, zinc-coated (galvanized) or aluminum-zinc alloy-coated steel sheet
4. Joint Type: Double folded.
5. Panel Coverage: 16 inches.
6. Panel Height: 1.5 inches.

2.3 UNDERLAYMENT MATERIALS

- A. Self-Adhering, High-Temperature Underlayment: Provide self-adhering, cold-applied, sheet underlayment, a minimum of 30 mils thick, consisting of slip-resistant, polyethylene-film top surface laminated to a layer of butyl or SBS-modified asphalt adhesive, with release-paper backing. Provide primer when recommended by underlayment manufacturer.
 1. Thermal Stability: Stable after testing at 240 deg F; ASTM D 1970.
 2. Low-Temperature Flexibility: Passes after testing at minus 20 deg F; ASTM D 1970.
- B. Products: Subject to compliance with requirements, provide one of the following:
 1. [Carlisle Residential; a division of Carlisle Construction Materials.](#)
 2. [Grace Construction Products; W.R. Grace & Co. -- Conn.](#)
 3. [Owens Corning.](#)
- C. Slip Sheet: Manufacturer's recommended slip sheet, of type required for application.

2.4 MISCELLANEOUS MATERIALS

- A. Panel Accessories: Provide components required for a complete, weathertight panel system including trim, copings, fasciae, mullions, sills, corner units, clips, flashings, sealants, gaskets, fillers, closure strips, and similar items. Match material and finish of metal panels unless otherwise indicated.
 1. Closures: Provide closures at eaves and ridges, fabricated of same metal as metal panels.
 2. Backing Plates: Provide metal backing plates at panel end splices, fabricated from material recommended by manufacturer.
 3. Closure Strips: Closed-cell, expanded, cellular, rubber or crosslinked, polyolefin-foam or closed-cell laminated polyethylene; minimum 1-inch- thick, flexible closure strips; cut or premolded to match metal panel profile. Provide closure strips where indicated or necessary to ensure weathertight construction.
- B. Flashing and Trim: Provide flashing and trim formed from same material as metal panels as required to seal against weather and to provide finished appearance. Locations include, but are not limited to, eaves, rakes, corners, bases, framed openings, ridges, fasciae, and fillers. Finish flashing and trim with same finish system as adjacent metal panels.

- C. Panel Fasteners: Self-tapping screws designed to withstand design loads.
- D. Panel Sealants: Provide sealant type recommended by manufacturer that are compatible with panel materials, are nonstaining, and do not damage panel finish.
 - 1. Sealant Tape: Pressure-sensitive, 100 percent solids, gray polyisobutylene compound sealant tape with release-paper backing. Provide permanently elastic, nonsag, nontoxic, nonstaining tape 1/2 inch wide and 1/8 inch thick.
 - 2. Joint Sealant: ASTM C 920; elastomeric polyurethane or silicone sealant; of type, grade, class, and use classifications required to seal joints in metal panels and remain weathertight; and as recommended in writing by metal panel manufacturer.
 - 3. Butyl-Rubber-Based, Solvent-Release Sealant: ASTM C 1311.

2.5 FABRICATION

- A. General: Fabricate and finish metal panels and accessories at the factory, by manufacturer's standard procedures and processes, as necessary to fulfill indicated performance requirements demonstrated by laboratory testing. Comply with indicated profiles and with dimensional and structural requirements.
- B. On-Site Fabrication: Subject to compliance with requirements of this Section, metal panels may be fabricated on-site using UL-certified, portable roll-forming equipment if panels are of same profile and warranted by manufacturer to be equal to factory-formed panels. Fabricate according to equipment manufacturer's written instructions and to comply with details shown.
- C. Provide panel profile, including major ribs and intermediate stiffening ribs, if any, for full length of panel.
- D. Fabricate metal panel joints with factory-installed captive gaskets or separator strips that provide a weathertight seal and prevent metal-to-metal contact, and that minimize noise from movements.
- E. Sheet Metal Flashing and Trim: Fabricate flashing and trim to comply with manufacturer's recommendations and recommendations in SMACNA's "Architectural Sheet Metal Manual" that apply to design, dimensions, metal, and other characteristics of item indicated.
 - 1. Form exposed sheet metal accessories that are without excessive oil canning, buckling, and tool marks and that are true to line and levels indicated, with exposed edges folded back to form hems.
 - 2. Seams for Other Than Aluminum: Fabricate nonmoving seams in accessories with flat-lock seams. Tin edges to be seamed, form seams, and solder.
 - 3. Sealed Joints: Form nonexpansion, but movable, joints in metal to accommodate sealant and to comply with SMACNA standards.
 - 4. Conceal fasteners and expansion provisions where possible. Exposed fasteners are not allowed on faces of accessories exposed to view.
 - 5. Fabricate cleats and attachment devices from same material as accessory being anchored or from compatible, noncorrosive metal recommended in writing by metal panel manufacturer.
 - a. Size: As recommended by SMACNA's "Architectural Sheet Metal Manual" or metal panel manufacturer for application, but not less than thickness of metal being secured.

2.6 FINISHES

- A. Protect mechanical and painted finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

- B. Appearance of Finished Work: Variations in appearance of abutting or adjacent pieces are acceptable if they are within one-half of the range of approved Samples. Noticeable variations in same piece are unacceptable. Variations in appearance of other components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

2.7 METAL SOFFIT PANELS

- A. General: Provide factory-formed metal soffit panels designed to be installed by lapping and interconnecting side edges of adjacent panels and mechanically attaching through panel to supports using concealed fasteners and factory-applied sealant in side laps. Include accessories required for weathertight installation.
- B. Flush-Profile Metal Soffit Panels: Solid panels formed with vertical panel edges and flat pan between panel edges; with flush joint between panels.
 - 1. Manufacturers: Same as roofing panels.
 - 2. Material: Same material, finish, and color as metal roof panels.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances, metal panel supports, and other conditions affecting performance of the Work.
 - 1. Examine primary and secondary roof framing to verify that rafters, purlins, angles, channels, and other structural panel support members and anchorages have been installed within alignment tolerances required by metal roof panel manufacturer.
 - 2. Examine solid roof sheathing to verify that sheathing joints are supported by framing or blocking and that installation is within flatness tolerances required by metal roof panel manufacturer.
 - a. Verify that air- or water-resistive barriers have been installed over sheathing or backing substrate to prevent air infiltration or water penetration.
- B. Examine roughing-in for components and systems penetrating metal panels to verify actual locations of penetrations relative to seam locations of metal panels before installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Miscellaneous Supports: Install subframing, furring, and other miscellaneous panel support members and anchorages according to ASTM C 754 and metal panel manufacturer's written recommendations.

3.3 UNDERLAYMENT INSTALLATION

- A. Self-Adhering Sheet Underlayment: Apply primer if required by manufacturer. Comply with temperature restrictions of underlayment manufacturer for installation. Apply at locations indicated below, wrinkle free, in shingle fashion to shed water, and with end laps of not less than 6 inches staggered 24 inches

between courses. Overlap side edges not less than 3-1/2 inches. Roll laps with roller. Cover underlayment within 14 days.

1. Apply over the entire roof surface.

B. Slip Sheet: Apply slip sheet over underlayment before installing metal roof panels.

C. Flashings: Install flashings to cover underlayment to comply with requirements specified in Section 076200 "Sheet Metal Flashing and Trim."

3.4 METAL PANEL INSTALLATION

A. General: Install metal panels according to manufacturer's written instructions in orientation, sizes, and locations indicated. Install panels perpendicular to supports unless otherwise indicated. Anchor metal panels and other components of the Work securely in place, with provisions for thermal and structural movement.

1. Shim or otherwise plumb substrates receiving metal panels.
2. Flash and seal metal panels at perimeter of all openings. Fasten with self-tapping screws. Do not begin installation until air- or water-resistive barriers and flashings that will be concealed by metal panels are installed.
3. Install screw fasteners in predrilled holes.
4. Locate and space fastenings in uniform vertical and horizontal alignment.
5. Install flashing and trim as metal panel work proceeds.
6. Locate panel splices over, but not attached to, structural supports. Stagger panel splices and end laps to avoid a four-panel lap splice condition.
7. Align bottoms of metal panels and fasten with blind rivets, bolts, or self-tapping screws. Fasten flashings and trim around openings and similar elements with self-tapping screws.
8. Provide weathertight escutcheons for pipe- and conduit-penetrating panels.

B. Fasteners:

1. Steel Panels: Use stainless-steel fasteners for surfaces exposed to the exterior; use galvanized-steel fasteners for surfaces exposed to the interior.
2. Aluminum Panels: Use aluminum or stainless-steel fasteners for surfaces exposed to the exterior; use aluminum or galvanized-steel fasteners for surfaces exposed to the interior.
3. Copper Panels: Use copper, stainless-steel, or hardware-bronze fasteners.
4. Stainless-Steel Panels: Use stainless-steel fasteners.

C. Anchor Clips: Anchor metal roof panels and other components of the Work securely in place, using manufacturer's approved fasteners according to manufacturers' written instructions.

D. Metal Protection: Where dissimilar metals contact each other or corrosive substrates, protect against galvanic action as recommended in writing by metal panel manufacturer.

E. Standing-Seam Metal Roof Panel Installation: Fasten metal roof panels to supports with concealed clips at each standing-seam joint at location, spacing, and with fasteners recommended in writing by manufacturer.

1. Install clips to supports with self-tapping fasteners.
2. Install pressure plates at locations indicated in manufacturer's written installation instructions.
3. Seamed Joint: Crimp standing seams with manufacturer-approved, motorized seamer tool so clip, metal roof panel, and factory-applied sealant are completely engaged.
4. Watertight Installation:

- a. Apply a continuous ribbon of sealant or tape to seal joints of metal panels, using sealant or tape as recommend in writing by manufacturer as needed to make panels watertight.
 - b. Provide sealant or tape between panels and protruding equipment, vents, and accessories.
 - c. At panel splices, nest panels with minimum 6-inch end lap, sealed with sealant and fastened together by interlocking clamping plates.

- F. Accessory Installation: Install accessories with positive anchorage to building and weathertight mounting, and provide for thermal expansion. Coordinate installation with flashings and other components.
 - 1. Install components required for a complete metal panel system including trim, copings, corners, seam covers, flashings, sealants, gaskets, fillers, closure strips, and similar items. Provide types indicated by metal roof panel manufacturers; or, if not indicated, types recommended by metal roof panel manufacturer.

- G. Flashing and Trim: Comply with performance requirements, manufacturer's written installation instructions, and SMACNA's "Architectural Sheet Metal Manual." Provide concealed fasteners where possible, and set units true to line and level as indicated. Install work with laps, joints, and seams that will be permanently watertight and weather resistant.
 - 1. Install exposed flashing and trim that is without buckling and tool marks, and that is true to line and levels indicated, with exposed edges folded back to form hems. Install sheet metal flashing and trim to fit substrates and achieve waterproof and weather-resistant performance.
 - 2. Expansion Provisions: Provide for thermal expansion of exposed flashing and trim. Space movement joints at a maximum of 10 feet with no joints allowed within 24 inches of corner or intersection. Where lapped expansion provisions cannot be used or would not be sufficiently weather resistant and waterproof, form expansion joints of intermeshing hooked flanges, not less than 1 inch deep, filled with mastic sealant (concealed within joints).

- H. Pipe Flashing: Form flashing around pipe penetration and metal roof panels. Fasten and seal to metal roof panels as recommended by manufacturer.

3.5 ERECTION TOLERANCES

- A. Installation Tolerances: Shim and align metal panel units within installed tolerance of 1/4 inch in 20 feet on slope and location lines as indicated and within 1/8-inch offset of adjoining faces and of alignment of matching profiles.

3.6 FIELD QUALITY CONTROL

- A. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect metal roof panel installation, including accessories. Report results in writing.
- B. Remove and replace applications of metal roof panels where tests and inspections indicate that they do not comply with specified requirements.
- C. Additional tests and inspections, at Contractor's expense, are performed to determine compliance of replaced or additional work with specified requirements.
- D. Prepare test and inspection reports.

3.7 CLEANING AND PROTECTION

- A. Remove temporary protective coverings and strippable films, if any, as metal panels are installed, unless otherwise indicated in manufacturer's written installation instructions. On completion of metal panel installation, clean finished surfaces as recommended by metal panel manufacturer. Maintain in a clean condition during construction.
- B. Replace metal panels that have been damaged or have deteriorated beyond successful repair by finish touchup or similar minor repair procedures.

END OF SECTION 074113

SECTION 074646 - FIBER-CEMENT SIDING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes fiber-cement siding and battens.

1.3 COORDINATION

- A. Coordinate siding installation with flashings and other adjoining construction to ensure proper sequencing.

1.4 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
- B. Samples for Initial Selection: For fiber-cement siding and soffit including related accessories.
- C. Samples for Verification: For each type, color, texture, and pattern required.
 - 1. 12-inch- long-by-actual-width Sample of siding.
 - 2. 12-inch- long-by-actual-width Samples of trim and accessories.

1.6 INFORMATIONAL SUBMITTALS

- A. Sample Warranty: For special warranty.

1.7 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For each type of product, including related accessories, to include in maintenance manuals.

1.8 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Furnish full lengths of fiber-cement siding including related accessories, in a quantity equal to 2 percent of amount installed.

1.9 QUALITY ASSURANCE

- A. Mockups: Build mockups to verify selections made under Sample submittals and to demonstrate aesthetic effects and to set quality standards for fabrication and installation.
 - 1. Build mockups for fiber-cement siding including accessories.
 - a. Size: 48 inches long by 60 inches high.
 - b. Include outside corner on one end of mockup and inside corner on other end.
 - 2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
 - 3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.10 DELIVERY, STORAGE, AND HANDLING

- A. Deliver and store packaged materials in original containers with labels intact until time of use.
- B. Store materials on elevated platforms, under cover, and in a dry location.

1.11 WARRANTY

- A. Special Warranty: Manufacturer agrees to repair or replace products that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Structural failures including cracking and deforming.
 - b. Deterioration of materials beyond normal weathering.
 - 2. Warranty Period: 25 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations: Obtain products, including related accessories, from single source from single manufacturer.

2.2 FIBER-CEMENT SIDING

- A. General: ASTM C 1186, Type A, Grade II, fiber-cement board, noncombustible when tested according to ASTM E 136; with a flame-spread index of 25 or less when tested according to ASTM E 84.
 - 1. CertainTeed Corporation
 - 2. GAF MAterials
 - 3. James Hardie Building Products
 - 4. Nichiha Fiber Cement
 - 5. Norandex Building Materials
- B. Labeling: Provide fiber-cement siding that is tested and labeled according to ASTM C 1186 by a qualified testing agency acceptable to authorities having jurisdiction.
- C. Nominal Thickness: Not less than 5/16 inch.
- D. Horizontal Pattern: Boards 8-1/4 to 8-1/2 inches wide in plain style.
 - 1. Texture: Smooth.
- E. Panel Texture: 48-inch- wide sheets with smooth texture.
- F. Factory Priming: Manufacturer's standard acrylic primer.

2.3 ACCESSORIES

- A. Siding Accessories, General: Provide starter strips, edge trim, outside and inside corner caps, and other items as recommended by siding manufacturer for building configuration.
 - 1. Provide accessories matching color and texture of adjacent siding unless otherwise indicated.
- B. Decorative Accessories: Provide the following fiber-cement decorative accessories as indicated:
 - 1. Corner posts.
 - 2. Door and window casings.
 - 3. Fasciae.
 - 4. Moldings and trim.
 - 5. 1x2 Battens.
- C. Flashing: Provide 16 oz. copper flashing at window and door heads and where indicated.
- D. Fasteners:
 - 1. For fastening to wood, use siding nails of sufficient length to penetrate a minimum of 1 inch into substrate.
 - 2. For fastening to metal, use ribbed bugle-head screws of sufficient length to penetrate a minimum of 1/4 inch, or three screw-threads, into substrate.
 - 3. For fastening fiber cement, use stainless-steel fasteners.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates for compliance with requirements for installation tolerances and other conditions affecting performance of fiber-cement siding and soffit and related accessories.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Clean substrates of projections and substances detrimental to application.

3.3 INSTALLATION

- A. General: Comply with manufacturer's written installation instructions applicable to products and applications indicated unless more stringent requirements apply.
 - 1. Do not install damaged components.
 - 2. Install fasteners no more than 16" o.c.
- B. Install joint sealants as specified in Section 079200 "Joint Sealants" and to produce a weathertight installation.

3.4 ADJUSTING AND CLEANING

- A. Remove damaged, improperly installed, or otherwise defective materials and replace with new materials complying with specified requirements.
- B. Clean finished surfaces according to manufacturer's written instructions and maintain in a clean condition during construction.

END OF SECTION 074646

SECTION 079200 - JOINT SEALANTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Silicone joint sealants.
 - 2. Mildew-resistant joint sealants.
 - 3. Latex joint sealants.

1.3 ACTION SUBMITTALS

- A. Product Data: For each joint-sealant product.
- B. Samples for Initial Selection: Manufacturer's color charts consisting of strips of cured sealants showing the full range of colors available for each product exposed to view.
- C. Joint-Sealant Schedule: Include the following information:
 - 1. Joint-sealant application, joint location, and designation.
 - 2. Joint-sealant manufacturer and product name.
 - 3. Joint-sealant formulation.
 - 4. Joint-sealant color.

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified testing agency.
- B. Sample Warranties: For special warranties.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: An authorized representative who is trained and approved by manufacturer.

1.6 FIELD CONDITIONS

- A. Do not proceed with installation of joint sealants under the following conditions:
 - 1. When ambient and substrate temperature conditions are outside limits permitted by joint-sealant manufacturer or are below 40 deg F.

2. When joint substrates are wet.
3. Where joint widths are less than those allowed by joint-sealant manufacturer for applications indicated.
4. Where contaminants capable of interfering with adhesion have not yet been removed from joint substrates.

1.7 WARRANTY

- A. Special Installer's Warranty: Installer agrees to repair or replace joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.
 1. Warranty Period: Two years from date of Substantial Completion.
- B. Special warranties specified in this article exclude deterioration or failure of joint sealants from the following:
 1. Movement of the structure caused by stresses on the sealant exceeding sealant manufacturer's written specifications for sealant elongation and compression.
 2. Disintegration of joint substrates from causes exceeding design specifications.
 3. Mechanical damage caused by individuals, tools, or other outside agents.
 4. Changes in sealant appearance caused by accumulation of dirt or other atmospheric contaminants.

PART 2 - PRODUCTS

2.1 JOINT SEALANTS, GENERAL

- A. Compatibility: Provide joint sealants, backings, and other related materials that are compatible with one another and with joint substrates under conditions of service and application, as demonstrated by joint-sealant manufacturer, based on testing and field experience.
- B. VOC Content of Interior Sealants: Sealants and sealant primers used inside the weatherproofing system shall comply with the following:
 1. Architectural sealants shall have a VOC content of 250 g/L or less.
 2. Sealants and sealant primers for nonporous substrates shall have a VOC content of 250 g/L or less.
 3. Sealants and sealant primers for nonporous substrates shall have a VOC content of 775 g/L or less.
- C. Colors of Exposed Joint Sealants: As selected by Architect from manufacturer's full range.

2.2 NONSTAINING SILICONE JOINT SEALANTS

- A. Nonstaining Joint Sealants: No staining of substrates when tested according to ASTM C 1248.
- B. Silicone, Nonstaining, S, NS, 50, NT: Nonstaining, single-component, nonsag, plus 50 percent and minus 50 percent movement capability, nontraffic-use, neutral-curing silicone joint sealant; ASTM C 920, Type S, Grade NS, Class 50, Use NT.
- C. Products: Subject to compliance with requirements, provide one of the following:
 1. Dow Corning Corporation; 756 SMS.
 2. GE Construction Sealants; Momentive Performance Materials Inc.; Silpruf NB.

3. Pecora Corporation; 864NST.
4. Tremco Incorporated; Spectrem 2.

2.3 URETHANE JOINT SEALANTS

- A. Urethane, S, P, 25, T, NT: Single-component, pourable, plus 25 percent and minus 25 percent movement capability, traffic- and nontraffic-use, urethane joint sealant; ASTM C 920, Type S, Grade P, Class 25, Uses T and NT.
- B. Products: Subject to compliance with requirements, provide one of the following:
 1. BASF Construction Chemicals - Building Systems; Sonolastic SL 1.
 2. Pecora Corporation; NR-201.
 3. Sherwin-Williams Company (The); Stampede 1SL.
- C. Urethane, M, P, 50, T, NT: Multicomponent, pourable, plus 50 percent and minus 50 percent movement capability, traffic- and nontraffic-use, urethane joint sealant; ASTM C 920, Type M, Grade P, Class 50, Uses T and NT.

2.4 MILDEW-RESISTANT JOINT SEALANTS

- A. Mildew-Resistant Joint Sealants: Formulated for prolonged exposure to humidity with fungicide to prevent mold and mildew growth.
- B. Silicone, Mildew Resistant, Acid Curing, S, NS, 25, NT: Mildew-resistant, single-component, nonsag, plus 25 percent and minus 25 percent movement capability, nontraffic-use, acid-curing silicone joint sealant; ASTM C 920, Type S, Grade NS, Class 25, Use NT.
- C. Products: Subject to compliance with requirements, provide one of the following:
 1. Dow Corning Corporation; 786-M White.
 2. GE Construction Sealants; Momentive Performance Materials Inc.; SCS1700 Sanitary.
 3. Tremco Incorporated; Tremsil 200.

2.5 LATEX JOINT SEALANTS

- A. Acrylic Latex: Acrylic latex or siliconized acrylic latex, ASTM C 834, Type OP, Grade NF.
- B. Products: Subject to compliance with requirements, provide one of the following:
 1. BASF Construction Chemicals - Building Systems; Sonolac.
 2. Pecora Corporation; AC-20.
 3. Sherwin-Williams Company (The); [850A][950A][PowerHouse].
 4. Tremco Incorporated; Tremflex 834.

2.6 JOINT-SEALANT BACKING

- A. Sealant Backing Material, General: Nonstaining; compatible with joint substrates, sealants, primers, and other joint fillers; and approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.

- B. Cylindrical Sealant Backings: ASTM C 1330, Type C (closed-cell material with a surface skin), Type O (open-cell material), Type B (bicellular material with a surface skin) or any of the preceding types, as approved in writing by joint-sealant manufacturer for joint application indicated, and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance.
- C. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint. Provide self-adhesive tape where applicable.

2.7 MISCELLANEOUS MATERIALS

- A. Primer: Material recommended by joint-sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.
- B. Cleaners for Nonporous Surfaces: Chemical cleaners acceptable to manufacturers of sealants and sealant backing materials, free of oily residues or other substances capable of staining or harming joint substrates and adjacent nonporous surfaces in any way, and formulated to promote optimum adhesion of sealants to joint substrates.
- C. Masking Tape: Nonstaining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine joints indicated to receive joint sealants, with Installer present, for compliance with requirements for joint configuration, installation tolerances, and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealants to comply with joint-sealant manufacturer's written instructions and the following requirements:
 - 1. Remove all foreign material from joint substrates that could interfere with adhesion of joint sealant, including dust, paints (except for permanent, protective coatings tested and approved for sealant adhesion and compatibility by sealant manufacturer), old joint sealants, oil, grease, waterproofing, water repellents, water, surface dirt, and frost.
 - 2. Clean porous joint substrate surfaces by brushing, grinding, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants. Remove loose particles remaining after cleaning operations above by vacuuming or blowing out joints with oil-free compressed air. Porous joint substrates include the following:
 - a. Concrete.
 - b. Masonry.
 - c. Unglazed surfaces of ceramic tile.

3. Remove laitance and form-release agents from concrete.
 4. Clean nonporous joint substrate surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants. Nonporous joint substrates include the following:
 - a. Metal.
 - b. Glass.
 - c. Porcelain enamel.
 - d. Glazed surfaces of ceramic tile.
- B. **Joint Priming:** Prime joint substrates where recommended by joint-sealant manufacturer or as indicated by preconstruction joint-sealant-substrate tests or prior experience. Apply primer to comply with joint-sealant manufacturer's written instructions. Confine primers to areas of joint-sealant bond; do not allow spillage or migration onto adjoining surfaces.
- C. **Masking Tape:** Use masking tape where required to prevent contact of sealant or primer with adjoining surfaces that otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing joint seal.

3.3 INSTALLATION OF JOINT SEALANTS

- A. **General:** Comply with joint-sealant manufacturer's written installation instructions for products and applications indicated, unless more stringent requirements apply.
- B. **Sealant Installation Standard:** Comply with recommendations in ASTM C 1193 for use of joint sealants as applicable to materials, applications, and conditions indicated.
- C. **Install sealant backings of kind indicated to support sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.**
 1. Do not leave gaps between ends of sealant backings.
 2. Do not stretch, twist, puncture, or tear sealant backings.
 3. Remove absorbent sealant backings that have become wet before sealant application, and replace them with dry materials.
- D. **Install bond-breaker tape behind sealants where sealant backings are not used between sealants and backs of joints.**
- E. **Install sealants using proven techniques that comply with the following and at the same time backings are installed:**
 1. Place sealants so they directly contact and fully wet joint substrates.
 2. Completely fill recesses in each joint configuration.
 3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.
- F. **Tooling of Nonsag Sealants:** Immediately after sealant application and before skinning or curing begins, tool sealants according to requirements specified in subparagraphs below to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint.
 1. Remove excess sealant from surfaces adjacent to joints.

2. Use tooling agents that are approved in writing by sealant manufacturer and that do not discolor sealants or adjacent surfaces.
3. Provide concave joint profile per Figure 8A in ASTM C 1193 unless otherwise indicated.
4. Provide flush joint profile at locations indicated on Drawings according to Figure 8B in ASTM C 1193.

3.4 CLEANING

- A. Clean off excess sealant or sealant smears adjacent to joints as the Work progresses by methods and with cleaning materials approved in writing by manufacturers of joint sealants and of products in which joints occur.

3.5 PROTECTION

- A. Protect joint sealants during and after curing period from contact with contaminating substances and from damage resulting from construction operations or other causes so sealants are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out, remove, and repair damaged or deteriorated joint sealants immediately so installations with repaired areas are indistinguishable from original work.

3.6 JOINT-SEALANT SCHEDULE

- A. Joint-Sealant Application: Exterior joints in horizontal traffic surfaces.
 1. Joint Locations:
 - a. Isolation and contraction joints in cast-in-place concrete slabs.
 2. Joint Sealant: Urethane, M, P, 50, T, NT.
 3. Joint-Sealant Color: As selected by Architect from manufacturer's full range of colors.
- B. Joint-Sealant Application: Exterior joints in vertical surfaces and horizontal nontraffic surfaces.
 1. Joint Locations:
 - a. Control and expansion joints in unit masonry.
 - b. Joints in dimension stone cladding.
 - c. Joints between metal panels.
 - d. Joints between different materials listed above.
 - e. Perimeter joints between materials listed above and frames of doors windows and louvers.
 - f. Control and expansion joints in overhead surfaces.
 2. Joint Sealant: Silicone, nonstaining, S, NS, 50, NT.
 3. Joint-Sealant Color: As selected by Architect from manufacturer's full range of colors.
- C. Joint-Sealant Application: Interior joints in horizontal traffic surfaces.
 1. Joint Locations:
 - a. Isolation joints in cast-in-place concrete slabs.
 - b. Control and expansion joints in stone flooring.
 - c. Control and expansion joints in tile flooring.
 2. Joint Sealant: Urethane, S, P, 25, T, NT.

3. Joint-Sealant Color: As selected by Architect from manufacturer's full range of colors.
- D. Joint-Sealant Application: Interior joints in vertical surfaces and horizontal nontraffic surfaces.
1. Joint Locations:
 - a. Control and expansion joints on exposed interior surfaces of exterior walls.
 - b. Tile control and expansion joints.
 2. Joint Sealant: Urethane, S, NS, 25, NT.
 3. Joint-Sealant Color: As selected by Architect from manufacturer's full range of colors.
- E. Joint-Sealant Application: Interior joints in vertical surfaces and horizontal nontraffic surfaces not subject to significant movement.
1. Joint Locations:
 - a. Control joints on exposed interior surfaces of exterior walls.
 - b. Perimeter joints between interior wall surfaces and frames of interior doors windows.
 2. Joint Sealant: Acrylic latex.
 3. Joint-Sealant Color: As selected by Architect from manufacturer's full range of colors.
- F. Joint-Sealant Application: Mildew-resistant interior joints in vertical surfaces and horizontal nontraffic surfaces.
1. Joint Locations:
 - a. Joints between plumbing fixtures and adjoining walls, floors, and counters.
 - b. Tile control and expansion joints where indicated.
 2. Joint Sealant: Silicone, mildew resistant, acid curing, S, NS, 25, NT.
 3. Joint-Sealant Color: As selected by Architect from manufacturer's full range of colors.
- G. Joint-Sealant Application: Concealed mastics.
1. Joint Locations:
 - a. Aluminum thresholds.
 - b. Sill plates.
 2. Joint Sealant: Butyl-rubber based.
 3. Joint-Sealant Color: As selected by Architect from manufacturer's full range of colors.

END OF SECTION 079200

SECTION 081213 - HOLLOW METAL FRAMES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes hollow-metal frames.

1.3 DEFINITIONS

- A. Minimum Thickness: Minimum thickness of base metal without coatings according to NAAMM-HMMA 803 or SDI A250.8.

1.4 COORDINATION

- A. Coordinate anchorage installation for hollow-metal frames. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors. Deliver such items to Project site in time for installation.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include construction details, material descriptions and finishes.
- B. Shop Drawings: Include the following:
 - 1. Frame details for each frame type, including dimensioned profiles and metal thicknesses.
 - 2. Locations of reinforcement and preparations for hardware.
 - 3. Details of each different wall opening condition.
 - 4. Details of anchorages, joints, field splices, and connections.
 - 5. Details of moldings, removable stops, and glazing.
 - 6. Details of conduit and preparations for power, signal, and control systems.
- C. Schedule: Provide a schedule of hollow-metal work prepared by or under the supervision of supplier, using same reference numbers for details and openings as those on Drawings. Coordinate with final Door Hardware Schedule.

1.6 INFORMATIONAL SUBMITTALS

- A. Product Test Reports: For each type of frame assembly, for tests performed by a qualified testing agency.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Deliver hollow-metal work palletized, packaged, or crated to provide protection during transit and Project-site storage. Do not use nonvented plastic.
- B. Deliver welded frames with two removable spreader bars across bottom of frames, tack welded to jambs and mullions.
- C. Store hollow-metal work vertically under cover at Project site with head up. Place on minimum 4-inch-high wood blocking. Provide minimum 1/4-inch space between each unit to permit air circulation.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations: Obtain hollow-metal work from single source from single manufacturer.

2.2 INTERIOR FRAMES

- A. Construct interior frames to comply with the standards indicated for materials, fabrication, hardware locations, hardware reinforcement, tolerances, and clearances, and as specified.
- B. Hollow-Metal Frames: NAAMM-HMMA 860..
 - 1. Physical Performance: Level A according to SDI A250.4.
 - 2. Materials: Uncoated steel sheet, minimum thickness of 0.053 inch.
 - 3. Construction: Full profile welded.
 - 4. Exposed Finish: Prime.

2.3 FRAME ANCHORS

- A. Jamb Anchors:
 - 1. Stud-Wall Type: Designed to engage stud, welded to back of frames; not less than 0.042 inch thick.

2.4 MATERIALS

- A. Cold-Rolled Steel Sheet: ASTM A 1008/A 1008M, Commercial Steel (CS), Type B; suitable for exposed applications.
- B. Hot-Rolled Steel Sheet: ASTM A 1011/A 1011M, Commercial Steel (CS), Type B; free of scale, pitting, or surface defects; pickled and oiled.
- C. Inserts, Bolts, and Fasteners: Hot-dip galvanized according to ASTM A 153/A 153M.
- D. Glazing: Comply with requirements in Section 088000 "Glazing."

2.5 FABRICATION

- A. Fabricate hollow-metal work to be rigid and free of defects, warp, or buckle. Accurately form metal to required sizes and profiles, with minimum radius for metal thickness. Where practical, fit and assemble units in manufacturer's plant. To ensure proper assembly at Project site, clearly identify work that cannot be permanently factory assembled before shipment.
- B. Hollow-Metal Frames: Where frames are fabricated in sections due to shipping or handling limitations, provide alignment plates or angles at each joint, fabricated of same thickness metal as frames.
1. Sidelight and Transom Bar Frames: Provide closed tubular members with no visible face seams or joints, fabricated from same material as door frame. Fasten members at crossings and to jambs by butt welding.
 2. Jamb Anchors: Provide number and spacing of anchors as follows:
 - a. Stud-Wall Type: Locate anchors not more than 18 inches from top and bottom of frame. Space anchors not more than 32 inches o.c. and as follows:
 - 1) Three anchors per jamb up to 60 inches high.
 - 2) Four anchors per jamb from 60 to 90 inches high.
 - 3) Five anchors per jamb from 90 to 96 inches high.
 - 4) Five anchors per jamb plus one additional anchor per jamb for each 24 inches or fraction thereof above 96 inches high.
 3. Head Anchors: Two anchors per head for frames more than 42 inches wide and mounted in metal-stud partitions.
 4. Door Silencers: Except on weather-stripped frames, drill stops to receive door silencers as follows. Keep holes clear during construction.
 - a. Single-Door Frames: Drill stop in strike jamb to receive three door silencers.
 - b. Double-Door Frames: Drill stop in head jamb to receive two door silencers.
 5. Terminated Stops: Terminate stops 6 inches above finish floor with a 45-degree angle cut, and close open end of stop with steel sheet closure. Cover opening in extension of frame with welded-steel filler plate, with welds ground smooth and flush with frame.
- C. Hardware Preparation: Factory prepare hollow-metal work to receive templated mortised hardware; include cutouts, reinforcement, mortising, drilling, and tapping according to SDI A250.6, the Door Hardware Schedule, and templates.
1. Reinforce frames to receive nontemplated, mortised, and surface-mounted hardware.
 2. Comply with applicable requirements in SDI A250.6 and BHMA A156.115 for preparation of hollow-metal work for hardware.
- D. Stops and Moldings: Provide stops and moldings around glazed lites and louvers where indicated. Form corners of stops and moldings with butted or mitered hairline joints.
1. Single Glazed Lites: Provide fixed stops and moldings welded on secure side of hollow-metal work.
 2. Multiple Glazed Lites: Provide fixed and removable stops and moldings so that each glazed lite is capable of being removed independently.
 3. Provide fixed frame moldings on outside of exterior and on secure side of interior frames.
 4. Provide loose stops and moldings on inside of hollow-metal work.
 5. Coordinate rabbet width between fixed and removable stops with glazing and installation types indicated.

2.6 STEEL FINISHES

- A. Prime Finish: Clean, pretreat, and apply manufacturer's standard primer.
 - 1. Shop Primer: Manufacturer's standard, fast-curing, lead- and chromate-free primer complying with SDI A250.10; recommended by primer manufacturer for substrate; compatible with substrate and field-applied coatings despite prolonged exposure.

2.7 ACCESSORIES

- A. Mullions and Transom Bars: Join to adjacent members by welding or rigid mechanical anchors.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Examine roughing-in for embedded and built-in anchors to verify actual locations before frame installation.
- C. Prepare written report, endorsed by Installer, listing conditions detrimental to performance of the Work.
- D. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Remove welded-in shipping spreaders installed at factory. Restore exposed finish by grinding, filling, and dressing, as required to make repaired area smooth, flush, and invisible on exposed faces.
- B. Drill and tap frames to receive nontemplated, mortised, and surface-mounted hardware.

3.3 INSTALLATION

- A. General: Install hollow-metal work plumb, rigid, properly aligned, and securely fastened in place. Comply with Drawings and manufacturer's written instructions.
- B. Hollow-Metal Frames: Install hollow-metal frames of size and profile indicated. Comply with SDI A250.11 or NAAMM-HMMA 840 as required by standards specified.
 - 1. Set frames accurately in position; plumbed, aligned, and braced securely until permanent anchors are set. After wall construction is complete, remove temporary braces, leaving surfaces smooth and undamaged.
 - a. Where frames are fabricated in sections because of shipping or handling limitations, field splice at approved locations by welding face joint continuously; grind, fill, dress, and make splice smooth, flush, and invisible on exposed faces.
 - b. Install frames with removable stops located on secure side of opening.
 - c. Install door silencers in frames before grouting.

- d. Remove temporary braces necessary for installation only after frames have been properly set and secured.
 - e. Check plumb, square, and twist of frames as walls are constructed. Shim as necessary to comply with installation tolerances.
- 2. Metal-Stud Partitions: Solidly pack mineral-fiber insulation inside frames.
 - 3. In-Place Metal or Wood-Stud Partitions: Secure slip-on drywall frames in place according to manufacturer's written instructions.
 - 4. Installation Tolerances: Adjust hollow-metal door frames for squareness, alignment, twist, and plumb to the following tolerances:
 - a. Squareness: Plus or minus 1/16 inch, measured at door rabbet on a line 90 degrees from jamb perpendicular to frame head.
 - b. Alignment: Plus or minus 1/16 inch, measured at jambs on a horizontal line parallel to plane of wall.
 - c. Twist: Plus or minus 1/16 inch, measured at opposite face corners of jambs on parallel lines, and perpendicular to plane of wall.
 - d. Plumbness: Plus or minus 1/16 inch, measured at jambs at floor.
- C. Glazing: Comply with installation requirements in Section 088000 "Glazing" and with hollow-metal manufacturer's written instructions.
 - 1. Secure stops with countersunk flat- or oval-head machine screws spaced uniformly not more than 9 inches o.c. and not more than 2 inches o.c. from each corner.

3.4 ADJUSTING AND CLEANING

- A. Final Adjustments: Remove and replace defective work, including hollow-metal work that is warped, bowed, or otherwise unacceptable.
- B. Remove grout and other bonding material from hollow-metal work immediately after installation.
- C. Prime-Coat Touchup: Immediately after erection, sand smooth rusted or damaged areas of prime coat and apply touchup of compatible air-drying, rust-inhibitive primer.
- D. Touchup Painting: Cleaning and touchup painting of abraded areas of paint are specified in painting Sections.

END OF SECTION 081213

SECTION 081416 - FLUSH WOOD DOORS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Solid-core doors with wood-veneer faces.
 - 2. Factory finishing flush wood doors.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of door. Include details of core and edge construction and trim for openings. Include factory-finishing specifications.
- B. Shop Drawings: Indicate location, size, and hand of each door; elevation of each kind of door; construction details not covered in Product Data; and the following:
 - 1. Dimensions and locations of blocking.
 - 2. Dimensions and locations of mortises and holes for hardware.
 - 3. Dimensions and locations of cutouts.
 - 4. Undercuts.
 - 5. Requirements for veneer matching.
 - 6. Doors to be factory finished and finish requirements.
- C. Samples for Initial Selection: For factory-finished doors.
- D. Samples for Verification:
 - 1. Factory finishes applied to actual door face materials, approximately 8 by 10 inches (200 by 250 mm), for each material and finish. For each wood species and transparent finish, provide set of three Samples showing typical range of color and grain to be expected in finished Work.
 - 2. Corner sections of doors, approximately 8 by 10 inches, with door faces and edges representing actual materials to be used.
 - a. Provide Samples for each species of veneer and solid lumber required.
 - b. Finish veneer-faced door Samples with same materials proposed for factory-finished doors.
 - 3. Frames for light openings, 6 inches long, for each material, type, and finish required.

1.4 INFORMATIONAL SUBMITTALS

- A. Sample Warranty: For special warranty.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Comply with requirements of referenced standard and manufacturer's written instructions.
- B. Package doors individually in cardboard cartons and wrap bundles of doors in plastic sheeting.
- C. Mark each door on bottom rail with opening number used on Shop Drawings.

1.6 FIELD CONDITIONS

- A. Environmental Limitations: Do not deliver or install doors until spaces are enclosed and weathertight, wet work in spaces is complete and dry, and HVAC system is operating and maintaining temperature between 60 and 90 deg F and relative humidity between 25 and 55 percent during remainder of construction period.

1.7 WARRANTY

- A. A. Special Warranty: Manufacturer agrees to repair or replace doors that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Warping (bow, cup, or twist) more than 1/4 inch in a 42-by-84-inch section.
 - b. Telegraphing of core construction in face veneers exceeding 0.01 inch in a 3-inch span.
 - 2. Warranty shall also include installation and finishing that may be required due to repair or replacement of defective doors.
 - 3. Warranty Period for Solid-Core Interior Doors: Life of installation.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Algoma Hardwoods, Inc.
 - 2. Eggers Industries.
 - 3. Graham Wood Doors; ASSA ABLOY Group company.
 - 4. Marshfield DoorSystems, Inc.
 - 5. Mohawk Flush Doors, Inc.
 - 6. Oshkosh Door Company.
- B. Source Limitations: Obtain flush wood doors from single manufacturer.

2.2 FLUSH WOOD DOORS, GENERAL

- A. Low-Emitting Materials: Fabricate doors with adhesives and composite wood products that do not contain urea formaldehyde.
- B. WDMA I.S.1-A Performance Grade: Heavy Duty.

C. Structural-Composite-Lumber-Core Doors:

1. Structural Composite Lumber: WDMA I.S.10.

- a. Screw Withdrawal, Face: 700 lbf.
- b. Screw Withdrawal, Edge: 400 lbf.

2.3 VENEER-FACED DOORS FOR TRANSPARENT FINISH

A. Interior Solid-Core Doors:

- 1. Grade: Premium, with Grade AA faces.
- 2. Species: Select white birch.
- 3. Cut: Rotary cut.
- 4. Match between Veneer Leaves: Book match.
- 5. Assembly of Veneer Leaves on Door Faces: Balance match.
- 6. Pair and Set Match: Provide for doors hung in same opening.
- 7. Room Match: Provide door faces of compatible color and grain within each separate room or area of building.
- 8. Exposed Vertical and Top Edges: Same species as faces - edge Type A.
- 9. Core: Glued wood stave.
- 10. Construction: Five plies. Stiles and rails are bonded to core, then entire unit is abrasive planed before veneering. Faces are bonded to core using a hot press.
- 11. WDMA I.S.1-A Performance Grade: Heavy Duty.

2.4 LIGHT FRAMES AND LOUVERS

A. Wood Beads for Light Openings in Wood Doors: Provide manufacturer's standard wood beads unless otherwise indicated.

- 1. Wood Species: Same species as door faces.
- 2. Profile: Recessed tapered beads.

2.5 FABRICATION

A. Factory fit doors to suit frame-opening sizes indicated. Comply with clearance requirements of referenced quality standard for fitting unless otherwise indicated.

B. Factory machine doors for hardware that is not surface applied. Locate hardware to comply with DHI-WDHS-3. Comply with final hardware schedules, door frame Shop Drawings, BHMA-156.115-W, and hardware templates.

- 1. Coordinate with hardware mortises in metal frames to verify dimensions and alignment before factory machining.

C. Openings: Factory cut and trim openings through doors.

- 1. Light Openings: Trim openings with moldings of material and profile indicated.
- 2. Glazing: Factory install glazing in doors indicated to be factory finished. Comply with applicable requirements in Section 088000 "Glazing."

2.6 FACTORY FINISHING

- A. General: Comply with referenced quality standard for factory finishing. Complete fabrication, including fitting doors for openings and machining for hardware that is not surface applied, before finishing.
 - 1. Finish faces, all four edges, edges of cutouts, and mortises. Stains and fillers may be omitted on bottom edges, edges of cutouts, and mortises.
- B. Factory finish doors that are indicated to receive transparent finish.
- C. Transparent Finish:
 - 1. Grade: Premium.
 - 2. Finish: AWT's, AWMAC's, and WI's "Architectural Woodwork Standards" System 9, UV curable, acrylated epoxy, polyester, or urethane or System 11, catalyzed polyurethane.
 - 3. Staining: As selected by Architect from manufacturer's full range.
 - 4. Effect: Filled finish.
 - 5. Sheen: Semigloss.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine doors and installed door frames, with Installer present, before hanging doors.
 - 1. Verify that installed frames comply with indicated requirements for type, size, location, and swing characteristics and have been installed with level heads and plumb jambs.
 - 2. Reject doors with defects.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Hardware: For installation, see Section 087100 "Door Hardware."
- B. Installation Instructions: Install doors to comply with manufacturer's written instructions and referenced quality standard, and as indicated.
- C. Factory-Finished Doors: Restore finish before installation if fitting or machining is required at Project site.

3.3 ADJUSTING

- A. Operation: Rehang or replace doors that do not swing or operate freely.
- B. Finished Doors: Replace doors that are damaged or that do not comply with requirements. Doors may be repaired or refinished if Work complies with requirements and shows no evidence of repair or refinishing.

END OF SECTION 081416

SECTION 083113 - ACCESS DOORS AND FRAMES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Access doors and frames for walls and ceilings.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include construction details, fire ratings, materials, individual components and profiles, and finishes.
- B. Shop Drawings:
 - 1. Include plans, elevations, sections, details, and attachments to other work.
 - 2. Detail fabrication and installation of access doors and frames for each type of substrate.
- C. Product Schedule: Provide complete access door and frame schedule, including types, locations, sizes, latching or locking provisions, and other data pertinent to installation.

PART 2 - PRODUCTS

2.1 ACCESS DOORS AND FRAMES FOR WALLS AND CEILINGS

- A. Source Limitations: Obtain each type of access door and frame from single source from single manufacturer.
- B. Flush Access Doors with Concealed Flanges:
 - 1. Assembly Description: Fabricate door to fit flush to frame. Provide frame with gypsum board beads for concealed flange installation.
 - 2. Locations: Wall and ceiling.
 - 3. Door Size: 24 x 24.
 - 4. Uncoated Steel Sheet for Door: Nominal 0.060 inch, 16 gage.
 - a. Finish: Factory prime.
 - 5. Frame Material: Same material and thickness as door.

6. Hinges: Manufacturer's standard.
7. Hardware: Latch.

C. Hardware:

1. Latch: Cam latch operated by screwdriver.

2.2 MATERIALS

- A. Steel Plates, Shapes, and Bars: ASTM A 36/A 36M.
- B. Rolled-Steel Floor Plate: ASTM A 786/A 786M, rolled from plate complying with ASTM A 36/A 36M or ASTM A 283/A 283M, Grade C or D.
- C. Steel Sheet: Uncoated or electrolytic zinc coated, ASTM A 879/A 879M, with cold-rolled steel sheet substrate complying with ASTM A 1008/A 1008M, Commercial Steel (CS), exposed.
- D. Frame Anchors: Same type as door face.
- E. Inserts, Bolts, and Anchor Fasteners: Hot-dip galvanized steel according to ASTM A 153/A 153M or ASTM F 2329.

2.3 FABRICATION

- A. General: Provide access door and frame assemblies manufactured as integral units ready for installation.
- B. Metal Surfaces: For metal surfaces exposed to view in the completed Work, provide materials with smooth, flat surfaces without blemishes. Do not use materials with exposed pitting, seam marks, roller marks, rolled trade names, or roughness.
- C. Doors and Frames: Grind exposed welds smooth and flush with adjacent surfaces. Furnish attachment devices and fasteners of type required to secure access doors to types of supports indicated.
 1. For concealed flanges with drywall bead, provide edge trim for gypsum board securely attached to perimeter of frames.
- D. Latching Mechanisms: Furnish number required to hold doors in flush, smooth plane when closed.
 1. For cylinder locks, furnish two keys per lock and key all locks alike.
 2. For recessed panel doors, provide access sleeves for each locking device. Furnish plastic grommets and install in holes cut through finish.

2.4 FINISHES

- A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
- B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

- C. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.
- D. Steel and Metallic-Coated-Steel Finishes:
 - 1. Factory Prime: Apply manufacturer's standard, fast-curing, lead- and chromate-free, universal primer immediately after surface preparation and pretreatment.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Comply with manufacturer's written instructions for installing access doors and frames.
- B. Install doors flush with adjacent finish surfaces or recessed to receive finish material.

3.3 ADJUSTING

- A. Adjust doors and hardware, after installation, for proper operation.
- B. Remove and replace doors and frames that are warped, bowed, or otherwise damaged.

END OF SECTION 083113

SECTION 084113 - ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Exterior storefront framing.
 - 2. Exterior manual-swing entrance doors and door-frame units.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
- B. Shop Drawings: For aluminum-framed entrances and storefronts. Include plans, elevations, sections, full-size details, and attachments to other work.
 - 1. Include details of provisions for assembly expansion and contraction and for draining moisture occurring within the assembly to the exterior.
 - 2. Include full-size isometric details of each vertical-to-horizontal intersection of aluminum-framed entrances and storefronts, showing the following:
 - a. Joinery, including concealed welds.
 - b. Anchorage.
 - c. Expansion provisions.
 - d. Glazing.
 - e. Flashing and drainage.
 - 3. Show connection to and continuity with adjacent thermal, weather, air, and vapor barriers.
- C. Samples for Initial Selection: For units with factory-applied color finishes.
- D. Samples for Verification: For each type of exposed finish required, in manufacturer's standard sizes.
- E. Fabrication Sample: Of each vertical-to-horizontal intersection of assemblies, made from 12-inch lengths of full-size components and showing details of the following:
 - 1. Joinery, including concealed welds.
 - 2. Anchorage.
 - 3. Expansion provisions.
 - 4. Glazing.

5. Flashing and drainage.

- F. Entrance Door Hardware Schedule: Prepared by or under supervision of supplier, detailing fabrication and assembly of entrance door hardware, as well as procedures and diagrams. Coordinate final entrance door hardware schedule with doors, frames, and related work to ensure proper size, thickness, hand, function, and finish of entrance door hardware.

1.4 INFORMATIONAL SUBMITTALS

- A. Energy Performance Certificates: For aluminum-framed entrances and storefronts, accessories, and components, from manufacturer.
1. Basis for Certification: NFRC-certified energy performance values for each aluminum-framed entrance and storefront.
- B. Product Test Reports: For aluminum-framed entrances and storefronts, for tests performed by manufacturer and witnessed by a qualified testing agency.
- C. Quality-Control Program: Developed specifically for Project, including fabrication and installation, according to recommendations in ASTM C 1401. Include periodic quality-control reports.
- D. Source quality-control reports.
- E. Field quality-control reports.
- F. Sample Warranties: For special warranties.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For aluminum-framed entrances and storefronts to include in maintenance manuals.
- B. Maintenance Data for Structural Sealant: For structural-sealant-glazed storefront to include in maintenance manuals. Include ASTM C 1401 recommendations for post-installation-phase quality-control program.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.
- B. Laboratory Mockup Testing Agency Qualifications: Qualified according to ASTM E 699 for testing indicated.
- C. Testing Agency Qualifications: Qualified according to ASTM E 699 for testing indicated.
- D. Product Options: Information on Drawings and in Specifications establishes requirements for aesthetic effects and performance characteristics of assemblies. Aesthetic effects are indicated by dimensions, arrangements, alignment, and profiles of components and assemblies as they relate to sightlines, to one another, and to adjoining construction.
1. Do not change intended aesthetic effects, as judged solely by Architect, except with Architect's approval. If changes are proposed, submit comprehensive explanatory data to Architect for review.

- E. Structural-Sealant Glazing: Comply with ASTM C 1401 for design and installation of storefront systems.

1.7 WARRANTY

- A. Special Warranty: Manufacturer agrees to repair or replace components of aluminum-framed entrances and storefronts that do not comply with requirements or that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Structural failures including, but not limited to, excessive deflection.
 - b. Noise or vibration created by wind and thermal and structural movements.
 - c. Deterioration of metals and other materials beyond normal weathering.
 - d. Water penetration through fixed glazing and framing areas.
 - e. Failure of operating components.
 - 2. Warranty Period: 10 years from date of Substantial Completion.
- B. Special Finish Warranty: Standard form in which manufacturer agrees to repair finishes or replace aluminum that shows evidence of deterioration of factory-applied finishes within specified warranty period.
 - 1. Deterioration includes, but is not limited to, the following:
 - a. Color fading more than 5 Hunter units when tested according to ASTM D 2244.
 - b. Chalking in excess of a No. 8 rating when tested according to ASTM D 4214.
 - c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.
 - 2. Warranty Period: 20 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. General Performance: Comply with performance requirements specified, as determined by testing of aluminum-framed entrances and storefronts representing those indicated for this Project without failure due to defective manufacture, fabrication, installation, or other defects in construction.
 - 1. Aluminum-framed entrances and storefronts shall withstand movements of supporting structure including, but not limited to, story drift, twist, column shortening, long-term creep, and deflection from uniformly distributed and concentrated live loads.
 - 2. Failure also includes the following:
 - a. Thermal stresses transferring to building structure.
 - b. Glass breakage.
 - c. Noise or vibration created by wind and thermal and structural movements.
 - d. Loosening or weakening of fasteners, attachments, and other components.
 - e. Failure of operating units.
- B. Structural Loads:
 - 1. Wind Loads: As indicated on Drawings.

C. Deflection of Framing Members: At design wind pressure, as follows:

1. Deflection Normal to Wall Plane: Limited to edge of glass in a direction perpendicular to glass plane not exceeding 1/175 of the glass edge length for each individual glazing lite or an amount that restricts edge deflection of individual glazing lites to 3/4 inch, whichever is less.
2. Deflection Parallel to Glazing Plane: Limited to 1/360 of clear span or 1/8 inch, whichever is smaller.

D. Structural: Test according to ASTM E 330 as follows:

1. When tested at positive and negative wind-load design pressures, assemblies do not evidence deflection exceeding specified limits.
2. When tested at 150 percent of positive and negative wind-load design pressures, assemblies, including anchorage, do not evidence material failures, structural distress, or permanent deformation of main framing members exceeding 0.2 percent of span.
3. Test Durations: As required by design wind velocity, but not less than 10 seconds.

E. Air Infiltration: Test according to ASTM E 283 for infiltration as follows:

1. Fixed Framing and Glass Area:
 - a. Maximum air leakage of 0.06 cfm/sq. ft. at a static-air-pressure differential of [6.24 lbf/sq. ft.].
2. Entrance Doors:
 - a. Pair of Doors: Maximum air leakage of 1.0 cfm/sq. ft. at a static-air-pressure differential of 1.57 lbf/sq. ft..
 - b. Single Doors: Maximum air leakage of 0.5 cfm/sq. ft. at a static-air-pressure differential of 1.57 lbf/sq. ft..

F. Water Penetration under Static Pressure: Test according to ASTM E 331 as follows:

1. No evidence of water penetration through fixed glazing and framing areas when tested according to a minimum static-air-pressure differential of 20 percent of positive wind-load design pressure, but not less than 10 lbf/sq. ft..

G. Water Penetration under Dynamic Pressure: Test according to AAMA 501.1 as follows:

1. No evidence of water penetration through fixed glazing and framing areas when tested at dynamic pressure equal to 20 percent of positive wind-load design pressure, but not less than 10 lbf/sq. ft..
2. Maximum Water Leakage: No uncontrolled water penetrating assemblies or water appearing on assemblies' normally exposed interior surfaces from sources other than condensation. Water leakage does not include water controlled by flashing and gutters, or water that is drained to exterior.

H. Energy Performance: Certify and label energy performance according to NFRC as follows:

1. Thermal Transmittance (U-factor): Fixed glazing and framing areas shall have U-factor of not more than 0.45 Btu/sq. ft. x h x deg F as determined according to NFRC 100.
2. Solar Heat Gain Coefficient: Fixed glazing and framing areas shall have a solar heat gain coefficient of no greater than 0.35 as determined according to NFRC 200.
3. Condensation Resistance: Fixed glazing and framing areas shall have an NFRC-certified condensation resistance rating of no less than 15 as determined according to NFRC 500.

- I. Thermal Movements: Allow for thermal movements resulting from ambient and surface temperature changes:
 - 1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.
 - 2. Thermal Cycling: No buckling; stress on glass; sealant failure; excess stress on framing, anchors, and fasteners; or reduction of performance when tested according to AAMA 501.5.
 - a. High Exterior Ambient-Air Temperature: That which produces an exterior metal-surface temperature of 180 deg F.
 - b. Low Exterior Ambient-Air Temperature: 0 deg F.
 - c. Interior Ambient-Air Temperature: 75 deg F.

- J. Structural-Sealant Joints:
 - 1. Designed to carry gravity loads of glazing.
 - 2. Designed to produce tensile or shear stress of less than 20 psi.

2.2 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Commercial Architectural Products, Inc.
 - 2. EFCO Corporation.
 - 3. Kawneer North America; an Alcoa company.
 - 4. TRACO.

- B. Source Limitations: Obtain all components of aluminum-framed entrance and storefront system, including framing and accessories, from single manufacturer.

2.3 FRAMING

- A. Framing Members: Manufacturer's extruded- or formed-aluminum framing members of thickness required and reinforced as required to support imposed loads.
 - 1. Construction: Thermally broken.
 - 2. Glazing System: Retained mechanically with gaskets on four sides.
 - 3. Glazing Plane: Front.
 - 4. Finish: **Clear anodic finish.**
 - 5. Fabrication Method: Field-fabricated stick system.

- B. Backer Plates: Manufacturer's standard, continuous backer plates for framing members, if not integral, where framing abuts adjacent construction.

- C. Brackets and Reinforcements: Manufacturer's standard high-strength aluminum with nonstaining, nonferrous shims for aligning system components.

- D. Materials:
 - 1. Aluminum: Alloy and temper recommended by manufacturer for type of use and finish indicated.
 - a. Sheet and Plate: ASTM B 209.
 - b. Extruded Bars, Rods, Profiles, and Tubes: ASTM B 221.
 - c. Extruded Structural Pipe and Tubes: ASTM B 429/B 429M.

- d. Structural Profiles: ASTM B 308/B 308M.
- 2. Steel Reinforcement: Manufacturer's standard zinc-rich, corrosion-resistant primer complying with SSPC-PS Guide No. 12.00; applied immediately after surface preparation and pretreatment. Select surface preparation methods according to recommendations in SSPC-SP COM, and prepare surfaces according to applicable SSPC standard.
 - a. Structural Shapes, Plates, and Bars: ASTM A 36/A 36M.
 - b. Cold-Rolled Sheet and Strip: ASTM A 1008/A 1008M.
 - c. Hot-Rolled Sheet and Strip: ASTM A 1011/A 1011M.

2.4 ENTRANCE DOOR SYSTEMS- STILE & RAIL ALUMINUM DOOR

- A. Entrance Doors: Manufacturer's standard glazed entrance doors for manual-swing operation.
 - 1. Door Construction: 1-3/4-inch overall thickness, with minimum 0.125-inch- thick, extruded-aluminum tubular rail and stile members. Mechanically fasten corners with reinforcing brackets that are deeply penetrated and fillet welded or that incorporate concealed tie rods.
 - a. Thermal Construction: High-performance plastic connectors separate aluminum members exposed to the exterior from members exposed to the interior.
 - 2. Door Design: As indicated.
 - 3. Glazing Stops and Gaskets: Beveled, snap-on, extruded-aluminum stops and preformed gaskets.
 - a. Provide nonremovable glazing stops on outside of door.

2.5 ENTRANCE DOOR HARDWARE

- A. Entrance Door Hardware: Hardware not specified in this Section is specified in Section 087100 "Door Hardware."
- B. Weather Stripping: Manufacturer's standard replaceable components.
 - 1. Compression Type: Made of ASTM D 2000, molded neoprene, or ASTM D 2287, molded PVC.
 - 2. Sliding Type: AAMA 701/702, made of wool, polypropylene, or nylon woven pile with nylon-fabric or aluminum-strip backing.
- C. Weather Sweeps: Manufacturer's standard exterior-door bottom sweep with concealed fasteners on mounting strip.
- D. Silencers: BHMA A156.16, Grade 1.

2.6 GLAZING

- A. Glazing: Comply with Section 088000 "Glazing."
- B. Glazing Gaskets: Manufacturer's standard sealed-corner pressure-glazing system of black, resilient elastomeric glazing gaskets, setting blocks, and shims or spacers.
- C. Glazing Sealants: Comply with Section 088000 "Glazing."

- D. Sealants used inside the weatherproofing system shall have a VOC content of 250 g/L.
 - 1. Color: Black.
- E. Weatherseal Sealants: ASTM C 920 for Type S; Grade NS; Class 25; Uses NT, G, A, and O; chemically curing silicone formulation that is compatible with structural sealant and other system components with which it comes in contact; recommended by structural-sealant, weatherseal-sealant, and structural-sealant-glazed storefront manufacturers for this use.
 - 1. Color: Match structural sealant.

2.7 ACCESSORIES

- A. Fasteners and Accessories: Manufacturer's standard corrosion-resistant, nonstaining, nonbleeding fasteners and accessories compatible with adjacent materials.
 - 1. Use self-locking devices where fasteners are subject to loosening or turning out from thermal and structural movements, wind loads, or vibration.
 - 2. Reinforce members as required to receive fastener threads.
 - 3. Use exposed fasteners with countersunk Phillips screw heads, finished to match framing system.
- B. Anchors: Three-way adjustable anchors with minimum adjustment of 1 inch that accommodate fabrication and installation tolerances in material and finish compatible with adjoining materials and recommended by manufacturer.
- C. Concealed Flashing: Dead-soft, 0.018-inch- thick stainless steel, ASTM A 240/A 240M of type recommended by manufacturer.
- D. Bituminous Paint: Cold-applied asphalt-mastic paint complying with SSPC-Paint 12 requirements except containing no asbestos, formulated for 30-mil thickness per coat.

2.8 FABRICATION

- A. Form or extrude aluminum shapes before finishing.
- B. Weld in concealed locations to greatest extent possible to minimize distortion or discoloration of finish. Remove weld spatter and welding oxides from exposed surfaces by descaling or grinding.
- C. Fabricate components that, when assembled, have the following characteristics:
 - 1. Profiles that are sharp, straight, and free of defects or deformations.
 - 2. Accurately fitted joints with ends coped or mitered.
 - 3. Physical and thermal isolation of glazing from framing members.
 - 4. Accommodations for thermal and mechanical movements of glazing and framing to maintain required glazing edge clearances.
 - 5. Provisions for field replacement of glazing from interior.
 - 6. Fasteners, anchors, and connection devices that are concealed from view to greatest extent possible.
- D. Entrance Door Frames: Reinforce as required to support loads imposed by door operation and for installing entrance door hardware.
 - 1. At exterior doors, provide compression weather stripping at fixed stops.

2. At interior doors, provide silencers at stops to prevent metal-to-metal contact. Install three silencers on strike jamb of single-door frames and two silencers on head of frames for pairs of doors.

E. Entrance Doors: Reinforce doors as required for installing entrance door hardware.

1. At pairs of exterior doors, provide sliding-type weather stripping retained in adjustable strip and mortised into door edge.
2. At exterior doors, provide weather sweeps applied to door bottoms.

F. Entrance Door Hardware Installation: Factory install entrance door hardware to the greatest extent possible. Cut, drill, and tap for factory-installed entrance door hardware before applying finishes.

G. After fabrication, clearly mark components to identify their locations in Project according to Shop Drawings.

2.9 ALUMINUM FINISHES

A. Clear Anodic Finish: AAMA 611, AA-M12C22A41, Class I, 0.018 mm or thicker.

B. High-Performance Organic Finish: Two-coat fluoropolymer finish complying with AAMA 2604 and containing not less than 50 percent PVDF or FEVE resin by weight in color coat. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.

1. Color and Gloss: As selected by Architect from manufacturer's full range.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Prepare surfaces that are in contact with structural sealant according to sealant manufacturer's written instructions to ensure compatibility and adhesion. Preparation includes, but is not limited to, cleaning and priming surfaces.

3.3 INSTALLATION

- A. General:
 1. Comply with manufacturer's written instructions.
 2. Do not install damaged components.
 3. Fit joints to produce hairline joints free of burrs and distortion.
 4. Rigidly secure nonmovement joints.

5. Install anchors with separators and isolators to prevent metal corrosion and electrolytic deterioration and to prevent impeding movement of moving joints.
6. Seal perimeter and other joints watertight unless otherwise indicated.

B. Metal Protection:

1. Where aluminum is in contact with dissimilar metals, protect against galvanic action by painting contact surfaces with materials recommended by manufacturer for this purpose or by installing nonconductive spacers.
2. Where aluminum is in contact with concrete or masonry, protect against corrosion by painting contact surfaces with bituminous paint.

C. Set continuous sill members and flashing in full sealant bed as specified in Section 079200 "Joint Sealants" to produce weathertight installation.

D. Install components plumb and true in alignment with established lines and grades.

E. Install operable units level and plumb, securely anchored, and without distortion. Adjust weatherstripping contact and hardware movement to produce proper operation.

F. Install glazing as specified in Section 088000 "Glazing."

G. Install weatherseal sealant according to Section 079200 "Joint Sealants" and according to sealant manufacturer's written instructions to produce weatherproof joints. Install joint filler behind sealant as recommended by sealant manufacturer.

H. Entrance Doors: Install doors to produce smooth operation and tight fit at contact points.

1. Exterior Doors: Install to produce weathertight enclosure and tight fit at weather stripping.
2. Field-Installed Entrance Door Hardware: Install surface-mounted entrance door hardware according to entrance door hardware manufacturers' written instructions using concealed fasteners to greatest extent possible.

3.4 ERECTION TOLERANCES

A. Erection Tolerances: Install aluminum-framed entrances and storefronts to comply with the following maximum tolerances:

1. Plumb: 1/8 inch in 10 feet; 1/4 inch in 40 feet.
2. Level: 1/8 inch in 20 feet; 1/4 inch in 40 feet.
3. Alignment:
 - a. Where surfaces abut in line or are separated by reveal or protruding element up to 1/2 inch wide, limit offset from true alignment to 1/16 inch.
 - b. Where surfaces are separated by reveal or protruding element from 1/2 to 1 inch wide, limit offset from true alignment to 1/8 inch.
 - c. Where surfaces are separated by reveal or protruding element of 1 inch wide or more, limit offset from true alignment to 1/4 inch.
4. Location: Limit variation from plane to 1/8 inch in 12 feet; 1/2 inch over total length.

END OF SECTION 084113

SECTION 084229 - SLIDING AUTOMATIC ENTRANCES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes exterior and interior, sliding, power-operated automatic entrances.

1.3 DEFINITIONS

- A. AAADM: American Association of Automatic Door Manufacturers.
- B. Activation Device: A control that, when actuated, sends an electrical signal to the door operator to open the door.
- C. IBC: International Building Code.
- D. Safety Device: A control that, to avoid injury, prevents a door from opening or closing.
- E. For automatic door terminology, refer to BHMA A156.10 for definitions of terms.

1.4 COORDINATION

- A. Coordinate sizes and locations of recesses in concrete floors for that control automatic entrances. Concrete, reinforcement, and formwork requirements are specified elsewhere.
- B. Templates: Distribute for doors, frames, and other work specified to be factory prepared for installing automatic entrances.
- C. Coordinate hardware with doors, frames, and related work to ensure proper size, thickness, hand, function, and finish. Coordinate hardware for automatic entrances with hardware required for rest of Project.
- D. Electrical System Roughing-in: Coordinate layout and installation of automatic entrances with connections to power supplies and access-control system.

1.5 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.6 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for automatic entrances.
 - 2. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.
- B. Shop Drawings: For automatic entrances.
 - 1. Include plans, elevations, sections, hardware mounting heights, and attachment details.
 - 2. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
 - 3. Include diagrams for power, signal, and control wiring.
 - 4. Indicate locations of activation and safety devices.
 - 5. Include hardware schedule and indicate hardware types, functions, quantities, and locations.
- C. Samples for Initial Selection: For units with factory-applied color and metal-clad finishes.
 - 1. Include Samples of hardware and accessories involving color or finish selection.
- D. Samples for Verification: For each type of exposed finish required, in manufacturer's standard sizes.
- E. Delegated-Design Submittal: For automatic entrances.

1.7 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer and manufacturer.
- B. Product Certificates: For each type of automatic entrance. Include emergency-exit features of automatic entrances serving as a required means of egress.
- C. Product Test Reports: For each type of automatic entrance, for tests performed by a qualified testing agency.
- D. Field quality-control reports.
- E. Sample Warranties: For manufacturer's special warranties.

1.8 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For automatic entrances, safety devices, and control systems to include in operation and maintenance manuals.

1.9 QUALITY ASSURANCE

- A. Manufacturer Qualifications: A manufacturer with company certificate issued by AAADM indicating that manufacturer has a Certified Inspector on staff.
- B. Installer Qualifications: Manufacturer's authorized representative who is trained and approved for installation and maintenance of units required for this Project.

1. Maintenance Proximity: Not more than two hours' normal travel time from Installer's place of business to Project site.

1.10 WARRANTY

- A. Special Warranty: Manufacturer agrees to repair or replace components of automatic entrances that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

- a. Structural failures including, but not limited to, excessive deflection.
- b. Faulty operation of operators, controls, and hardware.
- c. Deterioration of metals, metal finishes, and other materials beyond normal weathering and use.

2. Warranty Period: Two years from date of Substantial Completion.

- B. Special Finish Warranty: Manufacturer agrees to repair or replace components on which finishes fail in materials or workmanship within specified warranty period.

1. Deterioration includes, but is not limited to, the following:

- a. Color fading more than 5 Hunter units when tested according to ASTM D 2244.
- b. Chalking in excess of a No. 8 rating when tested according to ASTM D 4214.
- c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.

2. Warranty Period: 20 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 AUTOMATIC ENTRANCE ASSEMBLIES

- A. Source Limitations: Obtain sliding automatic entrances from single source from single manufacturer.
- B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- C. Power-Operated Door Standard: BHMA A156.10.

2.2 PERFORMANCE REQUIREMENTS

- A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design automatic entrances.
- B. Structural Performance: Automatic entrances shall withstand the effects of gravity loads and the following loads and stresses within limits and under conditions indicated according to ASCE/SEI 7.
 1. Seismic Loads: As noted..
 2. Wind Loads: As noted.
- C. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes.

1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.
- D. Operating Temperature Range: Automatic entrances shall operate within minus 20 to plus 122 deg F.
- E. Air Infiltration: Maximum air leakage through fixed glazing and framing areas of 1.25 cfm/sq. ft. of fixed entrance-system area when tested according to ASTM E 283 at a minimum static-air-pressure difference of 1.57 lbf/sq. ft..
- F. Opening Force:
 1. Power-Operated Doors: Not more than 50 lbf required to manually set door in motion if power fails, and not more than 15 lbf required to open door to minimum required width.
 2. Breakaway Device for Power-Operated Doors: Not more than 50 lbf required for a breakaway door or panel to open.
- G. Entrapment-Prevention Force:
 1. Power-Operated Sliding Doors: Not more than 30 lbf required to prevent stopped door from closing.

2.3 SLIDING AUTOMATIC ENTRANCES

- A. General: Provide manufacturer's standard automatic entrances including doors, sidelites, framing, headers, carrier assemblies, roller tracks, door operators, controls, and accessories required for a complete installation.
- B. Sliding Automatic Entrance:
 1. Basis-of-Design Product: Subject to compliance with requirements, provide Besam SL1500 or comparable product by one of the following:
 - a. Biparting-Sliding Units:
 - 1) Besam Entrance Solutions; Subsidiary of ASSA ABLOY Entrance Systems.
 - 2) DORMA Automatics; Division of DORMA Group North America.
 - 3) Hunter Automatics Inc.
 - 4) Nabco Entrances Inc.
 - 5) Stanley Access Technologies, LLC; Division of Stanley Security Solutions.
 2. Configuration: Biparting-sliding doors with two sliding leaves, transom, and sidelites on each side.
 - a. Traffic Pattern: Two way.
 - b. Emergency Breakaway Capability: Sliding leaves only.
 - c. Mounting: Between jambs.
 3. Operator Features:
 - a. Power opening and closing.
 - b. Drive System: Chain or belt.
 - c. Adjustable opening and closing speeds.
 - d. Adjustable hold-open time between zero and 30 seconds.
 - e. Obstruction recycle.
 - f. On-off/hold-open switch to control electric power to operator.

4. Sliding-Door Carrier Assemblies and Overhead Roller Tracks: Carrier assembly that allows vertical adjustment; consisting of nylon- or delrin-covered, ball-bearing-center steel wheels operating on a continuous roller track, or ball-bearing-center steel wheels operating on a nylon- or delrin-covered, continuous roller track. Support doors from carrier assembly by cantilever and pivot assembly.
 - a. Rollers: Minimum of two ball-bearing roller wheels and two antirise rollers for each active leaf.
5. Sliding-Door Threshold: Threshold members and bottom-guide-track system with stainless-steel, ball-bearing-center roller wheels.
 - a. Configuration: Saddle-type threshold across door opening and surface-mounted guide-track system at sidelites.
6. Controls: Activation and safety devices as indicated on Drawings and according to BHMA standards.
 - a. Activation Device: Motion sensor mounted on each side of door header to detect pedestrians in activating zone and to open door.
 - b. Safety Device: Presence sensor mounted on each side of door header and two photoelectric beams mounted in sidelite jambs on one side of the door to detect pedestrians in presence zone and to prevent door from closing.
 - c. Opening-Width Control: Two-position switch that in the normal position allows sliding doors to travel to full opening width and in the alternate position reduces opening to a selected partial opening width.
7. Finish: Finish framing, door(s), and header with Class I, clear anodic finish.

2.4 ENTRANCE COMPONENTS

- A. Framing Members: Extruded aluminum, minimum 0.125 inch thick and reinforced as required to support imposed loads.
 1. Nominal Size: 1-3/4 by 4-1/2 inches.
 2. Extruded Glazing Stops and Applied Trim: Minimum 0.062-inch wall thickness.
- B. Stile and Rail Doors: 1-3/4-inch- thick, glazed doors with minimum 0.125-inch- thick, extruded-aluminum tubular stile and rail members. Mechanically fasten corners with reinforcing brackets that are welded, or incorporate concealed tie-rods that span full length of top and bottom rails.
 1. Glazing Stops and Gaskets: Beveled, snap-on, extruded-aluminum stops and preformed gaskets.
 2. Stile Design: Medium stile, 3-1/2-inch nominal width.
 3. Rail Design: As indicated on Drawings.
- C. Sidelite(s) and Transom: 1-3/4-inch- deep sidelite(s) and transom with minimum 0.125-inch- thick, extruded-aluminum tubular stile and rail members matching door design.
 1. Glazing Stops and Gaskets: Same materials and design as for stile and rail door.
 2. Glazing Stops and Gaskets: Beveled, snap-on, extruded-aluminum stops and preformed gaskets.
- D. Headers: Fabricated from minimum 0.125-inch- thick extruded aluminum and extending full width of automatic entrance units to conceal door operators and controls. Provide hinged or removable access

panels for service and adjustment of door operators and controls. Secure panels to prevent unauthorized access.

1. Mounting: Concealed, with one side of header flush with framing.
2. Capacity: Capable of supporting doors up to 175 lb per leaf over spans up to 14 feet without intermediate supports.

- a. Provide sag rods for spans exceeding 14 feet.

E. Brackets and Reinforcements: High-strength aluminum with nonstaining, nonferrous shims for aligning system components.

F. Signage: As required by cited BHMA standard.

1. Application Process: Silk-screened.
2. Provide sign materials with instructions for field application after glazing is installed.

2.5 MATERIALS

A. Aluminum: Alloy and temper recommended by manufacturer for type of use and finish indicated.

1. Extrusions: ASTM B 221.
2. Sheet: ASTM B 209.

B. Steel Reinforcement: Reinforcement with corrosion-resistant primer complying with SSPC-PS Guide No. 12.00 applied immediately after surface preparation and pretreatment. Use surface preparation methods according to recommendations in SSPC-SP COM and prepare surfaces according to applicable SSPC standard.

C. Stainless-Steel Bars: ASTM A 276 or ASTM A 666, Type 304.

D. Stainless-Steel Tubing: ASTM A 554, Grade MT 304 .

E. Stainless-Steel Sheet: ASTM A 240/A 240M or ASTM A 666, Type 304, stretcher-leveled standard of flatness, in entrance manufacturer's standard thickness.

F. Brass Sheet: ASTM B 36/B 36M, Alloy UNS No. C26000 (cartridge brass, 70 percent copper), in entrance manufacturer's standard thickness.

G. Bronze Sheet: ASTM B 36/B 36M, Alloy UNS No. C28000 (muntz metal, 60 percent copper) or Alloy UNS No. C23000 (red brass, 85 percent copper), in entrance manufacturer's standard thickness.

H. Glazing: As specified in Section 088000 "Glazing."

I. Sealants and Joint Fillers: As specified in Section 079200 "Joint Sealants."

J. Nonmetallic, Shrinkage-Resistant Grout: Premixed, nonmetallic, noncorrosive, nonstaining grout; complying with ASTM C 1107/C 1107M; of consistency suitable for application.

K. Bituminous Coating: Cold-applied asphalt emulsion complying with ASTM D 1187.

L. Fasteners and Accessories: Corrosion-resistant, nonstaining, nonbleeding fasteners and accessories compatible with adjacent materials.

2.6 DOOR OPERATORS AND CONTROLS

- A. General: Provide operators and controls, which include activation and safety devices, according to BHMA standards, for condition of exposure, and for long-term, maintenance-free operation under normal traffic load for type of occupancy indicated.
- B. Door Operators: Provide door operators of size recommended by manufacturer for door size, weight, and movement.
 - 1. Door Operator Performance: Door operators shall open and close doors and maintain them in fully closed position when subjected to Project's design wind loads.
 - 2. Electromechanical Operators: Concealed, self-contained, overhead unit powered by fractional-horsepower, permanent-magnet dc motor; with closing speed controlled mechanically by gear train and dynamically by braking action of electric motor; with solid-state microprocessor controller; UL 325; and with manual operation with power off.
- C. Motion Sensors: Self-contained, K-band-frequency, microwave-scanner units; fully enclosed by its plastic housing; adjustable to provide detection-field sizes and functions required by BHMA A156.10.
 - 1. Provide capability for switching between bidirectional and unidirectional detection.
 - 2. For one-way traffic, sensor on egress side shall not be active when doors are fully closed.
- D. Presence Sensors: Self-contained, active-infrared scanner units; adjustable to provide detection-field sizes and functions required by BHMA A156.10. Sensors shall remain active at all times.
- E. Photoelectric Beams: Pulsed infrared, sender-receiver assembly for recessed mounting. Beams shall not be active when doors are fully closed.
- F. Electrical Interlocks: Unless units are equipped with self-protecting devices or circuits, provide electrical interlocks to prevent activation of operator when door is locked, latched, or bolted.

2.7 HARDWARE

- A. General: Provide units in sizes and types recommended by automatic entrance and hardware manufacturers for entrances and uses indicated. Finish exposed parts to match door finish.
- B. Breakaway Device for Power-Operated Doors: Device that allows door to swing out in direction of egress to full 90 degrees from any operating position. Maximum force to open door shall be as stipulated in "Performance Requirements" Article. Interrupt powered operation of door operator while in breakaway mode.
- C. Deadlocks: Deadbolt operated by exterior cylinder and interior thumb turn, with minimum 1-inch- long throw bolt; BHMA A156.5, Grade 1.
 - 1. Cylinders: BHMA A156.5, Grade 1, six-pin mortise type.
 - a. Keying: Integrate into building master key system.
 - 2. Deadbolts: Steel, mortise type, BHMA A156.5, Grade 1.
 - 3. Two-Point Locking for Stile and Rail Sliding Doors: Mechanism in stile of active door leaf that automatically extends second lockbolt into overhead carrier assembly.
- D. Automatic Locking: Electrically controlled device mounted in header that automatically locks sliding door against sliding when in closed position. Provide fail safe operation if power fails.

E. Weather Stripping: Replaceable components.

1. Sliding Type: AAMA 701, made of wool, polypropylene, or nylon woven pile with nylon-fabric or aluminum-strip backing.

2.8 FABRICATION

A. General: Factory fabricate automatic entrance components to designs, sizes, and thicknesses indicated and to comply with indicated standards.

1. Form aluminum shapes before finishing.
2. Weld in concealed locations to greatest extent possible to minimize distortion or discoloration of finish. Remove weld spatter and welding oxides from exposed surfaces by descaling or grinding.
3. Use concealed fasteners to greatest extent possible. Where exposed fasteners are required, use countersunk Phillips flat-head machine screws, finished to match framing.
 - a. Where fasteners are subject to loosening or turning out from thermal and structural movements, wind loads, or vibration, use self-locking devices.
 - b. Reinforce members as required to receive fastener threads.
4. Where aluminum will contact dissimilar metals, protect against galvanic action by painting contact surfaces with primer or by applying sealant or tape recommended by manufacturer for this purpose.

B. Framing: Provide automatic entrances as prefabricated assemblies. Complete fabrication, assembly, finishing, hardware application, and other work before shipment to Project site.

1. Fabricate tubular and channel frame assemblies with welded or mechanical joints. Provide subframes and reinforcement as required for a complete system to support required loads.
2. Perform fabrication operations in manner that prevents damage to exposed finish surfaces.
3. Form profiles that are sharp, straight, and free of defects or deformations.
4. Provide components with concealed fasteners and anchor and connection devices.
5. Fabricate components with accurately fitted joints with ends coped or mitered to produce hairline joints free of burrs and distortion.
6. Fabricate exterior components to drain condensation and water passing joints within system to the exterior.
7. Provide anchorage and alignment brackets for concealed support of assembly from building structure.
8. Allow for thermal expansion of exterior units.

C. Doors: Factory fabricated and assembled in profiles indicated. Reinforce as required to support imposed loads and for installing hardware.

D. Metal Cladding: Factory-fabricated and installed metal cladding, completely covering all visible surfaces as part of prefabricated entrance assembly before shipment to Project site.

1. Perform fabrication operations in manner that prevents damage to exposed finish surfaces.
2. Form profiles that are sharp, straight, and free of defects or deformations.
3. Provide components with concealed fasteners and anchor and connection devices.
4. Fabricate components with accurately fitted joints with ends coped or mitered to produce hairline joints free of burrs and distortion.
5. Fabricate exterior components to drain water passing joints and condensation and moisture occurring or migrating within system to the exterior.
6. Allow for thermal expansion at exterior entrances.

- E. Door Operators: Factory fabricated and installed in headers, including adjusting and testing.
- F. Glazing: Fabricate framing with minimum glazing edge clearances for thickness and type of glazing indicated, according to GANA's "Glazing Manual."
- G. Hardware: Factory install hardware to greatest extent possible; remove only as required for final finishing operation and for delivery to and installation at Project site. Cut, drill, and tap for factory-installed hardware before applying finishes.
 - I. Provide sliding-type weather stripping, mortised into door, at perimeter of doors and breakaway sidelites.
- H. Controls:
 - I. General: Factory install activation and safety devices in doors and headers as required by BHMA A156.10 for type of door and direction of travel.
 - 2. Install photoelectric beams in vertical jambs of sidelites, with dimension above finished floor as follows:
 - a. Top Beam: 48 inches.
 - b. Bottom Beam: 24 inches.

2.9 GENERAL FINISH REQUIREMENTS

- A. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- B. Apply organic and anodic finishes to formed metal after fabrication unless otherwise indicated.
- C. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

2.10 ALUMINUM FINISHES

- A. Clear Anodic Finish: AAMA 611, AA-M12C22A41, Class I, 0.018 mm or thicker.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine conditions, with Installer present, for compliance with requirements for installation tolerances, header support, and other conditions affecting performance of automatic entrances.
- B. Examine roughing-in for electrical systems to verify actual locations of power connections before automatic entrance installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. General: Install automatic entrances according to manufacturer's written instructions and cited BHMA standard for direction of pedestrian travel, including signage, controls, wiring, and connection to the building's power supply.
 - 1. Do not install damaged components. Fit frame joints to produce hairline joints free of burrs and distortion. Rigidly secure nonmovement joints. Seal joints watertight.
 - 2. Where aluminum will contact dissimilar metals, protect against galvanic action by painting contact surfaces with primer or by applying sealant or tape recommended by manufacturer for this purpose.
 - 3. Where aluminum will contact concrete or masonry, protect against corrosion by painting contact surfaces with bituminous coating.
- B. Entrances: Install automatic entrances plumb and true in alignment with established lines and grades without warp or rack of framing members and doors. Anchor securely in place.
 - 1. Install surface-mounted hardware using concealed fasteners to greatest extent possible.
 - 2. Set headers, carrier assemblies, tracks, operating brackets, and guides level and true to location with anchorage for permanent support.
 - 3. Install components to drain water passing joints, condensation occurring within framing members, and moisture migrating within system to exterior.
 - 4. Level recesses for recessed thresholds using nonshrink grout.
- C. Door Operators: Connect door operators to electrical power distribution system.
- D. Controls: Install and adjust activation and safety devices according to manufacturer's written instructions and cited BHMA standard for direction of pedestrian travel. Connect control wiring according to Section 260519 "Low-Voltage Electrical Power Conductors and Cables."
- E. Guide Rails: Install rails according to BHMA A156.10, including Appendix A, and manufacturer's written instructions unless otherwise indicated.
- F. Glazing: Install glazing as specified in Section 088000 "Glazing."
- G. Sealants: Comply with requirements specified in Section 079200 "Joint Sealants" to provide weathertight installation.
 - 1. Set thresholds, framing members and flashings in full sealant bed.
 - 2. Seal perimeter of framing members with sealant.
- H. Signage: Apply signage on both sides of each door and breakaway sidelite as required by cited BHMA standard for direction of pedestrian travel.
- I. Wiring within Automatic Entrance Enclosures: Bundle, lace, and train conductors to terminal points with no excess and without exceeding manufacturer's written limitations on bending radii. Provide and use lacing bars and distribution spools.

3.3 FIELD QUALITY CONTROL

- A. Certified Inspector: Owner will engage a Certified Inspector to test and inspect components, assemblies, and installations, including connections.

- B. Perform the following tests and inspections with the assistance of a factory-authorized service representative:
 - 1. Test and inspect each automatic entrance, using AAADM inspection forms, to determine compliance of installed systems with applicable BHMA standards.
- C. Automatic entrances will be considered defective if they do not pass tests and inspections.
- D. Prepare test and inspection reports.

3.4 ADJUSTING

- A. Adjust hardware, moving parts, door operators, and controls to function smoothly, and lubricate as recommended by manufacturer; comply with requirements of applicable BHMA standards.
 - 1. Adjust exterior doors for weathertight closure.
- B. Readjust door operators and controls after repeated operation of completed installation equivalent to three days' use by normal traffic (100 to 300 cycles).

3.5 CLEANING

- A. Clean glass and metal surfaces promptly after installation. Remove excess glazing and sealant compounds, dirt, and other substances. Repair damaged finish to match original finish.
 - 1. Comply with requirements in Section 088000 "Glazing" for cleaning and maintaining glass.

3.6 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain automatic entrances.

END OF SECTION 084229

SECTION 084523 - FIBERGLASS-SANDWICH-PANEL ASSEMBLIES

PART 1 - GENERAL

1.1 SUMMARY

- A. This Section includes assemblies incorporating fiberglass sandwich panels and aluminum frame systems as follows:

1. Wall assemblies.

1.2 PERFORMANCE REQUIREMENTS

- A. Provide assemblies, including anchorage, capable of withstanding, without failure, the effects of the following:

1. Structural loads.
2. Thermal movements.
3. Movements of supporting structure.
4. Dimensional tolerances of building frame and other adjacent construction.

- B. Failure includes the following:

1. Deflection exceeding specified limits.
2. Water leakage.
3. Thermal stresses transferred to building structure.
4. Noise or vibration created by wind and thermal and structural movements.
5. Loosening or weakening of fasteners, attachments, and other components.
6. Delamination of fiberglass-sandwich-panel faces from panel cores.

- C. Structural Loads:

1. Wind Loads: As indicated by structural design data on Drawings.
2. Snow Loads: As indicated by structural design data on Drawings.
3. Load Combinations: Calculate according to requirements of applicable code indicated on Drawings.

- D. Deflection of Assemblies:

1. Vertical Assemblies: Limited to 1/180 of clear span for each assembly component.

- E. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes. Base engineering calculation on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.

1. Temperature Change (Range): 120 deg F, ambient; 180 deg F, material surfaces.

1.3 PERFORMANCE TESTING

- A. Provide assemblies that comply with test-performance requirements indicated, as evidenced by reports of tests performed on manufacturer's standard assemblies by a qualified independent testing agency.
- B. Structural-Performance Test: ASTM E 330.
 - 1. Performance at Design Load: When tested at positive and negative wind-load design pressures, assemblies do not evidence deflection exceeding specified limits.
 - 2. Performance at Maximum Test Load: When tested at 150 percent of positive and negative wind-load design pressures, assemblies, including anchorage, do not evidence material failures, structural distress, and permanent deformation of main supporting members exceeding 0.2 percent of span.
 - 3. Test Durations: As required by design wind velocity but not less than 10 seconds.
- C. Air-Infiltration Test: ASTM E 283.
 - 1. Minimum Static-Air-Pressure Difference: 1.57 lbf/sq. ft..
 - 2. Maximum Air Leakage: 0.06 cfm/sq. ft..
- D. Test for Water Penetration under Static Pressure: ASTM E 331.
 - 1. Minimum Static-Air-Pressure Difference: 20 percent of positive wind-load design pressure, but not less than 10 lbf/sq. ft..
 - 2. Water Leakage: None.
- E. Water-Penetration, Wind-Driven-Rain Test: Wind-driven-rain test in ICBO ES AC07, "Special Roofing Systems."
 - 1. Water Leakage: None.

1.4 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: For assemblies. Include plans, elevations, sections, details, and attachments to other work.
 - 1. Include structural analysis data signed and sealed by the qualified NC Professional Engineer responsible for their preparation.
- C. Samples: For each exposed finish.
- D. Field quality-control test reports.
- E. Product test reports.
- F. Maintenance data.
- G. Special warranties specified in this Section.

1.5 QUALITY ASSURANCE

- A. **Installer Qualifications:** Entity capable of assuming engineering responsibility, including preparation of Shop Drawings, and performing work of this Section and who is acceptable to manufacturer.
- B. **Manufacturer Qualifications:** For fiberglass sandwich panels, a qualified manufacturer whose facilities, processes, and products are monitored by an independent, accredited quality-control agency for compliance with applicable requirements in ICBO ES AC04, "Sandwich Panels."
- C. **Welding:** Qualify procedures and personnel according to AWS D1.2, "Structural Welding Code - Aluminum."
- D. **NFRC Certification:** Provide fiberglass sandwich panels that are certified for U-factors indicated according to NFRC 100 and listed in its "National Fenestration Council Incorporated - Certified Products Directory."

1.6 PROJECT CONDITIONS

- A. **Field Measurements:** Indicate measurements on Shop Drawings.

1.7 WARRANTY

- A. **Special Fiberglass-Sandwich-Panel Warranty:** Manufacturer's standard form in which manufacturer agrees to replace panels that exhibit defects in materials or workmanship.
 - 1. Defects include, but are not limited to, the following:
 - a. Fiberbloom.
 - b. Delamination of coating, if any, from exterior face sheet.
 - c. Discoloration of exterior face sheet of more than 8.0 units Delta E when measured according ASTM D 2244.
 - d. Delamination of panel face sheets from panel cores.
 - 2. Warranty Period: 10 years from date of Project Acceptance.
- B. **Special Aluminum-Finish Warranty:** Manufacturer's standard form in which manufacturer agrees to repair or replace components on which finishes fail within specified warranty period. Warranty does not include normal weathering.
 - 1. Failures include, but are not limited to, checking, crazing, peeling, chalking, and fading of finishes.
 - 2. Warranty Period: 20 years from date of Project Acceptance.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. **Manufacturers:** Subject to compliance with requirements, provide products by one of the following:
 - 1. Kalwall Corporation.
 - 2. Skywall Translucent Systems; Vistawall Group (The).

3. Structures Unlimited, Inc.

2.2 ALUMINUM FRAME SYSTEMS

- A. Aluminum: Alloy and temper recommended in writing by manufacturer for type of use and finish indicated.
 1. Sheet and Plate: ASTM B 209.
 2. Extruded Bars, Rods, Profiles, and Tubes: ASTM B 221.
 3. Extruded Structural Pipe and Tubes: ASTM B 429.
- B. Components: Manufacturer's standard extruded-aluminum members of thickness required and reinforced as required to support imposed loads.
 1. Construction: Thermally broken; framing members are composite assemblies of two separate extruded-aluminum components permanently bonded by a material of low thermal conductance.
- C. Exposed Flashing and Closures: Manufacturer's standard aluminum components not less than 0.040 inch thick.
- D. Frame-System Gaskets: Manufacturer's standard.
- E. Frame-System Sealants: As recommended in writing by manufacturer.
 1. Provide sealants for use inside of the weatherproofing system that have a VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
- F. Anchors, Fasteners, and Accessories: Manufacturer's standard, corrosion-resistant, nonstaining, and nonbleeding; compatible with adjacent materials.
 1. At closures, retaining caps, or battens, use ASTM A 193/A 193M, 300 series stainless-steel screws.
 2. Where fasteners are subject to loosening or turning out from thermal and structural movements, wind loads, or vibration, use self-locking devices.
 3. At movement joints, use slip-joint linings, spacers, and sleeves of material and type recommended in writing by manufacturer.
- G. Anchor Bolts: ASTM A 307, Grade A, hot-dip zinc coating, ASTM A 153/A 153M, Class C.
- H. Frame System Fabrication:
 1. Fabricate components before finishing.
 2. Fabricate components that, when assembled, have the following characteristics:
 - a. Profiles that are sharp, straight, and free of defects or deformations.
 - b. Accurately fitted joints with ends coped or mitered.
 - c. Internal guttering systems or other means to drain water passing joints, condensation occurring within components, and moisture migrating within the assembly to exterior.
 3. Fabricate sill closures with weep holes and for installation as continuous component.
 4. Reinforce components as required to receive fastener threads.
 5. Weld components in concealed locations to greatest extent possible to minimize distortion or discoloration of finish. Remove weld spatter and welding oxides from exposed surfaces by descaling or grinding.

2.3 FIBERGLASS SANDWICH PANELS

- A. Panel Construction: Assembly of uniformly colored, translucent, thermoset, fiberglass-reinforced-polymer face sheets bonded to both sides of a grid core and complying with requirements applicable to panel materials in ICBO ES AC04, "Sandwich Panels."
1. Face-Sheet, Self-Ignition Temperature: 650 deg F or more per ASTM D 1929.
 2. Face-Sheet Burning Extent: 1 inch or less per ASTM D 635.
 3. Face-Sheet, Smoke-Developed Index: 450 or less per ASTM E 84.
 4. Interior Face-Sheet, Flame-Spread Index: Not more than [25] [75] per ASTM E 84.
- B. Panel Thickness: 1 inch (Interior Locations)
- C. Panel Thickness: 2-3/4 inches (Exterior Locations)
- D. Panel U-Factor: Not more than 0.23, measured in Btu/sq. ft. x h x deg F according to NFRC 100 or ASTM C 1363 using procedures described in ASTM C 1199 and ASTM E 1423.
- E. Panel Strength Characteristics:
1. Maximum Panel Deflection: 3-1/2 inches when a 4-by-12-foot panel is tested according to ASTM E 72 at 34 lbf/ sq. ft., with a maximum 0.090-inch set deflection after 5 minutes.
 2. Panel Support Strength: Capable of supporting, without failure, a 300-lbf concentrated load when applied to a 3-inch- diameter disk according to ASTM E 661.
- F. Grid Core: Mechanically interlocked extruded-aluminum I-beams, with a minimum flange width of 7/16 inch.
1. Extruded Aluminum: ASTM B 221, in alloy and temper recommended in writing by manufacturer.
 2. Grid Pattern: As indicated on Drawings.
- G. Exterior Face Sheet:
1. Thickness: 0.070 inches.
 2. Color: As selected by Architect from manufacturer's full range.
 3. Color Stability: Not more than 3.0 units Delta E when measured according to ASTM D 2244 after outdoor weathering in southern Florida according to procedures in ASTM D 1435 with panels mounted facing south and as follows:
 - a. Panel Mounting Angle: Not more than 5 degrees from horizontal.
 - b. Exposure Period: 60 months.
 4. Erosion Protection: Manufacturer's standard.
 5. Impact Resistance: No fracture or tear at impact of 60 ft. x lbf by a 3-1/4-inch- diameter, 5-lb free-falling ball according to test procedure in UL 972.
- H. Interior Face Sheet:
1. Thickness: 0.060 inch.
 2. Color: As selected by Architect from manufacturer's full range.
- I. Fiberglass-Sandwich-Panel Adhesive: ASTM D 2559.
1. Compatible with facing and core materials.

2. Tensile and shear bond strength of aged adhesive ensures permanent adhesion of facings to cores, as evidenced by testing according to ASTM C 297 and ASTM D 1002 after accelerated aging procedures that comply with aging requirements for adhesives with high resistance to moisture in ICBO ES AC05, "Sandwich Panel Adhesives."

J. Panel Fabrication: Factory assemble and seal panels.

1. Laminate face sheets to grid core under a controlled process using heat and pressure to produce straight adhesive bonding lines that cover width of core members and that have sharp edges.
 - a. White spots indicating lack of bond at intersections of grid-core members are limited in number to 4 for every 40 sq. ft. of panel and limited in diameter to 3/64 inch.
2. Fabricate with grid pattern that is symmetrical about centerlines of each panel.
3. Fabricate panel to allow condensation within panel to escape.
4. Reinforce panel corners.

2.4 ACCESSORY MATERIALS

- A. Bituminous Paint: Cold-applied asphalt-mastic paint complying with SSPC-Paint 12 requirements except containing no asbestos, formulated for 30-mil thickness per coat.

2.5 ALUMINUM FINISHES

- A. Aluminum Anodic Finish: Class I, clear anodic coating complying with AAMA 611.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General:

1. Do not install damaged components.
2. Fit joints between aluminum components to produce hairline joints free of burrs and distortion.
3. Rigidly secure nonmovement joints.
4. Install anchors with separators and isolators to prevent metal corrosion and electrolytic deterioration and to prevent impeding movement of moving joints.
5. Weld aluminum components in concealed locations to minimize distortion or discoloration of finish. Protect glazing surfaces from welding.
6. Seal joints watertight, unless otherwise indicated.

- B. Metal Protection: Where aluminum components will contact dissimilar materials, protect against galvanic action by painting contact surfaces with bituminous paint or by installing nonconductive spacers as recommended in writing by manufacturer for this purpose.

- C. Install continuous aluminum sill closure with weatherproof expansion joints and locked and sealed or welded corners. Locate weep holes at rafters.

- D. Install components to drain water passing joints, condensation occurring within aluminum members and panels, and moisture migrating within assembly to exterior.

- E. Install components plumb and true in alignment with established lines and elevations.
- F. Erection Tolerances: Install assemblies to comply with the following maximum tolerances:
 - 1. Alignment: Limit offset from true alignment to 1/32 inch where surfaces abut in line, edge to edge, at corners, or where a reveal or protruding element separates aligned surfaces by less than 3 inches; otherwise, limit offset to 1/8 inch.
 - 2. Location and Plane: Limit variation from true location and plane to 1/8 inch in 12 feet; 1/2 inch over total length.

3.2 FIELD QUALITY CONTROL

- A. Water-Spray Test: Before installation of interior finishes has begun, assemblies shall be tested according to AAMA 501.2 and shall not evidence water penetration.
 - 1. Repair or remove work where test results and inspections indicate that it does not comply with specified requirements.
 - 2. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.

END OF SECTION 084523

SECTION 085113 - ALUMINUM WINDOWS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes fixed aluminum-framed windows for exterior locations.

1.3 DEFINITIONS

- A. Performance class designations according to AAMA/WDMA 101/I.S.2/NAFS:
 - 1. HC: Heavy Commercial.
- B. Performance grade number according to AAMA/WDMA 101/I.S.2/NAFS:
 - 1. Design pressure number in pounds force per square foot used to determine the structural test pressure and water test pressure.
- C. Structural Test Pressure: For uniform load structural test, is equivalent to 150 percent of the design pressure.
- D. Minimum Test Size: Smallest size permitted for performance class (gateway test size). Products must be tested at minimum test size or at a size larger than minimum test size to comply with requirements for performance class.

1.4 PERFORMANCE REQUIREMENTS

- A. General: Provide aluminum windows capable of complying with performance requirements indicated, based on testing manufacturer's windows that are representative of those specified, and that are of minimum test size indicated below:
 - 1. Size required by AAMA/WDMA 101/I.S.2/NAFS for gateway performance for both gateway performance and optional performance grade.
- B. Structural Performance: Provide aluminum windows capable of withstanding the effects of the following loads, based on testing units representative of those indicated for Project that pass AAMA/WDMA 101/I.S.2/NAFS, Uniform Load Structural Test:
 - 1. Design Wind Loads: Determine design wind loads applicable to Project from basic wind speed indicated in miles per hour at 33 feet above grade, according to ASCE 7, Section 6.5, "Method 2-Analytical Procedure," based on mean roof heights above grade indicated on Drawings.
 - 2. Deflection: Design glass framing system to limit lateral deflections of glass edges to less than 1/175 of glass-edge length or 3/4 inch, whichever is less, at design pressure based on testing

performed according to AAMA/WDMA 101/I.S.2/NAFS, Uniform Load Deflection Test or structural computations.

- C. Thermal Movements: Provide aluminum windows, including anchorage, that allow for thermal movements resulting from the following maximum change (range) in ambient and surface temperatures by preventing buckling, opening of joints, overstressing of components, failure of joint sealants, failure of connections, and other detrimental effects. Base engineering calculation on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.
 - 1. Temperature Change (Range): 120 deg F, ambient; 180 deg F material surfaces.

1.5 ACTION SUBMITTALS

- A. Product Data: Include construction details, material descriptions, fabrication methods, dimensions of individual components and profiles, hardware, finishes, and operating instructions for each type of aluminum window indicated.
- B. Shop Drawings: Include plans, elevations, sections, details, hardware, attachments to other work, operational clearances, installation details, and the following:
 - 1. Mullion details, including reinforcement and stiffeners.
 - 2. Joinery details.
 - 3. Expansion provisions.
 - 4. Flashing and drainage details.
 - 5. Weather-stripping details.
 - 6. Thermal-break details.
 - 7. Glazing details.
- C. Samples for Initial Selection: For units with factory-applied color finishes.
 - 1. Include similar Samples of hardware and accessories involving color selection.
- D. Samples for Verification: For aluminum windows and components required, prepared on Samples of size indicated below.
 - 1. Main Framing Member: 12-inch- long, full-size sections of extrusions with factory-applied color finish.
- E. Product Schedule: For aluminum windows. Use same designations indicated on Drawings.

1.6 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer.
- B. Product Test Reports: Based on evaluation of comprehensive tests performed within the last four years by a qualified testing agency for each type, class, grade, and size of aluminum window. Test results based on use of downsized test units will not be accepted.
- C. Field quality-control test reports.
- D. Warranty: Special warranty specified in this Section.

1.7 QUALITY ASSURANCE

- A. **Installer Qualifications:** An installer acceptable to aluminum window manufacturer for installation of units required for this Project.
- B. **Manufacturer Qualifications:** A manufacturer capable of fabricating aluminum windows that meet or exceed performance requirements indicated and of documenting this performance by inclusion in lists and by labels, test reports, and calculations.
- C. **Source Limitations:** Obtain aluminum windows through one source from a single manufacturer.
- D. **Product Options:** Information on Drawings and in Specifications establishes requirements for aluminum windows' aesthetic effects and performance characteristics. Aesthetic effects are indicated by dimensions, arrangements, alignment, and profiles of components and assemblies as they relate to sightlines, to one another, and to adjoining construction. Performance characteristics are indicated by criteria subject to verification by one or more methods including preconstruction testing, field testing, and in-service performance.
- E. **Glazing Publications:** Comply with published recommendations of glass manufacturers and with GANA's "Glazing Manual" unless more stringent requirements are indicated.

1.8 PROJECT CONDITIONS

- A. **Field Measurements:** Verify aluminum window openings by field measurements before fabrication and indicate measurements on Shop Drawings.
 - 1. **Established Dimensions:** Where field measurements cannot be made without delaying the Work, establish opening dimensions and proceed with fabricating aluminum windows without field measurements. Coordinate wall construction to ensure that actual opening dimensions correspond to established dimensions.

1.9 WARRANTY

- A. **Special Warranty:** Manufacturer's standard form in which manufacturer agrees to repair or replace aluminum windows that fail in materials or workmanship within specified warranty period.
 - 1. **Failures include, but are not limited to, the following:**
 - a. Failure to meet performance requirements.
 - b. Structural failures including excessive deflection, water leakage, air infiltration, or condensation.
 - c. Faulty operation of movable sash and hardware.
 - d. Deterioration of metals, other materials, and metal finishes beyond normal weathering.
 - e. Failure of insulating glass.
 - 2. **Warranty Period:**
 - a. **Glazing:** 10 years from date of Project Acceptance.
 - b. **Metal Finish:** 15 years from date of Project Acceptance.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Basis-of-Design Product: Subject to compliance with requirements, provide EFCO 325G or a comparable product by one of the following:
1. EFCO Corporation.
 2. Graham Architectural Products Corp.
 3. TRACO.
 4. YKK AP America Inc.

2.2 MATERIALS

- A. Aluminum Extrusions: Alloy and temper recommended by aluminum window manufacturer for strength, corrosion resistance, and application of required finish, but not less than 22,000-psi ultimate tensile strength, not less than 16,000-psi minimum yield strength, and not less than 0.062-inch thickness at any location for the main frame and sash members.
- B. Fasteners: Aluminum, nonmagnetic stainless steel, epoxy adhesive, or other materials warranted by manufacturer to be noncorrosive and compatible with aluminum window members, trim, hardware, anchors, and other components.
1. Reinforcement: Where fasteners screw anchor into aluminum less than 0.125 inch thick, reinforce interior with aluminum or nonmagnetic stainless steel to receive screw threads, or provide standard, noncorrosive, pressed-in, splined grommet nuts.
 2. Exposed Fasteners: Unless unavoidable for applying hardware, do not use exposed fasteners. For application of hardware, use fasteners that match finish of member or hardware being fastened, as appropriate.
- C. Anchors, Clips, and Accessories: Aluminum, nonmagnetic stainless steel, or zinc-coated steel or iron complying with ASTM B 633 for SC 3 severe service conditions; provide sufficient strength to withstand design pressure indicated.
- D. Reinforcing Members: Aluminum, nonmagnetic stainless steel, or nickel/chrome-plated steel complying with ASTM B 456 for Type SC 3 severe service conditions, or zinc-coated steel or iron complying with ASTM B 633 for SC 3 severe service conditions; provide sufficient strength to withstand design pressure indicated.
- E. Compression-Type Weather Stripping: Provide compressible weather stripping designed for permanently resilient sealing under bumper or wiper action and for complete concealment when aluminum window is closed.
1. Weather-Stripping Material: Manufacturer's standard system and materials complying with AAMA/WDMA 101/I.S.2/NAFS.
- F. Sealant: For sealants required within fabricated windows, provide window manufacturer's standard, permanently elastic, nonshrinking, and nonmigrating type recommended by sealant manufacturer for joint size and movement.

2.3 WINDOW

- A. Window Type: Fixed.

- B. AAMA/WDMA Performance Requirements: Provide aluminum windows of performance indicated that comply with AAMA/WDMA 101/I.S.2/NAFS.
 - 1. Performance Class and Grade: HC 40.
- C. Condensation-Resistance Factor (CRF): Provide aluminum windows tested for thermal performance according to AAMA 1503, showing a CRF of 71.
- D. Thermal Transmittance: Provide aluminum windows with a whole-window, U-factor maximum indicated at 15-mph exterior wind velocity and winter condition temperatures when tested according to AAMA 1503.
 - 1. U-Factor: $[0.33 \text{ Btu/sq. ft.} \times h \times \text{deg F}]$ or less.
- E. Air Infiltration: Maximum rate not more than indicated when tested according to AAMA/WDMA 101/I.S.2/NAFS, Air Infiltration Test.
 - 1. Maximum Rate: 0.1 cfm/sq. ft. of area at an inward test pressure of 6.24 lbf/sq. ft..
- F. Water Resistance: No water leakage as defined in AAMA/WDMA referenced test methods at a water test pressure equaling that indicated, when tested according to AAMA/WDMA 101/I.S.2/NAFS, Water Resistance Test.
 - 1. Test Pressure: 15 percent of positive design pressure, but not less than 2.86 lbf/sq. ft. or more than 15 lbf/sq. ft..
- G. Forced-Entry Resistance: Comply with Performance Grade 40 requirements when tested according to ASTM F 588.
- H. Life-Cycle Testing: Test according to AAMA 910 and comply with AAMA/WDMA 101/I.S.2/NAFS.
- I. Operating Force and Auxiliary (Durability) Tests: Comply with AAMA/WDMA 101/I.S.2/NAFS for operating window types indicated.

2.4 GLAZING

- A. Glass and Glazing Materials: Refer to Division 08 Section "Glazing" for glass units and glazing requirements applicable to glazed aluminum window units.
- B. Glazing System: Manufacturer's standard factory-glazing system that produces weathertight seal.

2.5 FABRICATION

- A. Fabricate aluminum windows in sizes indicated. Include a complete system for assembling components and anchoring windows.
- B. Fabricate aluminum windows that are reglazable without dismantling sash or ventilator framing.
- C. Thermally Improved Construction: Fabricate aluminum windows with an integral, concealed, low-conductance thermal barrier; located between exterior materials and window members exposed on interior side; in a manner that eliminates direct metal-to-metal contact.
 - 1. Provide thermal-break construction that has been in use for not less than three years and has been tested to demonstrate resistance to thermal conductance and condensation and to show adequate strength and security of glass retention.

- D. Mullions: Provide mullions and cover plates as shown, matching window units, complete with anchors for support to structure and installation of window units. Allow for erection tolerances and provide for movement of window units due to thermal expansion and building deflections, as indicated. Provide mullions and cover plates capable of withstanding design loads of window units.
- E. Subframes: Provide subframes with anchors for window units as shown, of profile and dimensions indicated but not less than 0.062-inch- thick extruded aluminum. Miter or cope corners, and weld and dress smooth with concealed mechanical joint fasteners. Finish to match window units. Provide subframes capable of withstanding design loads of window units.
- F. Factory-Glazed Fabrication: Glaze aluminum windows in the factory where practical and possible for applications indicated. Comply with requirements in Division 08 Section "Glazing" and with AAMA/WDMA 101/I.S.2/NAFS.
- G. Glazing Stops: Provide snap-on glazing stops coordinated with Division 08 Section "Glazing" and glazing system indicated. Provide glazing stops to match sash and ventilator frames.

2.6 FINISHES, GENERAL

- A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
- B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- C. Appearance of Finished Work: Variations in appearance of abutting or adjacent pieces are acceptable if they are within one-half of the range of approved Samples. Noticeable variations in the same piece are not acceptable. Variations in appearance of other components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

2.7 ALUMINUM FINISHES

- A. Finish designations prefixed by AA comply with the system established by the Aluminum Association for designating aluminum finishes.
- B. High-Performance Organic Finish (2-Coat Fluoropolymer): AA-C12C40R1x (Chemical Finish: cleaned with inhibited chemicals; Chemical Finish: conversion coating; Organic Coating: manufacturer's standard 2-coat, thermocured system consisting of specially formulated inhibitive primer and fluoropolymer color topcoat containing not less than [50] [70] percent polyvinylidene fluoride resin by weight). Prepare, pretreat, and apply coating to exposed metal surfaces to comply with AAMA 2604 and with coating and resin manufacturers' written instructions.
 - 1. Color and Gloss: Match Architect's sample.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine openings, substrates, structural support, anchorage, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of work. Verify rough opening dimensions, levelness of sill plate, and operational clearances. Examine

wall flashings, vapor retarders, water and weather barriers, and other built-in components to ensure a coordinated, weathertight window installation.

1. Masonry Surfaces: Visibly dry and free of excess mortar, sand, and other construction debris.
2. Wood Frame Walls: Dry, clean, sound, well nailed, free of voids, and without offsets at joints. Ensure that nail heads are driven flush with surfaces in opening and within 3 inches of opening.
3. Metal Surfaces: Dry; clean; free of grease, oil, dirt, rust, corrosion, and welding slag; without sharp edges or offsets at joints.
4. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Comply with Drawings, Shop Drawings, and manufacturer's written instructions for installing windows, hardware, accessories, and other components.
- B. Install windows level, plumb, square, true to line, without distortion or impeding thermal movement, anchored securely in place to structural support, and in proper relation to wall flashing and other adjacent construction.
- C. Set sill members in bed of sealant or with gaskets, as indicated, for weathertight construction.
- D. Install windows and components to drain condensation, water penetrating joints, and moisture migrating within windows to the exterior.
- E. Separate aluminum and other corrodible surfaces from sources of corrosion or electrolytic action at points of contact with other materials.

3.3 ADJUSTING, CLEANING, AND PROTECTION

- A. Clean aluminum surfaces immediately after installing windows. Avoid damaging protective coatings and finishes. Remove excess sealants, glazing materials, dirt, and other substances.
- B. Clean factory-glazed glass immediately after installing windows. Comply with manufacturer's written recommendations for final cleaning and maintenance. Remove nonpermanent labels, and clean surfaces.
- C. Remove and replace glass that has been broken, chipped, cracked, abraded, or damaged during construction period.
- D. Protect window surfaces from contact with contaminating substances resulting from construction operations. In addition, monitor window surfaces adjacent to and below exterior concrete and masonry surfaces during construction for presence of dirt, scum, alkaline deposits, stains, or other contaminants. If contaminating substances do contact window surfaces, remove contaminants immediately according to manufacturer's written recommendations.

END OF SECTION 085113

SECTION 087100 - DOOR HARDWARE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes:
 - 1. Mechanical door hardware for the following:
 - a. Swinging doors.
 - b. Electrified Door Hardware

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include construction and installation details, material descriptions, dimensions of individual components and profiles, and finishes.
- B. Shop Drawings: Details of electrified door hardware, indicating the following:
 - 1. Wiring Diagrams: For power, signal, and control wiring and including the following:
 - a. Details of interface of electrified door hardware and building safety and security systems.
 - b. Schematic diagram of systems that interface with electrified door hardware.
 - c. Point-to-point wiring.
 - d. Risers.
 - e. Elevations doors controlled by electrified door hardware.
 - 2. Operation Narrative: Describe the operation of doors controlled by electrified door hardware.
- C. Samples for Initial Selection: For plastic protective trim units in each finish, color, and texture required for each type of trim unit indicated.
- D. Samples for Verification: For exposed door hardware of each type required, in each finish specified, prepared on Samples of size indicated below. Tag Samples with full description for coordination with the door hardware schedule. Submit Samples before, or concurrent with, submission of door hardware schedule.
 - 1. Sample Size: Full-size units or minimum 2-by-4-inch Samples for sheet and 4-inch long Samples for other products.
 - a. Full-size Samples will be returned to Contractor. Units that are acceptable and remain undamaged through submittal, review, and field comparison process may, after final check of operation, be incorporated into the Work, within limitations of keying requirements.

E. Other Action Submittals:

1. Door Hardware Schedule: Prepared by or under the supervision of Installer, detailing fabrication and assembly of door hardware, as well as installation procedures and diagrams. Coordinate final door hardware schedule with doors, frames, and related work to ensure proper size, thickness, hand, function, and finish of door hardware.
 - a. Submittal Sequence: Submit door hardware schedule concurrent with submissions of Product Data, Samples, and Shop Drawings. Coordinate submission of door hardware schedule with scheduling requirements of other work to facilitate the fabrication of other work that is critical in Project construction schedule.
 - b. Format: Use same scheduling sequence and format and use same door numbers as in the Contract Documents.
 - c. Content: Include the following information:
 - 1) Identification number, location, hand, fire rating, size, and material of each door and frame.
 - 2) Locations of each door hardware set, cross-referenced to Drawings on floor plans and to door and frame schedule.
 - 3) Complete designations, including name and manufacturer, type, style, function, size, quantity, function, and finish of each door hardware product.
 - 4) Description of electrified door hardware sequences of operation and interfaces with other building control systems.
 - 5) Fastenings and other pertinent information.
 - 6) Explanation of abbreviations, symbols, and codes contained in schedule.
 - 7) Mounting locations for door hardware.
 - 8) List of related door devices specified in other Sections for each door and frame.
2. Keying Schedule: Prepared by or under the supervision of Installer, detailing Owner's final keying instructions for locks. Include schematic keying diagram and index each key set to unique door designations that are coordinated with the Contract Documents.

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer and Architectural Hardware Consultant.
- B. Product Certificates: For electrified door hardware, from the manufacturer.
- C. Product Test Reports: For compliance with accessibility requirements, based on evaluation of comprehensive tests performed by manufacturer and witnessed by a qualified testing agency, for door hardware on doors located in accessible routes.
- D. Warranty: Special warranty specified in this Section.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For each type of door hardware to include in maintenance manuals. Include final hardware and keying schedule.

1.6 QUALITY ASSURANCE

- A. **Installer Qualifications:** Supplier of products and an employer of workers trained and approved by product manufacturers and an Architectural Hardware Consultant who is available during the course of the Work to consult with Contractor, Architect, and Owner about door hardware and keying.
- B. **Architectural Hardware Consultant Qualifications:** A person who is experienced in providing consulting services for door hardware installations that are comparable in material, design, and extent to that indicated for this Project and who is currently certified by DHI as follows:
 - 1. For door hardware, an Architectural Hardware Consultant (AHC).
- C. **Source Limitations:** Obtain each type of door hardware from a single manufacturer.
 - 1. Provide electrified door hardware from same manufacturer as mechanical door hardware, unless otherwise indicated. Manufacturers that perform electrical modifications and that are listed by a testing and inspecting agency acceptable to authorities having jurisdiction are acceptable.
- D. **Electrified Door Hardware:** Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction.
- E. **Means of Egress Doors:** Latches do not require more than 15 lbf to release the latch. Locks do not require use of a key, tool, or special knowledge for operation.
- F. **Accessibility Requirements:** For door hardware on doors in an accessible route, comply with the U.S. Architectural & Transportation Barriers Compliance Board's ADA-ABA Accessibility Guidelines and ICC/ANSI A117.1.
 - 1. Provide operating devices that do not require tight grasping, pinching, or twisting of the wrist and that operate with a force of not more than 5 lbf.
 - 2. Comply with the following maximum opening-force requirements:
 - a. Interior, Non-Fire-Rated Hinged Doors: 5 lbf applied perpendicular to door.
 - b. Sliding or Folding Doors: 5 lbf applied parallel to door at latch.
 - 3. Bevel raised thresholds with a slope of not more than 1:2. Provide thresholds not more than 1/2 inch high.
 - 4. Adjust door closer sweep periods so that, from an open position of 70 degrees, the door will take at least 3 seconds to move to a point 3 inches from the latch, measured to the leading edge of the door.
- G. **Keying Conference:** Conduct conference at Project site to comply with requirements in Section 013100 "Project Management and Coordination." In addition to Owner Contractor, and Architect, conference participants shall also include Installer's Architectural Hardware Consultant. Incorporate keying conference decisions into final keying schedule after reviewing door hardware keying system including, but not limited to, the following:
 - 1. Function of building, flow of traffic, purpose of each area, degree of security required, and plans for future expansion.
 - 2. Preliminary key system schematic diagram.
 - 3. Address for delivery of keys.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Inventory door hardware on receipt and provide secure lock-up for door hardware delivered to Project site.
- B. Tag each item or package separately with identification coordinated with the final door hardware schedule, and include installation instructions, templates, and necessary fasteners with each item or package.
- C. Deliver keys and permanent cores to Owner by registered mail or overnight package service.

1.8 COORDINATION

- A. Coordinate layout and installation of floor-recessed door hardware with floor construction. Cast anchoring inserts into concrete.
- B. Installation Templates: Distribute for doors, frames, and other work specified to be factory prepared. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing door hardware to comply with indicated requirements.
- C. Security: Coordinate installation of door hardware, keying, and access control with Owner's security consultant.
- D. Electrical System Roughing-In: Coordinate layout and installation of electrified door hardware with connections to power supplies and building safety and security systems.

1.9 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of door hardware that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Structural failures including excessive deflection, cracking, or breakage.
 - b. Faulty operation of doors and door hardware.
 - c. Deterioration of metals, metal finishes, and other materials beyond normal weathering and use.
 - 2. Warranty Period: Insert number years from date of Substantial Completion, unless otherwise indicated.
 - a. Exit Devices: Two years from date of Substantial Completion.
 - b. Manual Closers: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 SCHEDULED DOOR HARDWARE

- A. Provide door hardware for each door as scheduled in Part 3 "Door Hardware Schedule" Article to comply with requirements in this Section.

1. Door Hardware Sets: Provide quantity, item, size, finish or color indicated, and products equivalent in function and comparable in quality to named products.
 2. Sequence of Operation: Provide electrified door hardware function, sequence of operation, and interface with other building control systems indicated.
- B. Designations: Requirements for design, grade, function, finish, size, and other distinctive qualities of each type of door hardware are indicated in Part 3 "Door Hardware Schedule" Article. Products are identified by using door hardware designations, as follows:
1. Named Manufacturers' Products: Manufacturer and product designation are listed for each door hardware type required for the purpose of establishing minimum requirements. Manufacturers' names are abbreviated in Part 3 "Door Hardware Schedule" Article.
 2. References to BHMA Designations: Provide products complying with these designations and requirements for description, quality, and function.

2.2 HINGES

- A. Hinges: BHMA A156.1. Provide template-produced hinges for hinges installed on hollow-metal doors and hollow-metal frames.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Hager Companies.
 2. McKinney Products Company; an ASSA ABLOY Group company.
 3. Stanley Commercial Hardware; a division of Stanley Security Services.

2.3 CONTINUOUS HINGES

- A. Continuous Hinges: BHMA A156.26; minimum 0.120-inch- thick, hinge leaves with minimum overall width of 4 inches; fabricated to full height of door and frame and to template screw locations; with components finished after milling and drilling are complete.
- B. Continuous, Gear-Type Hinges: Extruded-aluminum, pinless, geared hinge leaves joined by a continuous extruded-aluminum channel cap; with concealed, self-lubricating thrust bearings.
- C. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Hager Companies.
 2. McKinney Products Company; an ASSA ABLOY Group company.
 3. Select Products Limited.
 4. Stanley Commercial Hardware; a division of Stanley Security Services.

2.4 MECHANICAL LOCKS AND LATCHES

- A. Lock Functions: As indicated in door hardware schedule.
- B. Lock Throw: Comply with testing requirements for length of bolts required for labeled fire doors, and as follows:
1. Mortise Locks: Minimum 3/4-inch latchbolt throw.
 2. Deadbolts: Minimum 1-inch bolt throw.

- C. Lock Backset: 2-3/4 inches, unless otherwise indicated.
- D. Lock Trim:
 - 1. Levers: Cast.
 - 2. Escutcheons (Roses): Cast.
- E. Strikes: Provide manufacturer's standard strike for each lock bolt or latchbolt complying with requirements indicated for applicable lock or latch and with strike box and curved lip extended to protect frame; finished to match lock or latch.
 - 1. Flat-Lip Strikes: For locks with three-piece antifriction latchbolts, as recommended by manufacturer.
- F. Mortise Locks: BHMA A156.13; Operational Grade 1; stamped steel case with steel or brass parts; Series 1000.
- G. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Corbin Russwin; an ASSA ABLOY Group company.
 - 2. SARGENT Manufacturing Company; ASSA ABLOY.
 - 3. Schlage; an Ingersoll-Rand brand.
 - 4. Yale Security Inc; an ASSA ABLOY Group company.

2.5 AUXILIARY LOCKS

- A. Mortise Auxiliary Locks: BHMA A156.5; Grade [1] [2]; with strike that suits frame.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Hager Companies.
 - 2. SARGENT Manufacturing Company; ASSA ABLOY.
 - 3. Schlage; an Ingersoll-Rand brand.
 - 4. Yale Security Inc; an ASSA ABLOY Group company.

2.6 LOCK CYLINDERS

- A. Lock Cylinders: Tumbler type, constructed from brass or bronze, stainless steel, or nickel silver.
 - 1. Manufacturer: Same manufacturer as for locking devices.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Corbin Russwin; an ASSA ABLOY Group company.
 - 2. Hager Companies.
 - 3. SARGENT Manufacturing Company; ASSA ABLOY.
 - 4. Yale Security Inc; an ASSA ABLOY Group company.
- C. Construction Master Keys: Provide cylinders with feature that permits voiding of construction keys without cylinder removal. Provide 10 construction master keys.
- D. Construction Cores: Provide construction cores that are replaceable by permanent cores. Provide 10 construction master keys.

2.7 KEYING

- A. Keying System: Factory registered, complying with guidelines in BHMA A156.28, Appendix A. Incorporate decisions made in keying conference.
 - 1. Master Key System: Change keys and a master key operate cylinders.
- B. Keys: Nickel silver.
 - 1. Stamping: Permanently inscribe each key with a visual key control number and include the following notation:
 - a. Notation: "DO NOT DUPLICATE."
 - 2. Quantity: In addition to one extra key blank for each lock, provide the following:
 - a. Cylinder Change Keys: Three.
 - b. Master Keys: Five.

2.8 SURFACE CLOSERS

- A. Surface Closers: BHMA A156.4; rack-and-pinion hydraulic type with adjustable sweep and latch speeds controlled by key-operated valves and forged-steel main arm. Comply with manufacturer's written recommendations for size of door closers depending on size of door, exposure to weather, and anticipated frequency of use. Provide factory-sized closers, adjustable to meet field conditions and requirements for opening force.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Corbin Russwin; an ASSA ABLOY Group company.
 - 2. LCN; an Ingersoll-Rand brand.
 - 3. SARGENT Manufacturing Company; ASSA ABLOY.
 - 4. Yale Security Inc; an ASSA ABLOY Group company.

2.9 MECHANICAL STOPS AND HOLDERS

- A. Wall- and Floor-Mounted Stops: BHMA A156.16; polished cast aluminum base metal.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Hager Companies.
 - 2. Ives; an Ingersoll Rand brand.
 - 3. Stanley Commercial Hardware; a division of Stanley Security Services.

2.10 DOOR GASKETING

- A. Door Gasketing: BHMA A156.22; air leakage not to exceed 0.50 cfm per foot of crack length for gasketing other than for smoke control, as tested according to ASTM E 283; with resilient or flexible seal strips that are easily replaceable and readily available from stocks maintained by manufacturer.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Hager Companies.

2. National Guard Products, Inc.
3. Pemko Manufacturing Co.
4. Zero International, Inc.

2.11 THRESHOLDS

- A. Thresholds: BHMA A156.21; fabricated to full width of opening indicated.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 1. Hager Companies.
 2. Pemko Manufacturing Co.
 3. Zero International, Inc.

2.12 METAL PROTECTIVE TRIM UNITS

- A. Metal Protective Trim Units: BHMA A156.6; fabricated from 0.050-inch- thick stainless steel; with manufacturer's standard machine or self-tapping screw fasteners.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 1. Baldwin Hardware Corporation.
 2. Ives; an Ingersoll Rand brand.
 3. Trimco.

2.13 FABRICATION

- A. Manufacturer's Nameplate: Do not provide products that have manufacturer's name or trade name displayed in a visible location except in conjunction with required fire-rated labels and as otherwise approved by Architect.
 1. Manufacturer's identification is permitted on rim of lock cylinders only.
- B. Base Metals: Produce door hardware units of base metal indicated, fabricated by forming method indicated, using manufacturer's standard metal alloy, composition, temper, and hardness. Furnish metals of a quality equal to or greater than that of specified door hardware units and BHMA A156.18.
- C. Fasteners: Provide door hardware manufactured to comply with published templates prepared for machine, wood, and sheet metal screws. Provide screws that comply with commercially recognized industry standards for application intended, except aluminum fasteners are not permitted. Provide Phillips flat-head screws with finished heads to match surface of door hardware, unless otherwise indicated.
 1. Concealed Fasteners: For door hardware units that are exposed when door is closed, except for units already specified with concealed fasteners. Do not use through bolts for installation where bolt head or nut on opposite face is exposed unless it is the only means of securely attaching the door hardware. Where through bolts are used on hollow door and frame construction, provide sleeves for each through bolt.
 2. Fire-Rated Applications:
 - a. Wood or Machine Screws: For the following:

- 1) Hinges mortised to doors or frames; use threaded-to-the-head wood screws for wood doors and frames.
 - 2) Strike plates to frames.
 - 3) Closers to doors and frames.
- b. Steel Through Bolts: For the following unless door blocking is provided:
- 1) Surface hinges to doors.
 - 2) Closers to doors and frames.
 - 3) Surface-mounted exit devices.
3. Spacers or Sex Bolts: For through bolting of hollow-metal doors.
 4. Fasteners for Wood Doors: Comply with requirements in DHI WDHS.2, "Recommended Fasteners for Wood Doors."
 5. Gasketing Fasteners: Provide noncorrosive fasteners for exterior applications and elsewhere as indicated.

2.14 FINISHES

- A. Provide finishes complying with BHMA A156.18 as indicated in door hardware schedule.
- B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- C. Appearance of Finished Work: Variations in appearance of abutting or adjacent pieces are acceptable if they are within one-half of the range of approved Samples. Noticeable variations in the same piece are not acceptable. Variations in appearance of other components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine doors and frames, with Installer present, for compliance with requirements for installation tolerances, labeled fire-rated door assembly construction, wall and floor construction, and other conditions affecting performance.
- B. Examine roughing-in for electrical power systems to verify actual locations of wiring connections before electrified door hardware installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Steel Doors and Frames: For surface applied door hardware, drill and tap doors and frames according to ANSI/SDI A250.6.
- B. Wood Doors: Comply with DHI WDHS.5 "Recommended Hardware Reinforcement Locations for Mineral Core Wood Flush Doors."

3.3 INSTALLATION

- A. Mounting Heights: Mount door hardware units at heights indicated on Drawings or to comply with the following unless otherwise indicated or required to comply with governing regulations.
 - 1. Custom Steel Doors and Frames: HMMA 831.
 - 2. Wood Doors: DHI WDHS.3, "Recommended Locations for Architectural Hardware for Wood Flush Doors."
- B. Install each door hardware item to comply with manufacturer's written instructions. Where cutting and fitting are required to install door hardware onto or into surfaces that are later to be painted or finished in another way, coordinate removal, storage, and reinstallation of surface protective trim units with finishing. Do not install surface-mounted items until finishes have been completed on substrates involved.
 - 1. Set units level, plumb, and true to line and location. Adjust and reinforce attachment substrates as necessary for proper installation and operation.
 - 2. Drill and countersink units that are not factory prepared for anchorage fasteners. Space fasteners and anchors according to industry standards.
- C. Hinges: Install types and in quantities indicated in door hardware schedule but not fewer than the number recommended by manufacturer for application indicated or one hinge for every 30 inches of door height, whichever is more stringent, unless other equivalent means of support for door, such as spring hinges or pivots, are provided.
- D. Lock Cylinders: Install construction cores to secure building and areas during construction period.
 - 1. Replace construction cores with permanent cores as directed by Owner.
 - 2. Furnish permanent cores to Owner for installation.
- E. Boxed Power Supplies: Locate power supplies as indicated or, if not indicated, above accessible ceilings. Verify location with Architect.
- F. Thresholds: Set thresholds for exterior doors and other doors indicated in full bed of sealant complying with requirements specified in Section 079200 "Joint Sealants."
- G. Stops: Provide floor stops for doors unless wall or other type stops are indicated in door hardware schedule. Do not mount floor stops where they will impede traffic.
- H. Perimeter Gasketing: Apply to head and jamb, forming seal between door and frame.
- I. Meeting Stile Gasketing: Fasten to meeting stiles, forming seal when doors are closed.
- J. Door Bottoms: Apply to bottom of door, forming seal with threshold when door is closed.

3.4 FIELD QUALITY CONTROL

- A. Independent Architectural Hardware Consultant: Owner will engage a qualified independent Architectural Hardware Consultant to perform inspections and to prepare inspection reports.
 - 1. Independent Architectural Hardware Consultant will inspect door hardware and state in each report whether installed work complies with or deviates from requirements, including whether door hardware is properly installed and adjusted.

3.5 ADJUSTING

- A. Initial Adjustment: Adjust and check each operating item of door hardware and each door to ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.
 - 1. Door Closers: Adjust sweep period to comply with accessibility requirements and requirements of authorities having jurisdiction.

3.6 CLEANING AND PROTECTION

- A. Clean adjacent surfaces soiled by door hardware installation.
- B. Clean operating items as necessary to restore proper function and finish.
- C. Provide final protection and maintain conditions that ensure that door hardware is without damage or deterioration at time of Substantial Completion.

3.7 DOOR HARDWARE SCHEDULE

Door Hardware Set No. 1
Automatic Sliding Entrance Door- Exterior
 Hardware by Door System Supplier

Door Hardware Set No. 2
Automatic Sliding Entrance Door- Interior
 Hardware by Door System Supplier

Door Hardware Set No. 3
Exterior Aluminum Door

1	Continuous Gear Hinge	Hager, Roton	780HD-Painted.	
1	Closers	Corbin-Russwin	DC8210xA4	689
1	Lockset (Entrance)	Corbin-Russwin	ML2024-ASM	630
1	Cylinder			626
1	Threshold	Hager	520S	A1
1	Weather-strip set	By Door Manuf.(Full perimeter incl. bottom)		

Door Hardware Set No. 3
Exterior Aluminum AMP Door

1	Continuous Gear Hinge	Hager, Roton	780HD-Painted.	
1	Push Plate	Hager ("PUSH" engraved)	A40R-CFC (3.5x15")	630
1	Plate + Pull	Hager	A40R-CFC (3.5x15")+P4E	630
1	Closers	Corbin-Russwin	DC8210xA4	689
1	Cylinder			626
1	Threshold	Hager	520S	A1
1	Weather-strip set	By FRP Door Manuf.(Full perimeter incl. bottom)		
2	Kickplate, 12"x1/2"LDW			630

Door Hardware Set No. 4
Interior Wood Doors Non-rated

1.5	Pr. Hinges	Hager	BB1168, 4 1/2" x 4 1/2"	
1	Lockset- (Storage Hazard)	Corbin-Russwin	ML2057-ASM-M25	630
1	Cylinder			626
2	Kickplate, 12"x1/2"LDW			630

Door Hardware Set No. 4

Interior Wood Doors Non-rated

1.5	Pr. Hinges	Hager	BB1168, 4 1/2" x 4 1/2"	
1	Lockset- (Storage Hazard)	Corbin-Russwin	ML2057-ASM-M25	630
1	Cylinder			626
2	Kickplate, 12"x1/2"LDW			630

Door Hardware Set No. 5

Interior Wood Doors Non-rated

1.5	Pr. Hinges	Hager	BB1168, 4 1/2" x 4 1/2"	
1	Closers	Corbin-Russwin	DC8200xA10	689
1	Lockset- Passage	Corbin-Russwin	ML2010	630
1	Deadbolt	Corbin-Russwin	ML2000 w/Key operation only from outside	630
2	Kickplate, 12"x1/2"LDW			630

END OF SECTION 087100

SECTION 088000 - GLAZING

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes:
 - 1. Glass for doors, interior borrowed lites, glazed curtain walls.
 - 2. Glazing sealants and accessories.

1.3 DEFINITIONS

- A. Glass Manufacturers: Firms that produce primary glass, fabricated glass, or both, as defined in referenced glazing publications.
- B. Glass Thicknesses: Indicated by thickness designations in millimeters according to ASTM C 1036.
- C. IBC: International Building Code.
- D. Interspace: Space between lites of an insulating-glass unit.

1.4 COORDINATION

- A. Coordinate glazing channel dimensions to provide necessary bite on glass, minimum edge and face clearances, and adequate sealant thicknesses, with reasonable tolerances.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Glass Samples: For each type of the following products; 12 inches square.
 - 1. Coated glass.
 - 2. Insulating glass.
- C. Glazing Accessory Samples: For sealants and colored spacers, in 12-inch lengths.
- D. Glazing Schedule: List glass types and thicknesses for each size opening and location. Use same designations indicated on Drawings.

1.6 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer and manufacturers of insulating-glass units with sputter-coated, low-E coatings.

- B. Product Certificates: For glass.
- C. Product Test Reports: For coated glass, insulating glass and glazing sealants, for tests performed by a qualified testing agency.
 - I. For glazing sealants, provide test reports based on testing current sealant formulations within previous 36-month period.
- D. Sample Warranties: For special warranties.

1.7 QUALITY ASSURANCE

- A. Manufacturer Qualifications for Insulating-Glass Units with Sputter-Coated, Low-E Coatings: A qualified insulating-glass manufacturer who is approved and certified by coated-glass manufacturer.
- B. Installer Qualifications: A qualified installer who employs glass installers for this Project who are certified under the National Glass Association's Certified Glass Installer Program.
- C. Glass Testing Agency Qualifications: A qualified independent testing agency accredited according to the NFRC CAP 1 Certification Agency Program.
- D. Sealant Testing Agency Qualifications: An independent testing agency qualified according to ASTM C 1021 to conduct the testing indicated.

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Protect glazing materials according to manufacturer's written instructions. Prevent damage to glass and glazing materials from condensation, temperature changes, direct exposure to sun, or other causes.
- B. Comply with insulating-glass manufacturer's written instructions for venting and sealing units to avoid hermetic seal ruptures due to altitude change.

1.9 FIELD CONDITIONS

- A. Environmental Limitations: Do not proceed with glazing when ambient and substrate temperature conditions are outside limits permitted by glazing material manufacturers and when glazing channel substrates are wet from rain, frost, condensation, or other causes.
 - I. Do not install glazing sealants when ambient and substrate temperature conditions are outside limits permitted by sealant manufacturer or are below 40 deg F.

1.10 WARRANTY

- A. Manufacturer's Special Warranty for Coated-Glass Products: Manufacturer agrees to replace coated-glass units that deteriorate within specified warranty period. Deterioration of coated glass is defined as defects developed from normal use that are not attributed to glass breakage or to maintaining and cleaning coated glass contrary to manufacturer's written instructions. Defects include peeling, cracking, and other indications of deterioration in coating.
 - I. Warranty Period: 10 years from date of Substantial Completion.

- B. **Manufacturer's Special Warranty for Insulating Glass:** Manufacturer agrees to replace insulating-glass units that deteriorate within specified warranty period. Deterioration of insulating glass is defined as failure of hermetic seal under normal use that is not attributed to glass breakage or to maintaining and cleaning insulating glass contrary to manufacturer's written instructions. Evidence of failure is the obstruction of vision by dust, moisture, or film on interior surfaces of glass.

- 1. **Warranty Period:** 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. **Manufacturers:** Subject to compliance with requirements, provide products by one of the following:
 - 1. GTI; Glaz-Tech Industries.
 - 2. Guardian Industries Corp.; SunGuard.
 - 3. PPG Industries, Inc.
 - 4. Viracon, Inc.
- B. **Source Limitations for Glass:** Obtain from single source from single manufacturer for each glass type.
 - 1. Obtain tinted glass from single source from single manufacturer.
- C. **Source Limitations for Glazing Accessories:** Obtain from single source from single manufacturer for each product and installation method.

2.2 PERFORMANCE REQUIREMENTS

- A. **General:** Installed glazing systems shall withstand normal thermal movement and wind and impact loads (where applicable) without failure, including loss or glass breakage attributable to the following: defective manufacture, fabrication, or installation; failure of sealants or gaskets to remain watertight and airtight; deterioration of glazing materials; or other defects in construction.
- B. **Structural Performance:** Glazing shall withstand the following design loads within limits and under conditions indicated determined according to the IBC and ASTM E 1300.
 - 1. **Design Wind Pressures:** As indicated on Drawings.
 - 2. **Design Wind Pressures:** Determine design wind pressures applicable to Project according to ASCE/SEI 7, based on heights above grade indicated on Drawings.
 - a. **Wind Design Data:** As indicated on Drawings.
 - b. **Basic Wind Speed:** 120 MPH.
 - c. **Importance Factor:** As indicated
 - d. **Exposure Category:** As indicated..
 - 3. **Design Snow Loads:** As indicated on Drawings.
 - 4. **Maximum Lateral Deflection:** For glass supported on all four edges, limit center-of-glass deflection at design wind pressure to not more than 1/50 times the short-side length or 1 inch, whichever is less.
 - 5. **Differential Shading:** Design glass to resist thermal stresses induced by differential shading within individual glass lites.

- C. Windborne-Debris-Impact Resistance: Exterior glazing shall comply with enhanced-protection testing requirements in ASTM E 1996 for Wind Zone 3 when tested according to ASTM E 1886. Test specimens shall be no smaller in width and length than glazing indicated for use on Project and shall be installed in same manner as glazing indicated for use on Project.
 - 1. Large-Missile Test: For glazing located within 30 feet of grade.
 - 2. Small-Missile Test: For glazing located more than 30 feet above grade.
- D. Safety Glazing: Where safety glazing is indicated, provide glazing that complies with 16 CFR 1201, Category II.
- E. Thermal and Optical Performance Properties: Provide glass with performance properties specified, as indicated in manufacturer's published test data, based on procedures indicated below:
 - 1. For monolithic-glass lites, properties are based on units with lites 6 mm thick.
 - 2. For insulating-glass units, properties are based on units of thickness indicated for overall unit and for each lite.
 - 3. U-Factors: Center-of-glazing values, according to NFRC 100 and based on LBL's WINDOW 5.2 computer program, expressed as Btu/sq. ft. x h x deg F.
 - 4. Solar Heat-Gain Coefficient and Visible Transmittance: Center-of-glazing values, according to NFRC 200 and based on LBL's WINDOW 5.2 computer program.
 - 5. Visible Reflectance: Center-of-glazing values, according to NFRC 300.

2.3 GLASS PRODUCTS, GENERAL

- A. Glazing Publications: Comply with published recommendations of glass product manufacturers and organizations below unless more stringent requirements are indicated. See these publications for glazing terms not otherwise defined in this Section or in referenced standards.
 - 1. IGMA Publication for Insulating Glass: SIGMA TM-3000, "North American Glazing Guidelines for Sealed Insulating Glass Units for Commercial and Residential Use."
- B. Safety Glazing Labeling: Where safety glazing is indicated, permanently mark glazing with certification label of the SGCC or another certification agency acceptable to authorities having jurisdiction. Label shall indicate manufacturer's name, type of glass, thickness, and safety glazing standard with which glass complies.
- C. Insulating-Glass Certification Program: Permanently marked either on spacers or on at least one component lite of units with appropriate certification label of IGCC.
- D. Thickness: Where glass thickness is indicated, it is a minimum. Provide glass that complies with performance requirements and is not less than the thickness indicated.
- E. Strength: Where annealed float glass is indicated, provide annealed float glass, heat-strengthened float glass, or fully tempered float glass as needed to comply with "Performance Requirements" Article. Where heat-strengthened float glass is indicated, provide heat-strengthened float glass or fully tempered float glass as needed to comply with "Performance Requirements" Article. Where fully tempered float glass is indicated, provide fully tempered float glass.

2.4 GLASS PRODUCTS

- A. Clear Annealed Float Glass: ASTM C 1036, Type I, Class 1 (clear), Quality-Q3.

B. Fully Tempered Float Glass: ASTM C 1048, Kind FT (fully tempered), Condition A (uncoated) unless otherwise indicated, Type I, Class 1 (clear) or Class 2 (tinted) as indicated, Quality-Q3.

1. Fabrication Process: By horizontal (roller-hearth) process with roll-wave distortion parallel to bottom edge of glass as installed unless otherwise indicated.

C. Heat-Strengthened Float Glass: ASTM C 1048, Kind HS (heat strengthened), Type I, Condition A (uncoated) unless otherwise indicated, Type I, Class 1 (clear) or Class 2 (tinted) as indicated, Quality-Q3.

1. Fabrication Process: By horizontal (roller-hearth) process with roll-wave distortion parallel to bottom edge of glass as installed unless otherwise indicated.

2.5 INSULATING GLASS

A. Insulating-Glass Units: Factory-assembled units consisting of sealed lites of glass separated by a dehydrated interspace, qualified according to ASTM E 2190.

1. Sealing System: Dual seal, with manufacturer's standard primary and secondary sealants.

2. Spacer: Aluminum with mill or clear anodic finish.

3. Desiccant: Molecular sieve or silica gel, or a blend of both.

2.6 GLAZING SEALANTS

A. General:

1. Compatibility: Compatible with one another and with other materials they contact, including glass products, seals of insulating-glass units, and glazing channel substrates, under conditions of service and application, as demonstrated by sealant manufacturer based on testing and field experience.

2. Suitability: Comply with sealant and glass manufacturers' written instructions for selecting glazing sealants suitable for applications indicated and for conditions existing at time of installation.

3. Field-applied sealants shall have a VOC content of not more than 250 g/L.

4. Colors of Exposed Glazing Sealants: As selected by Architect from manufacturer's full range.

B. Glazing Sealant: Neutral-curing silicone glazing sealant complying with ASTM C 920, Type S, Grade NS, Class 100/50, Use NT.

2.7 GLAZING TAPES

A. Back-Bedding Mastic Glazing Tapes: Preformed, butyl-based, 100 percent solids elastomeric tape; nonstaining and nonmigrating in contact with nonporous surfaces; with or without spacer rod as recommended in writing by tape and glass manufacturers for application indicated; and complying with ASTM C 1281 and AAMA 800 for products indicated below:

1. AAMA 804.3 tape, where indicated.

2. AAMA 806.3 tape, for glazing applications in which tape is subject to continuous pressure.

3. AAMA 807.3 tape, for glazing applications in which tape is not subject to continuous pressure.

B. Expanded Cellular Glazing Tapes: Closed-cell, PVC foam tapes; factory coated with adhesive on both surfaces; and complying with AAMA 800 for the following types:

1. AAMA 810.1, Type 1, for glazing applications in which tape acts as the primary sealant.

2. AAMA 810.1, Type 2, for glazing applications in which tape is used in combination with a full bead of liquid sealant.

2.8 MISCELLANEOUS GLAZING MATERIALS

- A. General: Provide products of material, size, and shape complying with referenced glazing standard, with requirements of manufacturers of glass and other glazing materials for application indicated, and with a proven record of compatibility with surfaces contacted in installation.
- B. Cleaners, Primers, and Sealers: Types recommended by sealant or gasket manufacturer.
- C. Setting Blocks: Elastomeric material with a Shore, Type A durometer hardness of 85, plus or minus 5.
- D. Spacers: Elastomeric blocks or continuous extrusions of hardness required by glass manufacturer to maintain glass lites in place for installation indicated.
- E. Edge Blocks: Elastomeric material of hardness needed to limit glass lateral movement (side walking).
- F. Cylindrical Glazing Sealant Backing: ASTM C 1330, Type O (open-cell material), of size and density to control glazing sealant depth and otherwise produce optimum glazing sealant performance.

2.9 FABRICATION OF GLAZING UNITS

- A. Fabricate glazing units in sizes required to fit openings indicated for Project, with edge and face clearances, edge and surface conditions, and bite complying with written instructions of product manufacturer and referenced glazing publications, to comply with system performance requirements.
 1. Allow for thermal movements from ambient and surface temperature changes acting on glass framing members and glazing components.
 - a. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.
- B. Clean-cut or flat-grind vertical edges of butt-glazed monolithic lites to produce square edges with slight chamfers at junctions of edges and faces.
- C. Grind smooth and polish exposed glass edges and corners.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine framing, glazing channels, and stops, with Installer present, for compliance with the following:
 1. Manufacturing and installation tolerances, including those for size, squareness, and offsets at corners.
 2. Presence and functioning of weep systems.
 3. Minimum required face and edge clearances.
 4. Effective sealing between joints of glass-framing members.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Clean glazing channels and other framing members receiving glass immediately before glazing. Remove coatings not firmly bonded to substrates.
- B. Examine glazing units to locate exterior and interior surfaces. Label or mark units as needed so that exterior and interior surfaces are readily identifiable. Do not use materials that leave visible marks in the completed Work.

3.3 GLAZING, GENERAL

- A. Comply with combined written instructions of manufacturers of glass, sealants, gaskets, and other glazing materials, unless more stringent requirements are indicated, including those in referenced glazing publications.
- B. Protect glass edges from damage during handling and installation. Remove damaged glass from Project site and legally dispose of off Project site. Damaged glass includes glass with edge damage or other imperfections that, when installed, could weaken glass, impair performance, or impair appearance.
- C. Apply primers to joint surfaces where required for adhesion of sealants, as determined by preconstruction testing.
- D. Install setting blocks in sill rabbets, sized and located to comply with referenced glazing publications, unless otherwise required by glass manufacturer. Set blocks in thin course of compatible sealant suitable for heel bead.
- E. Do not exceed edge pressures stipulated by glass manufacturers for installing glass lites.
- F. Provide spacers for glass lites where length plus width is larger than 50 inches.
 - 1. Locate spacers directly opposite each other on both inside and outside faces of glass. Install correct size and spacing to preserve required face clearances, unless gaskets and glazing tapes are used that have demonstrated ability to maintain required face clearances and to comply with system performance requirements.
 - 2. Provide 1/8-inch minimum bite of spacers on glass and use thickness equal to sealant width. With glazing tape, use thickness slightly less than final compressed thickness of tape.
- G. Provide edge blocking where indicated or needed to prevent glass lites from moving sideways in glazing channel, as recommended in writing by glass manufacturer and according to requirements in referenced glazing publications.
- H. Set glass lites in each series with uniform pattern, draw, bow, and similar characteristics.
- I. Set glass lites with proper orientation so that coatings face exterior or interior as specified.
- J. Where wedge-shaped gaskets are driven into one side of channel to pressurize sealant or gasket on opposite side, provide adequate anchorage so gasket cannot walk out when installation is subjected to movement.
- K. Square cut wedge-shaped gaskets at corners and install gaskets in a manner recommended by gasket manufacturer to prevent corners from pulling away; seal corner joints and butt joints with sealant recommended by gasket manufacturer.

3.4 TAPE GLAZING

- A. Position tapes on fixed stops so that, when compressed by glass, their exposed edges are flush with or protrude slightly above sightline of stops.
- B. Install tapes continuously, but not necessarily in one continuous length. Do not stretch tapes to make them fit opening.
- C. Cover vertical framing joints by applying tapes to heads and sills first, then to jambs. Cover horizontal framing joints by applying tapes to jambs, then to heads and sills.
- D. Place joints in tapes at corners of opening with adjoining lengths butted together, not lapped. Seal joints in tapes with compatible sealant approved by tape manufacturer.
- E. Do not remove release paper from tape until right before each glazing unit is installed.
- F. Apply heel bead of elastomeric sealant.
- G. Center glass lites in openings on setting blocks, and press firmly against tape by inserting dense compression gaskets formed and installed to lock in place against faces of removable stops. Start gasket applications at corners and work toward centers of openings.
- H. Apply cap bead of elastomeric sealant over exposed edge of tape.

3.5 GASKET GLAZING (DRY)

- A. Cut compression gaskets to lengths recommended by gasket manufacturer to fit openings exactly, with allowance for stretch during installation.
- B. Insert soft compression gasket between glass and frame or fixed stop so it is securely in place with joints miter cut and bonded together at corners.
- C. Installation with Drive-in Wedge Gaskets: Center glass lites in openings on setting blocks, and press firmly against soft compression gasket by inserting dense compression gaskets formed and installed to lock in place against faces of removable stops. Start gasket applications at corners and work toward centers of openings. Compress gaskets to produce a weathertight seal without developing bending stresses in glass. Seal gasket joints with sealant recommended by gasket manufacturer.
- D. Installation with Pressure-Glazing Stops: Center glass lites in openings on setting blocks, and press firmly against soft compression gasket. Install dense compression gaskets and pressure-glazing stops, applying pressure uniformly to compression gaskets. Compress gaskets to produce a weathertight seal without developing bending stresses in glass. Seal gasket joints with sealant recommended by gasket manufacturer.
- E. Install gaskets so they protrude past face of glazing stops.

3.6 SEALANT GLAZING (WET)

- A. Install continuous spacers, or spacers combined with cylindrical sealant backing, between glass lites and glazing stops to maintain glass face clearances and to prevent sealant from extruding into glass channel and blocking weep systems until sealants cure. Secure spacers or spacers and backings in place and in position to control depth of installed sealant relative to edge clearance for optimum sealant performance.

- B. Force sealants into glazing channels to eliminate voids and to ensure complete wetting or bond of sealant to glass and channel surfaces.
- C. Tool exposed surfaces of sealants to provide a substantial wash away from glass.

3.7 CLEANING AND PROTECTION

- A. Immediately after installation remove nonpermanent labels and clean surfaces.
- B. Protect glass from contact with contaminating substances resulting from construction operations. Examine glass surfaces adjacent to or below exterior concrete and other masonry surfaces at frequent intervals during construction, but not less than once a month, for buildup of dirt, scum, alkaline deposits, or stains.
 - 1. If, despite such protection, contaminating substances do come into contact with glass, remove substances immediately as recommended in writing by glass manufacturer. Remove and replace glass that cannot be cleaned without damage to coatings.
- C. Remove and replace glass that is damaged during construction period.
- D. Wash glass on both exposed surfaces not more than four days before date scheduled for inspections that establish date of Substantial Completion. Wash glass as recommended in writing by glass manufacturer.

3.8 MONOLITHIC GLASS SCHEDULE

- A. Glass Type : Obscure fully tempered float glass.
 - 1. Minimum Thickness: 1/4-inch.
 - 2. Safety glazing required.

3.9 INSULATING GLASS SCHEDULE

- A. Glass Type : Low-E-coated, tinted insulating glass.
 - 1. Basis-of-Design Product: PPG Soloargray + Solarban 60 Cear.
 - 2. Overall Unit Thickness: 1 inch.
 - 3. Minimum Thickness of Each Glass Lite: 6 mm.
 - 4. Outdoor Lite: Tinted fully tempered float glass.
 - 5. Tint Color: Gray.
 - 6. Interspace Content: Argon.
 - 7. Indoor Lite: Clear fully tempered float glass.
 - 8. Low-E Coating: Pyrolytic or sputtered on second or third surface.
 - 9. Winter Nighttime U-Factor: 0.29 maximum.
 - 10. Summer Daytime U-Factor: 0.27 maximum.
 - 11. Visible Light Transmittance: 35 percent minimum.
 - 12. Solar Heat Gain Coefficient: 0.38 maximum.
 - 13. Safety glazing required.

END OF SECTION 088000

SECTION 092900 - GYPSUM BOARD

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Interior gypsum board.
 - 2. Tile backing panels.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples: For the following products:
 - 1. Trim Accessories: Full-size Sample in 12-inch- long length for each trim accessory indicated.

1.4 DELIVERY, STORAGE AND HANDLING

- A. Store materials inside under cover and keep them dry and protected against weather, condensation, direct sunlight, construction traffic, and other potential causes of damage. Stack panels flat and supported on risers on a flat platform to prevent sagging.

1.5 FIELD CONDITIONS

- A. Environmental Limitations: Comply with ASTM C 840 requirements or gypsum board manufacturer's written recommendations, whichever are more stringent.
- B. Do not install paper-faced gypsum panels until installation areas are enclosed and conditioned.
- C. Do not install panels that are wet, those that are moisture damaged, and those that are mold damaged.
 - 1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
 - 2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. STC-Rated Assemblies: For STC-rated assemblies, provide materials and construction identical to those tested in assembly indicated according to ASTM E 90 and classified according to ASTM E 413 by an independent testing agency.

2.2 GYPSUM BOARD, GENERAL

- A. Size: Provide maximum lengths and widths available that will minimize joints in each area and that correspond with support system indicated.

2.3 INTERIOR GYPSUM BOARD

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. American Gypsum.
 - 2. CertainTeed Corporation.
 - 3. Georgia-Pacific Building Products.
 - 4. National Gypsum Company.
 - 5. USG Corporation.
- B. Gypsum Wallboard: ASTM C 1396/C 1396M.
 - 1. Thickness: 5/8 inch.
 - 2. Long Edges: Tapered.
- C. Moisture- and Mold-Resistant Gypsum Board: ASTM C 1396/C 1396M. With moisture- and mold-resistant core and paper surfaces.
 - 1. Core: 5/8 inch.
 - 2. Long Edges: Tapered.
 - 3. Mold Resistance: ASTM D 3273, score of 10 as rated according to ASTM D 3274.

2.4 TILE BACKING PANELS

- A. Cementitious Backer Units: ANSI A118.9 and ASTM C 1288 or 1325, with manufacturer's standard edges.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. CertainTeed Corporation.
 - b. James Hardie Building Products, Inc.
 - c. National Gypsum Company.
 - d. USG Corporation.
 - 2. Thickness: 5/8 inch.
 - 3. Mold Resistance: ASTM D 3273, score of 10 as rated according to ASTM D 3274.

2.5 TRIM ACCESSORIES

A. Interior Trim: ASTM C 1047.

1. Material: Galvanized or aluminum-coated steel sheet or rolled zinc.
2. Shapes:
 - a. Cornerbead.
 - b. LC-Bead: J-shaped; exposed long flange receives joint compound.
 - c. Expansion (control) joint.

2.6 JOINT TREATMENT MATERIALS

A. General: Comply with ASTM C 475/C 475M.

B. Joint Tape:

1. Interior Gypsum Board: Paper.
2. Tile Backing Panels: As recommended by panel manufacturer.

C. Joint Compound for Interior Gypsum Board: For each coat use formulation that is compatible with other compounds applied on previous or for successive coats.

1. Prefilling: At open joints and damaged surface areas, use setting-type taping compound.
2. Embedding and First Coat: For embedding tape and first coat on joints, fasteners, and trim flanges, use setting-type taping compound.
 - a. Use setting-type compound for installing paper-faced metal trim accessories.
3. Fill Coat: For second coat, use setting-type, sandable topping compound.
4. Finish Coat: For third coat, use setting-type, sandable topping compound.

D. Joint Compound for Tile Backing Panels:

1. Cementitious Backer Units: As recommended by backer unit manufacturer.
2. Water-Resistant Gypsum Backing Board: Use setting-type taping compound and setting-type, sandable topping compound.

2.7 AUXILIARY MATERIALS

A. General: Provide auxiliary materials that comply with referenced installation standards and manufacturer's written recommendations.

B. Steel Drill Screws: ASTM C 1002, unless otherwise indicated.

1. Use screws complying with ASTM C 954 for fastening panels to steel members from 0.033 to 0.112 inch thick.
2. For fastening cementitious backer units, use screws of type and size recommended by panel manufacturer.

C. Sound Attenuation Blankets: ASTM C 665, Type I (blankets without membrane facing) produced by combining thermosetting resins with mineral fibers manufactured from glass, slag wool, or rock wool.

- D. Acoustical Joint Sealant: Manufacturer's standard nonsag, paintable, nonstaining latex sealant complying with ASTM C 834. Product effectively reduces airborne sound transmission through perimeter joints and openings in building construction as demonstrated by testing representative assemblies according to ASTM E 90.
 - 1. Acoustical joint sealant shall have a VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and substrates including welded hollow-metal frames and framing, with Installer present, for compliance with requirements and other conditions affecting performance.
- B. Examine panels before installation. Reject panels that are wet, moisture damaged, and mold damaged.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 APPLYING AND FINISHING PANELS, GENERAL

- A. Comply with ASTM C 840.
- B. Install ceiling panels across framing to minimize the number of abutting end joints and to avoid abutting end joints in central area of each ceiling. Stagger abutting end joints of adjacent panels not less than one framing member.
- C. Install panels with face side out. Butt panels together for a light contact at edges and ends with not more than 1/16 inch of open space between panels. Do not force into place.
- D. Locate edge and end joints over supports, except in ceiling applications where intermediate supports or gypsum board back-blocking is provided behind end joints. Do not place tapered edges against cut edges or ends. Stagger vertical joints on opposite sides of partitions. Do not make joints other than control joints at corners of framed openings.
- E. Form control and expansion joints with space between edges of adjoining gypsum panels.
- F. Cover both faces of support framing with gypsum panels in concealed spaces (above ceilings, etc.), except in chases braced internally.
 - 1. Unless concealed application is indicated or required for sound, fire, air, or smoke ratings, coverage may be accomplished with scraps of not less than 8 sq. ft. in area.
 - 2. Fit gypsum panels around ducts, pipes, and conduits.
 - 3. Where partitions intersect structural members projecting below underside of floor/roof slabs and decks, cut gypsum panels to fit profile formed by structural members; allow 1/4- to 3/8-inch- wide joints to install sealant.
- G. Isolate perimeter of gypsum board applied to non-load-bearing partitions at structural abutments, except floors. Provide 1/4- to 1/2-inch- wide spaces at these locations and trim edges with edge trim where edges of panels are exposed. Seal joints between edges and abutting structural surfaces with acoustical sealant.

- H. Attachment to Steel Framing: Attach panels so leading edge or end of each panel is attached to open (unsupported) edges of stud flanges first.
- I. STC-Rated Assemblies: Seal construction at perimeters, behind control joints, and at openings and penetrations with a continuous bead of acoustical sealant. Install acoustical sealant at both faces of partitions at perimeters and through penetrations. Comply with ASTM C 919 and with manufacturer's written recommendations for locating edge trim and closing off sound-flanking paths around or through assemblies, including sealing partitions above acoustical ceilings.
- J. Install sound attenuation blankets before installing gypsum panels unless blankets are readily installed after panels have been installed on one side.

3.3 APPLYING INTERIOR GYPSUM BOARD

- A. Install interior gypsum board in the following locations:
 - 1. Wallboard Type: Vertical surfaces unless otherwise indicated.
 - 2. Moisture- and Mold-Resistant Type: As indicated on Drawings.
- B. Single-Layer Application:
 - 1. On ceilings, apply gypsum panels before wall/partition board application to greatest extent possible and at right angles to framing unless otherwise indicated.
 - 2. On partitions/walls, apply gypsum panels horizontally (perpendicular to framing) unless otherwise indicated or required by fire-resistance-rated assembly, and minimize end joints.
 - a. Stagger abutting end joints not less than one framing member in alternate courses of panels.
 - 3. Fastening Methods: Apply gypsum panels to supports with steel drill screws.

3.4 APPLYING TILE BACKING PANELS

- A. Cementitious Backer Units: ANSI A108.11, at showers, tubs, and where indicated and locations indicated to receive tile.
- B. Where tile backing panels abut other types of panels in same plane, shim surfaces to produce a uniform plane across panel surfaces.

3.5 INSTALLING TRIM ACCESSORIES

- A. General: For trim with back flanges intended for fasteners, attach to framing with same fasteners used for panels. Otherwise, attach trim according to manufacturer's written instructions.
- B. Control Joints: Install control joints according to ASTM C 840 and in specific locations approved by Architect for visual effect.
- C. Interior Trim: Install in the following locations:
 - 1. Cornerbead: Use at outside corners.
 - 2. LC-Bead: Use at exposed panel edges.

3.6 FINISHING GYPSUM BOARD

- A. General: Treat gypsum board joints, interior angles, edge trim, control joints, penetrations, fastener heads, surface defects, and elsewhere as required to prepare gypsum board surfaces for decoration. Promptly remove residual joint compound from adjacent surfaces.
- B. Prefill open joints and damaged surface areas.
- C. Apply joint tape over gypsum board joints, except for trim products specifically indicated as not intended to receive tape.
- D. Gypsum Board Finish Levels: Finish panels to levels indicated below and according to ASTM C 840:
 - 1. Level 1: Ceiling plenum areas, concealed areas, and where indicated.
 - 2. Level 4: At panel surfaces that will be exposed to view unless otherwise indicated.
 - a. Primer and its application to surfaces are specified in Section 099123 "Interior Painting."
- E. Cementitious Backer Units: Finish according to manufacturer's written instructions.

3.7 PROTECTION

- A. Protect adjacent surfaces from drywall compound and promptly remove from floors and other non-drywall surfaces. Repair surfaces stained, marred, or otherwise damaged during drywall application.
- B. Protect installed products from damage from weather, condensation, direct sunlight, construction, and other causes during remainder of the construction period.
- C. Remove and replace panels that are wet, moisture damaged, and mold damaged.
 - 1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
 - 2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

END OF SECTION 092900

SECTION 093013 - CERAMIC TILING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Porcelain tile.
 - 2. Waterproof membrane.

1.3 DEFINITIONS

- A. General: Definitions in the ANSI A108 series of tile installation standards and in ANSI A137.1 apply to Work of this Section unless otherwise specified.
- B. ANSI A108 Series: ANSI A108.01, ANSI A108.02, ANSI A108.1A, ANSI A108.1B, ANSI A108.1C, ANSI A108.4, ANSI A108.5, ANSI A108.6, ANSI A108.8, ANSI A108.9, ANSI A108.10, ANSI A108.11, ANSI A108.12, ANSI A108.13, ANSI A108.14, ANSI A108.15, ANSI A108.16, and ANSI A108.17, which are contained in its "Specifications for Installation of Ceramic Tile."
- C. Module Size: Actual tile size plus joint width indicated.
- D. Face Size: Actual tile size, excluding spacer lugs.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: Show locations of each type of tile and tile pattern. Show widths, details, and locations of expansion, contraction, control, and isolation joints in tile substrates and finished tile surfaces.
- C. Samples for Initial Selection: For tile, grout, and accessories involving color selection.
- D. Samples for Verification:
 - 1. Full-size units of each type and composition of tile and for each color and finish required.
 - 2. Full-size units of each type of trim and accessory for each color and finish required.
 - 3. Stone thresholds in 6-inch lengths.

1.5 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match and are from same production runs as products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Tile and Trim Units: Furnish quantity of full-size units equal to 3 percent of amount installed for each type, composition, color, pattern, and size indicated.
 - 2. Grout: Furnish quantity of grout equal to 3 percent of amount installed, but no less than one small unopened bag, for each type, composition, and color indicated.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications:
 - 1. Installer is a five-star member of the National Tile Contractors Association or a Trowel of Excellence member of the Tile Contractors' Association of America.
 - 2. Installer employs Ceramic Tile Education Foundation Certified Installers or installers recognized by the U.S. Department of Labor as Journeyman Tile Layers.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Deliver and store packaged materials in original containers with seals unbroken and labels intact until time of use. Comply with requirements in ANSI A137.1 for labeling tile packages.
- B. Store tile and cementitious materials on elevated platforms, under cover, and in a dry location.
- C. Store aggregates where grading and other required characteristics can be maintained and contamination can be avoided.
- D. Store liquid materials in unopened containers and protected from freezing.

1.8 FIELD CONDITIONS

- A. Environmental Limitations: Do not install tile until construction in spaces is complete and ambient temperature and humidity conditions are maintained at the levels indicated in referenced standards and manufacturer's written instructions.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations for Tile: Obtain tile of each type and color or finish from single source or producer.
 - 1. Obtain tile of each type and color or finish from same production run and of consistent quality in appearance and physical properties for each contiguous area.
- B. Source Limitations for Setting and Grouting Materials: Obtain ingredients of a uniform quality for each mortar, adhesive, and grout component from single manufacturer and each aggregate from single source or producer.

1. Obtain setting and grouting materials, except for unmodified Portland cement and aggregate, from single manufacturer.
 2. Obtain waterproof membrane, except for sheet products, from manufacturer of setting and grouting materials.
- C. Source Limitations for Other Products: Obtain each of the following products specified in this Section from a single manufacturer:
1. Stone thresholds.
 2. Waterproof membrane.

2.2 PRODUCTS, GENERAL

- A. ANSI Ceramic Tile Standard: Provide tile that complies with ANSI A137.1 for types, compositions, and other characteristics indicated.
- B. ANSI Standards for Tile Installation Materials: Provide materials complying with ANSI A108.02, ANSI standards referenced in other Part 2 articles, ANSI standards referenced by TCNA installation methods specified in tile installation schedules, and other requirements specified.
- C. Factory Blending: For tile exhibiting color variations within ranges, blend tile in factory and package so tile units taken from one package show same range in colors as those taken from other packages and match approved Samples.
- D. Mounting: For factory-mounted tile, provide back- or edge-mounted tile assemblies as standard with manufacturer unless otherwise indicated.
1. Where tile is indicated for installation in wet areas, do not use back- or edge-mounted tile assemblies unless tile manufacturer specifies in writing that this type of mounting is suitable for installation indicated and has a record of successful in-service performance.

2.3 TILE PRODUCTS

- A. Ceramic Tile Type CT1: Unglazed porcelain tile.
- A. Daltile "City View" (Basis for Design) or equal by American Olean or Crossville.
1. Certification: Tile certified by the Porcelain Tile Certification Agency.
 2. Face Size: 24"x24".
 3. Thickness: 3/8 inch.
 4. Tile Color, Glaze, and Pattern: As selected by Architect from manufacturer's full range. Allow up to 2 colors in each area specified as CT1.
 5. Grout Color: As selected by Architect from manufacturer's full range.
 6. Trim Units: Coordinated with sizes and coursing of adjoining flat tile where applicable and matching characteristics of adjoining flat tile. Provide shapes as follows, selected from manufacturer's standard shapes:
 - a. Internal Corners: Field-buttet square corners.
 - b. Tapered Transition Tile: Shape designed to effect transition between thickness of tile floor and adjoining floor finishes of different thickness, tapered to provide reduction in thickness from 1/2 to 1/4 inch across nominal 4-inch dimension.
- B. Ceramic Tile Type CT2: Unglazed porcelain tile.

- A. Daltile "City View" (Basis for Design) or equal by American Olean or Crossville.
 - 1. Certification: Tile certified by the Porcelain Tile Certification Agency.
 - 2. Face Size: 12"x12".
 - 3. Thickness: 3/8 inch.
 - 4. Tile Color, Glaze, and Pattern: **As selected by Architect from manufacturer's full range.**
 - 5. Grout Color: **As selected by Architect from manufacturer's full range.**
 - 6. Trim Units: Coordinated with sizes and coursing of adjoining flat tile where applicable and **matching characteristics of adjoining flat tile.** Provide shapes as follows, selected from manufacturer's standard shapes:
 - a. Internal Corners: Field-buttet square corners.
 - b. Tapered Transition Tile: Shape designed to effect transition between thickness of tile floor and adjoining floor finishes of different thickness, tapered to provide reduction in thickness from 1/2 to 1/4 inch across nominal 4-inch dimension.

C. Ceramic Tile Type CT3 and CT4: Unglazed porcelain tile.

- A. Daltile "Unity" (Basis for Design) or equal by American Olean or Crossville.
 - 1. Certification: Tile certified by the Porcelain Tile Certification Agency.
 - 2. Face Size: 12"x24" as indicated.
 - 3. Thickness: 3/8 inch.
 - 4. Tile Color, Glaze, and Pattern: **As selected by Architect from manufacturer's full range.**
 - 5. Grout Color: **As selected by Architect from manufacturer's full range.**
 - 6. Trim Units: Coordinated with sizes and coursing of adjoining flat tile where applicable and **matching characteristics of adjoining flat tile.** Provide shapes as follows, selected from manufacturer's standard shapes:
 - a. Internal Corners: Field-buttet square corners.
 - b. Tapered Transition Tile: Shape designed to effect transition between thickness of tile floor and adjoining floor finishes of different thickness, tapered to provide reduction in thickness from 1/2 to 1/4 inch across nominal 4-inch dimension.

2.4 THRESHOLDS

- A. General: Fabricate to sizes and profiles indicated or required to provide transition between adjacent floor finishes.
 - 1. Bevel edges at 1:2 slope, with lower edge of bevel aligned with or up to 1/16 inch above adjacent floor surface. Finish bevel to match top surface of threshold. Limit height of threshold to 1/2 inch or less above adjacent floor surface.
- B. Slate Thresholds: ASTM C 629/C 629M, Classification II Interior, with fine, even grain and honed finish.
 - 1. Description: Uniform, black or gray stone and unfading.

2.5 WATERPROOF MEMBRANE

- A. General: Manufacturer's standard product, selected from the following, that complies with ANSI A118.10 and is recommended by the manufacturer for the application indicated. Include reinforcement and accessories recommended by manufacturer.

- B. Chlorinated Polyethylene Sheet: Nonplasticized, chlorinated polyethylene faced on both sides with nonwoven polyester fabric.
 - 1. Nominal Thickness: 0.040 inch.
- C. PVC Sheet: PVC heat-fused on both sides to facings of nonwoven polyester.
 - 1. Nominal Thickness: 0.040 inch.
- D. Fabric-Reinforced, Modified-Bituminous Sheet: Self-adhering, SBS-modified-bituminous sheet with fabric reinforcement facing; 0.040-inch nominal thickness.

2.6 SETTING MATERIALS

- A. Portland Cement Mortar (Thickset) Installation Materials: ANSI A108.02.
 - 1. Cleavage Membrane: Asphalt felt, ASTM D 226/D 226M, Type I (No. 15); or polyethylene sheeting, ASTM D 4397, 4.0 mils thick.
 - 2. Reinforcing Wire Fabric: Galvanized, welded-wire fabric, 2 by 2 inches by 0.062-inch diameter; comply with ASTM A 185/A 185M and ASTM A 82/A 82M, except for minimum wire size.
 - 3. Expanded Metal Lath: Diamond-mesh lath complying with ASTM C 847.
 - a. Base Metal and Finish for Interior Applications: Uncoated or zinc-coated (galvanized) steel sheet, with uncoated steel sheet painted after fabrication into lath.
 - b. Base Metal and Finish for Exterior Applications: Zinc-coated (galvanized) steel sheet.
 - c. Weight: 2.5 lb/sq. yd..
 - 4. Latex Additive: Manufacturer's standard water emulsion, serving as replacement for part or all of gaging water, of type specifically recommended by latex-additive manufacturer for use with field-mixed portland cement and aggregate mortar bed.
- B. Latex-Portland Cement Mortar (Thinset): ANSI A118.4.
 - 1. Provide prepackaged, dry-mortar mix containing dry, redispersible, vinyl acetate or acrylic additive to which only water must be added at Project site.
 - 2. For wall applications, provide mortar that complies with requirements for nonsagging mortar in addition to the other requirements in ANSI A118.4.

2.7 GROUT MATERIALS

- A. Sand-Portland Cement Grout: ANSI A108.10, consisting of white or gray cement and white or colored aggregate as required to produce color indicated.
- B. High-Performance Tile Grout: ANSI A118.7.
 - 1. Polymer Type: Ethylene vinyl acetate or acrylic additive, in dry, redispersible form, prepackaged with other dry ingredients.

2.8 MISCELLANEOUS MATERIALS

- A. Trowelable Underlayments and Patching Compounds: Latex-modified, portland cement-based formulation provided or approved by manufacturer of tile-setting materials for installations indicated.

- B. Tile Cleaner: A neutral cleaner capable of removing soil and residue without harming tile and grout surfaces, specifically approved for materials and installations indicated by tile and grout manufacturers.
- C. Grout Sealer: Manufacturer's standard product for sealing grout joints and that does not change color or appearance of grout.

2.9 MIXING MORTARS AND GROUT

- A. Mix mortars and grouts to comply with referenced standards and mortar and grout manufacturers' written instructions.
- B. Add materials, water, and additives in accurate proportions.
- C. Obtain and use type of mixing equipment, mixer speeds, mixing containers, mixing time, and other procedures to produce mortars and grouts of uniform quality with optimum performance characteristics for installations indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions where tile will be installed, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
 - 1. Verify that substrates for setting tile are firm; dry; clean; free of coatings that are incompatible with tile-setting materials, including curing compounds and other substances that contain soap, wax, oil, or silicone; and comply with flatness tolerances required by ANSI A108.01 for installations indicated.
 - 2. Verify that concrete substrates for tile floors installed with adhesives, bonded mortar bed or thinset mortar comply with surface finish requirements in ANSI A108.01 for installations indicated.
 - a. Verify that surfaces that received a steel trowel finish have been mechanically scarified.
 - b. Verify that protrusions, bumps, and ridges have been removed by sanding or grinding.
 - 3. Verify that installation of grounds, anchors, recessed frames, electrical and mechanical units of work, and similar items located in or behind tile has been completed.
 - 4. Verify that joints and cracks in tile substrates are coordinated with tile joint locations; if not coordinated, adjust joint locations in consultation with Architect.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Fill cracks, holes, and depressions in concrete substrates for tile floors installed with adhesives or thinset mortar with trowelable leveling and patching compound specifically recommended by tile-setting material manufacturer.
- B. Where indicated, prepare substrates to receive waterproofing by applying a reinforced mortar bed that complies with ANSI A108.1A and is sloped 1/4 inch per foot toward drains.

- C. Blending: For tile exhibiting color variations, verify that tile has been factory blended and packaged so tile units taken from one package show same range of colors as those taken from other packages and match approved Samples. If not factory blended, either return to manufacturer or blend tiles at Project site before installing.

3.3 CERAMIC TILE INSTALLATION

- A. Comply with TCNA's "Handbook for Ceramic, Glass, and Stone Tile Installation" for TCNA installation methods specified in tile installation schedules. Comply with parts of the ANSI A108 series "Specifications for Installation of Ceramic Tile" that are referenced in TCNA installation methods, specified in tile installation schedules, and apply to types of setting and grouting materials used.
 - 1. For the following installations, follow procedures in the ANSI A108 series of tile installation standards for providing 95 percent mortar coverage:
 - a. Tile floors in wet areas.
 - b. Tile floors consisting of tiles 8 by 8 inches or larger.
 - c. Tile floors consisting of rib-backed tiles.
- B. Extend tile work into recesses and under or behind equipment and fixtures to form complete covering without interruptions unless otherwise indicated. Terminate work neatly at obstructions, edges, and corners without disrupting pattern or joint alignments.
- C. Accurately form intersections and returns. Perform cutting and drilling of tile without marring visible surfaces. Carefully grind cut edges of tile abutting trim, finish, or built-in items for straight aligned joints. Fit tile closely to electrical outlets, piping, fixtures, and other penetrations so plates, collars, or covers overlap tile.
- D. Provide manufacturer's standard trim shapes where necessary to eliminate exposed tile edges.
- E. Where accent tile differs in thickness from field tile, vary setting-bed thickness so that tiles are flush.
- F. Jointing Pattern: Lay tile in grid pattern unless otherwise indicated. Lay out tile work and center tile fields in both directions in each space or on each wall area. Lay out tile work to minimize the use of pieces that are less than half of a tile. Provide uniform joint widths unless otherwise indicated.
 - 1. For tile mounted in sheets, make joints between tile sheets same width as joints within tile sheets so joints between sheets are not apparent in finished work.
 - 2. Where adjoining tiles on floor, base, walls, or trim are specified or indicated to be same size, align joints.
 - 3. Where tiles are specified or indicated to be whole integer multiples of adjoining tiles on floor, base, walls, or trim, align joints unless otherwise indicated.
- G. Joint Widths: Unless otherwise indicated, install tile with the following joint widths:
 - 1. Porcelain Tile: 1/4 inch.
- H. Lay out tile wainscots to dimensions indicated or to next full tile beyond dimensions indicated.
- I. Expansion Joints: Provide expansion joints and other sealant-filled joints, including control, contraction, and isolation joints, where indicated. Form joints during installation of setting materials, mortar beds, and tile. Do not saw-cut joints after installing tiles.
 - 1. Where joints occur in concrete substrates, locate joints in tile surfaces directly above them.

- J. Stone Thresholds: Install stone thresholds in same type of setting bed as adjacent floor unless otherwise indicated.
 - 1. At locations where mortar bed (thickset) would otherwise be exposed above adjacent floor finishes, set thresholds in latex-portland cement mortar (thinset).
 - 2. Do not extend waterproofing or crack isolation membrane under thresholds set in latex-portland cement mortar. Fill joints between such thresholds and adjoining tile set on waterproofing or crack isolation membrane with elastomeric sealant.
- K. Grout Sealer: Apply grout sealer to cementitious grout joints in tile floors according to grout-sealer manufacturer's written instructions. As soon as grout sealer has penetrated grout joints, remove excess sealer and sealer from tile faces by wiping with soft cloth.

3.4 WATERPROOFING INSTALLATION

- A. Install waterproofing to comply with ANSI A108.13 and manufacturer's written instructions to produce waterproof membrane of uniform thickness that is bonded securely to substrate.
- B. Allow waterproofing to cure and verify by testing that it is watertight before installing tile or setting materials over it.

3.5 ADJUSTING AND CLEANING

- A. Remove and replace tile that is damaged or that does not match adjoining tile. Provide new matching units, installed as specified and in a manner to eliminate evidence of replacement.
- B. Cleaning: On completion of placement and grouting, clean all ceramic tile surfaces so they are free of foreign matter.
 - 1. Remove grout residue from tile as soon as possible.
 - 2. Clean grout smears and haze from tile according to tile and grout manufacturer's written instructions but no sooner than 10 days after installation. Use only cleaners recommended by tile and grout manufacturers and only after determining that cleaners are safe to use by testing on samples of tile and other surfaces to be cleaned. Protect metal surfaces and plumbing fixtures from effects of cleaning. Flush surfaces with clean water before and after cleaning.

3.6 PROTECTION

- A. Protect installed tile work with kraft paper or other heavy covering during construction period to prevent staining, damage, and wear. If recommended by tile manufacturer, apply coat of neutral protective cleaner to completed tile walls and floors.
- B. Prohibit foot and wheel traffic from tiled floors for at least seven days after grouting is completed.
- C. Before final inspection, remove protective coverings and rinse neutral protective cleaner from tile surfaces.

3.7 INTERIOR CERAMIC TILE INSTALLATION SCHEDULE

- A. Interior Floor Installations, Concrete Subfloor:

1. Ceramic Tile Installation (CT2-TOILETS 101,103,105,106,108): TCNA F121 and ANSI A108.1A; cement mortar bed (thickset) on waterproof membrane.
 - a. Ceramic Tile Type: CT2-12 x 12 Unglazed Porcelain Tile.
 - b. Bond Coat for Cured-Bed Method: Latex- portland cement mortar.
 - c. Grout: High-performance sanded grout.
 - d. Provide Bonded Waterproof membrane ANSI A108.10 above cement mortar bed and extending up walls as shown on Drawings. Waterproof all penetrations, corners, and extend waterproof membrane into floor drains.
 - e. Provide a cleavage membrane, loose-laid below mudded.
2. Ceramic Tile Installation (CT1): TCNA F125A; thinset mortar on crack isolation membrane.
 - a. Ceramic Tile Type: CT1-24"x24" Unglazed Porcelain Tile.
 - b. Thinset Mortar: Latex- portland cement mortar.
 - c. Grout: High-performance unsanded grout.
3. Ceramic Tile Installation CT2 (Room 104): TCNA F122; thinset mortar on waterproof membrane.
 - a. Ceramic Tile Type: CT2.
 - b. Thinset Mortar: Latex- portland cement mortar.
 - c. Grout: High-performance unsanded grout.
 - d.

B. Interior Wall Installations, Wood Studs:

1. Ceramic Tile Installation: TCNA W244C or TCNA W244F; thinset mortar on cementitious backer units.
 - a. Ceramic Tile Type: 12 x 12 Unglazed Porcelain Tile.
 - b. Thinset Mortar: Latex- portland cement mortar.
 - c. Grout: High-performance sanded grout.

END OF SECTION 093013

SECTION 096513 - RESILIENT BASE AND ACCESSORIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Resilient base.
 - 2. Resilient molding accessories.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Samples for Initial Selection: For each type of product indicated.
- C. Samples for Verification: For each type of product indicated, in manufacturer's standard-size Samples but not less than 12 inches long, of each resilient product color, texture, and pattern required.
- D. Product Schedule: For resilient products.

1.4 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Furnish not less than 10 linear feet for every 500 linear feet or fraction thereof, of each type, color, pattern, and size of resilient product installed.

1.5 QUALITY ASSURANCE

- A. Fire-Test-Response Characteristics: As determined by testing identical products according to ASTM E 648 or NFPA 253 by a qualified testing agency.
 - 1. Critical Radiant Flux Classification: Class I, not less than 0.45 W/sq. cm.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Store resilient products and installation materials in dry spaces protected from the weather, with ambient temperatures maintained within range recommended by manufacturer, but not less than 50 deg F or more than 90 deg F.

1.7 PROJECT CONDITIONS

- A. Maintain ambient temperatures within range recommended by manufacturer, but not less than 70 deg F or more than 95 deg F, in spaces to receive resilient products during the following time periods:
 - 1. 48 hours before installation.
 - 2. During installation.
 - 3. 48 hours after installation.
- B. Install resilient products after other finishing operations, including painting, have been completed.

PART 2 - PRODUCTS

2.1 RESILIENT BASE

- A. Resilient Base:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following
 - a. Armstrong World Industries, Inc.
 - b. Burke Mercer Flooring Products; Division of Burke Industries, Inc.
 - c. Flexco, Inc.
 - d. Johnsonite.
 - e. Roppe Corporation, USA.
- B. Resilient Base Standard: ASTM F 1861.
 - 1. Material Requirement: Type TS (rubber, vulcanized thermoset).
 - 2. Manufacturing Method: Group I (solid, homogeneous).
 - 3. Style: Cove (base with toe).
- C. Minimum Thickness: 0.125 inch
- D. Height: 4 inches
- E. Lengths: Coils in manufacturer's standard length.
- F. Outside Corners: Preformed
- G. Inside Corners: Preformed
- H. Finish: As selected by Architect from manufacturer's full range.
- I. Colors and Patterns: As selected by Architect from full range of industry colors.

2.2 RESILIENT MOLDING ACCESSORY

- A. Resilient Molding Accessory:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- a. Burke Mercer Flooring Products; Division of Burke Industries, Inc.
 - b. Flexco, Inc.
 - c. Johnsonite.
 - d. Roppe Corporation, USA.
- B. Description: Carpet edge for glue-down applications. Nosing for resilient floor covering, Reducer strip for resilient floor covering, Joiner for tile and carpet.
 - C. Material: Rubber.
 - D. Colors and Patterns: As selected by Architect from full range of industry colors.

2.3 INSTALLATION MATERIALS

- A. Trowelable Leveling and Patching Compounds: Latex-modified, portland cement based or blended hydraulic-cement-based formulation provided or approved by manufacturer for applications indicated.
- B. Adhesives: Water-resistant type recommended by manufacturer to suit resilient products and substrate conditions indicated.
 - I. Adhesives shall have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24), except that adhesive for rubber stair treads shall have a VOC content of 60 g/L or less.
- C. Floor Polish: Provide protective liquid floor polish products as recommended by resilient stair tread manufacturer.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, with Installer present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.
- B. Verify that finishes of substrates comply with tolerances and other requirements specified in other Sections and that substrates are free of cracks, ridges, depressions, scale, and foreign deposits that might interfere with adhesion of resilient products.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Prepare substrates according to manufacturer's written instructions to ensure adhesion of resilient products.
- B. Concrete Substrates for Resilient Stair Treads and Accessories: Prepare according to ASTM F 710.
 - 1. Verify that substrates are dry and free of curing compounds, sealers, and hardeners.
 - 2. Remove substrate coatings and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, using mechanical methods recommended by manufacturer. Do not use solvents.

3. Alkalinity and Adhesion Testing: Perform tests recommended by manufacturer.
 4. Moisture Testing: Perform tests recommended by manufacturer[and as follows]. Proceed with installation only after substrates pass testing.
- C. Fill cracks, holes, and depressions in substrates with trowelable leveling and patching compound and remove bumps and ridges to produce a uniform and smooth substrate.
 - D. Do not install resilient products until they are same temperature as the space where they are to be installed.
 1. Move resilient products and installation materials into spaces where they will be installed at least 48 hours in advance of installation.
 - E. Sweep and vacuum clean substrates to be covered by resilient products immediately before installation.

3.3 RESILIENT BASE INSTALLATION

- A. Comply with manufacturer's written instructions for installing resilient base.
- B. Apply resilient base to walls, columns, pilasters, casework and cabinets in toe spaces, and other permanent fixtures in rooms and areas where base is required.
- C. Install resilient base in lengths as long as practicable without gaps at seams and with tops of adjacent pieces aligned.
- D. Tightly adhere resilient base to substrate throughout length of each piece, with base in continuous contact with horizontal and vertical substrates.
- E. Do not stretch resilient base during installation.
- F. On masonry surfaces or other similar irregular substrates, fill voids along top edge of resilient base with manufacturer's recommended adhesive filler material.
- G. Preformed Corners: Install preformed corners before installing straight pieces.
- H. Job-Formed Corners:
 1. Outside Corners: Use straight pieces of maximum lengths possible. Form without producing discoloration (whitening) at bends.
 2. Inside Corners: Use straight pieces of maximum lengths possible.

3.4 RESILIENT ACCESSORY INSTALLATION

- A. Comply with manufacturer's written instructions for installing resilient accessories.
- B. Resilient Stair Accessories:
 1. Use stair-tread-nose filler to fill nosing substrates that do not conform to tread contours.
 2. Tightly adhere to substrates throughout length of each piece.
 3. For treads installed as separate, equal-length units, install to produce a flush joint between units.

- C. Resilient Molding Accessories: Butt to adjacent materials and tightly adhere to substrates throughout length of each piece. Install reducer strips at edges of carpet, resilient floor covering, that would otherwise be exposed.

3.5 CLEANING AND PROTECTION

- A. Comply with manufacturer's written instructions for cleaning and protection of resilient products.
- B. Perform the following operations immediately after completing resilient product installation:
 - 1. Remove adhesive and other blemishes from exposed surfaces.
 - 2. Sweep and vacuum surfaces thoroughly.
 - 3. Damp-mop surfaces to remove marks and soil.
- C. Protect resilient products from mars, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.
- D. Floor Polish: Remove soil, visible adhesive, and surface blemishes from resilient stair treads before applying liquid floor polish.
 - 1. Apply two coat(s)..
- E. Cover resilient products until Project Acceptance.

END OF SECTION 096513

SECTION 099123 - INTERIOR PAINTING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes surface preparation and the application of paint systems on the following interior substrates:
 - 1. Gypsum board.

1.3 DEFINITIONS

- A. Gloss Level 1: Not more than 5 units at 60 degrees and 10 units at 85 degrees, according to ASTM D 523.
- B. Gloss Level 2: Not more than 10 units at 60 degrees and 10 to 35 units at 85 degrees, according to ASTM D 523.
- C. Gloss Level 3: 10 to 25 units at 60 degrees and 10 to 35 units at 85 degrees, according to ASTM D 523.
- D. Gloss Level 4: 20 to 35 units at 60 degrees and not less than 35 units at 85 degrees, according to ASTM D 523.
- E. Gloss Level 5: 35 to 70 units at 60 degrees, according to ASTM D 523.
- F. Gloss Level 6: 70 to 85 units at 60 degrees, according to ASTM D 523.
- G. Gloss Level 7: More than 85 units at 60 degrees, according to ASTM D 523.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include preparation requirements and application instructions.
- B. Samples for Initial Selection: For each type of topcoat product.
- C. Samples for Verification: For each type of paint system and in each color and gloss of topcoat.
 - 1. Submit Samples on rigid backing, 8 inches square.
 - 2. Step coats on Samples to show each coat required for system.
 - 3. Label each coat of each Sample.
 - 4. Label each Sample for location and application area.
- D. Product List: For each product indicated, include the following:

1. Cross-reference to paint system and locations of application areas. Use same designations indicated on Drawings and in schedules.
2. Printout of current "MPI Approved Products List" for each product category specified in Part 2, with the proposed product highlighted.
3. VOC content.

1.5 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 1. Paint: 5 percent, but not less than 1 unopened gal. of each material and color applied.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Store materials not in use in tightly covered containers in well-ventilated areas with ambient temperatures continuously maintained at not less than 45 deg F.
 1. Maintain containers in clean condition, free of foreign materials and residue.
 2. Remove rags and waste from storage areas daily.

1.7 FIELD CONDITIONS

- A. Apply paints only when temperature of surfaces to be painted and ambient air temperatures are between 50 and 95 deg F.
- B. Do not apply paints when relative humidity exceeds 85 percent; at temperatures less than 5 deg F above the dew point; or to damp or wet surfaces.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 1. Behr Process Corporation.
 2. Glidden Professional.
 3. Lenmar Lacquers; Benjamin Moore & Co.
 4. PPG Architectural Finishes, Inc.
 5. Pratt & Lambert.
 6. Sherwin-Williams; Paint Stores Group.

2.2 PAINT, GENERAL

- A. MPI Standards: Provide products that comply with MPI standards indicated and that are listed in its "MPI Approved Products List."
- B. Material Compatibility:

1. Provide materials for use within each paint system that are compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer, based on testing and field experience.
 2. For each coat in a paint system, provide products recommended in writing by manufacturers of topcoat for use in paint system and on substrate indicated.
- C. VOC Content: Products shall comply with VOC limits of authorities having jurisdiction and, for interior paints and coatings applied at Project site, the following VOC limits, exclusive of colorants added to a tint base, when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
1. Flat Paints and Coatings: 50 g/L.
 2. Nonflat Paints and Coatings: 150 g/L.
 3. Dry-Fog Coatings: 400 g/L.
 4. Primers, Sealers, and Undercoaters: 200 g/L.
 5. Anticorrosive and Antirust Paints Applied to Ferrous Metals: 250 g/L.
 6. Zinc-Rich Industrial Maintenance Primers: 340 g/L.
 7. Pretreatment Wash Primers: 420 g/L.
 8. Floor Coatings: 100 g/L.
 9. Shellacs, Clear: 730 g/L.
 10. Shellacs, Pigmented: 550 g/L.
- D. Colors: As selected by Architect from manufacturer's full range.
1. 10 percent of surface area will be painted with deep tones.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Applicator present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.
- B. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:
 1. Gypsum Board: 12 percent.
- C. Gypsum Board Substrates: Verify that finishing compound is sanded smooth.
- D. Verify suitability of substrates, including surface conditions and compatibility with existing finishes and primers.
- E. Proceed with coating application only after unsatisfactory conditions have been corrected.
 1. Application of coating indicates acceptance of surfaces and conditions.

3.2 PREPARATION

- A. Comply with manufacturer's written instructions and recommendations in "MPI Manual" applicable to substrates indicated.

- B. Remove hardware, covers, plates, and similar items already in place that are removable and are not to be painted. If removal is impractical or impossible because of size or weight of item, provide surface-applied protection before surface preparation and painting.
 - 1. After completing painting operations, use workers skilled in the trades involved to reinstall items that were removed. Remove surface-applied protection if any.
- C. Clean substrates of substances that could impair bond of paints, including dust, dirt, oil, grease, and incompatible paints and encapsulants.
 - 1. Remove incompatible primers and reprime substrate with compatible primers or apply tie coat as required to produce paint systems indicated.

3.3 APPLICATION

- A. Apply paints according to manufacturer's written instructions and to recommendations in "MPI Manual."
 - 1. Use applicators and techniques suited for paint and substrate indicated.
 - 2. Paint surfaces behind movable equipment and furniture same as similar exposed surfaces. Before final installation, paint surfaces behind permanently fixed equipment or furniture with prime coat only.
 - 3. Paint front and backsides of access panels, removable or hinged covers, and similar hinged items to match exposed surfaces.
 - 4. Do not paint over labels of independent testing agencies or equipment name, identification, performance rating, or nomenclature plates.
 - 5. Primers specified in painting schedules may be omitted on items that are factory primed or factory finished if acceptable to topcoat manufacturers.
- B. Tint each undercoat a lighter shade to facilitate identification of each coat if multiple coats of same material are to be applied. Tint undercoats to match color of topcoat, but provide sufficient difference in shade of undercoats to distinguish each separate coat.
- C. If undercoats or other conditions show through topcoat, apply additional coats until cured film has a uniform paint finish, color, and appearance.
- D. Apply paints to produce surface films without cloudiness, spotting, holidays, laps, brush marks, roller tracking, runs, sags, ropiness, or other surface imperfections. Cut in sharp lines and color breaks.
- E. Painting Fire Suppression, Plumbing, HVAC, Electrical, Communication, and Electronic Safety and Security Work:
 - 1. Paint the following work where exposed in equipment rooms:
 - a. Uninsulated metal piping.
 - b. Metal conduit.
 - c. Plastic conduit.
 - d. Tanks that do not have factory-applied final finishes.
 - 2. Paint the following work where exposed in occupied spaces:
 - a. Pipe hangers and supports.
 - b. Metal conduit.
 - c. Other items as directed by Architect.
 - 3. Paint portions of internal surfaces of metal ducts, without liner, behind air inlets and outlets that are visible from occupied spaces.

3.4 FIELD QUALITY CONTROL

- A. Dry Film Thickness Testing: Owner may engage the services of a qualified testing and inspecting agency to inspect and test paint for dry film thickness.
 - 1. Contractor shall touch up and restore painted surfaces damaged by testing.
 - 2. If test results show that dry film thickness of applied paint does not comply with paint manufacturer's written recommendations, Contractor shall pay for testing and apply additional coats as needed to provide dry film thickness that complies with paint manufacturer's written recommendations.

3.5 CLEANING AND PROTECTION

- A. At end of each workday, remove rubbish, empty cans, rags, and other discarded materials from Project site.
- B. After completing paint application, clean spattered surfaces. Remove spattered paints by washing, scraping, or other methods. Do not scratch or damage adjacent finished surfaces.
- C. Protect work of other trades against damage from paint application. Correct damage to work of other trades by cleaning, repairing, replacing, and refinishing, as approved by Architect, and leave in an undamaged condition.
- D. At completion of construction activities of other trades, touch up and restore damaged or defaced painted surfaces.

3.6 INTERIOR PAINTING SCHEDULE

- A. Steel Substrates:
 - 1. Alkyd System:
 - a. Prime Coat: Primer, alkyd, anti-corrosive, for metal, MPI #79.
 - b. Intermediate Coat: Alkyd, interior, matching topcoat.
 - c. Topcoat (2 coats, minimum): Alkyd, interior, semi-gloss (Gloss Level 5), MPI #47.
- B. Wood Substrates: Including wood trim.
 - 1. High-Performance Architectural Latex System:
 - a. Prime Coat: Primer, latex, for interior wood, MPI #39.
 - b. Intermediate Coat: Latex, interior, high performance architectural, matching topcoat.
 - c. Topcoat (2 coats, minimum): Latex, interior, high performance architectural, semi-gloss (Gloss Level 5), MPI #141.
- C. Gypsum Board Substrates:
 - 1. High-Performance Architectural Latex System:
 - a. Prime Coat: Primer sealer, latex, interior, MPI #50.
 - b. Intermediate Coat: Latex, interior, high performance architectural, matching topcoat.
 - c. Topcoat: Latex, interior, high performance architectural, (Gloss Level 4), MPI #140.

END OF SECTION 099123

SECTION 099300 - STAINING AND TRANSPARENT FINISHING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes surface preparation and application of wood finishes on the following substrates:

- 1. Interior Substrates:
 - a. Exposed dimension lumber (rough carpentry).
 - b. Dressed lumber (finish carpentry).
 - c. Exposed wood decking.

1.3 DEFINITIONS

- A. Gloss Level 1: Not more than 5 units at 60 degrees and 10 units at 85 degrees, according to ASTM D 523.
- B. Gloss Level 4: 20 to 35 units at 60 degrees and not less than 35 units at 85 degrees, according to ASTM D 523.
- C. Gloss Level 5: 35 to 70 units at 60 degrees, according to ASTM D 523.
- D. Gloss Level 6: 70 to 85 units at 60 degrees, according to ASTM D 523.
- E. Gloss Level 7: More than 85 units at 60 degrees, according to ASTM D 523.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include preparation requirements and application instructions.
- B. Samples for Initial Selection: For each type of product indicated.
- C. Samples for Verification: For each type of finish system and in each color and gloss of finish indicated.
 - 1. Submit Samples on representative samples of actual wood substrates, 8 inches square or 8 inches long.
 - 2. Label each Sample for location and application area.
- D. Product List: For each product indicated, include the following:
 - 1. Cross-reference to finish system and locations of application areas. Use same designations indicated on Drawings and in schedules.

2. Printout of current "MPI Approved Products List" for each product category specified in Part 2, with the product proposed for use highlighted.
3. VOC content.

1.5 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 1. Stains and Transparent Finishes: 5 percent, but not less than 1 unopened gal. of each material and color applied.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Store materials not in use in tightly covered containers in well-ventilated areas with ambient temperatures continuously maintained at not less than 45 deg F.
 1. Maintain containers in clean condition, free of foreign materials and residue.
 2. Remove rags and waste from storage areas daily.

1.7 FIELD CONDITIONS

- A. Apply finishes only when temperature of surfaces to be finished and ambient air temperatures are between 50 and 95 deg F.
- B. Do not apply finishes when relative humidity exceeds 85 percent; at temperatures less than 5 deg F above the dew point; or to damp or wet surfaces.
- C. Do not apply exterior finishes in snow, rain, fog, or mist.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 1. Behr Process Corporation.
 2. PPG Architectural Finishes, Inc.
 3. Pratt & Lambert.
 4. Sherwin-Williams; Paint Stores Group.

2.2 MATERIALS, GENERAL

- A. MPI Standards: Provide products that comply with MPI standards indicated and that are listed in its "MPI Approved Products List."
- B. Material Compatibility:

1. Provide materials for use within each finish system that are compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer, based on testing and field experience.
 2. For each coat in a finish system, provide products recommended in writing by manufacturers of topcoat for use in finish system and on substrate indicated.
- C. VOC Content: Products shall comply with VOC limits of authorities having jurisdiction and, for interior stains and finishes applied at project site, the following VOC limits, exclusive of colorants added to a tint base, when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
1. Clear Wood Finishes, Varnishes: VOC not more than 350 g/L.
 2. Shellacs, Clear: VOC not more than 730 g/L.
 3. Stains: VOC not more than 250 g/L.
 4. Primers, Sealers, and Undercoaters: 200 g/L.
- D. Stain Colors: As selected by Architect from manufacturer's full range.

2.3 WOOD FILLERS

- A. Wood Filler Paste: MPI #91.

2.4 SOURCE QUALITY CONTROL

- A. Testing of Materials: Owner reserves the right to invoke the following procedure:
1. Owner will engage the services of a qualified testing agency to sample wood finishing materials. Contractor will be notified in advance and may be present when samples are taken. If materials have already been delivered to Project site, samples may be taken at Project site. Samples will be identified, sealed, and certified by testing agency.
 2. Testing agency will perform tests for compliance with product requirements.
 3. Owner may direct Contractor to stop applying wood finishes if test results show materials being used do not comply with product requirements. Contractor shall remove noncomplying materials from Project site, pay for testing, and refinish surfaces finished with rejected materials. Contractor will be required to remove rejected materials from previously finished surfaces before refinishing with complying materials if the two finishes are incompatible or produce results that, in the opinion of the Architect, are aesthetically unacceptable.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Applicator present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.
- B. Maximum Moisture Content of Exterior Wood Substrates: 15 percent, when measured with an electronic moisture meter.
- C. Maximum Moisture Content of Interior Wood Substrates: 15 percent, when measured with an electronic moisture meter.

- D. Verify suitability of substrates, including surface conditions and compatibility with existing finishes and primers.
- E. Proceed with finish application only after unsatisfactory conditions have been corrected.
 - 1. Beginning finish application constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Comply with manufacturer's written instructions and recommendations in "MPI Architectural Painting Specification Manual" applicable to substrates indicated.
- B. Remove hardware, covers, plates, and similar items already in place that are removable. If removal is impractical or impossible because of size or weight of item, provide surface-applied protection before surface preparation and finishing.
 - 1. After completing finishing operations, use workers skilled in the trades involved to reinstall items that were removed. Remove surface-applied protection if any.
- C. Clean and prepare surfaces to be finished according to manufacturer's written instructions for each particular substrate condition and as specified.
 - 1. Remove dust, dirt, oil, and grease by washing with a detergent solution; rinse thoroughly with clean water and allow to dry. Remove grade stamps and pencil marks by sanding lightly. Remove loose wood fibers by brushing.
 - 2. Remove mildew by scrubbing with a commercial wash formulated for mildew removal and as recommended by stain manufacturer.
- D. Interior Wood Substrates:
 - 1. Scrape and clean knots, and apply coat of knot sealer before applying primer.
 - 2. Apply wood filler paste to open-grain woods, as defined in "MPI Architectural Painting Specification Manual," to produce smooth, glasslike finish.
 - 3. Sand surfaces that will be exposed to view and dust off.
 - 4. After priming, fill holes and imperfections in the finish surfaces with putty or plastic wood filler. Sand smooth when dried.

3.3 APPLICATION

- A. Apply finishes according to manufacturer's written instructions and recommendations in "MPI Architectural Painting Specification Manual."
 - 1. Use applicators and techniques suited for finish and substrate indicated.
 - 2. Finish surfaces behind movable equipment and furniture same as similar exposed surfaces.
 - 3. Do not apply finishes over labels of independent testing agencies or equipment name, identification, performance rating, or nomenclature plates.
- B. Apply finishes to produce surface films without cloudiness, holidays, lap marks, brush marks, runs, ropiness, or other surface imperfections.

3.4 CLEANING AND PROTECTION

- A. At end of each workday, remove rubbish, empty cans, rags, and other discarded materials from Project site.
- B. After completing finish application, clean spattered surfaces. Remove spattered materials by washing, scraping, or other methods. Do not scratch or damage adjacent finished surfaces.
- C. Protect work of other trades against damage from finish application. Correct damage by cleaning, repairing, replacing, and refinishing, as approved by Architect, and leave in an undamaged condition.
- D. At completion of construction activities of other trades, touch up and restore damaged or defaced finished wood surfaces.

3.5 INTERIOR WOOD-FINISH-SYSTEM SCHEDULE

- A. Wood substrates, nontraffic surfaces, including wood trim, architectural woodwork, exposed beams.
 - I. Moisture-Cured Clear Polyurethane System:
 - a. Prime Coat: Moisture-cured polyurethane matching topcoat.
 - b. Intermediate Coat: Moisture-cured polyurethane matching topcoat.
 - c. Topcoat: Varnish, polyurethane, moisture-cured, gloss (Gloss Level 6)[, MPI #31].

END OF SECTION 099300

SECTION 101423 - PANEL SIGNAGE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Room-identification signs.

1.3 DEFINITIONS

- A. Accessible: In accordance with the accessibility standard.

1.4 COORDINATION

- A. Furnish templates for placement of sign-anchorage devices embedded in permanent construction by other installers.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: For panel signs.
 - 1. Include fabrication and installation details and attachments to other work.
 - 2. Show sign mounting heights, locations of supplementary supports to be provided by others, and accessories.
 - 3. Show message list, typestyles, graphic elements, including raised characters and Braille, and layout for each sign at least half size.
- C. Samples for Initial Selection: For each type of sign assembly, exposed component, and exposed finish.
 - 1. Include representative Samples of available typestyles and graphic symbols.
- D. Samples for Verification: For each type of sign assembly showing all components and with the required finish(es), in manufacturer's standard size unless otherwise indicated and as follows:
 - 1. Room-Identification Signs: Full-size Sample.
- E. Sign Schedule: Use same designations specified or indicated on Drawings or in a sign schedule.

1.6 INFORMATIONAL SUBMITTALS

- A. Sample Warranty: For special warranty.

1.7 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For signs to include in maintenance manuals.

1.8 FIELD CONDITIONS

- A. Field Measurements: Verify locations of anchorage devices embedded in permanent construction by other installers by field measurements before fabrication, and indicate measurements on Shop Drawings.

1.9 WARRANTY

- A. Special Warranty: Manufacturer agrees to repair or replace components of signs that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Deterioration of finishes beyond normal weathering.
 - b. Deterioration of embedded graphic image.
 - c. Separation or delamination of sheet materials and components.
 - 2. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 SIGNS

- A. Products: Subject to compliance with requirements, provide one of the following:
 - 1. APCO Graphics, Inc.
 - 2. ASI Sign Systems, Inc.
 - 3. Best Sign Systems, Inc.
 - 4. Mohawk Sign Systems, Inc. (Series 200; Basis of Design)
 - 5. Laminated-Sheet Sign: Photopolymer face sheet with raised graphics laminated to acrylic backing sheet to produce composite sheet.
 - a. Composite-Sheet Thickness: 0.25 inch.
 - b. Surface-Applied Graphics: 1/32" thick dimensional letters in Black or White that are chemically welded to backing.
 - c. Color(s): As selected by Architect from manufacturer's full range.
 - 6. Sign-Panel Perimeter: Finish edges smooth.
 - a. Edge Condition: Beveled.
 - b. Corner Condition in Elevation: Square.

7. Mounting: Surface mounted to wall with adhesive or for exterior applications, fasteners as specified.
8. Text and Typeface: Accessible raised characters and Braille typeface as selected by Architect from manufacturer's full range and variable content as scheduled. Finish raised characters to contrast with background color, and finish Braille to match background color.

2.2 PANEL-SIGN MATERIALS

- A. Acrylic Sheet: ASTM D 4802, category as standard with manufacturer for each sign, Type UVF (UV filtering).

2.3 ACCESSORIES

- A. Fasteners and Anchors: Manufacturer's standard as required for secure anchorage of signage, noncorrosive and compatible with each material joined, and complying with the following:
 1. For exterior exposure, furnish stainless-steel devices unless otherwise indicated.
 2. Exposed Metal-Fastener Components, General:
 - a. Fabricated from same basic metal and finish of fastened metal unless otherwise indicated.
 - b. Fastener Heads: For nonstructural connections, use oval countersunk screws and bolts with tamper-resistant one-way-head slots unless otherwise indicated.
- B. Adhesives: As recommended by sign manufacturer and with a VOC content of 70 g/L or less for adhesives used inside the weatherproofing system and applied on-site when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

2.4 FABRICATION

- A. Signs with Changeable Message Capability: Fabricate signs to allow insertion of changeable messages as follows:
 1. For snap-in changeable inserts beneath removable face sheet, furnish one suction or other device to assist in removing face sheet. Furnish initial changeable insert. Furnish two blank inserts for each sign for Owner's use.

2.5 GENERAL FINISH REQUIREMENTS

- A. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- B. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of signage work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. General: Install signs using mounting methods indicated and according to manufacturer's written instructions.
 - 1. Install signs level, plumb, true to line, and at locations and heights indicated, with sign surfaces free of distortion and other defects in appearance.
 - 2. Install signs so they do not protrude or obstruct according to the accessibility standard.
 - 3. Before installation, verify that sign surfaces are clean and free of materials or debris that would impair installation.
- B. Room-Identification Signs: Install in locations on walls as directed..
- C. Mounting Methods:
 - 1. Through Fasteners: Drill holes in substrate using predrilled holes in sign as template. Countersink holes in sign if required. Place sign in position and flush to surface. Install through fasteners and tighten.
 - 2. Adhesive: Clean bond-breaking materials from substrate surface and remove loose debris. Apply linear beads or spots of adhesive symmetrically to back of sign and of suitable quantity to support weight of sign after cure without slippage. Keep adhesive away from edges to prevent adhesive extrusion as sign is applied and to prevent visibility of cured adhesive at sign edges. Place sign in position, and push to engage adhesive. Temporarily support sign in position until adhesive fully sets.
- D. Signs Mounted on Glass: Provide opaque sheet matching sign material and finish onto opposite side of glass to conceal back of sign.

3.3 ADJUSTING AND CLEANING

- A. Remove and replace damaged or deformed signs and signs that do not comply with specified requirements. Replace signs with damaged or deteriorated finishes or components that cannot be successfully repaired by finish touchup or similar minor repair procedures.
- B. Remove temporary protective coverings and strippable films as signs are installed.
- C. On completion of installation, clean exposed surfaces of signs according to manufacturer's written instructions, and touch up minor nicks and abrasions in finish. Maintain signs in a clean condition during construction and protect from damage until acceptance by Owner.

3.4 ROOM SIGN SCHEDULE

A. Panel Sign Schedule:

1. PS #1: Room Identification Sign with Braille.
 - a. Sign Size: 6"x6"x ¼".
 - b. Message Panel Material: Interior Panel Sign, Series 200.
 - c. Text/Message: Room #- Room Name.
 - d. Location: As directed in the field by Architect.
 - e. Quantity: Provide 3.

2. PS #3: Room Identification Sign with pictograms and Braille.
 - a. Sign Size: 6"x8"x ¼".
 - b. Message Panel Material: Interior Panel Sign, Series 200 w/male or female pictogram and accessibility symbol.
 - c. Text/Message: Male or Female.
 - d. Location: As directed in the field by Architect.
 - e. Quantity: Provide 3 male, 3 female, 1 family. Gender as indicated by room name.

END OF SECTION 101423

SECTION 102113 - PLASTIC TOILET COMPARTMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Solid-plastic toilet compartments configured as toilet enclosures.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for toilet compartments.
- B. Shop Drawings: For toilet compartments.
 - 1. Include plans, elevations, sections, details, and attachment details.
 - 2. Show locations of cutouts for compartment-mounted toilet accessories.
 - 3. Show locations of centerlines of toilet fixtures.
 - 4. Show locations of floor drains.
- C. Samples for Initial Selection: For each type of toilet compartment material indicated.
 - 1. Include Samples of hardware and accessories involving material and color selection.
- D. Samples for Verification: For the following products, in manufacturer's standard sizes unless otherwise indicated:
 - 1. Each type of material, color, and finish required for toilet compartments, prepared on **6-inch-square** Samples of same thickness and material indicated for Work.
 - 2. Each type of hardware and accessory.
- E. Product Schedule: For toilet compartments, prepared by or under the supervision of supplier, detailing location and selected colors for toilet compartment material.

1.4 INFORMATIONAL SUBMITTALS

- A. Product Certificates: For each type of toilet compartment.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For toilet compartments to include in maintenance manuals.

1.6 PROJECT CONDITIONS

- A. Field Measurements: Verify actual locations of toilet fixtures, walls, columns, ceilings, and other construction contiguous with toilet compartments by field measurements before fabrication.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Surface-Burning Characteristics: Comply with ASTM E 84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - 1. Flame-Spread Index: 75 or less.
 - 2. Smoke-Developed Index: 450 or less.
- B. Regulatory Requirements: Comply with applicable provisions in the U.S. Architectural & Transportation Barriers Compliance Board's ADA-ABA Accessibility Guidelines for Buildings and Facilities and ICC A117.1 for toilet compartments designated as accessible.

2.2 SOLID-PLASTIC TOILET COMPARTMENTS

- A. Manufacturers: Subject to compliance with requirements, **provide products by one of the following:**
 - 1. Accurate Partitions Corporation (Tough Texture TT).
 - 2. Partition Systems Incorporated of South Carolina.
 - 3. Scranton Products (Basis of Design, EX Texture)
- B. Toilet-Enclosure Style: Overhead braced.
- C. Door, Panel, and Pilaster Construction: Solid, high-density polyethylene (HDPE) panel material, not less than **1 inch** thick, seamless, with eased edges, and with homogenous color and pattern throughout thickness of material.
 - 1. Integral Hinges: Configure doors and pilasters to receive integral hinges.
 - 2. Heat-Sink Strip: Manufacturer's standard continuous, extruded-aluminum or stainless-steel strip fastened to exposed bottom edges of solid-plastic components to hinder malicious combustion.
 - 3. Color and Pattern: One color and pattern in each room as indicated by manufacturer's designations.
- D. Pilaster Shoes and Sleeves (Caps): Manufacturer's standard design; stainless steel.
- E. Brackets (Fittings):
 - 1. Stirrup Type: Ear or U-brackets, stainless steel.
 - 2. Full-Height (Continuous) Type: Manufacturer's standard design; stainless steel.

- F. Overhead Cross Bracing for Ceiling-Hung Units: As recommended by manufacturer and fabricated from solid polymer.

2.3 HARDWARE AND ACCESSORIES

- A. Hardware and Accessories: Manufacturer's heavy-duty operating hardware and accessories.
 - 1. Hinges: Manufacturer's minimum **0.062-inch-** thick stainless-steel continuous, cam type that swings to a closed or partially open position, allowing emergency access by lifting door. Mount with through-bolts.
 - 2. Latch and Keeper: Manufacturer's heavy-duty surface-mounted cast-stainless-steel latch unit designed to resist damage due to slamming, with combination rubber-faced door strike and keeper, and with provision for emergency access. Provide units that comply with regulatory requirements for accessibility at compartments designated as accessible. Mount with through-bolts.
 - 3. Coat Hook: Manufacturer's heavy-duty combination cast-stainless-steel hook and rubber-tipped bumper, sized to prevent in-swinging door from hitting compartment-mounted accessories. Mount with through-bolts.
 - 4. Door Bumper: Manufacturer's heavy-duty rubber-tipped cast-stainless-steel bumper at out-swinging doors. Mount with through-bolts.
 - 5. Door Pull: Manufacturer's heavy-duty cast-stainless-steel pull at out-swinging doors that complies with regulatory requirements for accessibility. Provide units on both sides of doors at compartments designated as accessible. Mount with through-bolts.
- B. Overhead Bracing: Manufacturer's standard continuous, extruded-aluminum head rail with antigrip profile and in manufacturer's standard finish.
- C. Anchorages and Fasteners: Manufacturer's standard exposed fasteners of stainless steel, finished to match the items they are securing, with theft-resistant-type heads. Provide sex-type bolts for through-bolt applications. For concealed anchors, use stainless-steel, hot-dip galvanized-steel, or other rust-resistant, protective-coated steel compatible with related materials.

2.4 MATERIALS

- A. Stainless-Steel Sheet: ASTM A 666, Type 304, stretcher-leveled standard of flatness.
- B. Stainless-Steel Castings: ASTM A 743/A 743M.

2.5 FABRICATION

- A. Fabrication, General: Fabricate toilet compartment components to sizes indicated. Coordinate requirements and provide cutouts for through-partition toilet accessories where required for attachment of toilet accessories.
- B. Overhead-Braced Units: Provide manufacturer's standard corrosion-resistant supports, leveling mechanism, and anchors at pilasters to suit floor conditions. Provide shoes at pilasters to conceal supports and leveling mechanism.
- C. Door Size and Swings: Unless otherwise indicated, provide **24-inch-** wide, in-swinging doors for standard toilet compartments and **36-inch-** wide, out-swinging doors with a minimum **32-inch-** wide, clear opening for compartments designated as accessible.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and conditions, with Installer present, for compliance with requirements for fastening, support, alignment, operating clearances, and other conditions affecting performance of the Work.
 - 1. Confirm location and adequacy of blocking and supports required for installation.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. General: Comply with manufacturer's written installation instructions. Install units rigid, straight, level, and plumb. Secure units in position with manufacturer's recommended anchoring devices.
 - 1. Maximum Clearances:
 - a. Pilasters and Panels: **1/2 inch.**
 - b. Panels and Walls: **1 inch.**
 - 2. Full-Height (Continuous) Brackets: Secure panels to walls and to pilasters with full-height brackets.
 - a. Locate bracket fasteners so holes for wall anchors occur in masonry or tile joints.
 - b. Align brackets at pilasters with brackets at walls.
- B. Overhead-Braced Units: Secure pilasters to floor and level, plumb, and tighten. Set pilasters with anchors penetrating not less than **1-3/4 inches** into structural floor unless otherwise indicated in manufacturer's written instructions. Secure continuous head rail to each pilaster with no fewer than two fasteners. Hang doors to align tops of doors with tops of panels, and adjust so tops of doors are parallel with overhead brace when doors are in closed position.

3.3 ADJUSTING

- A. Hardware Adjustment: Adjust and lubricate hardware according to hardware manufacturer's written instructions for proper operation. Set hinges on in-swinging doors to hold doors open approximately 30 degrees from closed position when unlatched. Set hinges on out-swinging doors[**and doors in entrance screens**] to return doors to fully closed position.

END OF SECTION 102113

SECTION 102800 - TOILET, BATH, AND LAUNDRY ACCESSORIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Public-use washroom accessories.
 - 2. Private-use bathroom accessories.
 - 3. Childcare accessories.
 - 4. Underlavatory guards.
 - 5. Custodial accessories.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include the following:
 - 1. Construction details and dimensions.
 - 2. Anchoring and mounting requirements, including requirements for cutouts in other work and substrate preparation.
 - 3. Material and finish descriptions.
 - 4. Features that will be included for Project.
 - 5. Manufacturer's warranty.
- B. Product Schedule: Indicating types, quantities, sizes, and installation locations by room of each accessory required.
 - 1. Identify locations using room designations indicated.
 - 2. Identify products using designations indicated.

1.4 INFORMATIONAL SUBMITTALS

- A. Warranty: Sample of special warranty.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For toilet and bath accessories to include in maintenance manuals.

1.6 QUALITY ASSURANCE

- A. Source Limitations: For products listed together in the same Part 2 articles, obtain products from single source from single manufacturer.

1.7 COORDINATION

- A. Coordinate accessory locations with other work to prevent interference with clearances required for access by people with disabilities, and for proper installation, adjustment, operation, cleaning, and servicing of accessories.
- B. Deliver inserts and anchoring devices set into concrete or masonry as required to prevent delaying the Work.

1.8 WARRANTY

- A. Special Mirror Warranty: Manufacturer's standard form in which manufacturer agrees to replace mirrors that develop visible silver spoilage defects and that fail in materials or workmanship within specified warranty period.
 - 1. Warranty Period: 15 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Stainless Steel: ASTM A 666, Type 304, 0.031-inch minimum nominal thickness unless otherwise indicated.
- B. Steel Sheet: ASTM A 1008/A 1008M, Designation CS (cold rolled, commercial steel), 0.036-inch minimum nominal thickness.
- C. Galvanized-Steel Sheet: ASTM A 653/A 653M, with G60 hot-dip zinc coating.
- D. Galvanized-Steel Mounting Devices: ASTM A 153/A 153M, hot-dip galvanized after fabrication.
- E. Fasteners: Screws, bolts, and other devices of same material as accessory unit and tamper-and-theft resistant where exposed, and of galvanized steel where concealed.
- F. Chrome Plating: ASTM B 456, Service Condition Number SC 2 (moderate service).
- G. Mirrors: ASTM C 1503, Mirror Glazing Quality, clear-glass mirrors, nominal 6.0 mm thick.
- H. ABS Plastic: Acrylonitrile-butadiene-styrene resin formulation.

2.2 PUBLIC-USE WASHROOM ACCESSORIES

- A. Products: Subject to compliance with requirements, provide one of the following:
 - 1. A&J Washroom Accessories, Inc.

2. American Specialties, Inc.; ASI Group.
3. Bobrick Washroom Equipment, Inc.
4. Bradley Corporation.

B. Grab Bar:

1. Mounting: Flanges with concealed fasteners.
2. Material: Stainless steel, 0.05 inch thick.
 - a. Finish: Smooth, No. 4 finish (satin) on ends and slip-resistant texture in grip area.
3. Outside Diameter: 1-1/2 inches.
4. Configuration and Length: As indicated on Drawings.

C. Mirror Unit:

1. Frame: Stainless-steel angle, 0.05 inch thick.
 - a. Corners: Welded and ground smooth.
2. Hangers: Produce rigid, tamper- and theft-resistant installation, using method indicated below.
 - a. One-piece, galvanized-steel, wall-hanger device with spring-action locking mechanism to hold mirror unit in position with no exposed screws or bolts.
 - b. Wall bracket of galvanized steel, equipped with concealed locking devices requiring a special tool to remove.
3. Size: 18"x36".

D. Combination Towel (Folded) Dispenser/Waste Receptacle:

1. Basis-of-Design Product: "Classic" Model B-3944 as manufactured by Bobrick.
2. Description: Combination unit for dispensing C-fold or multifold towels, with removable waste receptacle.
3. Mounting: Recessed.
 - a. Designed for nominal 6-inch wall depth.
4. Minimum Towel-Dispenser Capacity: 600 C-fold or 800 multifold paper towels.
5. Minimum Waste-Receptacle Capacity: 12 gal..
6. Material and Finish: Stainless steel, No. 4 finish (satin).
7. Liner: Reusable, vinyl waste-receptacle liner.
8. Lockset: Tumbler type for towel-dispenser compartment and waste receptacle.

E. Liquid-Soap Dispenser:

1. Basis-of-Design Product: "Classic" Model B-2111 as manufactured by Bobrick.
2. Description: Designed for dispensing soap in liquid or lotion form.
3. Mounting: Vertically oriented, surface mounted.
4. Capacity: 40 oz. .
5. Lockset: Tumbler type.
6. Refill Indicator: Slotted Window type.

F. Sanitary-Napkin Disposal Unit:

1. Basis-of-Design Product: Model B-4353.

2. Mounting: Semi-recessed.
3. Door or Cover: Self-closing, disposal-opening cover.
4. Receptacle: Removable.
5. Material and Finish: Stainless steel, No. 4 finish (satin).
6. Provide in end stalls and HC stall.

G. Sanitary-Napkin Disposal Unit:

1. Basis-of-Design Product: B-4354 as manufactured by Bobrick.
2. Mounting: Partition mounted, dual access.
3. Door or Cover: Self-closing, disposal-opening cover.
4. Receptacle: Removable.
5. Material and Finish: Stainless steel, No. 4 finish (satin).
6. Provide in two center stalls in each Women's Toilet

H. Toilet Tissue (Jumbo-Roll) Dispenser:

1. Basis-of-Design Product: Model B-2892 as manufactured by Bobrick.
2. Description: Two-roll unit with sliding panel to expose other roll.
3. Mounting: Surface mounted.
4. Capacity: 9- or 10-inch- (228- or 254-mm-) diameter rolls.
5. Material and Finish: Stainless steel, No. 4 finish (satin).
6. Lockset: Tumbler type.
7. Refill Indicator: Pierced slots at front.

2.3 WARM-AIR DRYERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. A&J Washroom Accessories, Inc.
2. Bobrick Washroom Equipment, Inc. Model B-708 Basis for Design.
3. Bradley Corporation.
4. Excel Dryer Inc.
 - a. Operation Time: 30 to 40 seconds.
5. Cover Material and Finish: Stainless steel, No. 4 finish (satin).
6. Electrical Requirements: 115 V, 13 A, 1500 W.

2.4 UNDERLAVATORY GUARDS

A. Underlavatory Guard:

1. Description: Insulating pipe covering for supply and drain piping assemblies that prevent direct contact with and burns from piping; allow service access without removing coverings.
2. Material and Finish: Antimicrobial, molded plastic, white.

2.5 CUSTODIAL ACCESSORIES

A. Products: Subject to compliance with requirements, provide one of the following:

1. A&J Washroom Accessories, Inc.

2. American Specialties, Inc.; ASI Group.
3. Bobrick Washroom Equipment, Inc.
4. Bradley Corporation.

B. Mop and Broom Holder:

1. Description: Unit with shelf, hooks, holders, and rod suspended beneath shelf.
2. Length: 36 inches.
3. Hooks: Three.
4. Mop/Broom Holders: Four, spring-loaded, rubber hat, cam type.
5. Material and Finish: Stainless steel, No. 4 finish (satin).
 - a. Shelf: Not less than nominal 0.05-inch- thick stainless steel.
 - b. Rod: Approximately 1/4-inch- diameter stainless steel.

2.6 FABRICATION

- A. General: Fabricate units with tight seams and joints, and exposed edges rolled. Hang doors and access panels with full-length, continuous hinges. Equip units for concealed anchorage and with corrosion-resistant backing plates.
- B. Keys: Provide universal keys for internal access to accessories for servicing and resupplying. Provide minimum of six keys to Owner's representative.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install accessories according to manufacturers' written instructions, using fasteners appropriate to substrate indicated and recommended by unit manufacturer. Install units level, plumb, and firmly anchored in locations and at heights indicated.
- B. Grab Bars: Install to withstand a downward load of at least 250 lbf, when tested according to ASTM F 446.

3.2 ADJUSTING AND CLEANING

- A. Adjust accessories for unencumbered, smooth operation. Replace damaged or defective items.
- B. Remove temporary labels and protective coatings.
- C. Clean and polish exposed surfaces according to manufacturer's written recommendations.

END OF SECTION 102800

SECTION 104413 - FIRE PROTECTION CABINETS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Fire-protection cabinets for the following:
 - a. Portable fire extinguishers.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product. Show door hardware, cabinet type, trim style, and panel style. Include roughing-in dimensions and details showing recessed-, semirecessed-, or surface-mounting method and relationships of box and trim to surrounding construction.
- B. Shop Drawings: For fire-protection cabinets. Include plans, elevations, sections, details, and attachments to other work.
- C. Samples: For each type of exposed finish required.
- D. Samples for Initial Selection: For each type of exposed finish required.

1.4 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For fire-protection cabinets to include in maintenance manuals.

1.5 COORDINATION

- A. Coordinate size of fire-protection cabinets to ensure that type and capacity of fire extinguishers indicated are accommodated.
- B. Coordinate sizes and locations of fire-protection cabinets with wall depths.

1.6 SEQUENCING

- A. Apply vinyl lettering on field-painted fire-protection cabinets after painting is complete.

PART 2 - PRODUCTS

2.1 FIRE-PROTECTION CABINET

- A. Cabinet Type: Suitable for fire extinguisher.
- B. Products: Subject to compliance with requirements, provide one of the following:
 - 1. American Specialties, Inc.; ASI Group.
 - 2. Guardian Fire Equipment, Inc.
 - 3. JL Industries, Inc.; a division of the Activar Construction Products Group.
 - 4. Kidde Residential and Commercial Division.
 - 5. Larsens Manufacturing Company.
- C. Semirecessed Cabinet: One-piece combination trim and perimeter door frame overlapping surrounding wall surface with exposed trim face and wall return at outer edge (backbend).
 - 1. Rolled-Edge Trim: 2-1/2-inch backbend depth.
- D. Cabinet Trim Material: Stainless-steel sheet.
- E. Door Material: Stainless-steel sheet.
- F. Door Style: Vertical duo panel with frame.
- G. Door Glazing: Tempered break glass.
- H. Door Hardware: Manufacturer's standard door-operating hardware of proper type for cabinet type, trim style, and door material and style indicated.
 - 1. Provide recessed door pull and friction latch.
 - 2. Provide continuous hinge, of same material and finish as trim, permitting door to open 180 degrees.
- I. Accessories:
 - 1. Mounting Bracket: Manufacturer's standard steel, designed to secure fire extinguisher to fire-protection cabinet, of sizes required for types and capacities of fire extinguishers indicated, with plated or baked-enamel finish.
 - 2. Door Lock: Cylinder lock, keyed alike to other cabinets.
 - 3. Identification: Lettering complying with authorities having jurisdiction for letter style, size, spacing, and location. Locate as indicated.
 - a. Identify fire extinguisher in fire-protection cabinet with the words "FIRE EXTINGUISHER."
 - 1) Location: Applied to cabinet door.
 - 2) Application Process: Pressure-sensitive vinyl letters.
 - 3) Lettering Color: Red.
 - 4) Orientation: Vertical.
- J. Materials:
 - 1. Cold-Rolled Steel: ASTM A 1008/A 1008M, Commercial Steel (CS), Type B.

- a. Finish: Baked enamel or powder coat.
 - b. Color: As selected by Architect from full range of industry colors and color densities.
2. Stainless Steel: ASTM A 666, Type 304.
 - a. Finish: No. 4 directional satin finish.
 3. Tempered Break Glass: ASTM C 1048, Kind FT, Condition A, Type I, Quality q3, 1.5 mm thick.

2.2 FABRICATION

- A. Fire-Protection Cabinets: Provide manufacturer's standard box (tub) with trim, frame, door, and hardware to suit cabinet type, trim style, and door style indicated.
 1. Weld joints and grind smooth.
 2. Provide factory-drilled mounting holes.
 3. Prepare doors and frames to receive locks.
 4. Install door locks at factory.
- B. Cabinet Doors: Fabricate doors according to manufacturer's standards, from materials indicated and coordinated with cabinet types and trim styles.
 1. Fabricate door frames with tubular stiles and rails and hollow-metal design, minimum 1/2 inch thick.
 2. Fabricate door frames of one-piece construction with edges flanged.
 3. Miter and weld perimeter door frames.
- C. Cabinet Trim: Fabricate cabinet trim in one piece with corners mitered, welded, and ground smooth.

2.3 GENERAL FINISH REQUIREMENTS

- A. Comply with NAAMM's AMP 500, "Metal Finishes Manual for Architectural and Metal Products," for recommendations for applying and designating finishes.
- B. Protect mechanical finishes on exposed surfaces of fire-protection cabinets from damage by applying a strippable, temporary protective covering before shipping.
- C. Finish fire-protection cabinets after assembly.
- D. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine walls and partitions for suitable framing depth and blocking where semirecessed cabinets will be installed.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Prepare recesses for semirecessed fire-protection cabinets as required by type and size of cabinet and trim style.

3.3 INSTALLATION

- A. General: Install fire-protection cabinets in locations and at mounting heights indicated or, if not indicated, at heights indicated below:
 - 1. Fire-Protection Cabinets: 54 inches above finished floor to top of cabinet.
- B. Fire-Protection Cabinets: Fasten cabinets to structure, square and plumb.
 - 1. Unless otherwise indicated, provide recessed fire-protection cabinets. If wall thickness is inadequate for recessed cabinets, provide semirecessed fire-protection cabinets.
 - 2. Provide inside latch and lock for break-glass panels.
 - 3. Fasten mounting brackets to inside surface of fire-protection cabinets, square and plumb.
- C. Identification: Apply vinyl lettering at locations indicated.

3.4 ADJUSTING AND CLEANING

- A. Remove temporary protective coverings and strippable films, if any, as fire-protection cabinets are installed unless otherwise indicated in manufacturer's written installation instructions.
- B. Adjust fire-protection cabinet doors to operate easily without binding. Verify that integral locking devices operate properly.
- C. On completion of fire-protection cabinet installation, clean interior and exterior surfaces as recommended by manufacturer.
- D. Touch up marred finishes, or replace fire-protection cabinets that cannot be restored to factory-finished appearance. Use only materials and procedures recommended or furnished by fire-protection cabinet and mounting bracket manufacturers.
- E. Replace fire-protection cabinets that have been damaged or have deteriorated beyond successful repair by finish touchup or similar minor repair procedures.

END OF SECTION 104413

SECTION 104416 - FIRE EXTINGUISHERS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes portable, hand-carried fire extinguishers for fire extinguishers.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include rating and classification, material descriptions, dimensions of individual components and profiles, and finishes for fire extinguisher.
- B. Product Schedule: For fire extinguishers. Coordinate final fire-extinguisher schedule with fire-protection cabinet schedule to ensure proper fit and function.

1.4 INFORMATIONAL SUBMITTALS

- A. Warranty: Sample of special warranty.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For fire extinguishers to include in maintenance manuals.

1.6 COORDINATION

- A. Coordinate type and capacity of fire extinguishers with fire-protection cabinets to ensure fit and function.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. NFPA Compliance: Fabricate and label fire extinguishers to comply with NFPA 10, "Portable Fire Extinguishers."
- B. Fire Extinguishers: Listed and labeled for type, rating, and classification by an independent testing agency acceptable to authorities having jurisdiction.

2.2 PORTABLE, HAND-CARRIED FIRE EXTINGUISHERS

- A. Fire Extinguishers: Type, size, and capacity for each fire-protection cabinet indicated.
 - 1. Valves: Manufacturer's standard.
 - 2. Handles and Levers: Manufacturer's standard.
 - 3. Instruction Labels: Include pictorial marking system complying with NFPA 10, Appendix B.

- B. Multipurpose Dry-Chemical Type: UL-rated **3-A:40-B:C**, 6-lb nominal capacity, with monoammonium phosphate-based dry chemical in manufacturer's standard enameled container.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine fire extinguishers for proper charging and tagging.
 - 1. Remove and replace damaged, defective, or undercharged fire extinguishers.

- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. General: Install fire extinguishers in locations indicated and in compliance with requirements of authorities having jurisdiction.

END OF SECTION 104416

SECTION 15010 - BASIC PLUMBING REQUIREMENTS

PART I - GENERAL

1.1 GENERAL CONDITIONS

- A. The stipulations and conditions stated in this Section, together with all provisions of the "Instructions to Bidders", "General Conditions", "Supplemental General Conditions", and "Special Conditions", hereinbefore set forth, shall apply to this and the other Sections of Division 15A.

1.2 GENERAL REQUIREMENTS

- A. The General Requirements hereinafter listed apply to the Plumbing Work Division. If there is any conflict between the General Requirements and the General Conditions, the General Conditions shall take precedence.

1.3 ALTERNATES

- A. Carefully examine all alternates at the back of this specification to determine if any work described under the Plumbing Section will be affected thereby.

1.4 INTENT

- A. The intent of these drawings and specifications are to describe the installation of a complete, fully adjusted and operational system. Therefore, any items shown on drawings and not specifically called for in the specifications, or any items specified and not specifically indicated or detailed on the drawings, or any items neither specified or shown, but which are reasonably incidental to and commonly required to make a complete job, will be furnished and installed by the Plumbing Contractor at his own expense.

1.5 DEFINITIONS

- A. The Plumbing Contractor shall provide all supervision, labor, material equipment, machinery, plant, and any and all other items necessary to complete the plumbing systems. All items of equipment are specified in the singular; however, the Plumbing Contractor shall provide the number of items of equipment as indicated on the drawings, and as required for complete systems.

Where the word "provide" is used, it shall mean "furnish and install complete and ready to use".

1.6 VISIT TO THE SITE

The Plumbing Contractor shall visit the site before submitting his bid so as to be thoroughly familiar with the job conditions and/or peculiarities. No extra payment will be allowed for anything which could have been anticipated from a visit to the site.

1.7 REGULATORY REQUIREMENTS

- A. All work under this Section shall be accomplished in strict accordance with State codes. Where these plans and specifications conflict with such codes, the codes shall govern. The Plumbing Contractor shall notify the Architect or Engineer of such conflicts in writing prior to receipt of bids.

1.8 PERMITS AND FEES

- A. NA

1.9 DRAWINGS AND SPECIFICATIONS

- A. The Plumbing Drawings and Specifications are intended to cover all the work enumerated under the respective headings. The drawings are diagrammatic only. No Contractor shall take advantage of conflict or error between Drawings and Specifications, or between General Drawings and Mechanical, Plumbing and/or Electrical Drawings, but shall request a clarification of such from the Architect/Engineer, should this condition exist. If there is insufficient time to issue an Addendum for this clarification, the Plumbing Contractor shall figure on the most expensive of the items in conflict.
- B. The Plumbing Contractor shall refer to the Architectural and Structural Drawings and Specifications for the general construction of the building, for floors and ceiling heights, for locations of walls, partitions, beams, etc., and shall be guided accordingly for setting of all sleeves, inserts and equipment. The Plumbing Contractor shall not under any circumstances scale drawings for the location of equipment. The Plumbing Contractor shall verify the locations of all utility services.
- C. The Plumbing Contractor shall keep at least one set of corrected Shop and Design Drawings at the site. Drawings are to be current, denoting approved modifications and actual installed departure. Submit drawings to Architect/Engineer before final payment is made.

1.10 SUPERVISION

- A. The Plumbing Contractor performing the work specified shall be required to employ a qualified Superintendent or Foreman to continuously supervise the installation of their work, with authorization to act as agent. Contractors: He shall be capable of checking layouts, coordinating and supervising the work, establishing grades and levels, and locating chases, openings, hangers, inserts, sleeves, etc.

PART II - PRODUCTS

2.1 STANDARD PRODUCTS

- A. Unless otherwise indicated in writing by the Architect/Engineer, the materials to be provided under this Specification shall be standard products of manufacturers regularly engaged in the production of such equipment and shall be the manufacturer's latest design. All items of the same type or rating shall be identical.

2.2 SUBMITTAL

- A. The Plumbing Contractor shall submit, for approval, detailed shop drawings on all major equipment and where requested. No materials or equipment may be delivered to the job site or installed until the Plumbing Contractor has in his possession the approved shop drawing for the particular material or equipment. The Plumbing Contractor shall furnish the number of copies required by the General or Special Conditions of the contract, but no case less than six (6) copies.
- B. Submitted material shall be properly labeled indicating specific service for which material or equipment to be used, section and article number of specifications governing, Contractor's name and name of job.
- C. Approval of equipment will not relieve the Plumbing Contractor of compliance with the Specifications even if such approval is made in writing, unless the attention of the Engineer is called to the non-complying features by letter accompanying the submittal data. Approval of

Submittal Data by the Engineer shall not be construed as a complete check of approval of detailed dimensions, weights, gauges, and similar details with the proposed articles. The conformance with the necessary coordination between the various other Contractors and suppliers shall be solely the responsibility of the Plumbing Contractor and with no additional expense to the Owner.

2.3 SUBSTITUTIONS

- A. Manufacturer's lists are to establish a standard of quality and not intended to limit the selection to these manufacturers. All materials and equipment which are essential and have not been specified or shown, shall be new and of the highest grade and quality and free from defect or other imperfections. It should be understood that where the words "furnished and installed" are used, it is intended that the Plumbing Contractor shall purchase and install all materials required.
- B. All materials and equipment proposed as substitutes for these specified shall require a ten (10) day prior approval from the Engineer prior to the bid date. No substitutions will be allowed after the ten (10) day period before the bid date.

2.4 PRODUCT HANDLING

- A. Equipment and materials shall be properly stored, adequately protected, and carefully handled to prevent damage before and during installation. Equipment and materials shall be handled, stored and protected in accordance with the manufacturer's recommendations and as approved by the Architect/Engineer. Equipment installed with a factory finish shall be fully protected during construction and shall be maintained free of dust, dirt, and foreign matter. Dents and other surface damage shall be repaired or replaced to the satisfaction of the Architect/Engineer at no additional cost to the Owner.
- B. The Plumbing Contractor shall clean up and remove from the job site all waste materials, packaging, crating, and refuse resulting from his work on a daily basis.

2.5 MATERIALS AND WORKMANSHIP

- A. The Plumbing Contractor shall perform a first class job, both in material and workmanship. None other will be accepted. Deviations from either will be corrected by the Plumbing Contractor at the Plumbing Contractor's expense.
- B. The material used throughout the work, except when otherwise noted, shall be new and of the best of its kind. No substitutes shall be used unless approved by the Architect/Engineer. All work shall be executed with a maximum speed consistent with safety and good workmanship.
- C. Any equipment furnished by the Plumbing Contractor that is larger than those indicated on the drawings and described in these Specifications or have different electrical characteristics, the increase in cost to the Electrical Contractor for larger wires, conduit, circuit breakers, switches, etc. or for changes in work already installed shall be borne by the instigating Contractor.

PART III - EXECUTION

3.1 EXCAVATION AND BACKFILL

- A. The Plumbing Contractor shall perform any and all trench and pit excavation and backfilling required for the installation of his work. Trenches shall be made with the sides vertical and shall be shored where necessary for the protection of men and equipment. All excavation work shall be done in a careful manner to avoid damage to footers and foundations. The backfilling shall be placed in layers not exceeding 4 inches in depth, wetting each layer as it is placed, and thoroughly

compacting each layer with mechanical tamper or other approved means. Any damage done during excavation and backfilling operations to roads, sidewalks, curbs, shrubs, sod, footers, foundations, etc shall be replaced to its condition prior to construction at no expense to the Owner.

3.2 SCAFFOLDING, RIGGING AND HOISTING

- A. The Plumbing Contractor shall furnish all necessary scaffolding, staging, rigging and hoisting required for the completion of his work. All such scaffolding, etc., shall be removed from the premises when its use is no longer required on the job.

3.3 CUTTING AND PATCHING

- A. The Plumbing Contractor shall provide all cutting and patching necessary to install the work specified in this section. The patching shall match adjacent surfaces.
- B. No structural member shall be cut without the approval of the Engineer, and all such cutting shall be done in a manner directed by him.

3.4 EQUIPMENT SPACE AND ARRANGEMENT

- A. The equipment shall fit into the space allotted and shall allow adequate clearance for entry, installation, replacement, servicing, and maintenance. The Plumbing Contractor shall coordinate the work to ensure that equipment may be moved into place without altering building components or other installations. Access space shall not be less than the equipment manufacturer's requirements.
- B. These drawings indicate the extent and general arrangement of equipment, piping, and ductwork. If any departures are deemed necessary by the Plumbing Contractor, details of such departures and the reasons therefore shall be submitted to the Architect/Engineer for approval as soon as practicable and within 30 days after award of the contract. No departure shall be made without written approval of the Architect/Engineer.

3.5 DAMAGE TO WORK ALREADY IN PLACE

- A. The Plumbing Contractor shall assume full responsibility for any damage done by him, his agents or employees, to any work already in place. Any such damage done shall be repaired at the Contractor's expense by mechanics skilled at their respective trades to the approval of the Architect/Engineer.

3.6 JURISDICTION OF WORK

- A. It may become necessary for the Plumbing Contractor to furnish labor or materials which is not generally accepted as part of this trade. In cases of this type, he shall contract the work or shall furnish materials and employ workmen of the trade involved in order not to cause any delay or stoppage of work caused by infringement of trade agreements as to jurisdiction, alleged or actual.

3.7 COORDINATION WITH OTHER TRADES

- A. All work shall be coordinated with other trades involved in the construction project. All work shall be carefully laid out in advance to coordinate Architectural, Structural, Mechanical, Plumbing and Electrical features of construction. The Plumbing Contractor shall verify at the site all locations, grades, elevations, and utility service connections indicated. Any conflicts due to lack of proper coordination shall be brought to the attention of the Architect/Engineer for resolution. The Plumbing Contractor shall make required changes or relocations at no additional cost to the Owner.

- B. Installation, inspection, and testing of work above ceilings shall be completed and approved by the Architect/Engineer prior to installation of the specified finished ceilings. However, ceiling suspension system may be installed as required for coordination.
- C. The Plumbing Contractor shall consult with the other trades at the start of the work and periodically thereafter, as required to properly coordinate the various items of work, and to avoid interferences. Should any interferences of any nature develop as the work progresses, such interferences shall be resolved and eliminated as directed. The cost of any work directed shall be borne by the Subcontractor or Contractors directed to do this work.

3.8 DIVISION OF WORK

- A. This paragraph is intended to show exactly the point of division of work between the Electrical Division and the Plumbing Division.
- B. All equipment covered in the Plumbing Division of the specifications shall be furnished, mounted, and aligned under the Plumbing Division. All individual motor starters, unless indicated as part of a motor control center, for this equipment shall be furnished and installed by the Plumbing Contractor.
- C. All final electrical connections to equipment covered in the Plumbing Division of the specifications shall be completed under the Plumbing Division.
- D. The Electrical Contractor shall provide a disconnect switch or junction box for each item of equipment under Division 16.
- E. Electrical equipment and wiring that is provided by the Plumbing Contractor shall be in accordance with the Electrical specification.

3.9 EQUIPMENT INSTALLATION

- A. Final connections to equipment, including pipe, duct, and controls, shall be provided under applicable sections of this Division, unless otherwise specified or indicated.
- B. Manufacturer's Instructions: Equipment shall be installed as recommended by the manufacturer to conform to the requirements of the particular application, in accordance with these drawings and specifications.

3.10 OPERATION AND MAINTENANCE MANUALS

- A. One complete manual as outlined herein shall be submitted for approval before conducting instruction sessions in operation, before systems or equipment tests are performed, and before final or beneficial occupancy.
- B. Manuals shall have rigid covers and index tabs for each major piece of equipment, auxiliaries, and systems. The following shall be inscribed on the cover: the words "OPERATION AND MAINTENANCE MANUAL", the name and location of the building, the name of the Section, such as "Plumbing" and the name of the Plumbing Contractor. Two copies of each approved manual shall be submitted to the Owner and one copy shall be submitted to the Architect/Engineer.
- C. Each piece of equipment shall be listed and identified with the same name, mark, number, or other identification as noted or scheduled in the Contract Documents.
- D. Manuals shall include the following:

1. Complete operating installations, covering start-up and shutdown for all components installed.
 2. Legible copies of all shop drawings. Any comments incorporated in "as noted" approvals of shop drawings shall be recorded on the drawings included in the manuals.
 3. All equipment Maintenance and Service Manuals.
- E. A complete parts list for each piece of equipment.
 - F. All descriptive literature for the equipment.
 - G. Operating characteristics, performance data, ratings, and curves for each piece of equipment.
 - H. Internal wiring and control diagrams.
 - I. All other information pertinent to the maintenance and servicing of equipment and systems provided in the project.
 - J. Name, address, and telephone number for service on each manufacturer's equipment.

3.11 OPERATING INSTRUCTIONS

- A. After all equipment and services are in operation, and the Operation and Maintenance Manuals are available, an instruction and training session shall be conducted for the Owner's operating personnel.
- B. Instruction sessions shall be conducted during the Owner's normal working periods, and at times and locations satisfactory to the Owner.

3.12 EQUIPMENT START-UP

- A. No equipment shall be placed in operation until it has been inspected by a qualified representative of the manufacturer and Certified to be ready for operation. The manufacturer's representative shall supervise the start-up operation and shall be responsible for all adjustments required to meet design conditions. Such services shall be at no additional cost to the Owner.

3.13 GUARANTEE

- A. The Plumbing Contractor shall present to the Owner a written guarantee covering his work, including all equipment, material and workmanship. This guarantee shall be against all defects in any of the above work, and shall run for a period of one (1) year from the date of written acceptance of the Contractor's work.
- B. Any defective work, equipment, material and/or workmanship that develops within the guarantee period, which is not caused by ordinary wear or abuse by other persons, shall be replaced by the Plumbing Contractor without cost to the Owner.

3.14 FINAL INSPECTION

- A. When the entire Contract has been completed and the work is ready for final inspection, the Architect/Engineer or his duly authorized representative will make the inspection. At the time of inspection, the Plumbing Contractor shall demonstrate to the

Architect/Engineer that the various systems and pieces of equipment have been adjusted to operate in accordance with the requirements of the Contract.

3.15 FINAL PAYMENTS

- A. All final payments are contingent upon all necessary Certificates and/or Approvals cited above, together with the written Guarantee being presented to the Owner.

END OF SECTION 15010

SECTION 15140 - HANGERS AND SUPPORTS

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawing and General Provisions of the Contract, including the General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes Hangers and Supports for Plumbing Systems Piping and Equipment.

PART II - PRODUCTS

2.1 PIPE HANGERS AND SUPPORTS

- A. Hangers: Galvanized carbon steel, adjustable, clevis
- B. Multiple or Trapeze Hangers: Steel channels with welded spacers and hanger rods.
- C. Vertical Support: Steel riser clamp
- D. Copper Pipe Support: Carbon steel ring, adjustable, copper plated.
- E. Shield for Insulated Piping 2 Inches and Smaller: 18 gauge galvanized steel shield over insulation in 180 degree segments, minimum 12 inches long at pipe support.
- F. Sheet metal saddles must be $\frac{1}{2}$ the circumference of the insulation, turned up or rounded at the corners to avoid damage to the vapor barrier.

2.2 HANGER RODS

- A. Galvanized Steel Hanger Rods: Threaded both ends or continuous threaded.

2.3 FLASHING

- A. Metal Flashing: 26 gauge galvanized steel
- B. Flexible Flashing: 47 mil thick sheet butyl; compatible with roofing.
- C. Flashing shall be compatible with the roofing material and be coordinated with the General Contractor.

2.4 SLEEVES

- A. Sleeves for Pipes: Form with schedule 40, galvanized steel pipe
- B. Fire Stopping Insulation: Glass fiber type, non-combustible
- C. Caulk: Fire Barrier type sealant

2.5 MISCELLANEOUS MATERIALS

- A. Structural Steel: ASTM A 36/A 36M, steel plates, shapes, and bars, black and galvanized
- B. Bolts and Nuts: ASME B18.10 or ASTM A 183, steel, hex-head, track bolts and nuts
- C. Washers: ASTM F 844, steel, plain, flat washers
- D. Grout: ASTM C 1107, Grade B, non-shrink, non-metallic
 - 1. Characteristics include post-hardening, volume-adjusting, dry, hydraulic cement-type grout that is non-staining, non-corrosive, non-gaseous and is recommended for both interior and exterior applications.
 - 2. Design Mix: 5000-psi (34.5MPa), 28-day compressive strength
 - 3. Water: Potable
 - 4. Packaging: Pre-mixed and factory-packaged

2.6 ATTACHMENTS

- A. Mechanical Anchor Fasteners: Insert-type attachments with pull-out and shear capacities appropriate for supported loads and building materials where used. Permitted in concrete over four (4) inches thick.
- B. Weld: Type 22
- C. Beam clamps: Types 20, 21, 28 or 29
- D. Wood: Wood screws or lag bolts

PART III - EXECUTION

3.1 HANGERS AND SUPPORTS INSTALLATION

- A. Install hangers, supports, clamps, and attachments as required to properly support piping from building structure.
- B. Install building attachments within concrete or to structural steel. Install additional attachments at concentrated loads, including valves, flanges, guides, strainers, expansion joints, and at changes in direction of piping.
- C. Install hangers and support complete with necessary inserts, bolts, rods, nuts, washers and other accessories.
- D. Install hangers and supports to allow controlled movement of piping systems, permit freedom of movement between pipe anchors, and facilitate action of expansion joints, expansion loops, expansion bends and similar units.
- E. Install hangers and supports so that piping live and dead loading and stresses from movement will not be transmitted to connected equipment.

F. Support horizontal piping as follows:

<u>PIPE SIZE</u>	<u>HANGER SPACING</u>	<u>MAXIMUM DIAMETER</u>
1/2 to 1-1/4 inch	6'-6"	3/8"
1-1/2 to 2 inch	10'-0"	3/8"
2-1/2 to 3 inch	10'-0"	1/2"
4 to 6 inch	10'-0"	5/8"
Waste Pipe	5'-0"	3/8"

- G. Install hangers to provide minimum ½ inch space between finished covering and adjacent work
- H. Place a hanger within 12 inches of each horizontal elbow.
- I. Use hangers with 1½ inch minimum vertical adjustment
- J. Support riser piping independently of connected horizontal piping.
- K. Hangers shall be galvanized steel or copper.

3.5 FLASHING

- A. Provide flashing and counter-flashing where piping penetrates weather-proofed walls, floors and roofs.
- B. Flash vent and soil pipes projecting six (6) inches minimum above finished roof surface with lead worked one (1) inch minimum into hub. For pipes through outside walls, turn flanges back into wall and caulk, metal counter-flash and seal.

3.6 SLEEVES

- A. Size sleeves large enough to allow for movement due to expansion and contraction. Provide for continuous insulation wrapping.
- B. Design hangers without disengagement of supported pipe
- C. Where piping penetrates floor, ceiling, or wall, close off space between pipe and adjacent work with fire stopping insulation and caulk seal air-tight. Provide close fitting metal collar or escutcheon covers at both sides of penetration.
- D. Install chrome plated steel or stainless steel escutcheons at finished surfaces.
- E. Pipe strapping will not be allowed.

END OF SECTION 15140

SECTION 15190 - PLUMBING IDENTIFICATION

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes plumbing identification materials and devices.

1.3 QUALITY ASSURANCE

- A. Comply with ASME A13.1 for lettering size, length of color field, colors, and viewing angles of identification devices.

1.4 SEQUENCING AND SCHEDULING

- A. Coordinate installation of identifying devices after completion of covering and painting where devices are applied to surfaces. Install identifying devices prior to installation of acoustical ceilings and similar concealment.

PART II - PRODUCTS

2.1 MATERIALS

- A. Color: Unless specified otherwise, conform with ANSI/ASME A13.1.
 - 1. Plastic Nameplates: Laminated three-layer plastic with engraved black letters on light contrasting background color.
 - 2. Plastic Tags: Laminated three-layer plastic with engraved black letters on light contrasting background color. Tag size minimum 1½ inch diameter.
 - 3. Plastic Tape Pipe Markers: Flexible, vinyl film tape with pressure sensitive adhesive backing and printed markings.
 - 4. Underground Plastic Pipe Markers: Bright colored continuously printed plastic ribbon tape of not less than 6 inch wide by 4 mil thick, manufactured for direct burial service.

PART III - EXECUTION

3.1 PREPARATION

- A. Degrease and clean surfaces to receive adhesive for identification materials.

3.2 INSTALLATION

- A. Plastic Nameplates: Install with corrosive-resistant mechanical fasteners.
- B. Plastic Tags: Install with corrosive-resistant chain.

- C. Plastic Tape Pipe Markers: Install complete around pipe in accordance with the manufacturer's instructions
- D. Underground Plastic Pipe Markers: Install 6 to 8 inches below finished grade, directly above the buried pipe.
- E. Equipment: Identify pumps, heat transfer equipment, tanks, and water treatment devices with plastic nameplates. Small devices, such as in-line pumps, may be identified with plastic tags
- F. Controls: Identify control panels and major control components outside panels with plastic nameplates.
- G. Piping: Identify piping, concealed or exposed, with plastic tape pipe markers. Tags may be used on small diameter piping. Identify service, flow direction, and pressure. Install in clear view and align with axis of piping. Locate identification not to exceed 20 feet on straight runs including risers and drops, adjacent to each valve and "T", at each side of penetration of structure or enclosure, and at each obstruction.

END OF SECTION 15190

SECTION 15250 - PLUMBING PIPING INSULATION

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes Plumbing Pipe Insulation.

1.3 QUALITY ASSURANCE

- A. Fire Performance Characteristics: Conform to the following characteristics for insulation including facings, cements, and adhesives, when tested according to ASTM E 84, by UL or other testing or inspecting organization acceptable to the authority having jurisdiction. Label insulation with appropriate markings of testing laboratory.

- 1. Interior Insulation: Flame spread rating of 25 or less and a smoke developed rating of 50 or less.

1.4 SEQUENCING AND SCHEDULING

- A. Schedule insulation application after testing of piping systems.
- B. Schedule insulation application after installation and testing of heat trace tape.

PART II - PRODUCTS

2.1 MANUFACTURERS

- A. Acceptable Manufacturers:
 - 1. Glass Fiber:
 - a. Certain Teed Corporation
 - b. Knauf Fiberglass GmbH
 - c. Manville
 - d. Owens-Corning Fiberglas Corporation
 - e. USG Interiors, Inc. - Thermafiber Division

2.2 GLASS FIBER

- A. Material: Inorganic glass fibers, bonded with a thermosetting resin. Jacket: All purpose, factory applied, laminated glass fiber- reinforced, flame retardant Kraft paper and aluminum foil having self-sealing lap.
- B. Preformed Pipe Insulation: ASTM C 547, Class 1, rigid pipe insulation, jacketed.
 - 1. Thermal Conductivity: 0.26 average maximum at 75 degrees F mean temperature.
 - 2. Density: 10 average maximum.

C. Adhesive: Produced under the UL Classification and Follow-up Service.

1. Type: Non-flammable, solvent-based.

2. Service Temperature Range: Minus 20 degrees to 180 degrees F.

2.3 INSULATING CEMENTS

A. Mineral Fiber, Hydraulic-Setting Insulating and Finishing Cement: ASTM C 449

1. Thermal Conductivity: 1.2 average maximum at 400 degrees F mean temperature.

2. Compressive Strength: 100 psi at 5 percent deformation.

2.4 ADHESIVES

A. Lagging Adhesive: MIL-A-3316C, non-flammable adhesive in the following Classes and Grades.

1. Class 1, Grade A for bonding glass cloth and tape to un-faced glass fiber insulation, sealing edges of glass fiber insulation, and bonding lagging cloth to un-faced glass fiber insulation.

2. Class 2, Grade A for bonding glass fiber insulation to metal surfaces.

2.5 JACKETS

A. PVC Fitting Covers: Factory-fabricated fitting covers manufactured from 20-mil thick, high impact, ultra-violet resistant PVC.

1. Adhesive: As recommended by insulation manufacturer.

2.6 SEALING COMPOUNDS

A. Vapor Barrier Compound: Water-based, fire-resistive composition

1. Water Vapor Permeance: 0.08 perm maximum

2. Temperature Range: Minus 20 degrees to 180 degrees F

PART III - EXECUTION

3.1 PREPARATION

A. Surface Preparation: Clean, dry, and remove foreign materials such as rust, scale, and dirt.

3.2 INSTALLATION - GENERAL

A. Select accessories compatible with materials suitable for the service. Select accessories that do not corrode, soften, or otherwise attack the insulation or jacket in either the wet or dry state.

B. Apply insulation material, accessories, and finishes according to the manufacturer's printed instructions.

C. Keep insulation materials dry during application and finishing.

- D. Apply insulation continuously over fittings, valves and specialties.
- E. Apply insulation with a minimum number of joints.
- F. Apply insulation with integral jackets as follows:
 - 1. Pull jacket tight and smooth.
 - 2. Cover circumferential joints with butt strips, at least three (3) inches wide, and of same material as insulation jacket. Secure with adhesive and outward clinching staples along both edges of butt strip and space 4 inches on center.
 - 3. Longitudinal Seams: Overlap seams at least 1½ inches. Apply insulation with longitudinal seams at bottom of pipe. Clean and dry surface to receive selfsealing lap. Staple laps with outward clinching staples along edge at four (4) inches on center.
 - 4. Vapor Barrier Coatings: Apply on seams and joints, over staples, and at ends butt to flanges, unions, valves, and fittings.
 - 5. At penetrations in jackets for thermometers and pressure gauges, fill and seal voids with vapor barrier coating.
 - 6. Repair damaged insulation jackets, except metal jackets, by applying jacket material around damaged jacket. Adhere, staple, and seal. Extend patch at least 2 inches in both directions beyond damaged insulation jacket and around the entire circumference of the pipe.
- G. Interior Walls and Partitions Penetrations: Apply insulation continuously through walls and partitions, except fire rated walls and partitions.
- H. Flanges, Fittings, and Valves: Apply pre-molded, pre-cut, or field fabricated segments of insulation around flanges, unions, valves, and fittings. Make joints tight. Bond with adhesive.
 - 1. Use same material and thickness as adjacent pipe insulation.
 - 2. Overlap nesting insulation by 2 inches or 1 pipe diameter, whichever is greater.
 - 3. Apply materials with adhesive, fill voids with mineral fiber insulating cement. Secure with wire or tape.
 - 4. Insulate elbows and tees smaller than three (3) inches pipe size with pre-molded insulation.
 - 5. Insulate elbows and tees Three (3) inches and larger with pre-molded insulation or insulation material segments. Use at least three (3) segments for each elbow.
 - 6. Cover insulation, except for metal jacketed insulation, with PVC fitting covers and seal circumferential joints with butt strips.
- J. Hangers and Anchors: Apply insulation continuously through hangers and around anchor attachments. Install saddles, shields, and inserts as specified.
 - 1. Inserts and Shields: Cover hanger inserts and shields with jacket material matching adjacent pipe insulation.

3.3 GLASS FIBER INSULATION INSTALLATION

- A. Bond insulation to pipe with lagging adhesive.
- B. Seal exposed ends with lagging adhesive.
- C. Seal seams and joints with vapor barrier compound.

3.7 PIPE INSULATION SCHEDULES

<u>PIPING</u>	<u>INSULATION TYPE</u>	<u>THICKNESS IN INCHES</u>
Domestic Hot Water Supply	GLASS FIBER	1
Domestic Hot Water Re-Circulating	GLASS FIBER	1
Domestic Cold Water (INTERIOR)	GLASS FIBER	1/2
"P" Trap at Handicapped Fixtures	ELASTOMERIC	1/2

END OF SECTION 15250

SECTION 15410 - PLUMBING PIPING

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of the Contract, including General and Supplementary Conditions and Division I Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes plumbing piping systems to a point shown on the civil drawings. Systems include the following:
 - 1. Potable water distribution, including cold and hot water supply and hot water circulation.
 - 2. Sanitary Drainage and Vent Systems.

1.3 SYSTEM PERFORMANCE REQUIREMENTS

- A. Provide components and installation capable of producing piping systems with the following minimum working pressure ratings, except where indicated otherwise:
 - 1. Water Distribution Systems, Below Ground: 150 psig.
 - 2. Water Distribution Systems, Above Ground: 125 psig.
 - 3. Soil, Waste and Vent Systems: 10-foot head of water

PART II - PRODUCTS

2.1 SANITARY SEWER PIPING - BURIED

- A. Sch. 40 PVC Pipe: ASTM D2665. Fittings: PVC. Joints: ASTM D2564, solvent weld.

2.2 SANITARY SEWER PIPING - ABOVE GRADE

- A. Sch. 40 PVC Pipe: ASTM D2665. Fittings: PVC. Joints: ASTM D2564, solvent weld.

2.3 WATER PIPING - BURIED

- A. Copper Tubing: ASTM B88, Type K, annealed. Fittings: ANSI/ASME B16.29, wrought copper. Joints: ANSI/ASTM B32, solder, Grade 95TA.

2.4 WATER PIPING - ABOVE GRADE

- A. Copper Tubing: ASTM B88, Type L, hard drawn. Fittings: ANSI/ASME B16.23, cast brass, or ANSI/ASME B16.29, wrought copper. Joints: ANSI/ASTM B32, solder, Grade 95TA.

2.5 MANUFACTURERS

- A. Acceptable Manufacturers-Valves:
 - 1. Crane

2. Grinnell
3. Nibco
4. Apollo

2.6 GATE VALVES

- A. 150 psig rated, bronze body, lever ball type, Apollo or equal.

PART III - EXECUTION

3.1 PREPARATION

- A. Ream pipe and tube ends. Remove burrs. Bevel plain end ferrous pipe.
- B. Remove scale and dirt, on inside and outside, before assembly.
- C. Prepare piping connections to equipment with flanges or unions.

3.2 INSTALLATION

- A. Provide non-conducting dielectric connections wherever jointing dissimilar metals.
- B. Route piping in orderly manner and maintain gradient.
- C. Install piping to conserve building space and not interfere with use of space.
- D. Group piping whenever practical at common elevations.
- E. Install piping to allow for expansion and contraction without stressing pipes, joints, or connected equipment.
- F. Provide clearance for installation of insulation and access to valves and fittings.
- G. Slope water piping and arrange to drain at low points.
- H. Establish elevations of buried piping outside the building to ensure not less than 1 ft of cover.
- I. Where pipe support members are welded to structural building framing, scrape, brush clean, and apply one coat of zinc rich primer to welding.
- J. Prepare pipe, fittings, supports, and accessories not pre-finished, ready for finish painting.
- K. Establish invert elevations, slopes for drainage to 1/8 inch per foot minimum. Maintain gradients.
- L. Excavate in accordance with Sections 15010.
- M. Backfill in accordance with Sections 15010.
- N. Install bell and spigot pipe with bell end upstream.
- O. Copper piping 2" and larger shall be silver-soldered.

P. Install valves with stems upright or horizontal, not inverted.

3.3 APPLICATION

A. Install unions downstream of valves and at equipment or apparatus connections.

B. Install brass male adapters each side of valves in copper piped system. Sweat solder adapters to pipe.

C. Install gate or ball valves for shut-off and to isolate equipment, part of systems, or vertical risers.

D. Install globe or ball valves for throttling, bypass, or manual flow control services.

3.4 DISINFECTION OF DOMESTIC WATER PIPING SYSTEM

A. Prior to starting work, verify system is complete, flushed and clean.

B. Inject disinfectant solution containing 100 ppm of available chlorine and allow to stand for 2 hours before flushing.

C. Flush disinfectant from system until residual is equal to that of incoming water or 1.0 mg/L.

E. Take samples from outlets and analyze in accordance with AWWA C601. Contractor shall engage an independent laboratory to conduct bacteriological and post chlorination tests certifying that the water meets the quality of drinking water. After acceptance by the Engineer of Record, "The Water Test Report for Use" is required to be submitted to SCO prior to requesting the Occupancy Permit.

3.5 SERVICE CONNECTIONS

A. Provide new sanitary sewer services. Before commencing work check invert elevations required for sewer connections, confirm inverts and ensure that these can be properly connected with slope for drainage and cover to avoid freezing.

END OF SECTION 15410

SECTION 15430 - PLUMBING SPECIALTIES

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes Plumbing Specialties for water distribution systems; and soil, waste and vent systems.

1.3 SUBMITTALS

- A. General: Submit the following in accordance with Conditions of Contract and Division 1 Specification Sections.
- B. Submit product data including rated capacities of selected models and weights (shipping, installation, and operation). Indicate materials, finishes, dimensions, required clearances, and methods of assembly of components; and piping and wiring connections.

PART II - PRODUCTS

2.1 MANUFACTURERS

A. Acceptable Manufacturers:

1. Backflow Preventers:

- a. Ames Co., Inc.
- b. Hersey Products, Inc., Grinnell Corp.
- c. Watts Regulator Co.
- d. Wilkins Regulator Div., Zurn Industries, Inc.

2. Water Pressure Regulators:

- a. Spence Engineering Co., Inc.
- b. Watts Regulator Co.
- c. Wilkins Regulator Div., Zurn Industries, Inc.

3. Specialties:

- a. Josam Co.
- b. Smith by Jay R. Smith Mfg. Co. Div., Smith Industries, Inc.
- c. Watts Regulator Co.
- d. Woodford Manufacturing Co. Div., WCM Industries, Inc.
- e. Zurn by Hydromechanics Div., Zurn Industries, Inc.

2.2 CLEANOUTS

- A. Exterior Surfaced Areas: Round cast nickel-bronze access frame and non-skid cover.

- B. Exterior Un-Surfaced Areas: Line type with lacquered cast iron body and round epoxy coated gasketed cover.
- C. Interior Finished Floor Areas: Lacquered cast iron, two piece body, round with scoriated cover in service areas and round with depressed cover to accept floor finish in finished floor areas.
- D. Interior Finished Wall Areas: Line type with lacquered cast iron body and round epoxy coated gasketed cover, and round stainless steel access cover secured with machine screw.

2.3 WATER HAMMER ARRESTORS

- A. ANSI A112.26.1; sized in accordance with PDI WH-201, pre-charged suitable for operation in temperature range -100 to 300 degrees F and maximum 250 psig working pressure.

2.4 TRAP SEAL PRIMER VALVE:

- A. ASSE 1018; water supply fed type, fully automatic 125psig minimum working pressure, Bronze body with atmospheric vented drain chamber, ½ inch threaded or solder joint inlet and outlet connections, Chrome plated, or rough bronze finish. Unit shall be capable of being located on any active water line.

2.5 BACKFLOW PREVENTERS

- A. Reduced Pressure Back-flow Preventers: ANSI/ASSE 1013; bronze body with bronze and plastic internal parts and stainless steel springs; two independently operating, spring loaded check valves; diaphragm type differential pressure relief valve located between check valves; third check valve which opens under back pressure in case of diaphragm failure; non-threaded vent outlet; assembled with two gate valves, strainer, and four test cocks.

PART III - EXECUTION

3.1 PREPARATION

- A. Coordinate construction areas to receive drains to the required invert elevations.

3.2 INSTALLATION AND APPLICATION

- A. Install specialties in accordance with manufacturer's instructions to permit intended performance.
- B. Extend clean-outs to finished floor. Lubricate threaded clean-out plugs Teflon pipe dope. Ensure clearance at clean-out for rodding of drainage system.
- C. Encase exterior clean-outs in concrete flush with grade.
- D. Install water hammer arrestors complete with accessible isolation valve.

END OF SECTION 15430

SECTION 15450 - WATER HEATERS

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and Division I Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes Electric Water Heaters and In-Line Circulators.

1.3 SUBMITTALS

- A. General: Submit the following in accordance with Conditions of Contract and Division I Specification Sections.
- B. Product data including rated capacities of selected models, weights (shipping, installed, and operating), furnished specialties, and accessories, and indicating dimensions, required clearances, and methods of assembly of components, and piping and wiring connections.

PART II - PRODUCTS

2.1 MANUFACTURERS

- A. Acceptable Manufacturers:
 - 1. Water Heaters:
 - (a) Bradford-White Corp.
 - (b) A.O. Smith Water Products Co. Div.
 - (c) State Industries, Inc.
 - (d) Ruud

2.5 COMMERCIAL ELECTRIC WATER HEATERS

- A. Factory assembled and wired, electric, [vertical] [horizontal] storage type, 150 psig maximum working pressure.
- B. Glass lined welded steel tank; four (4) inch diameter inspection port, thermally insulated with minimum two (2) inches glass fiber encased in corrosion-resistant steel jacket; baked-on enamel finish.
- C. Brass water connections and dip tube, drain valve, high-density magnesium anode, and ASME rated temperature and pressure relief valve.
- D. Flange-mounted immersion heating electrical elements; individual elements sheathed with Incoloy corrosion-resistant metal alloy, rated less than 75 Watts per square inch.

2.6 IN-LINE CIRCULATOR PUMPS

- A. Casing: Bronze, rated for 125 psig working pressure
- B. Impeller: Bronze

- C. Shaft: Alloy steel with integral thrust collar and two (2) oil lubricated bronze sleeve bearings.
- D. Seal: Carbon rotating against a stationary ceramic seat.
- E. Drive: Flexible coupling

2.7 THERMAL EXPANSION TANKS

- A. Construction: Welded steel, tested and stamped in accordance with Section 8D of ANSI/ASME Code; supplied with National Board Form U-1, rated for working pressure of 125 psig, maximum operating temperature 210 degrees F., with flexible EPDM diaphragm sealed into tank.
- B. Accessories: Pressure gage and air-charging fitting, tank drain; pre-charge to 55 psig.
- C. Size: 10.5" diameter, 16" overall length, 5 gallon capacity.

PART III - EXECUTION

3.1 WATER HEATER INSTALLATION

- A. Install water heaters in accordance with manufacturer's instructions and to UL requirements.
- B. Coordinate with plumbing piping and related [fuel piping] [gas venting] [electrical] work to achieve operating system.

3.2 PUMP INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Provide air cock and drain connection on horizontal pump casings.
- C. Decrease from line size, with long radius reducing elbows or reducers. Support piping adjacent to pump such as that no weight is carried on pump casings.

Ensure pumps operate at specified system fluid temperatures without vapor binding and cavitation, are non-overloading in parallel or individual operation, and operate within 25 percent of midpoint of published maximum efficiency curve.

END OF SECTION 15450

SECTION 15500 BASIC MECHANICAL REQUIREMENTS

PART I - GENERAL

1.1 GENERAL CONDITIONS

- A. The Stipulations and Conditions stated in this Section, together with all provisions of the "Instructions to Bidders", "General Conditions", "Supplemental General Conditions", and "Special Conditions", herein before set forth, shall apply to this and the other Sections of Division 15.

1.2 GENERAL REQUIREMENTS

- A. The General Requirements hereinafter listed apply to the Mechanical Work Division. If there is any conflict between the General Requirements and the General Conditions, the General Conditions shall take precedence.

1.3 ALTERNATES

- A. Carefully examine all Alternates at the back of this Specification to determine if any work described under the Mechanical Section will be affected thereby.

1.4 INTENT

- A. The intent of these Drawings and Specifications are to describe the installation of a complete, fully adjusted, and operational system. Therefore, any items shown on Drawings and not specifically called for in the Specifications, or any items specified and not specifically indicated or detailed on the Drawings, or any items neither specified or shown, but which are reasonably incidental to and commonly required to make a complete job, will be furnished and installed by the Mechanical Contractor at his own expense.

1.5 DEFINITIONS

- A. The Mechanical Contractor shall provide all supervision, labor, material equipment, machinery, plant, and any and all other items necessary to complete the mechanical systems. All items of equipment are specified in the singular; however, the Mechanical Contractor shall provide the number of items of equipment as indicated on the Drawings, and as required for complete systems.

Where the word "provide" is used, it shall mean "furnish and install complete and ready to use".

1.6 VISIT TO THE SITE

- A. The Mechanical Contractor shall visit the site before submitting his bid, so as to be thoroughly familiar with the job conditions and/or peculiarities. No extra payment will be allowed for anything that could have been anticipated from a visit to the site.

1.7 REGULATORY REQUIREMENTS

- A. All work under this Section shall be accomplished in strict accordance with State codes. Where these Plans and Specifications conflict with such codes, the codes shall govern. The Mechanical Contractor shall notify the Architect or Engineer of such conflicts in writing prior to receipt of bids.

1.8 PERMITS AND FEES

- A. The Mechanical Contractor shall make all necessary arrangements, obtain all necessary approval,

obtain all permits and pay fees required for the installation of any of the work covered under the Mechanical Work Division of the Specifications. Any fees required by any utility companies or municipal authorities for the final connections for these services shall be paid by the Mechanical Contractor under whose work such services appear. Before the job is certified as substantially complete, a Certificate of Approval from all authorities involved must be obtained and turned over to the Architect/Engineer.

1.9 DRAWINGS AND SPECIFICATIONS

- A. The Mechanical Drawings and Specifications are intended to cover all the work enumerated under the respective headings. The drawings are diagrammatic only. No Contractor shall take advantage of conflict or error between Drawings and Specifications, or between general Drawings and Mechanical, Plumbing and/or Electrical Drawings, but shall request a clarification of such from the Architect/Engineer, should this condition exist. If there is insufficient time to issue an Addendum for this clarification, the Mechanical Contractor shall figure on the most expensive of the items in conflict.
- B. The Mechanical Contractor shall refer to the Architectural and Structural Drawings and Specifications for the general construction of the building, for floors and ceiling heights, for locations of walls, partitions, beams, etc., and shall be guided accordingly for setting of all sleeves, inserts and equipment. No Contractor shall under any circumstances scale Drawings for the location of equipment. The Mechanical Contractor shall verify the locations of all utility services.
- C. The Mechanical Contractor shall keep at least one (1) set of corrected Shop and Design Drawings at the site. Drawings are to be current, denoting approved modifications and actual installed departure. Submit drawings to Architect/Engineer before final payment is made.

1.10 SUPERVISION

- A. The Mechanical Contractor performing the work specified shall be required to employ a qualified superintendent or foreman to continuously supervise the installation of their work, with authorization to act as agent Contractors. He shall be capable of checking layouts, coordinating and supervising the work, establishing grades and levels and locating chases, openings, hangers, inserts, sleeves, etc.

PART II - PRODUCTS

2.1 STANDARD PRODUCTS

- A. Unless otherwise indicated in writing by the Architect/Engineer, the materials to be provided under this Specification shall be standard products of manufacturers regularly engaged in the production of such equipment and shall be the manufacturer's latest design. All items of the same type or rating shall be identical.

2.2 SUBMITTAL

- A. The Mechanical Contractor shall submit, for approval, detailed Shop Drawings on all major equipment and where requested. No materials or equipment may be delivered to the job site or installed until the Mechanical Contractor has in his possession the approved shop drawing for the particular material or equipment. The Mechanical Contractor shall furnish the number of copies required by the General or Special Conditions of the contract, but in no case less than six (6) copies.
- B. Submitted material shall be properly labeled indicating specific Service for which material or equipment to be used, Section and Article Number of Specifications governing, Contractor's name

and name of job.

- C. Approval of equipment will not relieve the Mechanical Contractor of compliance with the specifications even if such approval is made in writing, unless the attention of the Engineer is called to the non-complying features by letter accompanying the submittal data. Approval of submittal data by the Engineer shall not be construed as a complete check of approval of detailed dimensions, weights, gauges and similar details with the proposed articles. The conformance with the necessary coordination between the various other contractors and suppliers shall be solely the responsibility of the Mechanical Contractor and with no additional expense to the Owner.

2.3 SUBSTITUTIONS

- A. Manufacturer's lists are to establish a Standard of Quality and not intended to limit the selection to these manufacturers. All materials and equipment which are essential and have not been specified or shown shall be new and of the highest grade and quality. Free from defect or other imperfections. It should be understood that where the words "furnished and installed" are used, it is intended that the Mechanical Contractor shall purchase and install all materials required.
- B. All materials and equipment proposed as substitutes for these specified shall require a ten (10) day prior approval from the Engineer prior to the bid date. No substitutions will be allowed after the ten (10) day period before the bid date.

2.4 PRODUCT HANDLING

- A. Equipment and materials shall be properly stored, adequately protected, and carefully handled to prevent damage before and during installation. Equipment and materials shall be handled, stored and protected in accordance with the manufacturer's recommendations and as approved by the Architect/Engineer. Equipment installed with a factory finish shall be fully protected during construction and shall be maintained free of dust, dirt, and foreign matter. Dents and other surface damage shall be repaired or replaced to the satisfaction of the Architect/Engineer at no additional cost to the Owner
- B. The Mechanical Contractor shall clean up and remove from the job site all waste materials, packaging, crating, and refuse resulting from his work on a daily basis.

2.5 MATERIALS AND WORKMANSHIP

- A. The Mechanical Contractor shall perform a first class job, both in material and workmanship. None other will be accepted. Deviations from either will be corrected by the Mechanical Contractor at the Mechanical Contractor's expense.
- B. The material used throughout the work, except when otherwise noted, shall be new and of the best of its kind. No substitutes shall be used unless approved by the Architect/Engineer. All work shall be executed with a maximum speed consistent with safety and good workmanship.
- C. Any equipment furnished by the Mechanical Contractor that is larger than those indicated on the Drawings and described in these Specifications or have different electrical characteristics, the increase in cost to the Electrical Contractor for larger wires, conduit, circuit breakers, switches, etc. or for changes in work already installed shall be borne by the instigating Contractor.

PART III - EXECUTION

3.1 EXCAVATION AND BACKFILL

- A. The Mechanical Contractor shall preform any and all trench and pit excavation and backfilling required for the installation of his work. Trenches shall be made with the sides vertical and shall be shored where necessary for the protection of men and equipment. All excavation work shall be done in a careful manner to avoid damage to footers and foundations. The backfilling shall be placed in layers not exceeding four (4) inches in depth, wetting each layer as it is placed, and thoroughly compacting each layer with mechanical tamper or other approved means. Any damage done during excavation and back-filling operations to roads, sidewalks, curbs, shrubs, sod, footers, foundations, etc. shall be replaced to its condition prior to construction at no expense to the Owner.

3.2 SCAFFOLDING, RIGGING AND HOISTING

- A. The Mechanical Contractor shall furnish all necessary scaffolding, staging, rigging and hoisting required for the completion of his work. All such scaffolding, etc., shall be removed from the premises when its use is no longer required on the job.

3.3 CUTTING AND PATCHING

- A. The Mechanical Contractor shall provide all cutting and patching necessary to install the work specified in this Section. The patching shall match adjacent surfaces.
- B. No Structural member shall be cut without the approval of the Engineer and all such cutting shall be done in a manner directed by him.

3.4 EQUIPMENT SPACE AND ARRANGEMENT

- A. The equipment shall fit into the space allotted and shall allow adequate clearance for entry, installation, replacement, servicing and maintenance. The Mechanical Contractor shall coordinate the work to ensure that equipment may be moved into place without altering building components or other installations. Access space shall not be less than the equipment manufacturer's requirements.
- B. These drawings indicate the extent and general arrangement of equipment, piping, and ductwork. If any departures are deemed necessary by the Mechanical Contractor, details of such departures and the reasons therefore shall be submitted to the Architect/Engineer for approval as soon as practicable and within 30 days after Award of Contract. No departure shall be made without written Approval of the Architect/Engineer.

3.5 DAMAGE TO WORK ALREADY IN PLACE

- A. The Mechanical Contractor shall assume full responsibility for any damage done by him, his agents or employees, to any work already in place. Any such damage done shall be repaired at the Contractor's expense by mechanics skilled at their respective trades, to the approval of the Architect/Engineer.

3.6 JURISDICTION OF WORK

- A. It may become necessary for the Mechanical Contractor to furnish labor or material which is not generally accepted as part of this trade. In cases of this type, he shall contract the work, or shall furnish materials and employ workmen of the trade involved in order not to cause any delay or stoppage of work caused by infringement of trade agreements as to jurisdiction, alleged or actual.

3.7 COORDINATION WITH OTHER TRADES

- A. All work shall be coordinated with other trades involved in the construction project. All work

shall be carefully laid out in advance to coordinate Architectural, Structural, Mechanical, Plumbing and Electrical features of construction. The Contractor shall verify at the site all locations, grades, elevations, and utility service connections indicated. Any conflicts due to lack of proper coordination shall be brought to the attention of the Architect/Engineer for resolution. The Mechanical Contractor shall make required changes or relocations at no additional cost to the Owner.

- B. Installation, inspection, and testing of work above ceilings shall be completed and approved by the Architect/Engineer prior to installation of the specified finished ceilings. However, ceiling suspension system may be installed as required for coordination.
- C. The Mechanical Contractor shall consult with the other trades at the start of the work and periodically thereafter, as required to properly coordinate the various items of work, and to avoid interferences. Should any interferences of any nature develop as the work progresses, such interferences shall be resolved and eliminated as directed. The cost of any work directed will be borne by the subcontractor or contractors directed to do this work.

3.8 DIVISION OF WORK

- A. This paragraph is intended to show exactly the point of division of work between the Electrical Division and the Mechanical Division.
- B. All equipment covered in the Mechanical Division of the Specifications shall be furnished, mounted and aligned under the Mechanical Division. All individual motor starters, unless indicated as part of a motor control center, for this equipment shall be furnished and installed by the Mechanical Contractor.
- C. All final electrical connections to equipment covered in the Mechanical Division of the Specifications shall be completed under the Mechanical Division.
- D. The Electrical Contractor shall provide a disconnect switch or junction box for each item of equipment under Division 16.
- E. Electrical equipment and wiring that is provided by the Mechanical Contractor shall be in accordance with the Electrical specification.

3.9 EQUIPMENT INSTALLATION

- A. Final connections to equipment, including pipe, duct, and controls, shall be provided under applicable sections of this Division, unless otherwise specified or indicated.
- B. Manufacturer's Instructions: Equipment shall be installed as recommended by the manufacturer to conform to the requirements of the particular application, in accordance with these Drawings and Specifications.

3.10 OPERATION AND MAINTENANCE MANUALS

- A. One complete Manual as outlined herein shall be submitted for approval before conducting instruction sessions in operation, before systems or equipment tests are performed, and before final or beneficial occupancy.
- B. Manuals shall have rigid covers and index tabs for each major piece of equipment, auxiliaries, and systems. The following shall be inscribed on the cover: the words "OPERATION AND MAINTENANCE MANUAL", the name and location of the building, the name of the Section, such as "Heating" and the name of the Mechanical Contractor. Two (2) copies of each approved

manual shall be submitted to the Owner and one (1) copy shall be submitted to the Architect/Engineer.

- C. Each piece of equipment shall be listed and identified with the same name, mark, number, or other identification as noted or scheduled in the Contract Documents.
- D. Manuals shall include the following:
 - 1. Complete Operating Installations, covering start-up and shutdown for all components installed.
 - 2. Legible copies of all Shop Drawings. Any comments incorporated in "as noted" approvals of Shop Drawings shall be recorded on the Drawings included in the Manuals.
 - 3. All equipment Maintenance and Service Manuals.
 - 4. A complete parts list for each piece of equipment.
 - 5. All descriptive literature for the equipment.
 - 6. Operating characteristics, performance data, ratings, and curves for each piece of equipment such as condensers, fans and air handling units.
 - 7. Internal wiring and control diagrams.
 - 8. Automatic temperature control diagrams, part descriptions and numbers, and sequences of operation. Drawings shall be neatly folded and inserted in a separate clear plastic binder. The plastic binders shall be bound in the back of each Manual.
 - 9. Final Testing and Balancing Reports.
 - 10. All other information pertinent to the maintenance and servicing of equipment and systems provided in the Project.
 - 11. Name, address, and telephone number for service on each manufacturer's equipment.

3.11 OPERATING INSTRUCTIONS

- A. After all equipment and services are in operation, and the Operation and Maintenance Manuals are available, an instruction and training session shall be conducted for the Owner's operating personnel.
- B. Instruction sessions shall be conducted during the Owner's normal working periods, and at times and locations satisfactory to the Owner.

3.12 EQUIPMENT START-UP

- A. No equipment shall be placed in operation until it has been inspected by a qualified representative of the manufacturer and certified to be ready for operation. The manufacturer's representative shall supervise the start-up operation and shall be responsible for all adjustments are required to meet design conditions. Such services shall be at no additional cost to the Owner.

3.13 GUARANTEE

- A. The Mechanical Contractor shall present to the Owner a written Guarantee covering his work, including all equipment, material and workmanship. This Guarantee shall be against all defects in any of the above work, and shall run for a period of one (1) year from the date of written acceptance of the Contractor's work.
- B. Any defective work, equipment, material and/or workmanship that develops within the Guarantee period, which is not caused by ordinary wear or abuse by other persons, shall be replaced by the Mechanical Contractor without cost to the Owner.

3.14 FINAL INSPECTION

- A. When the entire Contract has been completed and the work is ready for final inspection, the Architect/Engineer or his duly authorized representative will make the inspection. At the time of inspection, the Mechanical Contractor shall demonstrate to the Architect/Engineer that the various systems and pieces of equipment have been adjusted to operate in accordance with the requirements of the Contract.

3.15 FINAL PAYMENTS

- A. All Final Payments are contingent upon all necessary Certificates and/or Approvals cited above, together with the written Guarantee being presented to the Owner.

END OF SECTION 15500

SECTION 15501 - HANGERS AND SUPPORTS

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawing and General Provisions of the Contract, including the General and Supplementary Conditions and Division I Specification Sections, apply to this Section.

1.2 SUMMARY

- B. This Section includes Hangers and Supports for Mechanical Systems Piping and Equipment.

PART II - PRODUCTS

2.1 PIPE HANGERS AND SUPPORTS

- A. Hangers: Galvanized carbon steel, adjustable, clevis.
- B. Copper Pipe Support: Carbon steel ring, adjustable, copper plated.
- C. Shield for Insulated Piping 2 Inches and Smaller: 18 gage galvanized steel shield over insulation in 180 degree segments, minimum 12 inches long at pipe support.

2.2 HANGER RODS

- A. Steel Hanger Rods: Threaded both ends or continuous threaded.

2.3 FLASHING

- A. Metal Flashing: 26 gage galvanized steel.
- B. Flexible Flashing: 47 mil thick sheet butyl; compatible with roofing.

2.4 SLEEVES

- A. Sleeves for Pipes: Form with schedule 40, galvanized steel pipe
- B. Sleeves for Pipes Through Fire Rated and Fire Resistive Floors and Walls, and Fireproofing: Prefabricated fire rated sleeves including seals, UL listed.
- C. Sleeves for Round Ductwork: Form with galvanized steel.
- D. Sleeves for Rectangular Ductwork: Form with galvanized steel or wood.
- E. Fire Stopping Insulation: Glass fiber type, non-combustible.
- F. Caulk: Fire Barrier type sealant.

2.5 MISCELLANEOUS MATERIALS

- A. Structural Steel: ASTM A 36/A 36M, steel plates, shapes, and bars, black and galvanized.

- B. Bolts and Nuts: ASME B18.10 or ASTM A 183, steel, hex-head, track bolts and nuts.
- C. Washers: ASTM F 844, steel, plain, flat washers.

2.6 ATTACHMENTS

- A. Mechanical-Anchor Fasteners: Insert-type attachments with pull-out and shear capacities appropriate for supported loads and building materials where used. Permitted in concrete over 4 inches thick.
- B. Beam Clamps: Types 20, 21, 28 or 29
- C. Wood: Wood screws or lag bolts

PART III - EXECUTION

3.1 HANGERS AND SUPPORTS INSTALLATION

- A. Install hangers, supports, clamps, and attachments as required to properly support piping from building structure.
- B. Install building attachments within concrete or to structural steel. Install additional attachments at concentrated loads, including valves, flanges, guides, strainers, expansion joints, and at changes in direction of piping.
- C. Install hangers and support complete with necessary inserts, bolts, rods, nuts, washers, and other accessories.
- D. Install hangers and supports to allow controlled movement of piping systems, permit freedom of movement between pipe anchors, and facilitate action of expansion joints, expansion loops, expansion bends, and similar units.
- E. Install hangers and supports so that piping live and dead loading and stresses from movement will not be transmitted to connected equipment.
- F. Support horizontal piping as follows:

<u>PIPE SIZE</u>	<u>HANGER SPACING</u>	<u>MAXIMUM HANGER DIAMETER</u>
1/2 to 1-1/4 inch	6' - 6"	3/8"
1-1/2 to 2 inch	10' - 0"	3/8"

- G. Install hangers to provide minimum 1/2 inch space between finished covering and adjacent work.
- H. Place a hanger within 12 inches of each horizontal elbow.
- I. Use hangers with 1 1/2 inch minimum vertical adjustment.
- J. Support vertical piping at every floor.
- L. Support riser piping independently of connected horizontal piping.
- M. All pipe hangers shall be galvanized steel or copper.
- N. Pipe strapping, duct tape or zip ties will not be allowed.

3.2 EQUIPMENT BASES AND SUPPORTS

- A. Provide equipment bases of concrete.
- B. Provide templates, anchor bolts, and accessories for mounting and anchoring equipment.

3.3 EQUIPMENT SUPPORTS

- A. Fabricate structural steel stands to suspend equipment from structure above or support equipment above floor.
- B. Grouting: Place grout under supports for equipment, and make a smooth bearing surface.

3.4 METAL FABRICATION

- A. Cut, drill, and fit miscellaneous metal fabrications for pipe and equipment supports.
- B. Fit exposed connections together to form hairline joints. Field weld connections that cannot be shop welded because of shipping size limitations.
- C. Field Welding: Comply with AWS D1.1 procedures for manual shielded metal arc welding, appearance and quality of welds.

3.5 FLASHING

- A. Provide flexible flashing and metal counter-flashing where piping and ductwork penetrate weather or waterproofed walls, floors, and roofs.
- B. Provide curbs for mechanical roof installations 14 inches minimum high above roofing surface. Flexible sheet flash and counter-flash with sheet metal; seal watertight.

3.6 SLEEVES

- A. Size sleeves large enough to allow for movement due to expansion and contraction. Provide for continuous insulation wrapping.
- B. Design hangers without disengagement of supported pipe.
- C. Where piping penetrates floor, ceiling, or wall, close off space between pipe and adjacent work with fire stopping insulation and caulk seal air tight. Provide close fitting metal collar or escutcheon covers at both sides of penetration.
- D. Install chrome plated steel or stainless steel escutcheons at finished surfaces.

END OF SECTION 15501

SECTION 15504 - PIPING INSULATION-REFRIGERANT/CONDENSATE

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes Mechanical Pipe Insulation.

1.3 QUALITY ASSURANCE

- A. Fire Performance Characteristics: Conform to the following characteristics for insulation including facings, cements, and adhesives, when tested according to ASTM E 84, by UL or other testing or inspecting organization acceptable to the authority having jurisdiction. Label insulation with appropriate markings of testing laboratory.
 - 1. Interior Insulation: Flame spread rating of 25 or less and a smoke developed rating of 50 or less.
 - 2. Exterior Insulation: Flame spread rating of 75 or less and a smoke developed rating of 150 or less.

1.4 SEQUENCING AND SCHEDULING

- A. Schedule insulation application after testing of piping systems.
- B. Schedule insulation application after installation and testing of heat trace tape.

PART II - PRODUCTS

2.1 MANUFACTURERS

- A. Acceptable Manufacturers
 - 1. Flexible Elastomeric Cellular:
 - a. Armstrong World Industries, Inc.
 - b. Halstead Industrial Products
 - c. IMCOA
 - d. Rubatex Corporation

2.3 FLEXIBLE ELASTOMERIC CELLULAR

- A. Material: Flexible expanded closed-cell structure with smooth skin on both sides.
- B. Form: Tubular materials conforming to ASTM C 534, Type I.
- C. Thermal Conductivity: 0.30 average maximum at 75 degrees F.
- D. Coating: Water based latex enamel coating recommended by insulation manufacturer.

2.5 ADHESIVES

- A. Flexible Elastomeric Cellular Insulation Adhesive: Solvent-based, contact adhesive recommended

by insulation manufacturer.
2.8 SEALING COMPOUNDS

- B. Weatherproof Sealant: Flexible elastomer based, vapor barrier sealant designed to seal metal joints.
 - 1. Water Vapor Permeance: 0.02 perm maximum
 - 2. Temperature Range: Minus 50 to 250 degrees F

PART III - EXECUTION

3.1 PREPARATION

- A. Surface Preparation: Clean, dry, and remove foreign materials such as rust, scale, and dirt.

3.2 INSTALLATION - GENERAL

- A. Select accessories compatible with materials suitable for the service. Select accessories that do not corrode, soften, or otherwise attack the insulation or jacket in either the wet or dry state.
- B. Apply insulation material, accessories, and finishes according to the manufacturer's printed instructions.
- C. Keep insulation materials dry during application and finishing.
- D. Apply insulation continuously over fittings, valves, and specialties.
- E. Apply insulation with a minimum number of joints.
- F. Interior Walls and Partitions Penetrations: Apply insulation continuously through walls and partitions, except fire-rated walls and partitions.
- G. Fire-Rated Walls and Partitions Penetrations: Terminate insulation at penetrations through fire rated walls and partitions. Seal insulation ends with vapor barrier coating. Seal around penetration with fire stopping or fire resistant joint sealer.
- H. Flanges, Fittings, and Valves: Apply pre-molded, pre-cut, or field fabricated segments of insulation around flanges, unions, valves, and fittings. Make joints tight. Bond with adhesive.
 - 1. Use same material and thickness as adjacent pipe insulation.
 - 2. Overlap nesting insulation by 2 inches or 1-pipe diameter, whichever is greater.
 - 3. Apply materials with adhesive, fill voids with mineral fiber insulating cement. Secure with wire or tape.
 - 4. Insulate elbows and tees smaller than 3-inches pipe size with pre-molded insulation.
 - 5. Insulate elbows and tees Three (3) inches and larger with pre-molded insulation or insulation material segments. Use at least 3 segments for each elbow.
- J. Hangers and Anchors: Apply insulation continuously through hangers and around anchor attachments. Install saddles, shields, and inserts as specified.

1. Inserts and Shields: Cover hanger inserts and shields with jacket material matching adjacent pipe insulation.

3.4 FLEXIBLE ELASTOMERIC CELLULAR INSULATION INSTALLATION

- A. Slip insulation on the pipe before making connections wherever possible. Seal joints with adhesive. Where the slip-on technique is not possible, cut one side longitudinally and apply to the pipe. Seal seams and joints with adhesive.
- B. Valves, Fittings, and Flanges: Cut insulation segments from pipe or sheet insulation. Bond to valve, fitting, and flange and seal joints with adhesive.
 1. Miter cut materials to cover soldered elbows and tees.
 2. Fabricate sleeve fitting covers from flexible elastomeric cellular insulation for screwed valves, fittings, and specialties. Miter cut materials. Overlap adjoining pipe insulation.

3.6 FINISHES

- A. Flexible Elastomeric Cellular Insulation: After adhesive has fully cured, apply 2 coats of protective coating to exposed insulation. Paint all exterior insulation with UV resistant paint as recommended by Insulation manufacturer.

INTERIOR COLD CONDENSATE DRAINS

<u>PIPE SIZES (NPS)</u>	<u>MATERIALS</u>	<u>THICKNESS IN INCHES</u>
1/2 TO 4	FLEXIBLE ELASTOMERIC	3/4

REFRIGERANT SUCTION

<u>PIPE SIZES (NPS)</u>	<u>MATERIALS</u>	<u>THICKNESS IN INCHES</u>
1/2 TO 1-1/4	FLEXIBLE ELASTOMERIC	3/4
1-1/2 TO 4	FLEXIBLE ELASTOMERIC	1

END OF SECTION 15505

SECTION 15507 - DUCTWORK INSULATION

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes Duct and Plenum Insulation.

1.3 QUALITY ASSURANCE

- A. Fire Performance Characteristics: Conform to the following characteristics for insulation including linings, cements, and adhesives, when tested according to ASTM E 84, by UL or other testing or inspecting organization acceptable to the authority having jurisdiction. Label insulation with appropriate markings of testing laboratory.
 - 1. Interior Insulation: Flame spread rating of 25 or less and a smoke developed rating of 50 or less.
 - 2. Exterior Insulation: Flame spread rating of 75 or less and a smoke developed rating of 150 or less.

PART II – PRODUCTS

2.1 MANUFACTURERS

- 1. Glass Fiber:
 - a. Certain Teed Corporation
 - b. Knauf Fiberglass GmbH
 - c. Manville
 - d. Owens-Corning Fiberglass Corporation
 - e. USG Interiors, Inc. - Thermafiber Division

2.2 INSTALLATION

A. GLASS FIBER

- 1. Material: Inorganic glass fibers, bonded with a thermosetting resin.
- B. Jacket: All purpose, factory-applied, laminated glass fiber reinforced, flame retardant Kraft paper and aluminum foil having self-sealing lap.
- C. Blanket: ASTM C 553, Type II, Class F-1, jacketed flexible blankets-2” thick.
 - 1. Thermal Conductivity: 0.32 average maximum, at 75 degrees F mean temperature.
- D. Adhesive: Produced under the UL Classification and follow-up service.
 - 1. Type: Non-Flammable, solvent-based.
 - 2. Service Temperature Range: Minus 20 to 180 degrees F.

2.3 ACCESSORIES AND ATTACHMENTS

- A. Corner Angles: 28-gauge, 1-inch by 1-inch aluminum, adhered to 2-inch by 2-inch Kraft paper.
- B. Anchor Pins: Capable of supporting 20 pounds each. Provide anchor pins and speed washers of sizes and diameters as recommended by the manufacturer for insulation type and thickness.

2.4 SEALING COMPOUNDS

- A. Vapor Barrier Compound: Water-based, fire-resistive composition
 - 1. Water Vapor Permeance: 0.08 perm maximum
 - 2. Temperature Range: Minus 20 to 180 degrees F

PART III - EXECUTION

3.1 PREPARATION

- A. Surface Preparation: Clean, dry, and remove foreign materials such as rust, scale and dirt.

3.2 INSTALLATION

- A. Select accessories compatible with materials suitable for the service. Select accessories that do not corrode, soften, or otherwise attack the insulation or jacket in either the wet or dry state.
- B. Apply insulation material, accessories, and finishes according to the manufacturer's printed instructions.
- C. Install insulation with smooth, straight, and even surfaces.
- D. Seal joints and seams to maintain vapor barrier.
- E. Seal penetrations for hangers, supports, anchors and other projections.
- F. Keep insulation materials dry during application and finishing.
- H. Blanket Insulation: Install tight and smooth. Secure to ducts having long sides or diameters as follows:
 - 1. Smaller Than 24 Inches: Bonding adhesive applied in 6-inch wide transverse strips on 12-inch centers.
 - 2. Twenty-four (24) Inches and Larger: Anchor pins spaced 12 inches apart each way. Apply bonding adhesive to prevent sagging of the insulation.
 - 3. Overlap joints three (3) inches.
 - 4. Seal joints, breaks, and punctures with vapor barrier compound.

END OF SECTION 15507

SECTION 15513 – REFRIGERANT PIPING

PART I - GENERAL

- 1.1 A. This section includes all pipe, pipe fittings, hangers, supports, etc. as may be required to provide a complete refrigerant piping system.
- B. Testing of all piping shall be made in the presence of a designated representative of the owner. No piping shall be covered or put into operation before such testing has been approved.
- C. The actual arrangement of the piping shall follow the general locations shown on the drawings such that clearances, line drainage, etc. shall be maintained.

PART II - PRODUCTS

2.1 PIPING

- A. Refrigerant piping shall be type "ACR" hard drawn copper conforming to ANSI B31.5 or ASTM B280.

2.2 PIPE FITTINGS

- A. Copper pipe fittings shall be wrought metal solder joint type conforming to ANSI B16.22.

PART III - EXECUTION

3.1 PIPING

- A. The installation of piping and related items shall be made neatly and in such a manner as not to interfere with access to valves or equipment.
- B. All piping shall be reamed to remove all burrs, fins and foreign material. Pipe shall be thoroughly cleaned before soldering.
- C. "Sil-Fos" or silver solder shall be used with non-corrosive flux. During the soldering operation, the pipe shall be purged with nitrogen.
- D. Piping shall be arranged (and traps installed where necessary) to allow the proper return of oil to the compressor.

3.2 HANGERS AND SUPPORTS

- A. The spacing of hangers and supports shall not exceed five feet.
- B. Pipe covering protection saddles shall be used at all supports for insulated piping. Sheet metal shields shall be 10 gauge, one half the circumference of the insulation and minimum of twelve inches long.

3.3 TESTING

- A. All refrigerant equipment not tested at the factory shall be shut off from the rest of the system and tested. Piping systems shall be tested after installation is complete and before any insulation is applied. All controls and other apparatus that may be damaged by the test pressure shall be removed before tests are made.

- B. Refrigerant lines shall be tested at 150 psig with dry nitrogen. Pressure shall be maintained for 60 minutes without loss of pressure. Each joint shall be checked for leaks with a soap solution. Testing and repair shall continue until there is no loss of pressure. After a satisfactory pressure test, high vacuum pumps shall be connected to the system and the system evacuated to a pressure of 0.20 inches of mercury with the ambient temperature at not less than 36 degrees F. After this has been attained, the vacuum shall be broken by charging the system with refrigerant as soon as possible.

END OF SECTION 15055

SECTION 15672 - SPLIT SYSTEM HEAT PUMP

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and a Division 1 Specification Sections, apply to work of this Section.

1.2 SUMMARY

- A. Section includes Split System Heat Pumps.

1.3 SUBMITTALS

- A. **Product Data:** Submit manufacturer's technical product data, including rated capacities of selected model clearly indicated, weights (shipping, installed, and operating), dimensions, required clearances, and methods of assembly of components, furnished specialties and accessories and installation and start-up instructions.
- B. **Wiring Diagrams:** Submit ladder-type wiring diagrams for power and control wiring required for final installation of heat pump units and controls. Clearly differentiate between portions of wiring which are factory-installed and portions to be field-installed.
- C. **Operation and Maintenance Data:** Submit maintenance data and parts list for each heat pump unit, control, and accessory; including "trouble shooting" maintenance guide; plus servicing, and preventative maintenance procedures and schedule. Include this data and product data in maintenance manual in accordance with requirements of Division 1.

1.4 WARRANTY

- A. Provide Five (5) Year Warranty.
- B. Warranty: Include coverage for Refrigerant Compressors.

PART II - PRODUCTS

2.1 SPLIT SYSTEM HEAT PUMPS

- A. **Acceptable Manufacturers:**
 - 1. Carrier Air Conditioning: Division of Carrier Corp.
 - 2. Trane (The) Co.: Division of American Standard Inc.
 - 3. York: Division of York International

2.2 GENERAL

- A. **Split System:** The split-system unit shall be an outdoor heat pump unit and indoor factory-fabricated single-zone draw-through air-handling unit. Both indoor and outdoor unit shall be by the same manufacturer. The net capacities shall be as indicated and shall not exceeded by more than 5%. The minimum efficiency for systems less than 65,000 BTUH shall be 15.0 SEER. The minimum efficiency for systems of 65,000 BTUH or greater shall be in accordance with the 2012 N. C. State Building Code: Energy Conservation Code.

2.3 AIR HANDLER

- A. Direct Expansion Coil: Coil shall be provided with pressure-type brass distributors and solder connections. The coil shall be dehydrated after testing and charged with dry air. Maximum working conditions shall be 300 psig at 200 degrees F for cooling. Tests shall be conducted, subjecting the coil to a minimum air pressure of 350 psig with the coil submerged in water. The cooling coil shall be subject to ASHRAE 15-1978 Safety code for Mechanical Refrigeration. Coils shall be of the cartridge type, removable from other side of casing and supported the entire length in tracks. Staggered tube pattern shall be provided for all coils of more than one row deep. Tubing shall have a minimum outside diameter of 1/2 inch. Tubing shall be individually finned with smooth aluminum or copper fins, wound under tension. Tube joints for all coils shall be made with high temperature brazing alloys.
- B. Cabinet: Unit shall be provided with baked enamel finish and internally insulated. Fan shall be forward curved, and dynamically and statically balanced at the factory. Fan shall be belt driven. Provide adjustable sheaves for each air handler. Fan and motor bearings shall be permanently lubricated type.

2.4 OUTDOOR HEAT PUMP UNIT

- A. Unit shall be factory-assembled and tested. Unit shall provide liquid lift as required to suit installation. Unit shall deliver the specified capacity to the cooling coil with an ambient air temperature of 95 degrees F. Units shall be certified per ARI 240 and 270.
- B. Coil shall have aluminum plate fins, mechanically bonded to 1/2 inch aluminum tubes. Coil shall be circuited for sub-cooling.
- C. Outdoor Fans and Motors: Unit shall be furnished with direct-driven, propeller-type fans arranged for vertical discharge. Condenser fan motors shall have Class B motor insulation and built in current and thermal overload protection, and shall be of the permanently lubricated type, resiliently mounted. Each fan shall have a safety guard.
- D. Compressor: Unit shall have compressors of serviceable hermetic design with external spring isolators and an automatically reversible oil pump. Compressor motors shall have across-the-line start.
- E. Controls shall be factory-wired and located in a separate enclosure. Safety devices shall consist of high and low pressure stats and compressor overload devices. Unit wiring shall incorporate a time delay relay to prevent short-cycling of the compressor. Relay shall prevent compressor from restarting for a 5-minute period. The unit shall include a transformer for 24-volt control circuit, pressure relief valves and circuit breakers.
- F. Casing shall make unit fully weatherproof for outdoor installation. Casing shall be of galvanized steel, zinc phosphatized and finished with baked enamel. Openings shall be provided for power and refrigerant connections. Panel shall be removable to provide access for servicing. The unit shall be mounted on manufacturer's standard legs anchored to concrete pedestals with steel bearing plates and neoprene pads.
- G. Connections: Only one liquid line, one suction line, required for units under 15 tons in capacity shall be provided. A 15-ton unit shall be dual circuited. Double suction risers for the refrigerant lines shall be provided.
- H. Piping shall be sized by the manufacturer.

2.5 TEMPERATURE CONTROL SYSTEM

2.6 A. See Section 15973, Direct Digital Controls
FILTRATION

- A. Provide a filter rack and a 1" replaceable pleated throwaway filter. Filter rack size shall be as required by AHU manufacture.
- B. Provide additional sets of filters (minimum of 3) as required during construction. Install a clean set of filters for the Final Inspection.

PART III - EXECUTION

3.1 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Provide for connection to electrical service.
- C. Install units with vibration isolation.
- D. Install units on concrete base as indicated.

3.2 MANUFACTURER'S FIELD SERVICES

- A. Prepare start systems under provisions of Section 15500.
- B. Provide initial start-up.
- C. Supply initial charge of refrigerant and oil for each refrigerant circuit. Replace losses of refrigerant and oil.

END OF SECTION 15672

SECTION 15674 DUCT FREE SPLIT SYSTEM AIR CONDITIONER

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and a Division 1 Specification Sections, apply to work of this Section.

1.2 SUBMITTALS

- A. Product Data: Submit manufacturer's technical product data, including rated capacities of selected model clearly indicated, weights (shipping, installed, and operating), dimensions, required clearances, and methods of assembly of components, furnished specialties and accessories and installation and start-up instructions.
- B. Wiring Diagrams: Submit ladder-type wiring diagrams for power and control wiring required for final installation of heat pump units and controls. Clearly differentiate between portions of wiring which are factory-installed and portions to be field-installed.
- C. Operation and Maintenance Data: Submit maintenance data and parts list for each heat pump unit, control, and accessory; including "trouble shooting" maintenance guide; plus servicing, and preventative maintenance procedures and schedule. Include this data and product data in maintenance manual in accordance with requirements of Division 1.

1.3 WARRANTY

- A. Provide Five (5) Year Warranty.
- B. Warranty: Include coverage for Refrigerant Compressors.

PART II - PRODUCTS

2.1 SPLIT SYSTEM AIR CONDITIONER

- A. Acceptable Manufacturers:
 - 1. Mitsubishi
 - 2. Sanyo.
 - 3. Freidrich
 - 4. Amana

2.2 GENERAL

- A. Split System: The split-system unit shall be an outdoor condensing unit and indoor factory-fabricated single-zone draw-through air-handling unit. Both indoor and outdoor unit shall be by the same manufacturer. The net capacities shall be as indicated and shall not be exceeded by more than 5%. The minimum efficiency for systems less than 65,000 BTUH shall be 13.0 SEER and shall be in accordance with the 2012 N. C. State Building Code; Energy Conservation Code.

2.3 AIR HANDLER

- A. Direct Expansion Coil: Coil shall be provided with pressure-type brass distributors and solder connections. The coil shall be dehydrated after testing and charged with dry air. Maximum

working conditions shall be 300 psig at 200 degrees F for cooling. Tests shall be conducted, subjecting the coil to a minimum air pressure of 350 psig with the coil submerged in water. The cooling coil shall be subject to ASHRAE 15-1978 Safety code for Mechanical Refrigeration. Staggered tube pattern shall be provided for all coils of more than one row deep. Tubing shall have a minimum outside diameter of 1/2 inch. Tubing shall be individually finned with smooth aluminum or copper fins, wound under tension. Tube joints for all coils shall be made with high temperature brazing alloys.

- B. Cabinet: Unit shall be provided with baked enamel finish and internally insulated. Fan shall be forward curved, and dynamically and statically balanced at the factory. Fan and motor bearings shall be permanently lubricated type.

2.4 OUTDOOR CONDENSING UNIT

- A. Unit shall be factory-assembled and tested. Unit shall provide liquid lift as required to suit installation. Unit shall deliver the specified capacity to the cooling coil with an ambient air temperature of 95 degrees F. Units shall be certified per ARI 240 and 270.
- B. Coil shall have aluminum plate fins, mechanically bonded to 1/2 inch aluminum tubes. Coil shall be circuited for sub-cooling.
- C. Outdoor Fans and Motors: Unit shall be furnished with direct-driven, propeller-type fans arranged for vertical discharge. Condenser fan motors shall have Class B motor insulation and built in current and thermal overload protection, and shall be of the permanently lubricated type, resiliently mounted. Each fan shall have a safety guard.
- D. Compressor: Unit shall have compressors of serviceable hermetic design with external spring isolators and an automatically reversible oil pump. Compressor motors shall have across-the-line start.
- E. Controls shall be factory-wired and located in a separate enclosure. Safety devices shall consist of high and low pressure stats and compressor overload devices. Unit wiring shall incorporate a time delay relay to prevent short-cycling of the compressor. Relay shall prevent compressor from restarting for a 5-minute period. The unit shall include a transformer for 24-volt control circuit, AND pressure relief valve.
- F. Casing shall make unit fully weatherproof for outdoor installation. Casing shall be of galvanized steel, zinc phosphatized and finished with baked enamel. Openings shall be provided for power and refrigerant connections. Panel shall be removable to provide access for servicing. The unit shall be mounted on manufacturer's standard legs anchored to concrete pedestals with steel bearing plates and neoprene pads.
- G. Piping shall be sized by the manufacturer.

2.5 FILTRATION

- A. Provide a throw away filter.
- B. Provide additional sets of filters (minimum of 3) as required during construction. Install a clean set of filters for the Final Inspection.

PART III - EXECUTION

3.1 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Provide for connection to electrical service.
- C. Install units with vibration isolation.
- D. Install units on concrete base as indicated.

3.2 MANUFACTURER'S FIELD SERVICES

- A. Prepare start systems under provisions of Section 15500.
- B. Provide initial start-up.
- C. Supply initial charge of refrigerant and oil for each refrigerant circuit. Replace losses of refrigerant and oil.

END OF SECTION

SECTION 15782 –Energy Recovery Ventilator

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to work of this Section.

1.2 DESCRIPTION OF WORK

- A. Extent of Air Conditioning Unit work required by this Section is indicated on Drawings and Schedules and by Requirements of this Section.

1.3 SUBMITTALS

- A. Product Data: Submit manufacturer's technical product data, including rated capacities for each unit indicated, weights (shipping, installed, and operating), furnished specialties and accessories; and rigging, installation, and start-up instructions.
- B. Maintenance Data: Submit Maintenance Data and Parts List for each unit, control, and accessory; including "trouble- shooting" maintenance guide. Include this data and product data in Maintenance Manual in accordance with requirements of Division 1.

1.4 DELIVERY, STORAGE AND HANDLING

- A. Handle unit and components properly to prevent damage, breaking, denting and scoring. Do not install damaged roof top unit or components; replace with new. Comply with manufacturer's rigging and installation instructions for unloading the unit, and transporting the unit to final location.

1.5 WARRANTY

- A. General Warranty: The special warranty specified in this Section shall not deprive the owner of other rights the owner may have under other provisions of the contract documents and shall be in addition to, and run concurrent with, other warranties made by the contractor under requirements of the contract documents.
- B. Special Warranty: A written warranty, executed by the manufacturer and signed by the contractor, agreeing to replace the components that fail in material or workmanship, within the specified warranty period, provided manufacturer's written instructions for installation, operation, and maintenance have been followed.
 - 1. Unit warranty period: Not less than one year after date of start-up, but not to exceed 14 months from date of shipment.
 - 2. Heat Wheel: Non-prorated full parts replacement not less than 5 years from date of shipment.

PART II - PRODUCTS

2.1 MANUFACTURERS

- A. Acceptable Manufacturers:
 - 1. Micrometal
 - 2. Semco
 - 3. RenewAire

2.2 MANUFACTURED UNITS

- A. Provide complete unit with heat wheel energy recovery.
- B. Unit shall be self-contained, packaged, factory assembled and pre-wired, consisting of cabinet and frame, supply fan, exhaust fan, heat recovery wheel, controls, air filters.

2.3 FABRICATION

- A. Cabinet: Galvanized steel with baked enamel finish, access doors or removable access panels with quick fasteners [locking door handle type with piano hinges. Structural members shall be minimum 18 gauge (1.20 mm), with access doors or removable panels of minimum 20 gauge (0.90 mm).
- B. Insulation: One inch thick neoprene coated glass fiber on surfaces where conditioned air is handled. Protect edges from erosion.
- C. Heat Exchangers: Aluminized steel of welded construction.
- D. Supply and Exhaust Fan: Forward curved centrifugal type, resiliently mounted with V-belt drive, adjustable variable pitch motor pulley, and rubber isolated hinge mounted motor.
- E. Air Filters: 2 inch thick pleated glass fiber disposable media in metal frames. Provide a total of 4 complete sets.

2.4 ENERGY RECOVERY SECTION

- A. The unit shall have a factory mounted and tested energy recovery wheel. The energy recovery wheel shall be mounted in a rigid frame containing the wheel drive motor, drive belt, wheel seals and bearings.
- B. The energy recovery cassette shall be rated in accordance with ARI Standard 1060 and shall bear the ARI certification symbol.
- C. The energy recovery cassette shall contain a total energy recovery heat wheel constructed of a light-weight polymer material with permanently bonded desiccant coating. The energy recovery wheel media shall be capable of removal from the cassette and replacement without the use of tools. Wheel media shall be cleanable using hot water or light detergent without degrading the efficiency.
- D. The exhaust fan shall be backward inclined type. Fan and motor shall be dynamically balanced. A back draft damper shall be included with the exhaust fan. Outside air filters shall be 4" thick pleated disposable media. Provide a total of 4 sets.
- E. Motors shall be standard efficiency with ball bearings and external lubrication connections.

PART III - EXECUTION

3.1 EXAMINATION

- A. Verify that proper power supply is available.

3.2 INSTALLATION

- A. Install in accordance with manufacturer's instructions.

- B. Mount units on field built mounting frame. Install mounting frame level. Mounting frame shall be provided by the HVAC Contractor. Field Coordinate frame and installation required.
- C. See structural drawings for design of mounting frame.

3.3 MANUFACTURER'S FIELD SERVICES

- A. Provide initial start-up and standard maintenance during first year of operation, including routine service and check-out.

END OF SECTION 15782

SECTION 15870 - POWER VENTILATORS

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes Power Ventilators.

1.3 SUBMITTALS

- A. General: Submit the following in accordance with Conditions of Contract and Division 1 Specification Sections:
 - 1. Product data for selected models, including specialties, accessories, and the following:
 - a. Motor ratings and electrical characteristics plus motor and fan accessories.
 - b. Materials gauges and finishes.
 - 2. Shop drawings from manufacturer detailing equipment assemblies and indicating dimensions, weights, required clearances, components, and location and size of field connections.

PART II - PRODUCTS

2.1 MANUFACTURERS

- A. Acceptable Manufacturers:
 - 1. Carnes Company, Inc.
 - 2. Cook (Loren) Co.
 - 3. Greenheck Fan Corp.
 - 4. Penn Ventilator Co., Inc.

2.2 ROOF EXHAUSTERS

- A. Centrifugal Fan Unit: V-belt driven with spun aluminum housing; resilient mounted motor, ½ inch mesh, 16 gauge aluminum bird screen; square base to suit roof curb with continuous curb gaskets; secured with cadmium plated bolts and screws.
- B. Roof Curb: 16 inch high with continuously welded seams and factory installed door nailer strip.
- C. Disconnect Switch: Factory wired, non-fusible, in housing for thermal overload protected motor.
- D. Back Draft Damper: Gravity activated, aluminum multiple blade construction, felt edged with nylon bearings.
- E. Sheaves: Cast iron or steel, dynamically balanced, bored to fit shafts and keyed; variable and adjustable pitch motor sheave selected so required rpm is obtained with sheaves set at mid-

position; fan shaft with self-aligning pre-lubricated ball bearings.

2.3 WALL EXHAUSTERS

- A. Centrifugal Fan Unit: V-belt driven with spun aluminum housing; resilient mounted motor, ½ inch mesh, 16 gauge aluminum bird screen; secured with cadmium plated bolts and screws.
- B. Disconnect Switch: Factory wired, non-fusible, in housing for thermal overload protected motor.
- C. Back Draft Damper: Gravity activated, aluminum multiple blade construction, felt edged with nylon bearings.
- D. Sheaves: Cast iron or steel, dynamically balanced, bored to fit shafts and keyed; variable and adjustable pitch motor sheave selected so required rpm is obtained with sheaves set at mid-position; fan shaft with self-aligning pre-lubricated ball bearings.

2.4 CEILING EXHAUST FANS

- A. Centrifugal Fan Unit: V-belt or direct drive with galvanized steel housing lined with ½ inch acoustic insulation, resilient mounted motor, gravity back draft damper in discharge.
- B. Disconnect Switch: Factory wired, non-fusible, in housing for thermal overload protected motor.
- C. Grille: Molded white plastic or aluminum with baked white enamel finish.
- D. Sheaves: Cast iron or steel, dynamically balanced, bored to fit shafts and keyed; variable and adjustable pitch motor sheaves selected so required RPM is obtained with sheaves set at mid-position; fan shaft with self-aligning pre-lubricated ball bearings.

2.5 IN-LINE CABINET EXHAUST FANS

- A. Centrifugal Fan Unit: V-belt or direct driven, with galvanized steel housing lined with ½ inch acoustic insulation, resilient mounted motor, gravity back draft damper in discharge.
- B. Disconnect Switch: Factory wired, non-fusible, in housing for thermal overload protected motor.
- C. Sheaves: Cast iron or steel, dynamically balanced, bored to fit shafts and keyed; variable and adjustable pitch motor sheaves selected so required RPM is obtained with sheaves set at mid-position; fan shaft with self-aligning pre-lubricated ball bearings.

2.6 ROOF SUPPLY FAN

- A. Fan Unit: Direct driven axial type, aluminum hood, bird screen, die formed aluminum propeller blades riveted to steel hub, resilient mounted motor square base to suit roof curb.
- B. Roof Curbs: 16 inch high, continuously welded seams, and factory door nailed strip. Roof curb shall have same manufacturer as fan and be supplied by Mechanical Contractor and installed by the General Contractor.
- C. Disconnect Switch: Factory wired, non-fusible, in housing for thermal overload protected motor.

PART III - EXECUTION

3.1 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Secure roof exhausters with lag screws to roof curb.

END OF SECTION 15870

SECTION 15891 - METAL DUCTWORK

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes low pressure ducts and plenums for heating, ventilating, and air conditioning systems

PART II - PRODUCTS

2.1 MATERIALS

- A. Steel Ducts: ASTM A525 or ASTM A527 galvanized steel sheet, lock-forming quality, having zinc coating of G-90 for each side in conformance with ASTM A90.
- B. Insulated Flexible Ducts: Flexible duct wrapped with flexible glass fiber insulation, enclosed by seamless aluminum pigmented plastic vapor barrier jacket; maximum Q23 K value at 75 degrees F.
- C. Fasteners: Rivets, bolts, or sheet metal screws
- D. Sealant: Liquid non-hardening, water resistant, fire resistive, compatible with mating materials; liquid used alone or with tape, or heavy mastic.
- E. Hanger Rod: Steel, galvanized; threaded both ends, threaded one end, or continuously threaded.

2.2 LOW PRESSURE DUCTWORK

- A. Fabricate and support in accordance with SMACNA Low Pressure Duct Construction Standards and ASHRAE handbooks, except as indicated. Provide duct material, gages, re-inforcing and sealing for operating pressures indicated.
- B. No variation of duct configuration or sizes permitted except by written permission.
- C. Construct T's, bends, and elbows with radius of not less than 1½ times width of duct oncenter line. Where not possible and where rectangular elbows are used, provide turning vanes.
- D. Increase duct sizes gradually, not exceeding 15 degrees divergence wherever possible. Divergence upstream of equipment shall not exceed 30 degrees; convergence downstream shall not exceed 45 degrees.
- E. Connect flexible ducts to metal ducts with liquid adhesive
- F. Use crimp joints with or without bead for joining round duct sizes 8 inch and smaller with crimp in direction of air flow.
- G. Use double nuts and lock washers on threaded rod supports.

2.3 FACTORY FABRICATED DUCTWORK

- A. Duct shall be of standard spiral lock seam or single-rib construction and shall be provided according to the gages given in the following table:

<u>Diameter (inches)</u>	<u>Thickness (inches)</u>
3 - 8	.032
9 - 14	.040
15 - 36	.050

- B. Duct shall be provided in continuous, unjoined lengths wherever possible. Except when interrupted by fittings, round duct sections.
- C. Fittings shall be round and shall have a wall thickness in accordance with the following table:

<u>Fitting Body Diameters (inches)</u>	<u>Minimum Round Fitting Thickness (inches)</u>
3-14	.040
15-26	.050
27-36	.063

- D. Elbows shall be of die-stamped, gored or pleated construction. The bend radius of stamped, gored and pleated elbows shall be 1.5 time the elbow diameter.
- E. All round elbows in diameter of 8 inches or less shall be of die-stamped or pleated construction.
- F. All round elbows in diameter of 9 inches through 14 inches shall be of gored or pleated construction.
- G. All round elbows in diameter greater than 14 inches shall be of gored construction.
- H. Diverging-flow fittings shall be constructed with a radiused entrance to all branch taps and with no excess material projecting from the body into the branch tap entrance.
- I. All take-off or branch entrances shall be by means of factory fabricated fittings.
- J. All fitting ends shall be sized to slip inside mating duct sections. They shall provide a tight fit and have a minimum 2-inch insertion length with a stop bead. No additional coupling shall be required for duct to fitting joints.

PART III - EXECUTION

3.1 INSTALLATION

- A. Factory Fabricated ductwork can be substituted for low-pressure field constructed ductwork.
- B. All factory fabricated spiral duct and fittings shall be installed in accordance with manufacturer's recommendations.
- C. Locate ducts with sufficient space around equipment to allow normal operating and maintenance activities.

- D. Connect diffusers or troffer boots to low pressure ducts with 5 feet maximum length of flexible duct. Hold in place with strap or clamp.
- E. During construction provide temporary closures of metal or taped polyethylene on open ductwork to prevent construction dust from entering ductwork system.

3.3 ADJUSTING AND CLEANING

- A. Clean duct system and force air at high velocity through duct to remove accumulated dust. To obtain sufficient air, clean half the system at a time. Protect equipment that may be harmed by excessive dirt with temporary filters or bypass during cleaning.
- B. Clean duct systems with high power vacuum machines. Protect equipment that may be harmed by excessive dirt with filters, or bypass during cleaning. Provide adequate access into ductwork for cleaning purposes.

END OF SECTION 15891

SECTION 15910 - DUCT ACCESSORIES

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Not used
 - 2. Turning Vanes
 - 3. Duct Mounted Access Doors and Panels
 - 4. Flexible Connectors
 - 5. Flexible Ducts

1.3 SUBMITTALS

- A. General: Submit the following in accordance with Conditions of Contract and Division 1 Specification Sections.
- B. Product data including details for materials, dimensions of individual components, profiles, and finishes.
- C. Shop drawings from manufacturer detailing assemblies: Include dimensions, weights, loadings, required clearances, method of field assembly, components, and location and size of each field connection.

PART II - PRODUCTS

2.3 AIR TURNING DEVICES

- A. Multi-blade device with blades aligned in short dimension; steel or aluminum construction; with individually adjustable blades, mounting straps.

2.4 FLEXIBLE DUCT CONNECTIONS

- A. Fabricate in accordance with SMACNA Low Pressure Duct Construction Standards, and as indicated.
- B. Provide factory made spin-in starting collars for connections to trunk ducts.

2.5 DUCT ACCESS DOORS

- A. Fabricate in accordance with SMACNA Low Pressure Duct Construction Standards and as indicated.
- B. Review locations prior to fabrication.
- C. Fabricate rigid and close fitting doors of galvanized steel with sealing gaskets and quick fastening locking devices. For insulated ductwork, install minimum one inch thick insulation with sheet

metal cover.

- D. Access doors smaller than 12 inches square may be secured with sash locks.
- E. Provide two hinges and two sash locks for sizes up to 18 inches square, three hinges and two compression latches with outside and inside handles for sizes up to 24 x 48 inches. Provide an additional hinge for larger sizes.
- F. Access doors with sheet metal screw fasteners are not acceptable.

PART III - EXECUTION

3.1 INSTALLATION

- A. Install accessories in accordance with manufacturer's instructions.
- B. Provide balancing dampers at points on low pressure supply systems where branches are taken from larger ducts as required for air balancing. Use splitter dampers only where indicated.
- C. Provide flexible connections immediately adjacent to equipment in ducts associated with fans and motorized equipment.
- D. Provide duct access doors for inspection and cleaning before and after filters, coils, fans, automatic dampers, at fire dampers, and elsewhere as indicated. Provide minimum 8 x 8 inch size for hand access, 18 x 18 inch size for shoulder access, and as indicated.
- E. Provide duct test holes where indicated and required for testing and balancing purposes.

END OF SECTION 15910

SECTION 15932 - AIR OUTLETS AND INLETS

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to work of this Section.

1.2 DESCRIPTION OF WORK

- A. Extent of air outlets and inlets work is indicated by Drawings and Schedules and by Requirements of this Section.
- B. Types of outlets and inlets required for this Project include the following:
 - 1. Ceiling Air Diffusers
 - 2. Wall Registers and Grilles
 - 3. Louvers

1.3 SUBMITTALS

- A. Product Data: Submit manufacturer's technical product data for air outlets and inlets including the following:
 - 1. Schedule of air outlets and inlets indicating drawing designation, room location, number furnished, model number, size and accessories furnished.
 - 2. Data sheet for each type of air outlet and inlet, and accessory furnished; indicating construction, finish and mounting details.
 - 3. Performance data for each type of air outlet and inlet furnished, throw and drop; and noise criteria ratings. Indicate selections on data.
- B. Shop Drawings: Submit manufacturer's assembly-type shop drawing for each type of air outlet and inlet, indicating materials and methods of assembly of components.

PART II - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

- A. Diffusers & Grilles
 - 1. Titus, Inc.
 - 2. Metalaire, Inc.
 - 3. Carnes, Inc.
 - 4. E. H. Price
- B. Louvers
 - 1. Arrow United Industries, Inc.
 - 2. Louvers & Dampers, Inc.
 - 3. Penn Ventilator Co., Inc.
 - 4. Ruskin Mfg. Co.

5. Safe-Air Inc.
6. Vent Products Co., Inc.
7. NCA
8. Cesco Products

2.2 RECTANGULAR CEILING DIFFUSERS

- A. Rectangular, extruded aluminum, multi-core type diffuser to discharge air in 360 degree pattern.
- B. Provide inverted T-bar type frame. In plaster ceilings, provide plaster frame and ceiling frame.
- C. Fabricate of aluminum with baked enamel offwhite finish.
- D. Provide opposed blade damper with damper adjustable from diffuser face.

2.3 CEILING GRID CORE EXHAUST AND RETURN REGISTERS/GRILLES

- A. Fixed grilles of 1/2 x 1/2 x 1 inch egg crate.
- B. Provide inverted T-bar type frame. In plaster ceilings, provide plaster frame and ceiling frame.
- C. Fabricate of aluminum with baked enamel offwhite finish.
- D. Where not individually connected to exhaust fans, provide integral, gang-operated opposed blade dampers with removable key operator, operable from face.

2.4 WALL SUPPLY REGISTERS/GRILLES

- A. Streamlined and individually adjustable blades, depth of which exceeds 3/4 inch maximum spacing with spring or other device to set blades, horizontal face, double deflection.
- B. Fabricate 1 1/4 inch margin frame with countersunk screw mounting and gasket.
- C. Fabricate of aluminum extrusions with 20 gauge minimum frames and 22 gauge minimum blades, with baked enamel off-white finish.
- D. Provide integral, gang-operated opposed blade dampers with removable key operator, operable from face.

2.6 LOUVERS

- A. Provide 4-inch deep louvers with blades on 45 degree slope with center baffle and return bend, heavy channel frame, bird screen with 1/2 inch square mesh.
- B. Fabricate of 12-gauge extruded aluminum, welded assembly, with factory baked enamel finish. Color selection from manufacturer standard.
- C. Furnish with interior screw holes in jambs for installation.

2.7 ROOF HOODS

- A. Fabricate air inlet or exhaust hoods in accordance with SMACNA Low Pressure Duct Construction Standards.
- B. Fabricate of aluminum, minimum 16 gauge base and 18 gauge hood; suitably reinforced; with

removable hood; bird screen with ½ inch square mesh and factory prime coat baked enamel finish.

- C. Mount unit on minimum 12-inch high curb base with insulation between duct and curb.
- D. Make hood outlet area minimum of twice throat area.

PART III - EXECUTION

3.1 INSTALLATION

- A. Install items in accordance with manufacturer's instructions.
- B. Check location of outlets and inlets and make necessary adjustments in position to conform with architectural features, symmetry and lighting arrangement.
- C. Install diffusers to ductwork with air-tight connection.
- D. Provide balancing dampers on duct take-off to diffusers, and grilles and registers, regardless of whether dampers are specified as part of the diffuser, or grille and register assembly.
- E. Paint ductwork visible behind air outlets and inlets matte black.

END OF SECTION 15932

SECTION 15990 - TESTING, ADJUSTING AND BALANCING

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to work of this Section.

1.2 SUMMARY

- A. This Section specifies the Requirements and Procedures of Total Mechanical Systems Testing, Adjusting and Balancing. Requirements include measurement and establishment of the fluid quantities of the Mechanical Systems as required to meet Design Specifications and Recording and reporting the results.
- B. Testing and Balancing must be conducted by an independent, Certified Testing and Balancing firm, registered with either the AABC or the NEBB.
- C. The Test and Balance Contractor shall be a subcontractor to the Mechanical Contractor.

1.3 SECTION INCLUDES

- A. Testing, adjustment and balancing of air systems.
- B. Measurement of final operating condition of HVAC Systems.
- C. Sound measurement of equipment operating conditions.
- D. Vibration measurement of equipment operating conditions.

1.4 SUBMITTALS

- A. Submit under provisions of Section 15500.
- B. Submit name of adjusting and balancing agency for approval within 30 days after Award of Contract.
- C. Field Reports: Submit under provisions of Section 15500.
- D. Field Reports: Indicate deficiencies in systems that would prevent proper testing, adjusting, and balancing of systems and equipment to achieve specified performance.
- E. Prior to commencing work, submit report forms or outlines indicating adjusting, balancing, and equipment data required.
- F. Submit draft copies of report for review prior to final acceptance of Project. Provide final copies for Owner and for inclusion in operating and maintenance manuals.
- G. Provide reports in soft cover, letter size, 3-ring binder manuals, complete with index page and indexing tabs, with cover identification at front and side. Report shall reference the Contract Drawings for location of equipment and devices. Where reference to the contract drawings is not satisfactory, include a set of reduced drawings or sketches with equipment and devices identified to correspond with data sheets.

H. Include detailed procedures, agenda, sample report forms and copy of AABC National Project Performance Guaranty prior to commencing system balance.

I. Test Reports: Indicate data on AABC National Standards for Total System Balance forms or NEBB forms.

1.5 QUALITY ASSURANCE

A. Perform total system balance in accordance with AABC National Standards for Field Measurement and Instrumentation, Total System Balance, ASHRAE 111, and NEBB Procedural Standards for Testing, Balancing and Adjusting of Environmental Systems.

B. Maintain one copy of each document on site.

1.6 SEQUENCING AND SCHEDULING

A. Sequence work under the provisions of Section 15500.

B. Sequence work to commence after completion of systems and schedule completion of work before Substantial Completion of Project.

C. Schedule work under the provisions of Section 15500.

D. Schedule and provide assistance in final adjustment and test of Smoke Control System with Fire Authority.

PART II - PRODUCTS (Not Used)

PART III - EXECUTION

3.1 EXAMINATION

A. Verify that systems are complete and operable before commencing work. Ensure the following conditions:

1. Systems are started and operating in a safe and normal condition.
2. Control systems are installed complete and operable.
3. Proper thermal overload protection is in place for electrical equipment.
4. Ductwork Systems:
 - a. Final filters are clean and in place. If required, install temporary media in addition to final filters.
 - b. Duct systems are clean of debris.
 - c. Fans are rotating correctly.
 - d. Dampers are in place and open.
 - e. Air coil fins are cleaned and combed.
 - f. Access doors are closed and duct end caps are in place.
 - g. Air inlets and outlets are installed and connected.

- h. Duct system leakage is minimized.
- B. Submit Field Reports: Report defects and deficiencies noted during performance of services which prevent system balance.
- C. Beginning of work means acceptance of existing conditions.

3.2 PREPARATION

- A. Provide instruments required for testing, adjusting, and balancing operations. Make instruments available to Owner to facilitate spot checks during testing.
- B. Provide additional balancing devices as required.

3.3 INSTALLATION TOLERANCES

- A. HVAC Systems: Adjust to within plus or minus 5 percent of design for supply and return systems and plus or minus 10 percent of design for exhaust systems.
- B. Air Outlets and Inlets: Adjust outlets and inlets in space to within plus or minus 10 percent of design.

3.4 ADJUSTING

- A. Ensure recorded data represents actual measured or observed conditions.
- B. Permanently mark settings of balancing devices allowing settings to be restored. Set and lock memory stops.
- C. After adjustment, take measurements to verify balance has not been disrupted or that such disruption has been rectified.
- D. Leave systems in proper working order, replacing belt guards, closing access doors, closing doors to electrical switch boxes, and restoring thermostats to specified settings.

3.5 AIR SYSTEM PROCEDURE

- A. Adjust equipment and distribution systems to provide required or design air quantities.
- B. Make air quantity measurements in ducts by Pitot tube traverse of entire cross sectional area of duct.
- C. Measure and record air quantities at air inlets and outlets.
- D. Adjust distribution system to obtain uniform space temperatures free from objectionable drafts and noise.
- E. Use volume control devices to regulate air quantities only to extent that adjustments do not create objectionable air motion or sound levels. Adjust air volume by adjusting duct internal devices such as dampers and splitters. Do not utilize opposed blade dampers at air inlets and outlets.
- F. Vary total system air quantities by adjusting sheave position at each fan. Vary branch air quantities by damper regulation.

- G. Measure and record static air pressure conditions at air supply and exhaust units, including filter and coil pressure drops, and total pressure across the fan. Make allowances for 50 percent loading of filters.
- H. Adjust settings and minimum set points for motorized and back draft dampers to design conditions.
- I. Measure and record inlet and outlet temperatures at each air supply unit at full cooling and heating capacity.

3.6 REPORT FORMS

A. Forms shall include the following:

1. Title Page:
 - a. Name of Testing, Adjusting and Balancing Agency
 - b. Address of Testing, Adjusting and Balancing Agency
 - c. Telephone number of Testing, Adjusting and Balancing Agency
 - d. Project Name
 - e. Project Location
 - f. Project Architect
 - g. Project Engineer
 - h. Project Contractor
 - i. Project Altitude
 - j. Report Date
2. Summary Comments:
 - a. Design versus final performance
 - b. Notable characteristics of system
 - c. Description of systems operation sequence
 - d. Summary of outdoor and exhaust flows to indicate amount of building pressurization
 - e. Nomenclature used throughout report
 - f. Test Conditions
3. Instrument List:
 - a. Instrument
 - b. Manufacturer
 - c. Model Number
 - d. Serial Number
 - e. Range
 - f. Calibration Date
4. Electric Motors:
 - a. Manufacturer
 - b. Model/Frame
 - c. HP/BHP/Efficiency
 - d. Phase, Voltage, Amperage; Nameplate, Actual, No Load
 - e. RPM
 - f. Service Factor
 - g. Starter Size, Rating, Heater Elements
 - h. Sheave Make/Size/Bore
5. V-Belt Drive:

- a. Identification/Location
 - b. Required Driven RPM
 - c. Driven Sheave, Diameter and RPM
 - d. Belt, Size and Quantity
 - e. Motor Sheave Diameter and RPM
 - f. Center to center distance, maximum, minimum, and actual
6. Equipment Data:
- a. Identification/number
 - b. Manufacturer
 - c. Model number and Serial number
 - d. Capacity
 - e. Service
 - f. Design flow rate, pressure drop, BHP
 - g. Actual flow rate, pressure drop, BHP
 - h. Temperature readings
7. Duct Traverse:
- a. System zone/branch
 - b. Duct size
 - c. Area
 - d. Design velocity
 - e. Design air flow
 - f. Test velocity
 - g. Test air flow
 - h. Duct static pressure
 - i. Air temperature
 - j. Correction factor
8. Air Distribution Test Sheet:
- a. Air terminal number
 - b. Room number/location
 - c. Terminal type
 - d. Terminal size
 - e. Area factor
 - f. Design velocity
 - g. Design air flow
 - h. Test (final) velocity
 - i. Test (final) air flow
 - j. Percent of design air flow

3.7 SOUND AND VIBRATION TESTING

- A. Test and adjust Mechanical Systems for sound and vibration in accordance with the detailed instructions of the referenced Standards.
- B. Sound Level Test and Report:
 - 1. Location
 - 2. Octave Bands - equipment off
 - 3. Octave Bands - equipment on
- C. Vibration Test and Report:
 - 1. Location of Points:

- a. Fan bearing: drive end
 - b. Fan bearing: opposite end
 - c. Motor bearing: center (if applicable)
 - d. Motor bearing: drive end
 - e. Motor bearing: opposite end
 - f. Casing: (bottom or top)
 - g. Casing: (side)
 - h. Duct after flexible connection: (discharge)
 - i. Duct after flexible connection: (suction)
2. Test Readings:
- a. Horizontal, velocity and displacement
 - b. Vertical, velocity and displacement
 - c. Axial, velocity and displacement
3. Normally acceptable readings, velocity and acceleration
4. Unusual conditions at time of test
5. Vibration source (if non-complying)

END OF SECTION 15990

SECTION 16010 - BASIC ELECTRICAL REQUIREMENTS

PART I - GENERAL

1.1 GENERAL CONDITIONS

- A. The Stipulations and Conditions stated in this Section, together with all provisions of the "Instructions to Bidders", "General Conditions", "Supplemental General Conditions" and "Special Conditions", hereinbefore set forth, shall apply to this and the other Sections of Division 16.

1.2 GENERAL REQUIREMENTS

- A. The General Requirements hereinafter listed apply to the Electrical Work Division. If there is any conflict between the General Requirements and the General Conditions, the General Conditions shall take precedence.

1.3 ALTERNATES

- A. Carefully examine all alternates at the back of this Specification and on the Drawings to determine if any work described under the Electrical Section will be affected thereby.

1.4 INTENT

- A. The intent of these Drawings and Specifications are to describe the installation of a complete, fully adjusted, and operational system. Therefore, any items shown on Drawings and not specifically called for in the Specifications, or any items specified and not specifically indicated or detailed on the Drawings, or any items neither specified or shown, but which are reasonably incidental to and commonly required to make a complete job, will be furnished and installed by the Electrical Contractor at his own expense.

1.5 DEFINITIONS

- A. The Electrical Contractor shall provide all supervision, labor, material equipment, machinery, plant, and any and all other items necessary to complete the Electrical systems. All items of equipment are specified in the singular; however, the Electrical Contractor shall provide the number of items of equipment as indicated on the drawings, and as required for complete systems.

Where the word "provide" is used, it shall mean "furnish and install complete and ready to use".

1.6 VISIT TO THE SITE

- A. The Electrical Contractor shall visit the site before submitting his bid so as to be thoroughly familiar with the job conditions and/or peculiarities. No extra payment will be allowed for anything which could have been anticipated from a visit to the site.

1.7 REGULATORY REQUIREMENTS

- A. All work under this section shall be accomplished in strict accordance with State codes. Where these plans and specifications conflict with such codes, the codes shall govern.
- B. The Electrical Contractor shall notify the Architect or Engineer of such conflicts in writing prior to receipt of bids.
- C. References to the National Electrical Code (NEC), Underwriters Laboratories, Inc. (UL), and National Fire Protection Association (NFPA) are a minimum installation requirement.

D. The following regulatory shall be used as minimum standards:

AEIC	American Association of Edison Illuminating Companies
ANSI	American National Standards Institute
ASTM	American Society for Testing and Materials
ICEA	Insulated Cable Engineers Association
IEEE	Institute of Electrical and Electronic Engineers
NCCM	N.C. Construction Manual w/G.S. as listed
NCSBC	N.C. State Building Code
NEC	National Electrical Code
NEMA	National Electrical Manufacturers Association
NESC	National Electrical Safety Code
NFPA	National Fire Protection Association
U/L	Underwriters' Laboratories, Inc.
OSHA	Occupational Safety and Health Standards
ASHRAE/IES	90.1 energy code

1.8 TEST STANDARDS

A. All material and equipment shall be listed, labeled or certified by a nationally recognized testing laboratory to meet Underwriters Laboratories, Inc., or third party agencies accredited by the North Carolina Building Code Councils latest edition or amendment.

1.9 PERMITS AND FEES

A. NA

1.10 DRAWINGS AND SPECIFICATIONS

A. The Electrical Drawings and Specifications are intended to cover all the work enumerated under the respective headings. The Drawings are diagrammatic only. No Contractor shall take advantage of conflict or error between Drawings and Specifications, or between General Drawings and Mechanical, Plumbing and/or Electrical Drawings, but shall request a clarification of such from the Architect/Engineer, should this condition exist. If there is insufficient time to issue an Addendum for this clarification, the Electrical Contractor shall include in his bid the most expensive of the items in conflict.

B. The Electrical Contractor shall refer to the Architectural and Structural Drawings and Specifications for the general construction of the building, for floors and ceiling heights, for locations of walls, partitions, beams, etc., and shall be guided accordingly for setting of all sleeves, inserts and equipment. No Contractor shall under any circumstances scale drawings for the location of equipment. The Electrical Contractor shall verify the locations of all utility services and electrical equipment.

C. The Electrical Contractor shall keep at least one set of corrected Shop and Design Drawings at the site. Drawings are to be current, denoting approved modifications and actual installed departure. Submit Drawings to Architect/Engineer before final payment is made.

1.11 SUPERVISION

A. The Electrical Contractor performing the work specified shall be required to employ a qualified superintendent or foreman to continuously supervise the installation of their work, with authorization to act as agent. He shall be capable of checking layouts, coordinating and supervising the work, establishing grades and levels and locating chases, openings, hangers, inserts, sleeves,

etc.

PART II - PRODUCTS

2.1 STANDARD PRODUCTS

- A. Unless otherwise indicated in writing by the Architect/Engineer, the materials to be provided under this Specification shall be standard products of manufacturers regularly engaged in the production of such equipment and shall be the manufacturer's latest design. All items of the same type or rating shall be identical.

2.2 SUBMITTAL

- A. The Electrical Contractor shall submit, for approval, detailed Shop Drawings on all major equipment and where requested. No materials or equipment may be delivered to the job site or installed until the Electrical Contractor has in his possession the approved Shop Drawing for the particular material or equipment. The Electrical Contractor shall furnish the number of copies required by the General or Special Conditions of the contract, but no case less than six (6) copies.
- B. Submitted material shall be properly labeled indicating specific service for which material or equipment is to be used, Section and Article Number of Specifications governing, Contractor's name and name of job.
- C. Approval of equipment will not relieve the Electrical Contractor of compliance with the Specifications even if such approval is made in writing, unless the attention of the Engineer is called to the non-complying features by letter accompanying the submittal data. Approval of submittal data by the Engineer shall not be construed as a complete check of approval of detailed dimensions, weights, gauges, and similar details with the proposed articles. The conformance with the necessary coordination between the various other Contractors and suppliers shall be solely the responsibility of the Electrical Contractor and with no additional expense to the Owner.

2.3 SUBSTITUTIONS

- A. Manufacturer's lists are to establish a standard of quality and not intended to limit the selection to these manufacturers. All materials and equipment which are essential and have not been specified or shown shall be new and of the highest grade and quality free from defect or other imperfections. It should be understood that where the words "furnished and installed" are used, it is intended that the Electrical Contractor shall purchase and install all materials required, unless otherwise noted.
- B. All materials and equipment proposed as substitutes for these specified shall require a ten (10) day prior approval from the Engineer prior to the bid date. No substitutions will be allowed after the ten (10) day period before the bid date.
- C. All products shall be furnished in compliance with NC General Statute 133-3.

2.4 PRODUCT HANDLING

- A. Equipment and materials shall be properly stored, adequately protected, and carefully handled to prevent damage before and during installation. Equipment and materials shall be handled, stored and protected in accordance with the manufacturer's recommendations and as approved by the Architect/Engineer. Equipment installed with a factory finish shall be fully protected during construction and shall be maintained free of dust, dirt and foreign matter. Dents and other surface damage shall be repaired or replaced to the satisfaction of the Architect/Engineer at no additional cost to the Owner.

- B. The Electrical Contractor shall clean up and remove from the job site all waste materials, packaging, crating, and refuse resulting from his work on a daily basis.

2.5 MATERIALS AND WORKMANSHIP

- A. The Electrical Contractor shall perform a first class job, both in material and workmanship. None other will be accepted. Deviations from either will be corrected by the Electrical Contractor at the Electrical Contractor's expense.
- B. The material used throughout the work, except when otherwise noted, shall be new and of Specification grade and the best of its kind. No substitutes shall be used unless approved by the Architect/Engineer. All work shall be executed with a maximum speed consistent with safety and good workmanship.
- C. Any equipment furnished by the Mechanical Contractor or any other Contractor that is larger than those indicated on the Drawings and described in these Specifications or have different Electrical characteristics, the increase in cost to the Electrical Contractor for larger wires, conduit, circuit breakers, switches, etc. or for changes in work already installed shall be borne by the instigating Contractor.

PART III - EXECUTION

3.1 EXCAVATION AND BACKFILL

- A. The Electrical Contractor shall preform any and all trench and pit excavation and backfilling required for the installation of his work. Trenches shall be made with the sides vertical and shall be shored where necessary for the protection of men and equipment. All excavation work shall be done in a careful manner to avoid damage to footers and foundations. The backfilling shall be placed in layers not exceeding 4 inches in depth, wetting each layer as it is placed and thoroughly compacting each layer with Mechanical tamper or other approved means. Any damage done during excavation and backfilling operations to roads, sidewalks, curbs, shrubs, sod, footers, foundations, etc. shall be replaced to its original condition prior to construction at no expense to the owner. All work will be approved by the Engineer.

3.2 SCAFFOLDING, RIGGING AND HOISTING

- A. The Electrical Contractor shall furnish all necessary scaffolding, staging, rigging and hoisting required for the completion of his work. All such scaffolding, etc, shall be removed from the premises when its use is no longer required on the job.

3.3 CUTTING AND PATCHING

- A. The Electrical Contractor shall provide all cutting and patching necessary to install the work specified in the 16000 Sections. The patching shall match adjacent surface material and finishes.
- B. No Structural member shall be cut without the approval of the Engineer and all such cutting shall be done in a manner directed by him.
- C. Cutting or Holes:
 - 1. Locate holes in advance where they are proposed in the Structural Sections such as ribs or beams. Obtain the approval of the Engineer prior to drilling through Structural Sections.
 - 2. Cut holes through concrete and masonry in new and existing structures with a diamond

core drill or concrete saw. Pneumatic hammer, impact electric, hand or manual hammer type drills are not allowed.

3.4 WATERPROOFING

- A. At floor, exterior wall, and roof conduit penetrations, completely seal clearances around the conduit and make watertight. All work subject to approval of the Engineer.

3.5 EQUIPMENT SPACE AND ARRANGEMENT

- A. The equipment shall fit into the space allotted and shall allow adequate clearance for entry, installation, replacement, servicing, and maintenance. The Electrical Contractor shall coordinate the work to ensure that equipment may be moved into place without altering building components or other installations. Access space shall not be less than the equipment manufacturer's requirements. Working clearances shall be not less than N.E.C or other regulatory requirements.
- B. These drawings indicate the extent and general arrangement of equipment. If any departures are deemed necessary by the Electrical Contractor, details of such departures and the reasons therefore shall be submitted to the Architect/Engineer for approval as soon as practicable and within 30 days after Award of the Contract. No departure shall be made without written approval of the Architect/Engineer. Any delay on the Contractor's part to provide such submittal will not constitute an extension of the Contract time.

3.6 DAMAGE TO WORK ALREADY IN PLACE

- A. The Electrical Contractor shall assume full responsibility for any damage done by him, his agents or employees, to any work already in place. Any such damage done shall be repaired at the Contractor's expense by Mechanics skilled at their respective trades, to the approval of the Architect/Engineer.

3.7 JURISDICTION OF WORK

- A. It may become necessary for the Electrical Contractor to furnish labor or materials which are not generally accepted as part of this trade. In cases of this type, he shall contract the work or shall furnish materials and employ workmen of the trade involved in order not to cause any delay or stoppage of work caused by infringement of Trade Agreements as to jurisdiction, alleged or actual.

3.8 COORDINATION WITH OTHER TRADES

- A. All work shall be coordinated with other trades involved in the construction project. All work shall be carefully laid out in advance to coordinate Architectural, Structural, Mechanical, Plumbing and Electrical features of construction. The Contractor shall verify at the site all locations, grades, elevations and utility service connections indicated. Any conflicts due to lack of proper coordination shall be brought to the attention of the Architect/Engineer for resolution. The Electrical Contractor shall make required changes or relocations at no additional cost to the Owner.
- B. Installation, inspection, and testing of work above ceilings shall be completed and approved by the Architect/Engineer prior to installation of the specified finished ceilings. However, a Ceiling Suspension System may be installed as required for coordination.
- C. The Electrical Contractor shall consult with the other trades at the start of the work and periodically thereafter, as required to properly coordinate the various items of work, and to avoid interferences. Should any interferences of any nature develop as the work progresses, such interferences shall be resolved and eliminated as directed. The cost of any work directed shall be borne by the Subcontractor or Contractors directed to do this work.

3.9 DIVISION OF WORK

- A. These paragraphs are intended to show exactly the point of division of work between the Electrical Division and the Mechanical Division or any other division.
- C. All equipment covered in the Mechanical Division or any other Division of the Specifications shall be furnished, mounted, and aligned under the respective Division. All starters, controls and wiring for this equipment, including final connection to the same, shall be furnished and installed under that Division.
- D. Divisions of the Specifications shall be completed under the respective Division.
- E. Under Division 16, the Contractor shall be responsible for providing all line side power wiring, conduit, disconnect switches, and junction boxes as shown on the electrical drawings.

3.10 EQUIPMENT INSTALLATION

- A. **Manufacturer's Instructions:** Equipment shall be installed as recommended by the manufacturer to conform to the requirements of the particular application, in accordance with these Drawings and Specifications.

3.11 OPERATION AND MAINTENANCE MANUALS

- A. Prepare maintenance manuals in accordance with Division 1 Section "PROJECT CLOSEOUT". In addition to the requirements specified in Division 1, include the following information for equipment items:
 - 1. Description of function, normal operating characteristics and limitations, performance curves, engineering data and tests, and complete nomenclature and commercial numbers of replacement parts.
 - 2. Manufacturer's printed Operating Procedures to include start-up, break-in, and routine and normal Operating Instructions; regulation, control, stopping, shutdown, and emergency instructions and summer and winter operating instructions.
 - 3. Maintenance procedures for routine preventative maintenance and troubleshooting; disassembly, repair, and re-assembly; aligning and adjusting instructions.
 - 4. Servicing Instructions and Lubrication Charts and Schedules.

3.12 RECORD DOCUMENTS

- A. Prepare record documents in accordance with the requirements in Division 1 Section "PROJECT CLOSEOUT". In addition to the requirements specified in Division 1, indicate installed conditions for:
 - 1. Major raceway systems, size and location, for both exterior and interior; locations of control devices; distribution and branch electrical circuitry; and fuse and circuit breaker size and arrangements.
 - 2. Equipment locations (exposed and concealed) dimensioned from prominent building lines.

3. Approved substitutions, Contract modifications and actual equipment and materials installed.

3.13 GUARANTEE

- A. The Electrical Contractor shall present to the Owner a written guarantee covering his work, including all equipment, material and workmanship. This guarantee shall be against all defects in any of the above work, and shall run for a period of one (1) year from the date of written acceptance of the Contractor's work.
- B. Any defective work, equipment, material and/or workmanship that develops within the Guarantee period, which is not caused by ordinary wear or abuse by other persons, shall be replaced by the Electrical Contractor without cost to the Owner.

3.14 FINAL INSPECTION

- A. When the entire Contract has been completed and the work is ready for final inspection, the Architect/Engineer or his duly authorized representative will make the inspection. At the time of inspection, the Electrical Contractor shall demonstrate to the Architect/Engineer that the various systems and pieces of equipment have been adjusted to operate in accordance with the requirements of the Contract.
- B. **An authorized Inspector from the North Carolina Department of Insurance shall inspect the project during construction and upon completion of the construction phase. It shall be the responsibility of the Electrical Contractor to notify the Inspector as the work progresses. The NCDOI Inspector can be reached at (919) 661-5880.**

3.15 FINAL PAYMENTS

- A. All Final Payments are contingent upon all necessary Certificates and/or Approvals cited above, together with the written Guarantee being presented to the Owner.

3.16 DOCUMENTATION

- A. All tests shall be completely documented indicated time of day, temperature, and all pertinent test information.
- B. All required documentation of readings shall be submitted to the engineer prior to, and as one of the prerequisites for, final acceptance of the project.

END OF SECTION 16010

SECTION 16050 - BASIC ELECTRICAL MATERIALS AND METHODS

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes limited Scope, General Construction Materials and Methods for Application with Electrical Installations as follows:
 - 1. Miscellaneous metals for support of electrical materials and equipment.
 - 2. Joint sealers for sealing around electrical materials and equipment; and for sealing penetrations in fire and smoke barriers, floors, and foundation walls.

1.3 DEFINITIONS

- A. The following definitions apply to excavation operations:
 - 1. **Additional Excavation:** Where excavation has reached required subgrade elevations, if unsuitable bearing materials are encountered, continue excavation until suitable bearing materials are reached. The Contract Sum may be adjusted by an appropriate Contract Modification.
 - 2. **Sub-Base:** As used in this Section refers to the compacted soil layer used in pavement systems between the subgrade and the pavement base course material.
 - 3. **Sub-Grade:** As used in this Section refers to the compacted soil immediately below the slab or pavement system.
 - 4. **Unauthorized excavation** consists of removal of materials beyond indicated subgrade elevations or dimensions without specific direction from the Architect.

1.4 SEQUENCE AND SCHEDULING

- A. Coordinate the shut-off and disconnection of electrical service with the Owner and the utility company.

PART II - PRODUCTS

2.1 SOIL MATERIALS

- A. **Sub-Base Material:** Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, crushed slag, or natural or crushed sand.
- B. **Drainage Fill:** Washed, evenly graded mixture of crushed stone, or crushed or uncrushed gravel, with 100 percent passing a 1½ inch sieve, and not more than 5 percent passing a No. 4 sieve.
- C. **Backfill and Fill Materials:** Materials complying with ASTM D2487 soil classification groups GW, GP, GM, SM, SW, and SP; free of clay, rock, or gravel larger than 2 inches in any

dimension; debris; waste; frozen materials; and vegetable and other deleterious matter.

2.2 MISCELLANEOUS METALS

- A. Steel plates, shapes, bars, and bar grating: ASTM A 36.
- B. Cold-Formed Steel Tubing: ASTM A 500.
- C. Hot-Rolled Steel Tubing: ASTM A 501.
- D. Steel Pipe: ASTM A 53, Schedule 40, welded.
- E. Fasteners: Zinc-coated, type, grade and class as required.

PART III - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting installation and application of joint sealers. Do not proceed with installation until unsatisfactory conditions have been corrected.

3.2 EXCAVATION

- A. Slope sides of excavations to comply with local codes and ordinances. Shore and brace as required for stability of excavation.
- B. Install sediment and erosion control measures in accordance with local codes and ordinances.
- C. Dewatering: Prevent surface water and subsurface or groundwater from flowing into excavations and from flooding project site and surrounding area.
 - 1. Do not allow water to accumulate in excavations. Remove water to prevent softening of bearing materials.
 - 2. Provide and establish and maintain temporary drainage ditches and other diversions outside excavation limits to convey surface water to collecting or run-off areas. Do not use trench excavations as temporary drainage ditches.
- D. Material Storage: Stockpile satisfactory excavated materials where directed, until required for backfill or fill. Place, grade, and shape stockpiles for proper drainage.
 - 1. Locate and retain soil materials away from edge of excavations. Do not store within drip line of trees indicated to remain.
 - 2. Remove and legally dispose of excess excavated materials and materials not acceptable for use as backfill or fill.
- E. Trenching: Excavate trenches for electrical installations as follows:
 - 1. Excavate trenches to the uniform width, sufficiently wide to provide ample working room and a minimum of 6 to 9 inches clearance on both sides of raceways and equipment.
 - 2. Excavate trenches to depth indicated or required.

3. Limit the length of open trench to that in which installations can be made and the trench backfilled within the same day.
 4. Where rock is encountered, carry excavation below required elevation and backfill with a layer of crushed stone or gravel prior to installation of raceways and equipment. Provide a minimum of 6 inches of stone or gravel cushion between rock bearing surface and electrical installations.
- F. Cold Weather Protection: Protect excavation bottoms against freezing when atmospheric temperature is less than 35 degrees F (1 degree 2 C).
- G. Backfilling and Filling: Place soil materials in layers to required subgrade elevations for each area classification listed below, using materials specified in Part 2 of this Section.
1. Under walks and pavements, use a combination of sub-base materials and excavated or borrowed materials.
 2. Under building slabs, use drainage fill materials.
 3. Under piping and equipment, use subbase materials where required over rock bearing surface and for correction of unauthorized excavation.
 4. For raceways less than 30 inches below surface of roadways, provide 4inch thick concrete base slab support. After installation of raceways, provide a 4-inch thick concrete encasement (sides and top) prior to backfilling and placement of roadway sub-base.
 5. Other areas, use excavated or borrowed materials.
- H. Backfill excavations as promptly as work permits, but not until completion of the following:
1. Inspection, testing, approval, and locations of underground utilities have been recorded.
 2. Removal of concrete formwork.
 3. Removal of shoring and bracing and backfilling of voids.
 4. Removal of trash and debris.
- I. Placement and Compaction: Place backfill and fill materials in layers of not more than eight (8) inches in loose depth for material compacted by heavy equipment, and not more than four (4) inches in loose depth for material compacted by hand operated tampers.
- J. Before compaction, moisten or aerate each layer as necessary to provide optimum moisture content. Compact each layer to required percentage of maximum dry density or relative dry density for each area classification specified below. Do not place backfill or fill material on surfaces that are muddy, frozen, or contain frost or ice.
- K. Place backfill and fill materials evenly adjacent to structures, piping, and equipment to required elevations. Prevent displacement of raceways and equipment by carrying material uniformly around them to approximately same elevation in each lift.
- L. Compaction: Control soil compaction during construction, providing minimum percentage of density specified for each area classification indicated below.
1. Percentage of Maximum Density Requirements: Compact soil to not less than he

following percentages of maximum density for soils which exhibit a well-defined moisture density relationship (cohesive soils), determined in accordance with ASTM D 1557 and not less than the following percentages of relative density, determined in accordance with ASTM D 2049, for soils which will not exhibit a well-defined moisture density relationship (cohesion-less soils).

2. Areas Under Structures, Building Slabs and Steps, Pavements: Compact top 12 inches of material, or 95 percent relative density for cohesionless material.
 - a. Areas Under Walkways: Compact top 6 inches of subgrade and each layer of backfill or fill material to 90 percent maximum density for cohesive material or 95 percent relative density for cohesionless material.
 - b. Other Areas: Compact top 6 inches of subgrade and each layer of backfill or fill material to 85 percent maximum density for cohesive soils, and 90 percent relative density for cohesionless soils.
3. Moisture Control: Where subgrade or layer of soil material must be moisture conditioned before compaction, uniformly apply water. Apply water in minimum quantity necessary to achieve required moisture content and to prevent water appearing on surface during, or subsequent to, compaction operations.
4. Subsidence: Where subsidence occurs at electrical installation excavations during the period 12 months after Substantial Completion, remove surface treatment (i.e., pavement, lawn, or other finish), add backfill material, compact to specified conditions, and replace surface treatment. Restore appearance, quality, and condition of surface or finish to match adjacent areas.

3.3 ERECTION OF METAL SUPPORTS AND ANCHORAGE

- A. Cut, fit, and place miscellaneous metal fabrications accurately in location, alignment, and elevation to support and anchor electrical materials and equipment.
- B. Field Welding: Comply with AWS "Structural Welding Code".

END OF SECTION 16050

SECTION 16100 - RACEWAYS, BOXES AND CABINETS

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes Raceways, Fittings, Boxes, Enclosures and Cabinets for Electrical Wiring.

PART II - PRODUCTS

2.1 METAL CONDUIT AND TUBING

- A. Rigid Steel Conduit: ANSI C80.1
- B. Intermediate Metal Conduit: ANSI C80.6
- C. Electrical Metallic Tubing and Fittings: ANSI C80.3 with compression-type fittings.
- D. Flexible Metal Conduit: Zinc coated steel
- E. Liquid tight Flexible Metal Conduit: Flexible steel conduit with PVC jacket.
- F. Fittings: NEMA FB 1, compatible with conduit/tubing materials.
- G. Non-Metallic Rigid Conduit: Schedule 40 pvc as where shown on the drawings.
- H. "MC" type cable.

2.2 OUTLET AND DEVICE BOXES

- A. Sheet Metal Boxes: NEMA OS 1
- B. Cast Metal Boxes: NEMA FB 1, type FD, cast alloy box with gasketed cover

2.3 PULL AND JUNCTION BOXES

- A. Small Sheet Metal Boxes: NEMA OS 1.
- B. Cast Metal Boxes: NEMA FB 1, cast aluminum with gasketed cover.
- C. Pull Boxes: Code gauge steel with screw type removable cover. NEMA rated for the condition.

PART III - EXECUTION

3.1 EXAMINATION

- A. Examine surfaces to receive raceways, boxes, enclosures, and cabinets for compliance with installation tolerances and other conditions affecting performance of the raceway system. Do not proceed with installation until unsatisfactory conditions have been corrected.

3.2 MINIMUM CONDUIT SIZE: (unless indicated otherwise) on the drawings conduit shall be sized as follows:

- A. Indoors: The minimum conduit size shall be 1/2".
 - 1. Flexible metal conduit may be used for tap connection to recessed lighting fixtures.
- B. Outdoors: Branch circuit conduit installed below grade to exterior equipment shall be one (1) inch minimum unless noted otherwise.

3.3 WIRING METHODS: Unless noted otherwise on the drawings the following materials shall be used:

- A. Outdoors: Use the following wiring methods:
 - 1. Exposed: Rigid or intermediate metal conduit.
 - 2. Underground: Galvanized Rigid Conduit.
 - 3. Connection to Vibrating Equipment (including transformers and hydraulic, pneumatic, or electric solenoid or motor-driven equipment): Liquid tight flexible metal conduit.
 - 4. Boxes and Enclosures: NEMA Type 3R or Type 4.
- B. Indoors: Use the following wiring methods:
 - 1. Connection to Vibrating Equipment (including transformers and hydraulic, pneumatic, or electric solenoid or motor-driven equipment): Flexible metal conduit, except in wet or damp locations use liquid tight flexible metal conduit.
 - 2. Damp or Wet Locations: Rigid steel conduit.
 - 3. Exposed: Electrical metallic tubing above 8 feet and rigid metallic conduit below eight (8) feet.
 - 4. Concealed: Electrical metallic tubing or MC cable.
 - 5. Boxes and Enclosures: NEMA Type 1, except in damp or wet locations use NEMA Type 3R, unless otherwise noted.

3.4 INSTALLATION

- A. Telephone/Data/Cable TV outlet boxes shall be 2 gang with appropriate trim and cover. Coordinate cover plates with Owner.
- B. Provide insulated bushings for all conduit ends.
- C. Conceal rigid conduit and EMT, unless otherwise indicated, within finished walls, ceilings, above attic space and below floors.
- D. Keep raceways at least 6 inches (150 mm) away from parallel runs of flues and steam or hot water pipes. Install horizontal raceway runs above water and steam piping.
- E. Install raceways level and square and at proper elevations. Provide adequate headroom.
- F. Complete raceway installation before starting conductor installation.

- G. Use temporary closures to prevent foreign matter from entering raceway.
- H. Protect stubs from damage where conduits rise through floor slabs. Arrange so curved portion of bends is not visible above the finished slab.
- I. **Where non-metallic conduit is shown to be used below the slab provide rigid conduit to turn up into the building space or at all exterior walls, poles or equipment.**
- J. Use raceway fittings compatible with raceway and suitable for use and location. For intermediate steel conduit, use threaded rigid steel conduit fittings, except as otherwise indicated.
- K. Run concealed raceways with a minimum of bends in the shortest practical distance considering the type of building construction and obstructions, except as otherwise indicated. Where the number of bends exceed the total number required by the N.E.C., provide pull boxes as required by code.
- L. Install raceways parallel to or at right angles to surfaces or structural members, and follow the surface contours as much as practical.
 - 1. Run parallel or banked raceways together, on common supports where practical.
 - 2. Make bends in parallel or banked runs from same centerline to make bends parallel. Use factory elbows only where they can be installed parallel; otherwise, provide field bends for parallel raceways.
- M. Join raceways with fittings designed and approved for the purpose and make joints tight.
 - 1. Use bonding jumpers where joints cannot be made tight.
 - 2. Use insulating bushings to protect conductors.
 - 3. Provide expansion joint fittings where required for the raceway used.
- N. IMC and GRC shall terminate with either a double locknut/bushing set or in a threaded hub.
- O. Where conduit type "LB" fittings are used all conduits on conduits over 2" in size shall be "MOGAL" type.
- P. **"EMT" connectors shall be steel plated hexagonal compression type only. Do not use pot metal, set-screw, or indenter type connectors.**
- Q. Where concentric, eccentric, or oversized knockouts are encountered, a grounding-type insulated bushing shall be provided.
- R. Where conduits of any type pass over a building expansion joint, a standard "expansion joint" fitting, compatible with the type raceway, shall be provided.
- S. Terminations: Where raceways are terminated with locknuts and bushings, align the raceway to enter squarely and install the locknuts with dished part against the box. Where terminations cannot be made secure with one locknut, use two locknuts, one inside and one outside the box.
- T. Where terminating in threaded hubs, screw the raceway or fitting tight into the hub so the end bears against the wire protection shoulder. Where chase nipples are used, align the raceway so the coupling is square to the box and tighten the chase nipple so no threads are exposed.

- U. Install pull cords in all empty raceways. Use monofilament plastic line having not less than 200-lb (90 kg) tensile strength. Leave not less than 12 inches (300 mm) of slack at each end of the pull cord.
- V. Telephone and Signal System Raceways 2 Inch Trade Size and Smaller: In addition to the above requirements, install in maximum lengths of 150 feet (45 m) and with a maximum of two 90 degree bends or equivalent. Install pull or junction boxes where necessary to comply with these requirements. Pull boxes shall be a minimum of 10" square x 6" deep with removable cover.
- W. Install raceway sealing fittings at suitable, approved, accessible locations and fill them with UL-listed sealing compound. For concealed raceways, install each fitting in a flush steel box with a blank cover plate having a finish similar to that of adjacent plates or surfaces. Install raceway sealing fittings at the following points and elsewhere as indicated:
 1. Where conduits enter or leave hazardous classified locations.
 2. Where conduits pass from warm locations to cold locations, such as exterior spaces and air-conditioned spaces.
 3. Where otherwise required by the NEC.
- X. Stub-Up Connections: Extend conduits through concrete floor a minimum of 6" for connection to freestanding equipment. Extend conductors to equipment with flexible metal conduit. Where equipment connections are not made under this Contract verify the length of the flexible connectors.
- Y. Flexible Connections: Use maximum of 6 feet (1830 mm) of flexible conduit for recessed and semi-recessed lighting fixtures; for equipment subject to vibration, noise transmission, or movement; and for all motors. Use liquid tight flexible conduit in wet or damp locations. Install separate ground conductor.
- AA. Provide grounding connections for raceway, boxes and components. Tighten connectors and terminals according to tightening torques specified in UL Standard 486A.
- BB. All underground raceways shall be identified by "UNDERGROUND LINE MARKING TAPE" located directly above the raceway at 6" below finished grade. Tape shall be permanent, bright colored, continuous, magnetic strip, printed, plastic tape compounded for direct burial not less than 6" wide and 4 mils thick. Printed legend shall be indicative of the service it is marking. Provide sufficient tape not less than 2/3 of the width of the item marked for the full length of the Raceway.
- CC. Where underground raceways are required to turn up into cabinets, equipment, etc., and on to poles, the elbow required and the sub-up out of the slab or earth shall be rigid steel.
- DD. Where shown to be used on the drawings PVC non-metallic conduit used exterior to the building for grouped circuits it shall be encased in a minimum of 3" of 3000 psi rated concrete. Concrete encased non-metallic ducts shall be supported on plastic separators coordinated with duct size and spacing. Separators shall be spaced close enough to prevent sagging and deforming of ducts. Secure separators to the earth and to ducts to prevent floating during placement of concrete. Do not use steel or tie wires in such a way to form conductive or magnetic loops around ducts or duct groups.
- EE. The Raceway System shall not be relied on for grounding continuity. A green grounding conductor, properly sized per NEC Table 250-122, shall be run in all power raceways.

- FF. Where non-metallic conduit is allowed on the drawings all bends and offsets shall be made by approved mechanical benders per the manufacturers instruction. Any conduit not in compliance will be removed.

3.5 PROTECTION

- A. Provide final protection and maintain conditions, in a manner acceptable to manufacturer and Installer, to ensure that coatings, finishes, and cabinets are without damage or deterioration at Substantial Completion.
 - 1. Repair damage to galvanized finishes with zinc-rich paint recommended by manufacturer.
 - 2. Repair damage to paint finishes with matching touch-up coating recommended by the manufacturer.

3.6 CLEANING

- A. Upon completion of installation of system, including outlet fittings and devices, inspect exposed finish. Remove burrs, dirt and construction debris and repair damaged finish, including chips.

END OF SECTION 16100

SECTION 16120 - WIRES AND CABLES

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes Building Wires and Cables and Associated Splices, Connectors and Terminations for Wiring Systems rated 600 Volts and Less.

PART II - PRODUCTS

2.1 BUILDING WIRES AND CABLES

- A. UL-listed building wires and cables with conductor material, insulation type, cable construction, and rating as specified in Part 3 "Applications" Article.
- B. Rubber Insulation: Conform to NEMA WC 3.
- C. Thermoplastic Insulation: Conform to NEMA WC 5.
- D. Cross-Linked Polyethylene Insulation: Conform to NEMA WC 7.
- E. Ethylene Propylene Rubber Insulation: Conform to NEMA WC 8.
- F. Solid conductor for 10 AWG and smaller: Stranded conductor for larger than 10 AWG.

2.2 CONNECTORS AND SPLICES

- A. UL-listed factory fabricated wiring connectors of size, ampacity rating, material, and type and class for application and for service indicated.

PART III - EXECUTION

3.1 EXAMINATION

- A. Examine raceways and building finishes to receive wires and cables for compliance with installation tolerances and other conditions. Do not proceed with installation until unsatisfactory conditions have been corrected.

3.2 APPLICATIONS

- A. Feeders and Branch Circuits: Type THHN\THWN or XHHW, copper conductor, in raceway.

3.3 INSTALLATION

- A. All conductors shall be copper.

- B. Minimum conductor size for power and lighting circuits shall be #12 AWG. Maximum conductor size shall be 500 KCMIL AWG.
- C. All power and lighting circuits #10 awg and smaller shall be solid copper conductors. Conductor sizes #8 awg and larger shall be Class "B" stranded copper conductors.
- D. Pull conductors into raceway simultaneously where more than one is being installed in same raceway.
 - 1. Use pulling compound or lubricant where necessary; compound used must not deteriorate conductor or insulation.
 - 2. Use pulling means, including fish tape, cable, rope, and basket weave wire/cable grips that will not damage cables or raceway.
- E. Conductor Splices: Keep to minimum.
- F. Wiring at Outlets: Install with at least 8 inches of slack conductor at each outlet.
- G. Connect outlets and components to wiring and to ground as indicated. Tighten to UL Standard 486A.
- H. **Power and Lighting circuits shall have individual neutral conductors.**
- I. All power circuits noted for computer equipment with isolated grounding shall be individually installed in a separate conduit with separate phase, neutral conductor, grounding conductor, and isolated grounding conductor, unless noted otherwise.
- J. In no case shall any wire installed to a device exceed the U.L. rating of the device.

3.4 SPLICING

- A. Joints in solid conductors shall be using Idea "wire nuts", 3M Company "scotch lock", or "T&B" "PIGGY" connectors in junction boxes, outlet boxes and lighting fixtures.
- B. "Sta-kon" or other permanent type crimp connectors shall not be used for branch circuit connections.
- C. Joints in stranded conductors shall be spliced by approved mechanical connectors. Solderless mechanical connectors similar to "NSI" multi-cable connector blocks for splices and taps, provided with UL approved insulating covers, may be used instead of mechanical connectors plus tape.
- D. Conductors in all cases, shall be continuous from outlet to outlet unless "taps" are required and shall be made only within outlet, junction boxes, troughs and gutters.

3.5 VOLTAGE DROP

- A. Where conductor length from the panel to the first outlet on a 120 volt circuit exceeds 100 feet, the branch circuit conductors from the panel to the first outlet shall be not smaller than #10 awg.

3.6 FIELD QUALITY CONTROL

- A. Testing: Upon installation of wires and cables and before electrical circuitry has been energized,

demonstrate product capability and compliance with requirements.

1. Procedures: Perform each Visual and Mechanical Inspection and Electrical Test stated in NETA Standard ATS, Section 7.3.1. Certify compliance with test parameters.
- B. Correct malfunctioning products at site, where possible, and re-test to demonstrate compliance; otherwise, remove and replace with new units and re-test.

3.7 ELECTRICAL TESTING

A. Feeder Insulation Resistance Testing:

1. All current carrying phase conductors and neutrals shall be tested as installed, and before connections are made, for insulation resistance and accidental grounds. This shall be done with a 500-volt megger. The procedures listed below shall be followed:
2. Minimum readings shall be one million (1,000,000) or more ohms for # 6 AWG wire and smaller, 250,000 ohms or more for #4 wire or larger, between conductor and the grounding conductor.
3. After all devices and equipment are installed and all connections completed to each panel, the Contractor shall disconnect the neutral feeder conductor from the neutral bar and take a megger reading between the neutral bar and the grounded enclosure. If this reading is less than 250,000 ohms, the Contractor shall disconnect the branch circuit neutral wires from the neutral bar. Test each neutral conductor separately until the low readings are found. The Contractor shall correct troubles, reconnect and re-test until at least 250,000 ohms from the neutral bar to the grounded panel can be achieved with only the neutral feeder disconnected.
4. The Contractor shall send a letter to the Engineer certifying that the above has been done and tabulating the megger readings for each panel. This shall be done at least four (4) days prior to final inspection.
5. At the final inspection, the Contractor shall furnish a megger and show the Engineers that the panels comply with the above requirements. He shall also furnish a hook-on type ammeter and a voltmeter and take current and voltage readings as directed by the representatives.

END OF SECTION 16120

SECTION 16140 - WIRING DEVICES

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes various types of receptacles, connectors, switches and finish plates.

1.3 SUBMITTALS

- A. Submit the following according to the Conditions of the Contract and Division 1 Specification Sections.
- B. Product data for each product specified.

PART II - PRODUCTS

2.1 WIRING DEVICES

- A. Comply with NEMA Standard WD 1-101968, "General Purpose Wiring Devices".
- B. Enclosures: NEMA 1 equivalent, except as otherwise indicated.
- C. Color: Selected by Architect.
- D. Duplex receptacles shall be of the grounding type arranged for back and side wiring, with separate single or double grounding terminals. Receptacles shall be straight blade, rated 20 amp, 125 volt and the face configuration shall conform to the NEMA Standard No. WD-1, NEMA WD-6, DSCC W-C-596G & UL 498, and shall be approved third party listed. Self-grounding or automatic type grounding receptacles are not acceptable in lieu of receptacles with separate grounding screw lugs and a direct green insulated conductor connection to the equipment grounding system. Receptacles shall be specification grade mounted vertically.
- E. Receptacles, Straight-Blade, Special Features: Comply with the basic requirements specified above for straight-blade receptacles of the class and type indicated, and with the following additional requirements:
 - 1. Ground Fault Circuit Interrupter (GFCI) Receptacles: UL Standard 943, "Ground Fault Circuit Interrupters" with integral NEMA 5-20R duplex receptacle. Design units for installation in a 2¼ inch (70-mm) deep outlet box without an adapter.
- F. Receptacles, Industrial Heavy-Duty: Conform to NEMA Standard PK 4 "Plugs, Receptacles and Cable Connectors of the Pin and Sleeve type for Industrial Use".
- G. Plug Sets: Match voltage and current ratings and number of conductors to requirements of the equipment being connected.
- H. Single pole and three or four-way toggle type as indicated on the drawings. Switches shall be of the grounding type with hex-head grounding screw rated 20 amp 120/277V AC only. Lighted

handle switches shall have neon lights of the correct voltage rating where indicated on the drawings. All switches shall have quiet operating mechanisms without the use of mercury switches. All switches shall be listed by an approved third-party agency, approved for the voltage and amperage indicated. Color selected by Architect.

I. Motion Sensor Switches

1. Single Pole-single switching
2. Single Pole-double switching
3. Switches shall be combination ultrasonic and passive infrared.
4. 100 square foot coverage, 180 degree.
5. 120 volt: 800 watt incandescent, 1000 watt fluorescent.
6. 277 volt, 1800 watt fluorescent.
7. 5 year warranty.

J. Wall Plates: Single and combination types that mate and match with corresponding wiring devices. Features include the following:

1. Material for Finished Spaces: 0.04 inch thick, type 302, satin finished stainless steel, intermediate jumbo size except as otherwise indicated.
2. Material for Unfinished Spaces: Galvanized cast ferrous steel, standard size.
3. Provide a quantity of 2% spare cover plates for each type of device cover used to the Owner.

PART III - EXECUTION

3.1 INSTALLATION

- A. Install devices and assemblies plumb and secure.
- B. Install wall plates when painting is complete.
 1. Arrangement of Devices: Except as otherwise indicated, mount flush, with long dimension vertical and grounding terminal of receptacles on top. Group adjacent switches under single, multi-gang wall plates.
- C. Protect devices and assemblies during painting.
- D. Adjust locations at which floor service outlets are installed to suit the indicated arrangement of partitions and furnishings.
- E. Field verify the actual location of all outlet devices above equipment or counter tops before rough-in and installation. Any outlet installed in conflict with equipment or conditions that could have been avoided, will be corrected at the Contractor's expense.
- F. Provide weatherproof cast aluminum cover plates for all devices exterior to the building or in

"wet" locations, Hubbell WP26M or equal.

- G. GFCI protection shall be provided for all receptacles exterior to the building, in restrooms or where required by Code.
- H. Locate all receptacles in rated walls with 24" minimum horizontal separation. This includes devices located opposite each other in the walls.

3.2 IDENTIFICATION

- A. Comply with Division 16 Section "Electrical Identification".
 - 1. Switches: Where 3 or more switches are ganged and elsewhere where indicated, identify each switch with approved legend engraved on wall plate.
 - 2. Receptacles: Identify the panelboard and circuit number from which served. Use machine-printed, pressure-sensitive, abrasion-resistant label tape on face of plate and durable wire markers or tags within outlet boxes.

3.3 FIELD QUALITY CONTROL

- A. Testing: Test wiring devices for proper polarity and ground continuity. Operate each operable device at least six (6) times.
- B. Test ground-fault circuit interrupter operation with both local and remote fault simulations according to manufacturer recommendations.
- C. Replace damaged or defective components.

3.4 CLEANING

- A. General: Internally clean devices, device outlet boxes and enclosures. Replace stained or improperly painted wall plates or devices.

END OF SECTION 16140

SECTION 16190 - SUPPORTING DEVICES

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes secure support from the building structure for Electrical items by means of Hangers, Supports, Anchors, Sleeves, Inserts, Seals and Associated Fastenings.

1.3 SUBMITTALS

- A. General: Submit the following in accordance with Conditions of Contract and Division 1 Specification Sections.
- B. Product data for each type of product specified.

PART II - PRODUCTS

2.1 COATINGS

- A. Coating: Supports, support hardware and fasteners shall be protected with zinc coating or with treatment of equivalent corrosion resistance using approved alternative treatment, finish and inherent material characteristic. Products for use outdoors shall be hot-dip galvanized.

2.2 MANUFACTURED SUPPORTING DEVICES

- A. Raceway Supports: Clevis hangers, riser clamps, conduit straps, threaded C clamps with retainers, ceiling trapeze hangers, wall brackets and spring steel clamps.
 - 1. Expansion Anchors: Carbon steel wedge or sleeve type.
 - 2. Toggle Bolts: All steel spring-head type.
- B. Conduit Sealing Bushings: Factory-fabricated watertight conduit sealing bushing assemblies suitable for sealing around conduit or tubing passing through concrete floors and walls. Construct seals with steel sleeve, malleable iron body, neoprene sealing grommets or rings, metal pressure rings, pressure clamps and cap screws.
- C. U-Channel Systems: 16-gage steel channels, with 9/16-inch diameter holes, at a minimum of 8 inches on center, in top surface. Provide fittings and accessories that mate and match with U-channel and are of the same manufacturer.

2.3 FABRICATED SUPPORTING DEVICES

- A. General: Shop or field fabricated supports or manufactured supports assembled from U-Channel components.
- B. Steel Brackets: Fabricated of angles, channels and other standard structural shapes. Connect with welds and machine bolts to form rigid supports.

- C. Pipe Sleeves: Provide pipe sleeves of one of the following:
 - 1. Sheet Metal: Fabricate from galvanized sheet metal; round tube closed with snap-lock joint, welded spiral seams, or welded longitudinal joint. Fabricate sleeves from the following gage metal for sleeve diameter noted:
 - a. 3-inch and smaller: 20-gage
 - b. 4-inch to 6-inch: 16-gage
 - 2. Steel Pipe: Fabricate from Schedule 40 galvanized steel pipe.
 - 3. Plastic Pipe: Fabricate from Schedule 80 PVC plastic pipe.

PART III - EXECUTION

3.1 INSTALLATION

- A. Install supporting devices to fasten electrical components securely and permanently in accordance with NEC requirements.
- B. Coordinate with the building structural system and with other electrical installation.
- C. Raceway Supports: Comply with the NEC and the following requirements:
 - 1. Strength of each support shall be adequate to carry present and future load multiplied by a safety factor of at least four. Where this determination results in a safety allowance of less than 200 lbs, provide additional strength until there is a minimum of 200 lbs safety allowance in the strength of each support.
 - 2. Install individual and multiple (trapeze) raceway hangers and riser clamps as necessary to support raceways. Provide U-bolts, clamps, attachments and other hardware necessary for hanger assembly and for securing hanger rods and conduits.
 - 3. Support parallel runs of horizontal raceways together on trapeze-type hangers.
 - 4. Support individual horizontal raceways by separate pipe hangers. Spring steel fasteners may be used in lieu of hangers only for 1 inch and smaller raceways serving lighting and receptacle branch circuits above suspended ceilings only. For hanger rods with spring steel fasteners, use ¼ inch diameter or larger threaded steel. Use spring steel fasteners that are specifically designed for supporting single conduits or tubing.
 - 5. Space supports for raceway's types not covered by the above in accordance with NEC.
 - 6. Support exposed and concealed raceway within 1 foot of an unsupported box and access fittings. In horizontal runs, support at the box and access fittings may be omitted where box or access fittings are independently supported and raceway terminals are not made with chase nipples or threadless box connectors.
 - 7. In vertical runs, arrange support so the load produced by the weight of the raceway and the enclosed conductors is carried entirely by the conduit supports with no weight load on raceway terminals.
 - 8. In interior spaces provide a minimum of ¼ inch space for all conduits installed on the exterior building walls. Approved "clamp-back" or strut devices shall be used.

- D. Miscellaneous Supports: Support miscellaneous electrical components as required to produce the same structural safety factors as specified for raceway supports. Install metal channel racks for mounting cabinets, panelboards, disconnects, control enclosures, pull boxes, junction boxes, transformers and other devices.
- E. In open overhead spaces, cast boxes threaded to raceways need not be supported separately except where used for fixture support; support sheet metal boxes directly from the building structure or by bar hangers. Where bar hangers are used, attach the bar to raceways on opposite sides of the box and support the raceway with an approved type of fastener not more than 24 inches from the box.
- F. Conduit Seals: Install bushing seals for conduit penetrations of slabs on grade and exterior walls below grade. Tighten sleeve seal screws until sealing grommets have expanded to form watertight seal.
- G. Fastening: Unless otherwise indicated, fasten electrical items and their supporting hardware securely to the building structure, including but not limited to conduits, raceways, cables, cable trays, bus ways, cabinets, panelboards, transformers, boxes, disconnect switches and control components in accordance with the following:
 - 1. Fasten by means of wood screws or screw-type nails on wood, toggle bolts on hollow masonry units, concrete inserts or expansion bolts on concrete or solid masonry and machine screws, welded threaded studs, or spring-tension clamps on steel. Do not weld conduit, pipe straps or items other than threaded studs to steel structures. In partitions of light steel construction, use sheet metal screws.

END OF SECTION 16190

SECTION 16195 - ELECTRICAL IDENTIFICATION

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and Division 1 Specification Sections apply to this Section.

1.2 SUMMARY

- A. This Section includes Identification of Electrical Materials, Equipment and Installations.

1.3 SUBMITTALS

- A. General: Submit the following in accordance with Conditions of Contract and Division 1 Specification Sections.
- B. Product Data for each type of product specified.

PART II - PRODUCTS

2.1 MANUFACTURERS

- A. Acceptable Manufacturers:
 - 1. Ideal Industries, Inc.
 - 2. National Band and Tag Co.
 - 3. Panduit Corp.
 - 4. Seton Name Plate Co.
 - 5. Standard Signs, Inc.
 - 6. W.H. Brady, Co.

2.2 ELECTRICAL IDENTIFICATION PRODUCTS

- A. Colored Adhesive Marking Tape for Raceways, Wires, and Cables: Self-adhesive vinyl tape not less than 3 mils thick by 1 inch to 2 inches in width. Colors to match color schemes noted herein
- B. Underground Line Marking Tape: Permanent, bright colored, continuous printed, metallic strip, plastic tape compounded for direct burial service not less than 6 inches wide by 4 mils thick. Printed legend indicative of general type of underground line below.
- C. Wire/Cable Designation Tape Markers: Vinyl or vinyl cloth, self adhesive, wrap-around, cable/conductor markers with pre-printed numbers and letter.
- D. Furnish and install engraved laminated phenolic nameplates for all safety switches, paneboards, transformers, switchboards, switchboard branch breakers, motor control centers and other electrical equipment. Nameplates shall be securely attached with self-tapping stainless steel screws, if the screw end is protected; otherwise rivets shall be used. Letters shall be approximately 1/2" high minimum. Embossed self-adhesive tape is not acceptable for marking equipment.
- E. Cable Ties: Fungus inert, self-extinguishing, one-piece, self-locking nylon cable ties, 0.18-inch minimum width, 50-lb minimum tensile strength, and suitable for a temperature range from minus 50 degrees F to 350 degrees F. Provide ties in specified colors when used for color coding.

PART III - EXECUTION

3.1 INSTALLATION

- A. Lettering and Graphics: Coordinate names, abbreviations, colors and other designations used in Electrical Identification work with corresponding designations specified or indicated. Install numbers, lettering, and colors as approved in submittals and as required by code.
- B. Sequence of Work: Where identification is to be applied to surfaces that require finish, install identification after completion of finish work.
- C. Identify Junction, Pull, and Connection Boxes: Install on outside of box cover. Label box covers with identity of contained circuits. Use pressure-sensitive plastic labels at exposed locations and similar labels concealed boxes. Color code boxes as indicated below. Method shall be by colored adhesive not less than 4 square inches for 4" boxes and larger boxes. Permanent type "magic" markers are not accepted as a means of identification

120/208 volt blue

- D. Underground Electrical Line Identification: During trench backfilling, for exterior underground power, signal and communications lines, install continuous underground plastic line marker, located directly above line at 6 inches below finished grade where multiple lines are installed in a common trench or concrete envelope. Provide marker tape to cover 2/3 of the overall width.
- E. Conductor Color Coding: Provide color coding for secondary service, feeder, and branch circuit conductors throughout the project secondary electrical system as follows:

<u>230/120 Volts</u>	<u>Phase</u>
Black	A
Red	B
White	Neutral
Green	Ground

- G. Use conductors with color factory-applied the entire length of the conductors except as follows:
 - 1. The following field-applied color-coding methods may be used in lieu of factory-coded wire for sizes larger than No. 10 AWG.
 - a. Apply colored, pressure-sensitive plastic tape in half-lapped turns for a distance of 6 inches from terminal points and in boxes where splices or taps are made. Apply the last two laps of tape with no tension to prevent possible unwinding. Use 1-inch wide tape in colors as specified. Do not obliterate cable identification markings by taping. Tape locations may be adjusted slightly to prevent such obliteration minimum width 2".
- H. Tag or label conductors as follows:
 - 1. Multiple Circuits: Where multiple branch circuits or control wiring or communications/signal conductors are present in the same box or enclosure (except for three-circuit, four-wire home runs), label each conductor or cable. Provide legend indicating source, voltage, circuit number, and phase for branch circuit wiring. Phase and voltage of branch circuit wiring may be indicated by mean of coded color of conductor insulation. For control and communications/signal wiring, use color coding or wire/cable marking tape at terminations and at intermediate locations where conductors appear in

wiring boxes, troughs, and control cabinets. Use consistent letter/number conductor designations throughout on wire/cable marking tapes.

2. Match identification markings with designations used in panelboards shop drawings, Contract Documents, and similar previously established identification schemes for the facility's electrical installations.
- I. Install equipment/system circuit/device identification as follows:
 1. Apply equipment identification labels of engraved plastic-laminate on each major unit of electrical equipment in building, including central or master unit of each electrical system. This includes communication/signal/alarm systems, unless unit is specified with its own self-explanatory identification. Except as otherwise indicated, provide single line of text, with 1/2 inch high lettering on 1½ inch high label (2 inch high where two lines are required), white lettering in blue field for normal power equipment other face colors shall match the equipment served. Text shall match terminology and numbering of the Contract Documents and shop drawings.
 2. All Phenolic labels shall be securely attached to the equipment by selftapping stainless steel screws.
 3. Name plate colors shall be as follows:

....Blue surface with white core for 120/230 Volt Equipment.
 - J. Apply circuit/control/item designation labels of engraved plastic laminate for disconnect switches, breakers, pushbuttons, pilot lights, motor control centers, and similar items for power distribution and control components above, except panelboards and alarm/signal components, where labeling is specified elsewhere. For panelboards, provide framed, typed circuit schedules with explicit description and identification of items controlled by each individual breaker. Pencil in all spare and leave spaces blank.
 - K. All outlet boxes, junction boxes and pull boxes shall have their covers and exterior visible surfaces painted with colors to match the surface color scheme specified. This includes covers on boxes above lay-in and other type accessible ceilings.
 - L. All empty conduit runs and conduit with conductors for future use shall be identified for use and shall indicate where they terminate. Identification shall be by pressure sensitive label applied to the conduit or outlet; designate "use" and "location served".

END OF SECTION 16195

SECTION 16452 - GROUNDING

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes Solid Grounding of Electrical Systems and Equipment. It includes basic requirements for grounding for protection of life, equipment, circuits, and systems. Grounding requirements specified in this Section may be supplemented in other Sections of these Specifications.

1.3 QUALITY ASSURANCE

- A. Listing and Labeling: Provide products specified in this Section that are listed and labeled. The terms "listed" and "labeled" shall be defined as they are in the National Electrical Code, Article 100.

PART II - PRODUCTS

2.1 GROUNDING AND BONDING PRODUCTS

- A. Products: Of types indicated and of sizes and ratings to comply with NEC. Where types, sizes, ratings, and quantities indicated are in excess of NEC requirements, the more stringent requirements and the greater size, rating, and quantity indications govern.
- B. Conductor Materials: Copper

2.2 WIRE AND CABLE CONDUCTORS

- A. General: Comply with Division 16 Section "Wires and Cables". Conform to NEC Table 8, except as otherwise indicated, for conductor properties, including stranding.
- B. Equipment Grounding Conductor: Green insulated
- C. Grounding Electrode Conductor: Stranded cable
- D. Bare Copper Conductors: Conform to the following:
 - 1. Solid Conductors: ASTM B-3
 - 2. Assembly of Stranded Conductors: ASTM B-8
 - 3. Tinned Conductors: ASTM B-33

2.3 MISCELLANEOUS CONDUCTORS

- A. Ground Bus: Bare annealed copper bars of rectangular cross section, full-size rated.
- B. Braided Bonding Jumpers: Copper tape, braided No. 30 gauge bare copper wire, terminated with copper ferrules.

- C. Bonding Strap Conductor/Connectors: Soft copper, 0.05 inch thick and 2 inches wide, except as indicated.

2.4 CONNECTOR PRODUCTS

- A. General: Listed and labeled as Grounding Connectors for the materials used.
- B. Pressure Connectors: High conductivity-plated units
- C. Bolted Clamps: Heavy-duty units listed for the application

2.5 GROUNDING ELECTRODES

- A. Ground Rods: Copper-clad steel with high strength steel core and electrolytic grade copper outer sheath, molten welded to core.
 - 1. Size: 3/4 inch by 10 feet

PART III - EXECUTION

3.1 APPLICATION

- A. Equipment Grounding Conductor Application: Comply with NEC Article 250 for sizes and quantities of equipment grounding conductors, except where larger sizes or more conductors are indicated.
 - 1. The raceway system shall not be relied on for ground continuity .Install an equipment ground conductor in all power related conduits. Size conductor as required by NEC Table 250-122. Data and Signal conduits do not require a separate grounding conductor unless required by the manufacturer of the equipment to be installed.
- C. Signal and Communications: For telephone, alarm, and communications systems, provide a #6 AWG minimum green insulated copper conductor in raceway from the grounding electrode system to each terminal equipment location. Leave 3' pigtail wiring at termination point where equipment boards are shown. Make direct connection where equipment is provided.

3.2 INSTALLATION

- A. General: Ground electrical systems and equipment in accordance with NEC requirements except where the Drawings or Specifications exceed NEC requirements.
- B. The electrical service shall be grounded by three (3) means:
 - 1. To the cold water main, if metallic and in direct contact with the earth for at least 10 feet as per the NEC Article 250-81.
 - 2. To the steel frame of the building, provided the building frame is effectively grounded.
 - 3. To ground rod(s)
- C. Ground Rods: Locate a minimum of one-rod length from each other and at least the same distance from any other grounding electrode. Interconnect ground rods with bare conductors buried at least 24 inches below grade. Connect bare-cable ground conductors to ground rods by means of

exothermic welds except as otherwise indicated. Make these connections without damaging the copper coating or exposing the steel. Use ¼ inch by 10 ft. ground rods except as otherwise indicated. Drive rods until tops are 6 inches below finished floor or final grade except as otherwise indicated. All ground connections shall be accessible.

- D. **Metallic Water Service Pipe:** Provide insulated copper ground conductors, sized as indicated, in conduit from the building main service equipment, or the ground bus, to main metallic water service entrances to the building. Connect ground conductors to the main metallic water service pipes by means of ground clamps. Where a dielectric main water fitting is installed, connect the ground conductor to the street side of the fitting. Do not install a grounding jumper around dielectric fittings. Bond the ground conductor conduit to the conductor at each end.
- E. Route grounding conductors along the shortest and straightest paths possible without obstructing access or placing conductors where they may be subjected to strain, impact, or damage, except as indicated.

3.3 CONNECTIONS

- A. **General:** Make connections in such a manner as to minimize possibility of galvanic action or electrolysis. Select connectors, connection hardware, conductors, and connection methods so metals in direct contact will be galvanically compatible.
 - 1. Use electroplated or hot tin-coated materials to assure high conductivity and make contact points closer in order of galvanic series.
 - 2. Make connections with clean bare metal at points of contact.
 - 3. Aluminum to steel connections shall be with stainless steel separators and mechanical clamps.
 - 4. Aluminum to galvanized steel connections shall be with tin-plated copper jumpers and mechanical clamps.
 - 5. Coat and seal connections involving dissimilar metals with inert material such as red lead paint to prevent future penetration of moisture to contact surfaces.
- B. Terminate insulated equipment grounding conductors for feeders and branch circuits with pressure-type grounding lugs. Where metallic raceways terminate at metallic housings without mechanical and electrical connection to the housing, terminate each conduit with a grounding bushing. Connect grounding bushings with a bare grounding conductor to the ground bus in the housing. Bond electrically non-continuous conduits at both entrances and exits with grounding bushings and bare grounding conductors.
- C. Tighten grounding and bonding connectors and terminals, including screws and bolts, in accordance with manufacturer's published torque tightening values for connectors and bolts. Where manufacturer's torquing requirements are not indicated, tighten connections to comply with torque tightening values specified in UL 486A and UL 486B.
- D. **Compression-Type Connections:** Use hydraulic compression tools to provide the correct circumferential pressure for compression connectors. Use tools and dies recommended by the manufacturer of the connectors. Provide embossing die code or other standard method to make a visible indication that a connector has been adequately compressed on the ground conductor.

3.4 FIELD QUALITY CONTROL

- A. Tests: Subject the completed grounding system to a megger test at each location where a maximum ground resistance level is specified, at service disconnect enclosure ground terminal, and at ground test wells. Measure ground resistance without the soil being moistened by any means other than natural precipitation or natural drainage or seepage and without chemical treatment or other artificial means of reducing natural ground resistance. Perform tests by the 2 point method in accordance with Section 9.03 of IEEE 81, "Guide for Measuring Earth Resistivity, Ground Impedance and Earth Surface Potentials of a Grounding System".
- B. Service Grounding Test
 - 1. After completion of the electrical grounding and bonding systems, test the ground resistance with a ground resistance tester. Where test shown resistance-to-ground is over 25 ohms, provide additional ground rods until the minimum of 25 ohms is achieved.
- C. Deficiencies: Where ground resistances exceed specified values, and if directed, modify the grounding system to reduce resistance values. Where measures are detected that exceed those indicated the provisions of the Contract, covering changes will apply.
- D. Report: Prepare test reports of the ground resistance at each test location. Include observations of weather and other phenomena that may affect test results. Describe measures taken to improve test results.

3.5 CLEANING AND ADJUSTING

- A. Restore surface features at areas disturbed by excavation and re-establish original grades. Where sod has been removed, replace it as soon as possible after backfilling is completed. Restore areas disturbed by trenching, storing of dirt, cable laying, and other Work to their original condition. Include necessary topsoil, fertilizing, liming, seeding, sodding, sprigging, or mulching.

END OF SECTION 16452

SECTION 16470 – PANEL BOARDS

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes Lighting and Power Panel Boards and Associated Auxiliary Equipment Rated 600 V or Less

1.3 DEFINITIONS

- A. Panel Boards: A panel board with thermal magnetic circuit-breaker branches, designed for residential and light commercial projects, operating at 600 V and below, available in both single and 3-phase versions, and equipped with combination flush/surface mounting trim.
- B. Over-current Protective Device (OCPD): A device operative on excessive current that causes and maintains the interruption of power in the circuit it protects.

1.4 SUBMITTALS

- A. General: Submit the following in accordance with Conditions of Contract and Division 1 Specification Sections.
- B. Product data for each type panel board, accessory item, and component specified.
- C. Shop Drawings from manufacturers of panel boards including dimensioned plans, sections, and elevations. Show tabulations of installed devices, major features and voltage rating.
- D. Include the following:
 - 1. Enclosure type with details for types other than NEMA Type 1.
 - 2. Bus configuration and current ratings.
 - 3. Short-circuit current rating of panelboard.
 - 4. Features, characteristics, ratings, and factory settings of individual protective devices and auxiliary components.

1.5 QUALITY ASSURANCE

- A. Listing and Labeling: Provide products specified in this Section that are listed and labeled.
 - 1. The terms "listed" and "labeled" shall be defined as they are in the National Electrical Code, Article 100.
- B. Electrical Component Standard: Components and installation shall comply with NFPA 70, "National Electrical Code".
- C. NEMA Standard: Comply with NEMA PB1, "Panel Boards".
- D. UL Standards: Comply with UL 61, "Panel Boards", and UL 50, "Cabinets and Boxes".

PART II - PRODUCTS

2.1 MANUFACTURERS

A. Acceptable Manufacturers:

1. Cutler Hammer
2. Square D
3. Siemens

2.2 PANELBOARDS - GENERAL REQUIREMENTS

- A. Over-current Protective Devices (OCPDs): Provide type, rating, and features as indicated on the schedules. Tandem circuit breakers shall not be used. Multiple breakers shall have common trip.
- B. Circuit Breakers shall be bolt-on type.
- C. 100% rated copper Ground and Neutral Bus (unless noted otherwise).
- D. Enclosures: Cabinets, flush or surface mounted as indicated. NEMA Type 1 enclosure.
- E. Front: Secured to box with concealed trim clamps except as indicated. Front for surface-mounted panels shall be same dimensions as box. Fronts for flush panels shall overlap box except as otherwise specified.
- F. Directory Frame: Metal, mounted inside each panel door.
- G. Bus: Hard drawn copper of 98 percent conductivity
- H. Main and Neutral Lugs: Bolt-on type
- I. Equipment Ground Bus: Adequate for feeder and branch-circuit equipment ground conductors.
- K. Provision for Future Devices: Equip with mounting brackets, bus connections, and necessary appurtenances, for the OCPD ampere ratings indicated for future installation of devices.
- L. Feed-through panels are not permitted.
- M. The use of series breakers is not permitted.
- N. Flash protection boundary and the incident energy for the electrical equipment shall be determined in accordance with IEEE 1584 and NFPA 70E requirements.

2.3 IDENTIFICATION

- A. Panel Board Nameplates: Engraved laminated plastic or metal nameplate for each panel board mounted with self-tapping stainless steel screws.

PART III - EXECUTION

3.1 INSTALLATION

- A. General: Install panel boards and accessory items in accordance with NEMA PB 1.1, "General Instructions for Proper Installation, Operation and Maintenance of Panel Boards Rated 600 Volts

or Less" and manufacturers' written installation instructions.

- B. Mounting Heights: Top of trim 6'-2" above finished floor, except as indicated.
- C. Mounting: Plumb and rigid without distortion of box. Mount flush panels uniformly flush with wall finish.
- D. Circuit Directory: Typed and reflective of final circuit changes required to balance panel loads. Obtain approval before installing. Pencil all spares. Spaces shall be left blank.
- E. Install filler plates in unused spaces.
- F. Provision for Future Circuits at Flush Panel Boards: Stub four 1-inch empty conduits from panel into accessible ceiling space or space designated to be ceiling space in future.
- G. Wiring in Panel Gutters: Train conductors neatly in groups, bundle and wrap with wire ties after completion of load balancing.

3.2 GROUNDING

- A. Connections: Make equipment grounding connections for panelboards as indicated.
- B. Provide ground continuity to main electrical ground bus indicated.

3.3 CONNECTIONS

- A. All connections shall be provided per UL 486A and UL 486B.

3.4 FIELD QUALITY CONTROL

- A. Quality Control Program: Conform to the following:
 - 1. Procedures: Field tests and Inspections will be made by the Engineer at time of completion of the work and in accordance these Specifications.
 - 2. Schedule tests with at least one (1) week in advance notification.
- B. Visual and Mechanical Inspection: Include the following inspections and related work:
 - 1. Inspect for defects and physical damage, labeling, and nameplate compliance with requirements of up-to-date Drawings and Panel Board Schedules.
 - 2. Exercise and perform of operational tests of all Mechanical components and other operable devices in accordance with manufacturer's Instruction Manual.
 - 3. Check panel board mounting, area clearances and alignment and fit of components.
 - 4. Check tightness of bolted electrical connections with calibrated torque wrench.

3.5 CLEANING

- A. Upon completion of installation, inspect interior and exterior of panel boards. Remove paint splatters and other spots, dirt, and debris. Touch up scratches and mars of finish to match original finish.

END OF SECTION 16470

SECTION 16476 – DISCONNECTS

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes Equipment and Service disconnects.

1.3 SUBMITTALS

- A. General: Submit the following according to the Conditions of the Contract and Division 1 Specification Sections.
- B. Product Data for Switches and Accessories specified in this Section.

1.4 QUALITY ASSURANCE

- A. Comply with NFPA 70 "National Electrical Code" for components and installation.
- B. Listing and Labeling: Provide products specified in this Section that are listed and labeled.
 - 1. The Terms "Listed" and "Labeled": As defined in the "National Electrical Code", Article 100.

PART II - PRODUCTS

2.1 MANUFACTURERS

- A. Acceptable Manufacturers:
 - 1. Cutler-Hammer Products; Eaton Corp.
 - 2. Siemens
 - 3. Square D Company

2.2 ENCLOSED SWITCHES

- A. Enclosed Non-Fusible Switch: NEMA KS 1, Type HD, handle lockable with 2 padlocks.
- B. Enclosed Fusible Switch, 800 Amperes and Smaller: NEMA KS 1, Type HD, clips to accommodate specified fuses, enclosure consistent with environment where located, handle lockable with 2 padlocks, and interlocked with cover in CLOSED position.
- C. Enclosure: NEMA KS 1, Type 1, unless specified or required otherwise to meet environmental conditions of installed location.
- D. Outdoor Locations: Type 3R
- E. Other Wet or Damp Indoor Locations: Type 4

- F. All switches shall be "Heavy Duty" rated for the voltage required.
- G. Coordinate all fuse rated switches with the equipment to be furnished. Furnish fuses.
- H. Safety switches shall be third-party listed.
- I. Switches shall have defeatable door interlocks that prevent the door from opening when the operating handle is in the open position.
- J. Switches shall have handles whose positions are easily recognizable in the "on" or "off" position. For safety reasons, padlocks shall be provided for switches located in the public areas.
- K. Switches shall have nonteasible, positive, quick make-quick-break mechanisms.
- L. Switches shall be properly labeled. See section 16195, Electrical Identification.

PART III - EXECUTION

3.1 INSTALLATION

- A. Install enclosed switches level and plumb.
- B. Where fuses are required, the fuses shall be matched with the equipment supplier's requirements.
- C. Provide one additional set of fuses for each disconnect switch.

3.2 FIELD QUALITY CONTROL

- A. Testing: After installing enclosed switches and after electrical circuitry has been energized, demonstrate product capability and compliance with requirements.
- B. Correct malfunctioning units at site, where possible, and retest to demonstrate compliance. Otherwise, remove and replace with new units and retest.

3.3 CLEANING

- A. After completing system installation, including outlet fittings and devices, inspect exposed finish. Remove burrs, dirt, construction debris and repair damaged finish including chips, scratches and abrasions.

END OF SECTION 16476

SECTION 16515 - INTERIOR LIGHTING

PART I - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and General Provisions of Contract, including General and Supplementary Conditions and Division I Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes interior lighting fixtures, lamps, ballasts, emergency lighting units, and accessories.

1.3 SUBMITTALS

- A. General: Submit the following in accordance with Conditions of Contract and Division I Specification Sections.
- B. Product data describing fixtures, lamps, ballasts, and emergency lighting units. Arrange product data for fixtures in order of fixture designation. Include data on features and accessories and the following information:
 - 1. Outline drawings of fixtures indicating dimensions and principal features.
 - 2. Electrical ratings and photometric data with specified lamps and certified results of independent laboratory tests.
 - 3. Data on batteries and chargers of emergency lighting units.
 - 4. Shop Drawings from manufacturers detailing non-standard fixtures and indicating dimensions, weights, methods of field assembly, components, features and accessories.
 - 5. Non-returnable samples, when requested by Engineer, for verification purposes of specific individual fixtures.

1.4 QUALITY ASSURANCE

- A. Comply with NFPA 70 "National Electrical Code" for components and installation.
- B. Listing and Labeling: Provide fixtures that are listed and labeled for their indicated use on the Project.
- C. Coordination of Fixtures With Ceiling: Coordinate fixtures mounting hardware and trim with the ceiling system. Provide plaster or sheet-rock trims when required on the project whether indicated or not at no additional cost to the Owner. Coordinate with Architectural Plans before ordering fixtures.

1.5 WARRANTY

- A. Minimum warranty period on emergency lights shall be three (3) years from date acceptance. Warranty shall include all parts (less lamps).
- B. All other lighting products shall be warranted for a period of not less than 1 year from date of acceptance. This warranty does not include miscellaneous parts which are external to the product

(i.e. lamps) which are considered maintenance item.

PART II - PRODUCTS

2.1 FIXTURES - GENERAL

- A. Comply with the requirements specified in the Articles below and the Lighting Fixture Schedule on the Drawings.

2.2 FIXTURE COMPONENTS - GENERAL

- A. Metal Parts: Free from burrs and sharp corners and edges.
- B. Sheet Metal Components: Steel, except as indicated. Components are formed and supported to prevent warping and sagging.
- C. Doors, Frames, and Other Internal Access: Smooth operating and free from light leakage under operating conditions. Arrange to permit re-lamping without use of tools. Arrange doors, frames, lenses, diffusers, and other pieces to prevent accidental falling during re-lamping and when secured in the operating position. Light seal strips inside the fixture will not be allowed.
- D. Reflecting Surfaces: Minimum reflectances as follows, except as otherwise indicated:
 - 1. White Surfaces: 85 percent
 - 2. Specular Surfaces: 83 percent
 - 3. Diffusing Specular Surfaces: 75 percent
 - 4. Laminated Silver Metalized Film: 90 percent
- E. Lenses, Diffusers, Covers, and Globes: 100 percent virgin acrylic
 - 1. Plastic: Highly resistance to yellowing and other changes due to aging, exposure to heat and UV radiation.
 - 2. Lens Thickness: 0.125 inches minimum

2.3 SUSPENDED FIXTURE SUPPORT COMPONENTS

- A. Single-Stem Hangers: ½ inch steel tubing with swivel ball fitting and ceiling canopy. Finish same as fixture.
- B. Twin-Stem Hangers: Two, ½ inch steel tubes with single canopy arranged to mount a single fixture. Finish same as fixture.
- C. Rod Hangers: 3/16 inch diameter cadmium plated, threaded steel rod.

2.4 FLUORESCENT FIXTURES

- A. Electronic Ballast:
 - 1. Ballast to be "UL listed, Class P".
 - 2. Ballast to be "Sound Rated A".

3. Ballast enclosure size shall be same as or smaller than, magnetic ballast.
 4. Light regulation shall be +/- 10% input voltage variation.
 5. Ballast shall have high power factor (minimum of 90%).
 6. Lamp current crest factor shall be equal to, or less than, 1.7.
 7. Input current third harmonics shall not exceed ANSI recommendations (32% total harmonic distortion, 27.5% of the third triplets).
 8. Flicker shall be 15% or less with any lamp suitable for the ballast.
 9. Ballast design shall withstand line transients per IEEE 587, Category A.
 10. Ballast case temperature shall not exceed 25 degrees C rise over 40 degrees C ambient.
 11. Ballast shall meet FCC Rules and Regulations, Part 18.
 12. Parallel wiring between the ballast and fixture is recommended.
 13. Minimum of five (5) years warranty is required with each electronic ballast.
 14. The manufacturer shall have not less than 5 years of experience in manufacturing electronic ballast.
- B. Provide disconnecting means per NEC 410.130 G.
- C. Low Temperature Ballast Minimum Starting Temperature: Minus 20 degreesC
- D. Where compact fluorescent light fixtures are specified, "High Power Factor" electronic ballast shall be standard.

2.5 FLUORESCENT LAMPS

- A. All fluorescent lamps to be {41} K-rated unless noted otherwise.

2.6 EXIT SIGNS

- A. Conform to UL 924, "Emergency Lighting and Power Equipment".
1. Arrows: Include as indicated.
- B. Emergency Exit Signs shall be of the "LED" style.
- C. Units shall be completely self-contained, provided with maintenance-free battery, automatic charger, and other features. Luminaire must be third-party listed as emergency lighting equipment, and meet or exceed the following standards: NEC, NC Building Code, Volume X Energy code, NFPA-101, and NEMA Standards.
- D. BATTERY-It shall be sealed, maintenance-free type, with minimum of 90 minutes operating endurance. Must have a normal life expectancy of 10 years. Batteries shall be a high temperature type with an operating range of 0 degree C to 60 degrees C and contain a resealable pressure vent, a sintered + positive and - negative terminal.

- E. CHARGER- It shall be fully automatic solid state type, full wave rectifying, with current limiting. Charger shall restore the battery to its full charge within 24 hours after a discharge of 90 minutes under full rated load. The unit shall be activated when the voltage drops below 80%. A low voltage disconnect switch shall be included if LEAD battery is used to disconnect the battery from the load and prevent damage from a deep discharge during extended power outage.
- F. ADDITIONAL FEATURES- Pilot light to indicate the unit is connected to AC power. The battery shall have rate discharge pilot light, unless self-diagnostic type. Test switch to simulate the operation of the unit upon loss of AC power by energizing the lamps from the battery. This simulation must also exercise the transfer relay.
- G. WARRANTY-The entire unit shall be warranted for 3 years. The battery must have an additional 2 more years pro-rated warranty. Warranty shall start from the date of project final acceptance. Warranty shall be included in the contract document.
- H. LED-The use of LED is required due to their reliable performance, low power consumption, and limited maintenance requirements. Maximum LED failure rate shall be 25% within a seven (7) year period; otherwise, if exceeded, manufacturer shall replace the complete unit at no charge to the owner.

2.7 EMERGENCY LIGHTING UNITS

- A. Conform to UL 924, "Emergency Lighting and Power Equipment" requirements for "Unit Equipment". Provide self-contained units with the following features and additional characteristics as indicated.
- B. Units shall be completely self-contained, provided with maintenance-free battery, automatic charger, and other features. Luminaire must be third-party listed as emergency lighting equipment, and meet or exceed the following standards: NEC, NC Building Code, Volume X Energy code, NFPA-101, and NEMA Standards.
- C. BATTERY-It shall be sealed, maintenance-free type, with minimum of 90 minutes operating endurance. Must have a normal life expectancy of 10 years. Batteries shall be a high temperature type with an operating range of 0 degree C to 60 degrees C and contain a resealable pressure vent, a sintered + positive and - negative terminal.
- D. CHARGER- It shall be fully automatic solid state type, full wave rectifying, with current limiting. Charger shall restore the battery to its full charge within 24 hours after a discharge of 90 minutes under full rated load. The unit shall be activated when the voltage drops below 80%. A low voltage disconnect switch shall be included if LEAD battery is used to disconnect the battery from the load and prevent damage from a deep discharge during extended power outage.
- E. ADDITIONAL FEATURES- Pilot light to indicate the unit is connected to AC power. The battery shall have rate discharge pilot light, unless self-diagnostic type. Test switch to simulate the operation of the unit upon loss of AC power by energizing the lamps from the battery. This simulation must also exercise the transfer relay.
- F. WARRANTY-The entire unit shall be warranted for 3 years. The battery must have an additional 2 more years pro-rated warranty. Warranty shall start from the date of project final acceptance. Warranty shall be included in the contract document.

2.8 FINISH

- A. Steel Parts: Manufacturer's standard finish applied over corrosion-resistant primer, free of streaks, runs, holidays, stains, blisters, and defects. Remove fixtures showing evidence of corrosion during

project warranty period and replace with new fixtures.

- B. Paint parts after fabrication.

PART III – EXECUTION

3.1 INSTALLATION

- A. Setting and Securing: Set units plumb, square, and level with ceiling and walls, and secure according to manufacturer's printed instructions and approved Shop Drawings.
- B. Support For Recessed and Semi-Recessed Fixtures: Units shall be supported independent from suspended ceiling. Install fixture with support wires at 2 diagonal corners to the structure or building steel.
 - 1. Fixtures of Sizes Less Than Ceiling Grid: Center in the acoustical panel. Support fixtures independently with at least two ¾ inch metal channels spanning and secured to the ceiling tees.
 - 2. Install support clips or screws for recessed fixtures, securely fastened to ceiling grid members, at or near each fixture corners.
 - 3. Support wires shall be not less than the support wires for the ceiling system.
- C. Support for Suspended Fixtures: Brace pendants and rods that are 4 feet long or longer to limit swinging. Support stem mounted single unit suspended fluorescent fixtures with twin stem hangers. For continuous rows, use tubing or stem for wiring at one point and tubing or rod for suspension for each unit length of chassis, including one at each end.
- D. Lamping: See Schedule on Drawings, or provide standard lamp for the rating of the fixture.
- E. Where mounting height for fixtures are not scheduled, coordinate with the Engineer before any installation.

3.2 FIELD QUALITY CONTROL

- A. Inspect each installed fixture for damage. Replace damaged fixtures and components.
- B. Emergency Battery Units Test: Verify normal operation of each fixture after fixtures have been installed and circuits have been energized with normal power source. Interrupt electrical energy for a period of not less than 90 minutes to demonstrate proper operation of Emergency Lighting installation. Include the following in tests of emergency lighting equipment.
 - 1. Duration of supply
 - 2. Low battery voltage shut-down
 - 3. Normal transfer to battery source and retransfer to normal
 - 4. Low supply voltage transfer
- C. Replace or repair malfunctioning fixtures and components, then retest. Repeat procedure until all units operate properly.
- D. Contractor shall perform a test on each unit after it is permanently installed and charged for a minimum of 24 hours. Battery shall be tested for 90 minutes. The battery test shall be done 10 days prior to final inspection by the State Construction Office. Any unit which fails the test must be repaired or replaced and tested again. Copy of the test report shall be sent to the State

Construction Office.

3.3 ADJUSTING AND CLEANING

- A. Clean fixtures upon completion of installation. Use methods and materials recommended by manufacturer.
- B. Adjust aimable fixtures to provide required light intensities.

END OF SECTION 16515

SECTION 15140 - HANGERS AND SUPPORTS

PART I – GENERAL

RELATED DOC

Drawing and General Provisions of the Contract, including the General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes Hangers and Supports for Plumbing Systems Piping and Equipment.

PART II – PROD

PIPE HANGERS AND SUPPORTS

- A. Hangers: Galvanized carbon steel, adjustable, clevis
- B. Multiple or Trapeze Hangers: Steel channels with welded spacers and hanger rods.
- C. Vertical Support: Steel riser clamp
- D. Copper Pipe Support: Carbon steel ring, adjustable, copper plated.
- E. Shield for Insulated Piping 2 Inches and Smaller: 18 gauge galvanized steel shield over insulation in 180 degree segments, minimum 12 inches long at pipe support.
- F. Shields for Insulated Piping 2½ Inches and Larger: Hard block non-conducting saddles in 90 degree segments, 12 inch minimum length, block thickness same as insulation thickness.
- G. Sheet metal saddles must be ½ the circumference of the insulation, turned up or rounded at the corners to avoid damage to the vapor barrier.

2.2 HANGER RODS

- A. Steel Hanger Rods: Threaded both ends or continuous threaded.

2.3 FLASHING

- A. Metal Flashing: 26 gauge galvanized steel
- B. Flexible Flashing: 47 mil thick sheet butyl; compatible with roofing

2.4 SLEEVES

- A. Sleeves for Pipes: Form with schedule 40, galvanized steel pipe
- B. Fire Stopping Insulation: Glass fiber type, non-combustible
- C. Caulk: Fire Barrier type sealant

2.5 MISCELLANEOUS MATERIALS

- A. Structural Steel: ASTM A 36/A 36M, steel plates, shapes, and bars, black and galvanized
- B. Bolts and Nuts: ASME B18.10 or ASTM A 183, steel, hex-head, track bolts and nuts
- C. Washers: ASTM F 844, steel, plain, flat washers
- D. Grout: ASTM C 1107, Grade B, non-shrink, non-metallic
 - 1. Characteristics include post-hardening, volume-adjusting, dry, hydraulic cement-type grout that is non-staining, non-corrosive, non-gaseous and is recommended for both interior and exterior applications.
 - 2. Design Mix: 5000-psi (34.5MPa), 28-day compressive strength
 - 3. Water: Potable
 - 4. Packaging: Pre-mixed and factory-packaged

2.6 ATTACHMENTS

- A. Mechanical Anchor Fasteners: Insert-type attachments with pull-out and shear capacities appropriate for supported loads and building materials where used. Permitted in concrete over four (4) inches thick.
- B. Weld: Type 22
- C. Beam clamps: Types 20, 21, 28 or 29
- D. Wood: Wood screws or lag bolts

PART III - EXECUTION

3.1 HANGERS AND SUPPORTS INSTALLATION

- A. Install hangers, supports, clamps, and attachments as required to properly support piping from building structure.
- B. Install building attachments within concrete or to structural steel. Install additional attachments at concentrated loads, including valves, flanges, guides, strainers, expansion joints, and at changes in direction of piping.
- C. Install hangers and support complete with necessary inserts, bolts, rods, nuts, washers and other accessories.
- D. Install hangers and supports to allow controlled movement of piping systems, permit freedom of movement between pipe anchors, and facilitate action of expansion joints, expansion loops, expansion bends and similar units.
- E. Install hangers and supports so that piping live and dead loading and stresses from movement will not be transmitted to connected equipment.

- F. Support horizontal piping as follows:

<u>PIPE SIZE</u>	<u>HANGER SPACING</u>	<u>MAXIMUM DIAMETER</u>
1/2 to 1-1/4 inch	6'-6"	3/8"
1-1/2 to 2 inch	10'-0"	3/8"
2-1/2 to 3 inch	10'-0"	1/2"
4 to 6 inch	10'-0"	5/8"
Waste Pipe	5'-0"	3/8"

- G. Install hangers to provide minimum 1/2 inch space between finished covering and adjacent work
- H. Place a hanger within 12 inches of each horizontal elbow.
- I. Use hangers with 1 1/2 inch minimum vertical adjustment
- J. Support vertical piping at every floor. Support vertical cast iron pipe at each floor at hub.
- K. Support horizontal cast iron pipe adjacent to each hub with 5 feet maximum spacing between hangers.
- L. Where several pipes can be installed in parallel and at same elevation, provide multiple or trapeze hangers.
- M. Support riser piping independently of connected horizontal piping.
- N. Prime coat exposed steel hangers and supports. Hangers and supports located in crawl spaces, pipe shafts, and suspended ceiling spaces are not considered exposed.

3.2 EQUIPMENT BASES AND SUPPORTS

- A. Provide equipment bases of concrete.
- B. Provide templates, anchor bolts, and accessories for mounting and anchoring equipment.

3.3 EQUIPMENT SUPPORTS

- A. Fabricate structural steel stands to suspend equipment from structure above or support equipment above floor.
- B. Grouting: Place grout under supports for equipment, and make a smooth bearing surface.

3.4 METAL FABRICATION

- A. Cut, drill, and fit miscellaneous metal fabrications for pipe and equipment supports.
- B. Fit exposed connections together to form hairline joints. Field weld connections that cannot be shop welded because of shipping size limitations.
- C. Field Welding: Comply with AWS D1.1 procedures for manual shielded metal arc welding, appearance and quality of welds.

3.5 FLASHING

- A. Provide flashing and counter-flashing where piping penetrates weather-proofed walls, floors and roofs.
- B. Flash vent and soil pipes projecting six (6) inches minimum above finished roof surface with lead worked one (1) inch minimum into hub. For pipes through outside walls, turn flanges back into wall and caulk, metal counter-flash and seal.

3.6 SLEEVES

- A. Size sleeves large enough to allow for movement due to expansion and contraction. Provide for continuous insulation wrapping.
- B. Design hangers without disengagement of supported pipe
- C. Extend sleeves through floors one (1) inch above finished floor level. Caulk sleeves full depth and provide floor plate.
- D. Where piping penetrates floor, ceiling, or wall, close off space between pipe and adjacent work with fire stopping insulation and caulk seal air-tight. Provide close fitting metal collar or escutcheon covers at both sides of penetration.
- E. Install chrome plated steel or stainless steel escutcheons at finished surfaces.
- F. Pipe strapping will not be allowed.

END OF SECTION 15140

LISTING OF DBE SUBCONTRACTORS

Sheet _____ of _____

Firm Name and Address	Item No.	Item Description	* Agreed upon Unit Price	** Dollar Volume of Item
Name Address				

* The Dollar Volume shown in this column shall be the Actual Price Agreed Upon by the Prime Contractor and the DBE subcontractor, and these prices will be used to determine the percentage of the DBE participation in the contract.

** Dollar Volume of DBE Subcontractor \$ _____
Percentage of Total Contract Bid Price _____ %

** - Must have entry even if figure to be entered is zero.

** - *If firm is a Material Supplier Only, show Dollar Volume as 60% of Agreed Upon Amount from Letter of Intent.
If firm is a Manufacturer, show Dollar Volume as 100% of Agreed Upon Amount from Letter of Intent.*

**This form must be completed in order for the Bid to be considered responsive and be publicly read.
Bidders with no DBE participation must so indicate this on the form by entering the word or number *zero***

**EXECUTION OF BID
NON-COLLUSION AFFIDAVIT, DEBARMENT CERTIFICATION AND GIFT BAN CERTIFICATION**

CORPORATION

The person executing the bid, on behalf of the Bidder, being duly sworn, solemnly swears (or affirms) that neither he, nor any official, agent or employee of the bidder has entered into any agreement, participated in any collusion, or otherwise taken any action which is in restraint of free competitive bidding in connection with any bid or contract, that the bidder has not been convicted of violating *N.C.G.S. § 133-24* within the last three years, and that the Bidder intends to do the work with its own bonafide employees or subcontractors and is not bidding for the benefit of another contractor.

In addition, execution of this bid in the proper manner also constitutes the Bidder's certification of status under penalty of perjury under the laws of the United States in accordance with the Debarment Certification attached, provided that the Debarment Certification also includes any required statements concerning exceptions that are applicable.

N.C.G.S. § 133-32 and Executive Order 24 prohibit the offer to, or acceptance by, any State Employee of any gift from anyone with a contract with the State, or from any person seeking to do business with the State. By execution of any response in this procurement, you attest, for your entire organization and its employees or agents, that you are not aware that any such gift has been offered, accepted, or promised by any employees of your organization.

SIGNATURE OF CONTRACTOR

Full name of Corporation

Address as Prequalified

Attest _____
Secretary/Assistant Secretary
Select appropriate title

By _____
President/Vice President/Assistant Vice President
Select appropriate title

Print or type Signer's name

Print or type Signer's name

CORPORATE SEAL

AFFIDAVIT MUST BE NOTARIZED

Subscribed and sworn to before me this the
____ day of _____ 20__.

NOTARY SEAL

Signature of Notary Public

of _____ County

State of _____

My Commission Expires: _____

**EXECUTION OF BID
NON-COLLUSION AFFIDAVIT, DEBARMENT CERTIFICATION AND GIFT BAN CERTIFICATION**

PARTNERSHIP

The person executing the bid, on behalf of the Bidder, being duly sworn, solemnly swears (or affirms) that neither he, nor any official, agent or employee of the bidder has entered into any agreement, participated in any collusion, or otherwise taken any action which is in restraint of free competitive bidding in connection with any bid or contract, that the bidder has not been convicted of violating *N.C.G.S. § 133-24* within the last three years, and that the Bidder intends to do the work with its own bonafide employees or subcontractors and is not bidding for the benefit of another contractor.

In addition, execution of this bid in the proper manner also constitutes the Bidder's certification of status under penalty of perjury under the laws of the United States in accordance with the Debarment Certification attached, provided that the Debarment Certification also includes any required statements concerning exceptions that are applicable.

N.C.G.S. § 133-32 and Executive Order 24 prohibit the offer to, or acceptance by, any State Employee of any gift from anyone with a contract with the State, or from any person seeking to do business with the State. By execution of any response in this procurement, you attest, for your entire organization and its employees or agents, that you are not aware that any such gift has been offered, accepted, or promised by any employees of your organization.

SIGNATURE OF CONTRACTOR

_____ Full Name of Partnership

_____ Address as Prequalified

_____ By _____
Signature of Witness Signature of Partner

_____ Print or type Signer's name

_____ Print or type Signer's name

AFFIDAVIT MUST BE NOTARIZED

Subscribed and sworn to before me this the _____ day of _____ 20__.

NOTARY SEAL

_____ Signature of Notary Public

of _____ County

State of _____

My Commission Expires: _____

**EXECUTION OF BID
NON-COLLUSION AFFIDAVIT, DEBARMENT CERTIFICATION AND GIFT BAN CERTIFICATION**

LIMITED LIABILITY COMPANY

The person executing the bid, on behalf of the Bidder, being duly sworn, solemnly swears (or affirms) that neither he, nor any official, agent or employee of the bidder has entered into any agreement, participated in any collusion, or otherwise taken any action which is in restraint of free competitive bidding in connection with any bid or contract, that the bidder has not been convicted of violating *N.C.G.S. § 133-24* within the last three years, and that the Bidder intends to do the work with its own bonafide employees or subcontractors and is not bidding for the benefit of another contractor.

In addition, execution of this bid in the proper manner also constitutes the Bidder's certification of status under penalty of perjury under the laws of the United States in accordance with the Debarment Certification attached, provided that the Debarment Certification also includes any required statements concerning exceptions that are applicable.

N.C.G.S. § 133-32 and Executive Order 24 prohibit the offer to, or acceptance by, any State Employee of any gift from anyone with a contract with the State, or from any person seeking to do business with the State. By execution of any response in this procurement, you attest, for your entire organization and its employees or agents, that you are not aware that any such gift has been offered, accepted, or promised by any employees of your organization.

SIGNATURE OF CONTRACTOR

_____ Full Name of Firm

_____ Address as Prequalified

_____ Signature of Witness

_____ Signature of Member/Manager/Authorized Agent
Select appropriate title

_____ Print or type Signer's name

_____ Print or type Signer's Name

AFFIDAVIT MUST BE NOTARIZED

Subscribed and sworn to before me this the _____ day of _____ 20__.

NOTARY SEAL

_____ Signature of Notary Public

of _____ County

State of _____

My Commission Expires: _____

**EXECUTION OF BID
NON-COLLUSION AFFIDAVIT, DEBARMENT CERTIFICATION AND GIFT BAN CERTIFICATION
JOINT VENTURE (2) or (3)**

The person executing the bid, on behalf of the Bidder, being duly sworn, solemnly swears (or affirms) that neither he, nor any official, agent or employee of the bidder has entered into any agreement, participated in any collusion, or otherwise taken any action which is in restraint of free competitive bidding in connection with any bid or contract, that the bidder has not been convicted of violating *N.C.G.S. § 133-24* within the last three years, and that the Bidder intends to do the work with its own bonafide employees or subcontractors and is not bidding for the benefit of another contractor.

In addition, execution of this bid in the proper manner also constitutes the Bidder's certification of status under penalty of perjury under the laws of the United States in accordance with the Debarment Certification attached, provided that the Debarment Certification also includes any required statements concerning exceptions that are applicable.

N.C.G.S. § 133-32 and Executive Order 24 prohibit the offer to, or acceptance by, any State Employee of any gift from anyone with a contract with the State, or from any person seeking to do business with the State. By execution of any response in this procurement, you attest, for your entire organization and its employees or agents, that you are not aware that any such gift has been offered, accepted, or promised by any employees of your organization.

SIGNATURE OF CONTRACTOR

Instructions: **2 Joint Venturers** Fill in lines (1), (2) and (3) and execute. **3 Joint Venturers** Fill in lines (1), (2), (3) and (4) and execute. On Line (1), fill in the name of the Joint Venture Company. On Line (2), fill in the name of one of the joint venturers and execute below in the appropriate manner. On Line (3), print or type the name of the other joint venturer and execute below in the appropriate manner. On Line (4), fill in the name of the third joint venturer, if applicable and execute below in the appropriate manner.

(1) _____
Name of Joint Venture

(2) _____
Name of Contractor

Address as Prequalified

Signature of Witness or Attest	By	Signature of Contractor
Print or type Signer's name		Print or type Signer's name

If Corporation, affix Corporate Seal and

(3) _____
Name of Contractor

Address as Prequalified

Signature of Witness or Attest	By	Signature of Contractor
Print or type Signer's name		Print or type Signer's name

If Corporation, affix Corporate Seal and

(4) _____
Name of Contractor (*for 3 Joint Venture only*)

Address as Prequalified

Signature of Witness or Attest	By	Signature of Contractor
Print or type Signer's name		Print or type Signer's name

If Corporation, affix Corporate Seal

NOTARY SEAL

Affidavit must be notarized for Line (2)

Subscribed and sworn to before me this _____ day of _____ 20____

Signature of Notary Public
of _____ County
State of _____
My Commission Expires: _____

NOTARY SEAL

Affidavit must be notarized for Line (3)

Subscribed and sworn to before me this _____ day of _____ 20____

Signature of Notary Public
of _____ County
State of _____
My Commission Expires: _____

NOTARY SEAL

Affidavit must be notarized for Line (4)

Subscribed and sworn to before me this _____ day of _____ 20____

Signature of Notary Public
of _____ County
State of _____
My Commission Expires: _____

**EXECUTION OF BID
NON-COLLUSION AFFIDAVIT, DEBARMENT CERTIFICATION AND GIFT BAN CERTIFICATION**

INDIVIDUAL DOING BUSINESS UNDER A FIRM NAME

The person executing the bid, on behalf of the Bidder, being duly sworn, solemnly swears (or affirms) that neither he, nor any official, agent or employee of the bidder has entered into any agreement, participated in any collusion, or otherwise taken any action which is in restraint of free competitive bidding in connection with any bid or contract, that the bidder has not been convicted of violating *N.C.G.S. § 133-24* within the last three years, and that the Bidder intends to do the work with its own bonafide employees or subcontractors and is not bidding for the benefit of another contractor.

In addition, execution of this bid in the proper manner also constitutes the Bidder's certification of status under penalty of perjury under the laws of the United States in accordance with the Debarment Certification attached, provided that the Debarment Certification also includes any required statements concerning exceptions that are applicable.

N.C.G.S. § 133-32 and Executive Order 24 prohibit the offer to, or acceptance by, any State Employee of any gift from anyone with a contract with the State, or from any person seeking to do business with the State. By execution of any response in this procurement, you attest, for your entire organization and its employees or agents, that you are not aware that any such gift has been offered, accepted, or promised by any employees of your organization.

SIGNATURE OF CONTRACTOR

Name of Contractor _____
Individual name

Trading and doing business as _____
Full name of Firm

Address as Prequalified

Signature of Witness

Signature of Contractor, Individually

Print or type Signer's name

Print or type Signer's name

AFFIDAVIT MUST BE NOTARIZED

Subscribed and sworn to before me this the _____
_____ day of _____ 20__.

NOTARY SEAL

Signature of Notary Public

of _____ County

State of _____

My Commission Expires: _____

**EXECUTION OF BID
NON-COLLUSION AFFIDAVIT, DEBARMENT CERTIFICATION AND GIFT BAN CERTIFICATION**

INDIVIDUAL DOING BUSINESS IN HIS OWN NAME

The person executing the bid, on behalf of the Bidder, being duly sworn, solemnly swears (or affirms) that neither he, nor any official, agent or employee of the bidder has entered into any agreement, participated in any collusion, or otherwise taken any action which is in restraint of free competitive bidding in connection with any bid or contract, that the bidder has not been convicted of violating *N.C.G.S. § 133-24* within the last three years, and that the Bidder intends to do the work with its own bonafide employees or subcontractors and is not bidding for the benefit of another contractor.

In addition, execution of this bid in the proper manner also constitutes the Bidder's certification of status under penalty of perjury under the laws of the United States in accordance with the Debarment Certification attached, provided that the Debarment Certification also includes any required statements concerning exceptions that are applicable.

N.C.G.S. § 133-32 and Executive Order 24 prohibit the offer to, or acceptance by, any State Employee of any gift from anyone with a contract with the State, or from any person seeking to do business with the State. By execution of any response in this procurement, you attest, for your entire organization and its employees or agents, that you are not aware that any such gift has been offered, accepted, or promised by any employees of your organization.

SIGNATURE OF CONTRACTOR

Name of Contractor _____
Print or type Individual name

Address as Prequalified

Signature of Contractor, Individually

Print or type Signer's Name

Signature of Witness

Print or type Signer's name

AFFIDAVIT MUST BE NOTARIZED

Subscribed and sworn to before me this the _____
_____ day of _____ 20__.

NOTARY SEAL

Signature of Notary Public

of _____ County

State of _____

My Commission Expires: _____

DEBARMENT CERTIFICATION

Conditions for certification:

1. The prequalified bidder shall provide immediate written notice to the Department if at any time the bidder learns that his certification was erroneous when he submitted his debarment certification or explanation filed with the Department, or has become erroneous because of changed circumstances.
2. The terms *covered transaction*, *debarred*, *suspended*, *ineligible*, *lower tier covered transaction*, *participant*, *person*, *primary covered transaction*, *principal*, *proposal*, and *voluntarily excluded*, as used in this provision, have the meanings set out in the Definitions and Coverage sections of the rules implementing Executive Order 12549. A copy of the Federal Rules requiring this certification and detailing the definitions and coverages may be obtained from the Contract Officer of the Department.
3. The prequalified bidder agrees by submitting this form, that he will not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in NCDOT contracts, unless authorized by the Department.
4. For Federal Aid projects, the prequalified bidder further agrees that by submitting this form he will include the Federal-Aid Provision titled *Required Contract Provisions Federal-Aid Construction Contract (Form FHWA PR 1273)* provided by the Department, without subsequent modification, in all lower tier covered transactions.
5. The prequalified bidder may rely upon a certification of a participant in a lower tier covered transaction that he is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless he knows that the certification is erroneous. The bidder may decide the method and frequency by which he will determine the eligibility of his subcontractors.
6. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this provision. The knowledge and information of a participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.
7. Except as authorized in paragraph 6 herein, the Department may terminate any contract if the bidder knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available by the Federal Government.

DEBARMENT CERTIFICATION

The prequalified bidder certifies to the best of his knowledge and belief, that he and his principals:

- a. Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;
- b. Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records; making false statements; or receiving stolen property;
- c. Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph b. of this certification; and
- d. Have not within a three-year period preceding this proposal had one or more public transactions (Federal, State or local) terminated for cause or default.
- e. Will submit a revised Debarment Certification immediately if his status changes and will show in his bid proposal an explanation for the change in status.

If the prequalified bidder cannot certify that he is not debarred, he shall provide an explanation with this submittal. An explanation will not necessarily result in denial of participation in a contract.

Failure to submit a non-collusion affidavit and debarment certification will result in the prequalified bidder's bid being considered non-responsive.

Check here if an explanation is attached to this certification.

County : Craven

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
ROADWAY ITEMS						
0001	2591000000-E	848	4" CONCRETE SIDEWALK	889		
				SY		
0002	6012000000-E	1610	SEDIMENT CONTROL STONE	1.5		
				TON		
0003	6042000000-E	1632	1/4" HARDWARE CLOTH	24		
				LF		
0004	6147000000-E	SP	GENERIC EROSION CONTROL ITEM (TREE PROTECTION FENCE)	592		
				LF		
0005	6900000000-E	SP	TOPSOIL	9		
				CY		
0006	6950000000-N	SP	GENERAL CONSTRUCTION OF REST AREA SERVICE BLDG	1		
				EA		
0007	6955000000-N	SP	PLUMBING INSTALLATION FOR REST AREA SERVICE BLDG	1		
				EA		
0008	6960000000-N	SP	ELECTRICAL INSTALLATION FOR REST AREA SERVICE BLDG	1		
				EA		
0009	6965000000-N	SP	HEATING & AIR CONDITIONING IN- STALLATION FOR REST AREA SER- VICE BLDG	1		
				EA		
0010	6970000000-N	SP	GENERIC REST AREA ITEM (EXISTING PICNIC SHELTER TABLE / METAL ROOF)	4		
				EA		
0011	6970000000-N	SP	GENERIC REST AREA ITEM (PICNIC SHELTER TABLE / METAL ROOF)	1		
				EA		
0012	6970000000-N	SP	GENERIC REST AREA ITEM (RELOCATE POST TOP LIGHT AND P OLE)	3		
				EA		
0013	6975000000-N	SP	GENERIC REST AREA ITEM (LANDSCAPE AND SITE GRADING)	Lump Sum	L.S.	
0014	6975000000-N	SP	GENERIC REST AREA ITEM (SITE DEMOLITION)	Lump Sum	L.S.	
0015	6975000000-N	SP	GENERIC REST AREA ITEM (SITE STORM WATER DRAINAGE)	Lump Sum	L.S.	
0016	6980000000-E	SP	GENERIC REST AREA ITEM (6" PVC UTILITY SLEEVE)	50		
				LF		

County : Craven

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0017	6980000000-E	SP	GENERIC REST AREA ITEM (BRICK BLOCK PLANTER SEAT WALL)	100 LF		
0018	6982000000-E	SP	GENERIC REST AREA ITEM (BRICK BLOCK PAVERS)	360 SF		
			Total Amount Of Bid For Entire Project :			

0930/Dec29/Q2040.5/D118299000000/E18

_____	_____
General Contractor	License No
_____	_____
Plumbing Subcontractor	License No
_____	_____
HVAC Subcontractor	License No
_____	_____
Electrical Subcontractor	License No

The Bidder further proposes and agrees hereby to commence work under this contract on a **March 1, 2015** and shall fully complete all work thereunder by **December 1, 2015**. Applicable liquidated damages shall be as stated in Supplementary General Conditions.

Respectively submitted this **28th** day of **January 2015**.

CONTRACTOR _____

ADDRESS _____

Federal Identification Number _____ Contractors License Number _____

Authorized Agent _____ Title _____

Signature _____ Date _____

Witness _____ Title _____

Signature _____ Date _____

Point of Contact for Post-Bid Inquiries (e.g., Letters of Intent, Insurance, Bonds, Contract Execution):

Name _____

Email _____

Phone _____

Addendum No. 1, dated _____ Addendum No. 2, dated _____

Addendum No. 3, dated _____ Addendum No. 4, dated _____

THIS SECTION TO BE COMPLETED BY NC DEPARTMENT OF TRANSPORTATION

This bid has been reviewed in accordance with Article 103-1 of the Standard Specifications for Roads and Structures 2012.

Reviewed by NCDOT _____ *Date* _____

Division Contract Officer

Accepted by NCDOT _____ *Date* _____