PROJECT REFERENCE NO.	SHEET NO.
W-5202K	PM 1
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

NORTH CAROLINA PROFESSIONAL SEAL 11274 ENGINEER BRICE EDWARD EATMON, III
Ed Eatmon 6/5/2015
A405E90A14244A7...

NORTH CAROLINA PROFESSIONAL SEAL 11274 ENGINEER BRICE EDWARD EATMON, III
Ed Eatmon 6/5/2015
A405E90A14244A7...

PAVEMENT MARKING SCHEDULE

PAVEMENT MARKING LINES

AA - THERMOPLASTIC (4" WHITE, 90 MILS) EDGE LINE
AB - THERMOPLASTIC (4" WHITE, 120 MILS) 13' MINI SKIP
AC - THERMOPLASTIC (4" WHITE, 120 MILS) SOLID LANE LINE

PAVEMENT MARKING SYMBOLS

BA - THERMOPLASTIC (LEFT ARROW, 90 MILS)

NOTE

PAINT MARKINGS AND TRAFFIC CONTROL DEVICES SHALL BE IN ACCORDANCE WITH NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES, NCDOT ROADWAY STANDARD DRAWINGS, AND THE CURRENT EDITON OF THE MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES (MUTCD). QUANTITIES FOR THESE ITEMS HAVE BEEN ACCOUNTED FOR IN THE CONTRACT BID FORM. ALL EDGE LINES SHALL BE 2' OFF EOP.

PAVEMENT MARKINGS ARE TYPICAL FOR EACH LEFT TURN LANE SECTION

NORTH OF INDUSTRIAL PARK

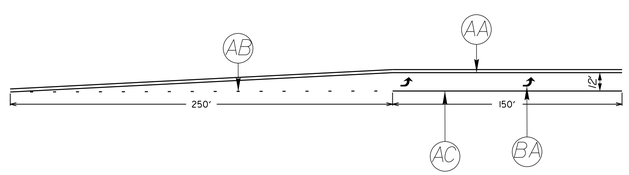

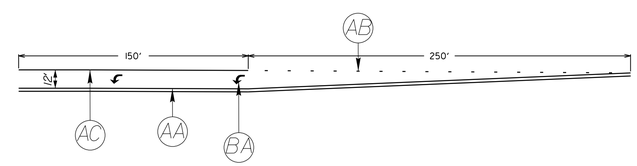

REVISIONS

8/17/99

05-JUN-2015 08:30
C:\pwworking\brice\d0327513\TRYNC 11 Median Turn Lanes\W5202K_PM1.dgn
$$$$USERNAME$$$$