



TYPICAL SECTION NO. 1

MAP NO. 1
SR 1569 (HOOVER RD.)
MP 0.073 - MP 1.125

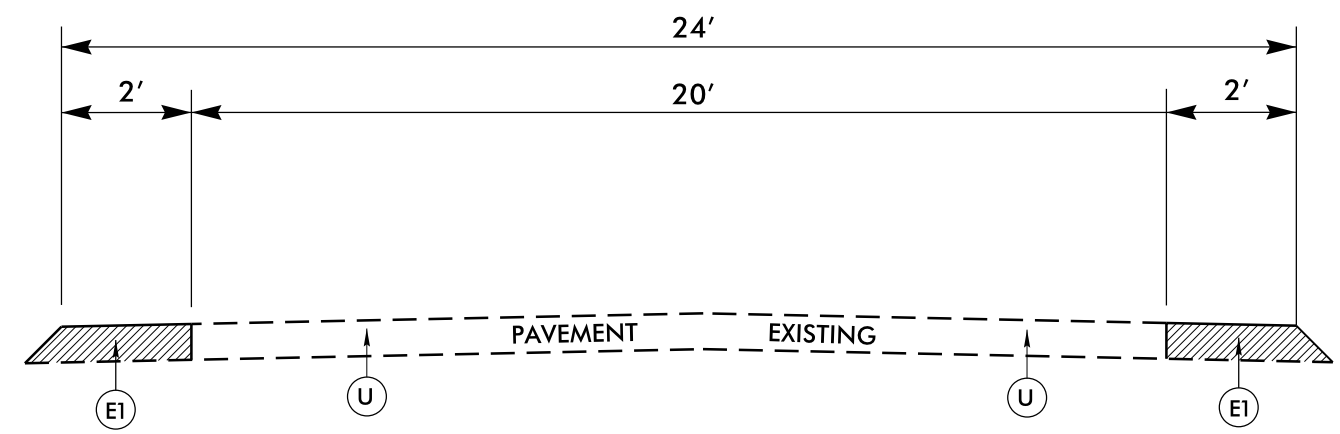

TYPICAL SECTION NO. 2

MAP NO. 2
SR 1569 (HOOVER RD.)
MP 1.125 - MP 1.620

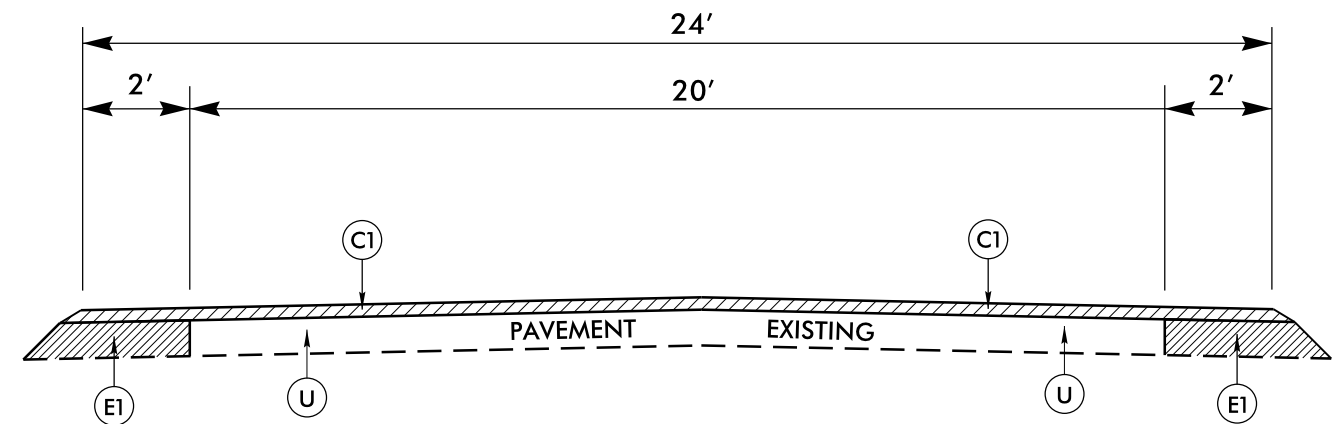

TYPICAL SECTION NO. 3

MAP NO. 3
SR 1569 (HOOVER RD.)
MP 1.620 - END MAINT.

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1½" DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ.YD.
E1	PROP. APPROX. 5.5" DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ.YD.
T1	EARTH MATERIAL (SHOULDER RECONSTRUCTION)
U	EXISTING PAVEMENT

PAVEMENT EDGE SLOPES ARE 1:1, EXCEPT FINAL SURFACE COURSE. SEE SHOULDER WEDGE DETAIL.

NOTE: SHOULDER WORK ON MAP NO. 2 & 3 AS NEEDED, TO BE DETERMINED BY ENGINEER.

PLACE EDGE LINES 10 FT. FROM CENTER LINE TO PROVIDE 2 FT. PAVED SHOULDERS.

REVISIONS

23-JAN-2019 16:04
 S:\DIVISION RESURFACING\z Additional CADD Work\071.Hoover Rd.Jerry\47785 Hoover.Rdy.txd.dgn
 \$\$\$SUSPENSE\$\$\$

