DocuSign Envelope ID: AABA41E8-314D-4D15-B46E-AE20FEAA4280

PROJ. REFERENCE NO.	SHEET NO.
17BP.4.R.82	TMP-2

SIGN NUMBER: name
TYPE: STATIONARY
QUANTITY: SEE PLANS

SIGN WIDTH: 3′-0″
HEIGHT: 2′-6″
TOTAL AREA: 7.5 Sq.Ft.

BORDER TYPE: INSET
RECESS: 0.38″
WIDTH: 0.63″
RADII: 1.5″

NO. Z BARS:
LENGTH:

BACKG COLOR: Fluorescent Orange
COPY COLOR: Black

SYMBOL	X	Y	WID	HT

MAT′L: 0.080″ (2.0 mm) ALUMINUM

DESIGN BY: SLK
CHECKED BY: JWG
Jan 08, 2018
PROJECT ID: 17BP.4.R.82
DIV: 4

USE NOTES: 1,2

1. Legend and border shall be direct applied black non-reflective sheeting.
2. Background shall be NC GRADE B fluorescent orange retroreflective sheeting.

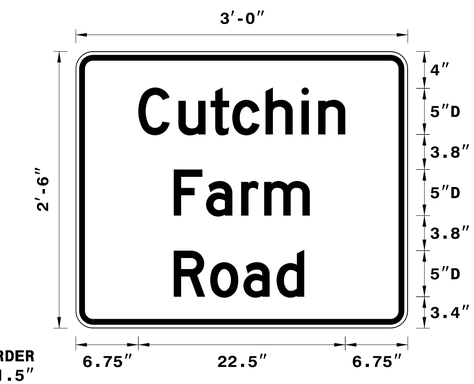

BORDER
R=1.5″
TH=0.63″
IN=0.38″

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter locations are panel edge to lower left corner

								Series/Size Text Length
	C	u	t	c	h	i	n	D 2000
	6.8	11.1	14.6	17	20.6	24.5	26.3	22.5
	F	a	r	m				D 2000
	10.6	14.1	17.9	20.4				14.8
	R	o	a	d				D 2000
	10.6	14.6	18.2	21.8				14.2

FILENAME: Guidesign6_022617

NORTH CAROLINA D.O.T. SIGN DETAIL

NOTE: TEMPORARY SIGNS TO BE PAID FOR AS "STATIONARY WORK ZONE SIGNS".

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

WETHERILL ENGINEERING
1223 Jones Franklin Rd.
Raleigh, N.C. 27606
Liscense No. F-0377
Bus: 919 851 8077
Fax: 919 851 8107
TRANSPORTATION PLANNING/DESIGN - BRIDGE/STRUCTURE DESIGN
CIVIL/SITE DESIGN - GIS/GPS - CONSTRUCTION OBSERVATION

APPROVED:_____ DATE:_____

SEAL

DocuSigned by: Greg S. Purvis
DIRECTOR OF PROFESSIONAL ENGINEERING
NORTH CAROLINA
SEAL 22999
ENGINEER
GREG S. PURVIS

4/9/2018

DIVISION OF HIGHWAYS
STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
WORK ZONE TRAFFIC CONTROL

SPECIAL SIGN DESIGN(S)

2/15/2018
R:\Traffic\TrafficControl\TCP\320047_TC_TMP_PSH_02.dgn
Userskennedy