DocuSign Envelope ID: F90362E1-E5FC-455F-8E38-FDBB4B7C6599

PROJECT REFERENCE NO.	SHEET NO.
17BP.4.R.69	2A-2

CALYX
ENGINEERS + CONSULTANTS
6750 TRYON ROAD
CARY, NC 27518
phone: 919.851.1912
CALYXengineers.com
NC License # F-1333

ROADWAY DESIGN ENGINEER

NORTH CAROLINA PROFESSIONAL SEAL 15759 ENGINEER STEPHEN C. BRONK

Docusigned by:
Stephen C. Bronk
5C7971E7A7A4BF...
1/20/2017

PAVEMENT DESIGN ENGINEER

PAVEMENT SCHEDULE

C1	1.5″ SF9.5A
C2	3″ SF9.5A
C3	VARIABLE DEPTH SF9.5A
E1	6″ B25.0B
E2	VARIABLE DEPTH B25.0B
R	SHOULDER BERM GUTTER
T	EARTH MATERIAL
U	EXISTING PAVEMENT
W	WEDGING

NOTES:
1) SEE SHEET 2A-1 FOR DETAILED PAVEMENT SCHEDULE.

2) PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

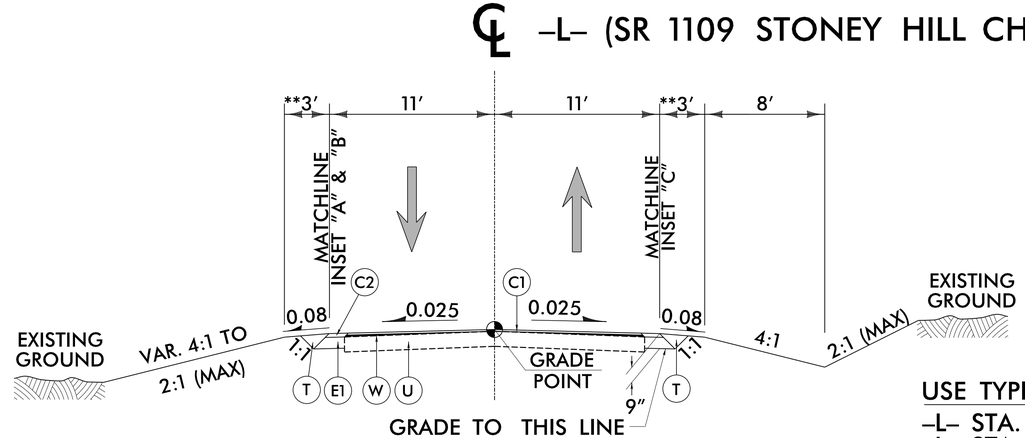

TYPICAL SECTION NO. 2

USE TYPICAL SECTION NO. 2 AS FOLLOWS:
–L– STA. 11+10.00 TO 12+69.92 (BEGIN BRIDGE)
–L– STA. 13+70.07 (END BRIDGE) TO 14+90.00

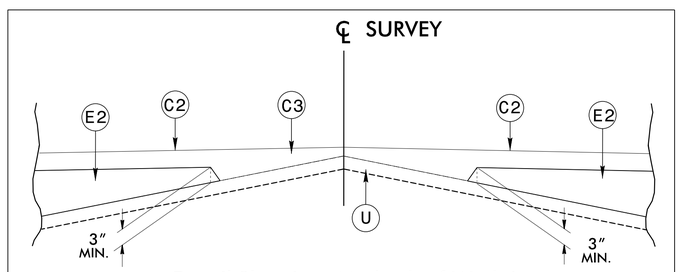

Detail Showing Method of Wedging on Roadway

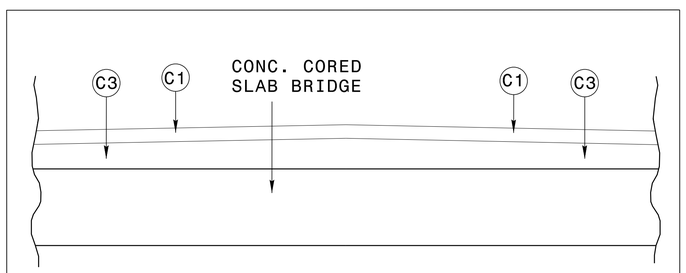

Detail Showing Method of Bridge Wedging

6/2/99
1/20/2017
R:\Roadway\Proj\Nash 62_RDY_TYP.dgn
bpeks