

General Instructions

Remove all existing Tree, Shrub and Daylily plantings and volunteer trees, shrubs, vines, and herbaceous material from existing planting areas shown, and areas where new planting is indicated.

Mulch all newly planted beds and trees.

All plant removals to include grubbing out of roots, and filling and compacting holes with topsoil to surrounding grade.

All disturbed and repaired areas not included in new bed areas to be seeded with Turf Grass.

PLANT LIST											
Des	Sec	Qty.	Unit	Key	Botanical Name	Common Name	Size	Caliper	Furnish	A.S.N.S.	Remarks
L	1670	760	ea	HM	<i>Hemerocallis 'Mary Todd'</i>	Mary Todd Daylily	2 Fan		BR	12.2.1	30" O.C.
L	1670	130	ea	JG	<i>Juniperus virginiana 'Grey Owl'</i>	Grey Owl Juniper	18-24"		#3 cont	3.2.2	6' o.c.
L	1670	0	ea	LM	<i>Lagersroemia 'Miami'</i>	Miami Crepe Myrtle	8-10'		BR	1.3.2.4.2	as shown
L	1670	122	ea	MC	<i>Muhlenbergia capillaris</i>	Pink Muhly Grass			#1 cont	12.4	4' o.c.
L	1670	3040	ea	NK	<i>Narcissus 'St. Keverne'</i>	St Keverne Daffodil	DN II		Bulb	11.19	15" o.c.
L	1670	9500	SF			Bed preparation					
L	1670	1057	SY			Pre Emergent Bed Treatment					
2729	1670	88	CY			Mulch for Planting					
2731	1670	14	M/G			Water for Planting					

STATE
W.B.S. # 3704.3.63
I.P. #
PA #

LANDSCAPE DESIGN & DEVELOPMENT SECTION
NCDOT ROADSIDE ENVIRONMENTAL UNIT
1557 MAIL SERVICE CENTER
RALEIGH NC 27699 919-733-2920

PLAN : **I-95 @ NC 125 Exit 171**

DESIGNED BY : **DLW**

SHEET : _____

DATE : **11/15/2010**

SCALE : **As Shown**

SHEET # _____ OF _____

4

PROJECT DESCRIPTION : Roanoke Rapids/Weldon, Halifax County
I-95 @ Exits 171 & 173 Landscape Renovation

WELDON





General Instructions

Remove all existing Tree, Shrub and Daylily plantings and volunteer trees, shrubs, vines, and herbaceous material from existing planting areas shown, and areas where new planting is indicated.

Mulch all newly planted beds and trees.

All plant removals to include grubbing out of roots, and filling and compacting holes with topsoil to surrounding grade.

All disturbed and repaired areas not included in new bed areas to be seeded with Turf Grass.

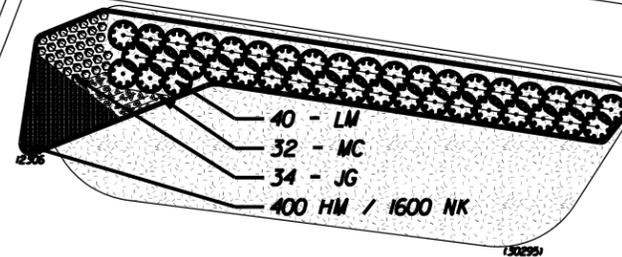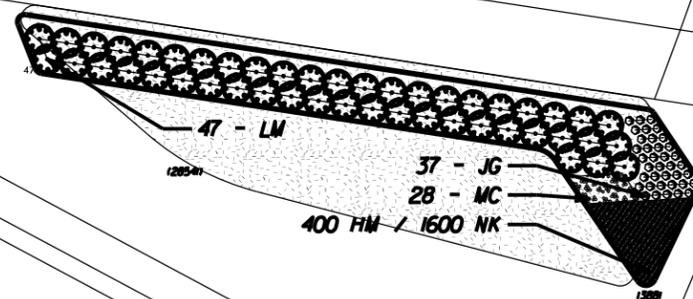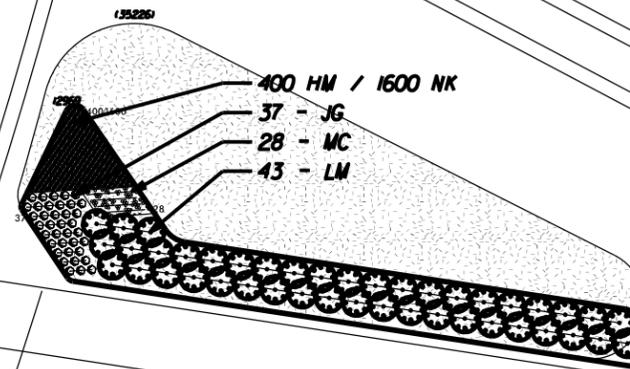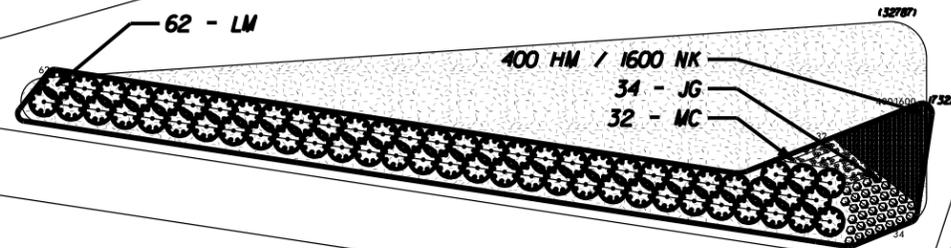

PLANT LIST											
Des	Sec	Qty.	Unit	Key	Botanical Name	Common Name	Size	Caliper	Furnish	A.S.N.S.	Remarks
L	1670	1600	ea	HM	<i>Hemerocallis 'Mary Todd'</i>	Mary Todd Daylily	2 Fan		BR	12.2.1	30" O.C.
L	1670	142	ea	JG	<i>Juniperus virginiana 'Grey Owl'</i>	Grey Owl Juniper	18-24"		#3 cont	3.2.2	6' o.c.
L	1670	192	ea	LM	<i>Lagersroemia 'Miami'</i>	Miami Crepe Myrtle	8-10'		BR	1.3.2.4.2	as shown
L	1670	120	ea	MC	<i>Muhlenbergia capillaris</i>	Pink Muhly Grass			#1 cont	12.4	4' o.c.
L	1670	6400	ea	NK	<i>Narcissus 'St. Keverne'</i>	St Keverne Daffodil	DN II		Bulb	11.19	15" o.c.
L	1670	56480	SF			Bed preparation					
L	1671	6275	SY			Pre Emergent Bed Treatment					
2729	1670	523	CY			Mulch for Planting					
2731	1670	57	M/G			Water for Planting					

ROANOKE RAPIDS

STATE

W.B.S. # 3704.3.63

I.P. #

PA #



LANDSCAPE DESIGN & DEVELOPMENT SECTION
 NCDOT ROADSIDE ENVIRONMENTAL UNIT
 1557 MAIL SERVICE CENTER
 RALEIGH NC 27699 919-7333-2920

PLAN : I-95 @ NC 158 Exit 173

DESIGNED BY:

DLW

SHEET:

DATE

11/15/2010

SCALE

As Shown

SHEET #

OF

4

PROJECT DESCRIPTION : Roanoke Rapids/Weldon, Halifax County I-95 @ Exits 171 & 173 Landscape Renovation